

# DeepLab2: A TensorFlow Library for Deep Labeling

Mark Weber<sup>1\*</sup> Huiyu Wang<sup>2\*</sup> Siyuan Qiao<sup>2\*</sup> Jun Xie<sup>4</sup> Maxwell D. Collins<sup>4</sup>  
Yukun Zhu<sup>4</sup> Liangzhe Yuan<sup>4</sup> Dahun Kim<sup>3</sup> Qihang Yu<sup>2</sup> Daniel Cremers<sup>1</sup>  
Laura Leal-Taixé<sup>1</sup> Alan L. Yuille<sup>2</sup> Florian Schroff<sup>4</sup> Hartwig Adam<sup>4</sup> Liang-Chieh Chen<sup>4</sup>  
<sup>1</sup>Technical University Munich <sup>2</sup>Johns Hopkins University <sup>3</sup>KAIST <sup>4</sup>Google Research

## Abstract

*DeepLab2 is a TensorFlow library for deep labeling, aiming to provide a state-of-the-art and easy-to-use TensorFlow codebase for general dense pixel prediction problems in computer vision. DeepLab2 includes all our recently developed DeepLab model variants with pretrained checkpoints as well as model training and evaluation code, allowing the community to reproduce and further improve upon the state-of-art systems. To showcase the effectiveness of DeepLab2, our Panoptic-DeepLab employing Axial-SWideRNet as network backbone achieves 68.0% PQ or 83.5% mIoU on Cityscapes validation set, with only single-scale inference and ImageNet-1K pretrained checkpoints. We hope that publicly sharing our library could facilitate future research on dense pixel labeling tasks and envision new applications of this technology. Code is made publicly available at <https://github.com/google-research/deeplab2>.*

## 1. Introduction

Deep labeling refers to solving certain computer vision problems by assigning a predicted value for each pixel (*i.e.*, label each pixel) in an image or video with a deep neural network [38, 44, 6]. Typical dense prediction problems include, but not limited to, semantic segmentation [26, 37, 19], instance segmentation [23, 42], panoptic segmentation [36, 48], depth estimation [47, 21], video panoptic segmentation [34, 70], and depth-aware video panoptic segmentation [55].

Going beyond our previous open source library<sup>1</sup> in 2018 (which could only tackle image semantic segmentation with the first few DeepLab model variants [6, 7, 8, 11]), we introduce DeepLab2, a modern TensorFlow library [1] for deep labeling, aiming to provide a unified and easy-to-use TensorFlow codebase for general dense pixel label-

ing tasks. *Re-implemented* in TensorFlow2, this release includes *all* our recently developed DeepLab model variants [13, 67, 66, 70, 55], model training and evaluation code, and several pretrained checkpoints, allowing the community to reproduce and further improve upon the state-of-art systems. We hope that the open source DeepLab2 would facilitate future research on dense pixel labeling tasks, and anticipate novel breakthroughs and new applications that adopt this technology.

In the following sections, we detail a few popular dense prediction tasks as well as the provided state-of-the-art models in the DeepLab2 library.

## 2. Dense Pixel Labeling Tasks

Several computer vision problems could be formulated as dense pixel labeling. In this section, we briefly introduce some typical examples of dense pixel labeling tasks.

- **Image Semantic Segmentation** [26, 37, 19, 46, 10, 15, 75], one step further than image-level classification [56] for scene understanding, recognizes objects within an image with pixel-level accuracy, requiring precise outline of objects. It is usually formulated as pixel-wise classification [44, 6], where each pixel is labeled by a predicted value encoding its semantic class.
- **Image Instance Segmentation** [23, 42] recognizes and localizes object instances with pixel-level accuracy in an image. Existing models [17, 41, 24, 43, 4] are mostly based on the top-down approach (*i.e.*, bounding box detection followed by segmentation) and formulate the problem as mask detection (one step further than bounding box detection for instance-level understanding). On the contrary, our system tackles instance segmentation from the bottom-up perspective, detecting (or more precisely, grouping) instances on top of segmentation prediction. Therefore, our system labels each ‘thing’ pixel by a predicted value encoding both semantic class and instance identity (and the ‘stuff’ pixels are ignored). Note that our model gen-

<sup>\*</sup>The first three authors contributed equally to this work.

<sup>1</sup><https://github.com/tensorflow/models/tree/master/research/deeplab>

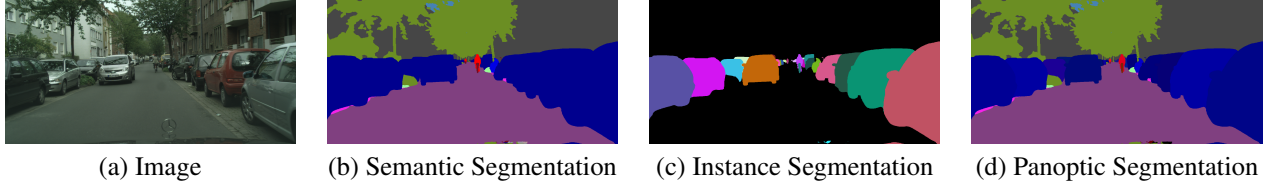


Figure 1: Segmentation results by Panoptic-DeepLab [13] on Cityscapes Images [15].

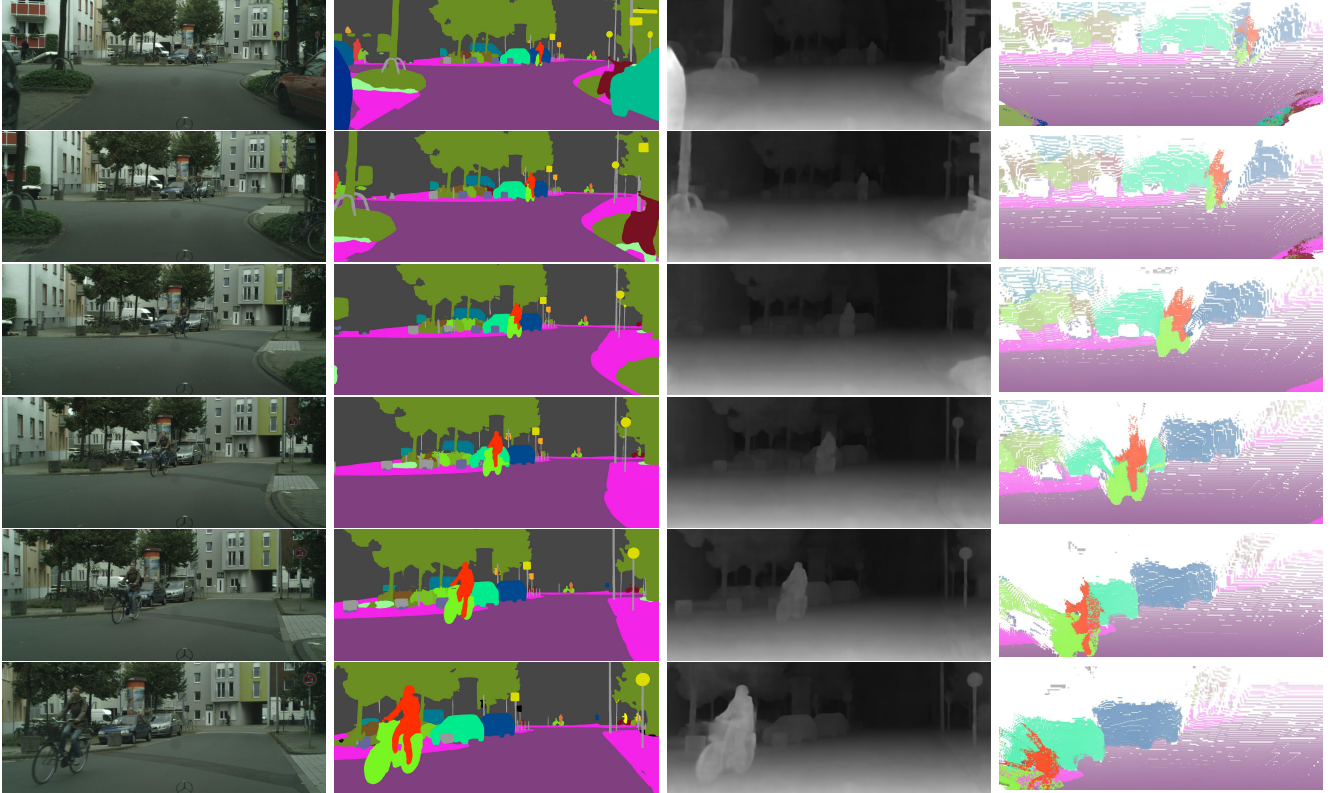


Figure 2: Prediction visualizations by ViP-DeepLab [55] on Cityscapes-DVPS [34]. From left to right: input image, temporally consistent panoptic segmentation prediction, monocular depth prediction, and point cloud visualization.

erates *non-overlapping* instance masks, unlike other proposal-based models.

- **Image Panoptic Segmentation** [36] unifies semantic segmentation and instance segmentation. The task disallows *overlapping* instance masks and requires labeling each pixel (including ‘thing’ and ‘stuff’ pixels) with a predicted value encoding both semantic class and instance identity. We would like to highlight that our whole system, including the training and evaluation pipelines, uses the panoptic label format (*i.e.*,  $\text{panoptic\_label} = \text{semantic\_label} \times \text{label\_divisor} + \text{instance\_id}$ ), and thus do not take (during training mode) or generate (during inference mode) any *overlapping* masks [12]. This is very different from most existing modern panoptic segmentation models [35,

72, 40, 52, 39, 45, 69, 54], which are trained with *overlapping* instance masks.

- **Monocular Depth Estimation** [58, 47, 21, 18, 20] attempts to understand the 3D geometry of a scene by labeling each pixel with an estimated depth value.
- **Video Panoptic Segmentation** [34, 70] extends the image panoptic segmentation to the video domain, where a temporally consistent instance identity is enforced across the video sequence.
- **Depth-aware Video Panoptic Segmentation** [3, 55] provides in-depth scene understanding by solving a joint task of depth estimation, panoptic segmentation, and pixel-level tracking. Each pixel in a video is la-

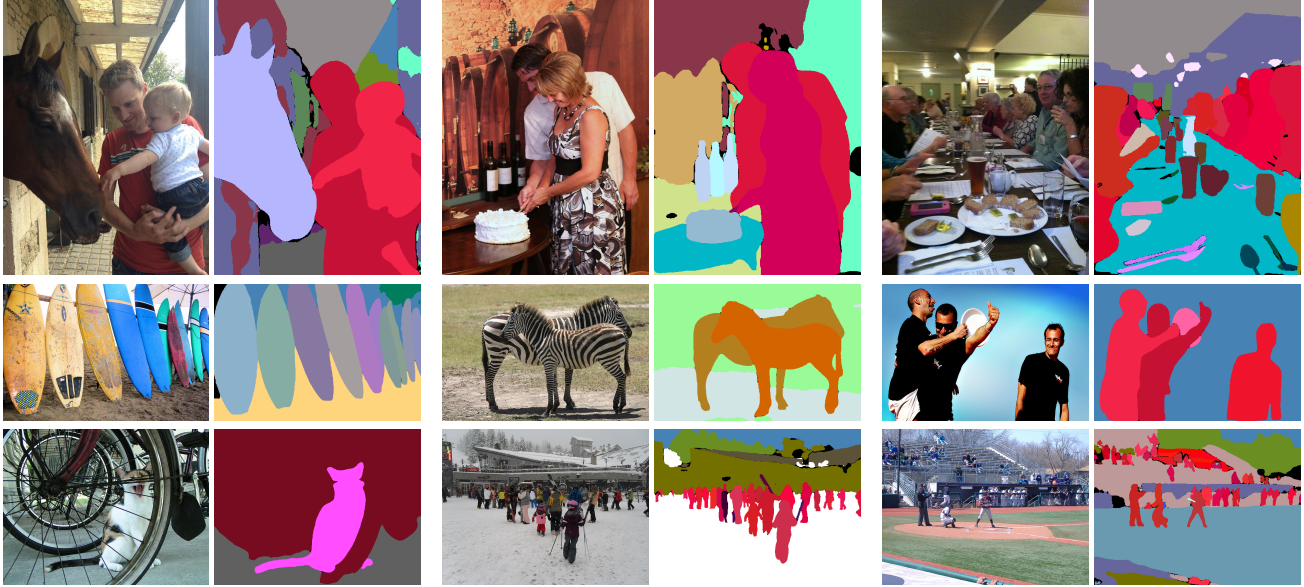


Figure 3: MaX-DeepLab [66] panoptic segmentation visualizations on the COCO [42] *val* set.

beled with semantic class, temporally consistent instance identity, and estimated depth value.

### 3. Model Garden

Herein, we briefly introduce our developed DeepLab model variants that are included in the DeepLab2 library.

- **DeepLab** [6, 7, 8, 11], where atrous convolution [6] (also known as convolution with holes or dilated convolution<sup>2</sup>) is intensively exploited for semantic segmentation (see several previous works [28, 22, 50, 59] that effectively use atrous convolution in different ways). Specifically, DeepLabv1 [6] employs atrous convolution to explicitly control the feature resolution computed by convolutional neural network backbones [59, 60, 25, 14, 53]. Additionally, atrous convolution allows us to effectively enlarge the model’s field of view without increasing the number of parameters. As a result, the proposed ASPP module (Atrous Spatial Pyramid Pooling) in the follow-up DeepLab models [7, 8, 11] effectively aggregates multi-scale information by employing parallel atrous convolutions with multiple sampling rates.
- **Panoptic-DeepLab** [13], a simple, fast, and strong bottom-up (*i.e.*, proposal-free) baseline for panoptic segmentation. Panoptic-DeepLab adopts the dual-ASPP and dual-decoder structures specific to semantic and instance segmentation, respectively. The semantic

segmentation branch is the same as DeepLab, while the instance segmentation branch is class-agnostic, involving a simple instance center regression [33, 51, 62, 49, 73]. Even though simple, Panoptic-DeepLab yields state-of-the-art performance on multiple panoptic segmentation benchmarks.

- **Axial-DeepLab** [67], building on top of the proposed Axial-ResNet [67] backbones that efficiently capture long-range context with precise position information. Axial-ResNet enables a huge or even global receptive field in all the layers of a backbone by replacing spatial convolutions with axial-attention layers [27, 32] sequentially applied to the height- and width-axis. Additionally, a position-sensitive self-attention formulation is proposed to preserve context position in the huge receptive field. As a result, Axial-DeepLab, employing the proposed Axial-ResNet as backbone in the Panoptic-DeepLab framework [13], outperforms state-of-the-art convolutional counterparts on multiple panoptic segmentation benchmarks.
- **MaX-DeepLab** [66], the first fully *end-to-end* system for panoptic segmentation. MaX-DeepLab *directly* predicts a set of segmentation masks and their corresponding semantic classes with a mask transformer, removing the needs for previous hand-designed modules (*e.g.*, box anchors [24], thing-stuff merging heuristic [35] or module [72]). The mask transformer is trained with a proposed PQ-style loss function and employs a *dual-path* architecture that enables an Axial-ResNet to read and write a global memory, allowing ef-

<sup>2</sup>[https://www.tensorflow.org/api\\_docs/python/tf/nnt/atrous\\_conv2d](https://www.tensorflow.org/api_docs/python/tf/nnt/atrous_conv2d)



efficient communication (feature information exchange) between any Axial-ResNet layer and the transformer. MaX-DeepLab achieves the state-of-the-art panoptic segmentation results on COCO [42], outperforming both proposal-based and proposal-free approaches.

- **Motion-DeepLab** [70], a unified model for the task of video panoptic segmentation, which requires to segment and track every pixel. It is built on top of Panoptic-DeepLab and uses an additional branch to regress each pixel to its center location in the previous frame. Instead of using a single RGB image as input, the network input contains two consecutive frames, *i.e.*, the current and previous frame, as well as the center heatmap from the previous frame [76]. The output is used to assign consistent track IDs to all instances throughout a video sequence.
- **ViP-DeepLab** [55], a unified model that jointly tackles monocular depth estimation and video panoptic segmentation. It extends Panoptic-DeepLab [13] by adding a depth prediction head to perform monocular depth estimation and a next-frame instance branch to generate panoptic predictions with temporally consistent instance IDs for videos. ViP-DeepLab achieves state-of-the-art performance on multiple benchmarks, including KITTI monocular depth estimation [21, 63], KITTI multi-object tracking and segmentation [21, 65], and Cityscapes video panoptic segmentation [15, 34].

## 4. Supported Network Backbones

In this section, we briefly introduce the network backbones that are supported by the DeepLab2 library.

- **MobileNetv3** [29], a light-weight backbone designed for mobile devices [30, 57], which thus could be used as a baseline for fast on-device model comparison.
- **ResNet** [25], along with some modern modifications (*e.g.*, Inception stem [61], stochastic drop path [31]). This backbone could be used as a general baseline.
- **SWideRNet** [9], which scales Wide ResNets [74, 71, 5] in both width (number of channels) and depth (number of layers). This could be used for strong model comparison.
- **Axial-ResNet** [67] and **Axial-SWideRNet** [67, 9], which replaces ResNet [25] and SWideRNet [9] residual blocks with axial-attention [27, 32, 67] blocks in the last few stages. This hybrid CNN-Transformer (more precisely, only self-attention modules as the Transformer encoder) architecture could be used as a baseline for self-attention based model comparison.

Besides the default axial-attention blocks, we also support global or non-local attention [64, 68] blocks.

- **MaX-DeepLab** [66], which incorporates transformer blocks [64] to Axial-ResNets [67] in a dual-path manner, allowing efficient communication between any Axial-ResNet layers and the transformers. When turning off the transformer path, this backbone could be also adopted in the Panoptic-DeepLab framework [13].

To briefly highlight the effectiveness of DeepLab2, our Panoptic-DeepLab employing the Axial-SWideRNet as network backbone achieves 68.0% PQ or 83.5% mIoU on Cityscapes validation set, with *single-scale* inference and ImageNet-1K pretrained checkpoints. For more detailed results, we refer the readers to the provided model zoo<sup>3</sup>.

Finally, we would like to emphasize that we have implemented the Axial-Block in a general way that encompasses not only transformer-based blocks (*i.e.*, axial-attention [67], global-attention [64], dual-path transformer [66]) but also convolutional residual blocks (*i.e.*, basic block, bottleneck block [25], wide residual block [9], each w/ or w/o Switchable Atrous Convolution [54]). Our design allows users to easily develop novel neural networks that efficiently combine convolution [38], attention [2], and transformer [64] (*i.e.*, self- and cross- attention) operations.

## 5. Data Augmentation During Training

In addition to the typical data augmentation (*i.e.* random scaling, left-right flipping, and random cropping) used for dense prediction tasks, we also support:

- A random color jittering found by AutoAugment [16]. In [9], we apply this augmentation policy with magnitude 1.0, and 0.2 on COCO and Cityscapes datasets, respectively.

## 6. Conclusion

We open-source DeepLab2, containing all our recent research results, in the hope that it would facilitate future research on dense prediction tasks. The codebase is still under active development, and any contribution to the codebase from the community is very welcome. Finally, to reiterate, the code along with model zoo could be found at <https://github.com/google-research/deeplab2>.

**Acknowledgments.** We would like to thank Michalis Raptis for the feedback on the paper, Jiquan Ngiam and Amil Merchant for Hungarian Matching implementation, and the support from Google Mobile Vision.

<sup>3</sup><https://github.com/google-research/deeplab2/tree/main/g3doc/projects>

## References

- [1] Martín Abadi, Paul Barham, Jianmin Chen, Zhifeng Chen, Andy Davis, Jeffrey Dean, Matthieu Devin, Sanjay Ghemawat, Geoffrey Irving, Michael Isard, Manjunath Kudlur, Josh Levenberg, Rajat Monga, Sherry Moore, Derek G. Murray, Benoit Steiner, Paul Tucker, Vijay Vasudevan, Pete Warden, Martin Wicke, Yuan Yu, and Xiaoqiang Zheng. Tensorflow: A system for large-scale machine learning. In *Proceedings of the 12th USENIX Conference on Operating Systems Design and Implementation*, 2016. 1
- [2] Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. Neural machine translation by jointly learning to align and translate. In *ICLR*, 2015. 4
- [3] Jens Behley, Martin Garbade, Andres Milioto, Jan Quenzel, Sven Behnke, Cyrill Stachniss, and Jurgen Gall. Semantickitti: A dataset for semantic scene understanding of lidar sequences. In *ICCV*, 2019. 2
- [4] Kai Chen, Jiangmiao Pang, Jiaqi Wang, Yu Xiong, Xiao-xiao Li, Shuyang Sun, Wansen Feng, Ziwei Liu, Jianping Shi, Wanli Ouyang, et al. Hybrid task cascade for instance segmentation. In *CVPR*, 2019. 1
- [5] Liang-Chieh Chen, Raphael Gontijo Lopes, Bowen Cheng, Maxwell D Collins, Ekin D Cubuk, Barret Zoph, Hartwig Adam, and Jonathon Shlens. Naive-Student: Leveraging Semi-Supervised Learning in Video Sequences for Urban Scene Segmentation. In *ECCV*, 2020. 4
- [6] Liang-Chieh Chen, George Papandreou, Iasonas Kokkinos, Kevin Murphy, and Alan L Yuille. Semantic image segmentation with deep convolutional nets and fully connected CRFs. In *ICLR*, 2015. 1, 3
- [7] Liang-Chieh Chen, George Papandreou, Iasonas Kokkinos, Kevin Murphy, and Alan L Yuille. DeepLab: Semantic image segmentation with deep convolutional nets, atrous convolution, and fully connected CRFs. *IEEE TPAMI*, 2017. 1, 3
- [8] Liang-Chieh Chen, George Papandreou, Florian Schroff, and Hartwig Adam. Rethinking atrous convolution for semantic image segmentation. *arXiv:1706.05587*, 2017. 1, 3
- [9] Liang-Chieh Chen, Huiyu Wang, and Siyuan Qiao. Scaling wide residual networks for panoptic segmentation. *arXiv:2011.11675*, 2020. 4
- [10] Liang-Chieh Chen, Yi Yang, Jiang Wang, Wei Xu, and Alan L Yuille. Attention to scale: Scale-aware semantic image segmentation. In *CVPR*, 2016. 1
- [11] Liang-Chieh Chen, Yukun Zhu, George Papandreou, Florian Schroff, and Hartwig Adam. Encoder-decoder with atrous separable convolution for semantic image segmentation. In *ECCV*, 2018. 1, 3
- [12] Bowen Cheng, Maxwell D Collins, Yukun Zhu, Ting Liu, Thomas S Huang, Hartwig Adam, and Liang-Chieh Chen. Panoptic-DeepLab. In *ICCV COCO + Mapillary Joint Recognition Challenge Workshop*, 2019. 2
- [13] Bowen Cheng, Maxwell D Collins, Yukun Zhu, Ting Liu, Thomas S Huang, Hartwig Adam, and Liang-Chieh Chen. Panoptic-DeepLab: A simple, strong, and fast baseline for bottom-up panoptic segmentation. In *CVPR*, 2020. 1, 2, 3, 4
- [14] François Chollet. Xception: Deep learning with depthwise separable convolutions. In *CVPR*, 2017. 3
- [15] Marius Cordts, Mohamed Omran, Sebastian Ramos, Timo Rehfeld, Markus Enzweiler, Rodrigo Benenson, Uwe Franke, Stefan Roth, and Bernt Schiele. The cityscapes dataset for semantic urban scene understanding. In *CVPR*, 2016. 1, 2, 4
- [16] Ekin D Cubuk, Barret Zoph, Dandelion Mane, Vijay Vasudevan, and Quoc V Le. Autoaugment: Learning augmentation policies from data. In *CVPR*, 2019. 4
- [17] Jifeng Dai, Kaiming He, and Jian Sun. Instance-aware semantic segmentation via multi-task network cascades. In *CVPR*, 2016. 1
- [18] David Eigen, Christian Puhrsch, and Rob Fergus. Depth map prediction from a single image using a multi-scale deep network. In *NeurIPS*, 2014. 2
- [19] Mark Everingham, Luc Van Gool, Christopher KI Williams, John Winn, and Andrew Zisserman. The pascal visual object classes (VOC) challenge. *IJCV*, 88(2):303–338, 2010. 1
- [20] Huan Fu, Mingming Gong, Chaohui Wang, Kayhan Batmanghelich, and Dacheng Tao. Deep ordinal regression network for monocular depth estimation. In *CVPR*, 2018. 2
- [21] Andreas Geiger, Philip Lenz, Christoph Stiller, and Raquel Urtasun. Vision meets robotics: The KITTI dataset. *The International Journal of Robotics Research*, 2013. 1, 2, 4
- [22] A. Giusti, D. Ciresan, J. Masci, L.M. Gambardella, and J. Schmidhuber. Fast image scanning with deep max-pooling convolutional neural networks. In *ICIP*, 2013. 3
- [23] Bharath Hariharan, Pablo Arbeláez, Ross Girshick, and Jitendra Malik. Simultaneous detection and segmentation. In *ECCV*, 2014. 1
- [24] Kaiming He, Georgia Gkioxari, Piotr Dollár, and Ross Girshick. Mask r-cnn. In *ICCV*, 2017. 1, 3
- [25] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *CVPR*, 2016. 3, 4
- [26] Xuming He, Richard S Zemel, and Miguel Á Carreira-Perpiñán. Multiscale conditional random fields for image labeling. In *CVPR*, 2004. 1
- [27] Jonathan Ho, Nal Kalchbrenner, Dirk Weissenborn, and Tim Salimans. Axial attention in multidimensional transformers. *arXiv:1912.12180*, 2019. 3, 4
- [28] Matthias Holschneider, Richard Kronland-Martinet, Jean Morlet, and Ph Tchamitchian. A real-time algorithm for signal analysis with the help of the wavelet transform. In *Wavelets: Time-Frequency Methods and Phase Space*, pages 289–297. Springer, 1989. 3
- [29] Andrew Howard, Mark Sandler, Grace Chu, Liang-Chieh Chen, Bo Chen, Mingxing Tan, Weijun Wang, Yukun Zhu, Ruoming Pang, Vijay Vasudevan, et al. Searching for mobilenetv3. In *ICCV*, 2019. 4
- [30] Andrew G Howard, Menglong Zhu, Bo Chen, Dmitry Kalenichenko, Weijun Wang, Tobias Weyand, Marco Andreetto, and Hartwig Adam. Mobilenets: Efficient convolutional neural networks for mobile vision applications. *arXiv:1704.04861*, 2017. 4

- [31] Gao Huang, Yu Sun, Zhuang Liu, Daniel Sedra, and Kilian Q Weinberger. Deep networks with stochastic depth. In *ECCV*, 2016. 4
- [32] Zilong Huang, Xinggang Wang, Lichao Huang, Chang Huang, Yunchao Wei, and Wenyu Liu. Ccnet: Criss-cross attention for semantic segmentation. In *ICCV*, 2019. 3, 4
- [33] Alex Kendall, Yarin Gal, and Roberto Cipolla. Multi-task learning using uncertainty to weigh losses for scene geometry and semantics. In *CVPR*, 2018. 3
- [34] Dahun Kim, Sanghyun Woo, Joon-Young Lee, and In So Kweon. Video panoptic segmentation. In *CVPR*, 2020. 1, 2, 4
- [35] Alexander Kirillov, Ross Girshick, Kaiming He, and Piotr Dollár. Panoptic feature pyramid networks. In *CVPR*, 2019. 2, 3
- [36] Alexander Kirillov, Kaiming He, Ross Girshick, Carsten Rother, and Piotr Dollár. Panoptic segmentation. In *CVPR*, 2019. 1, 2
- [37] Lubor Ladicky, Christopher Russell, Pushmeet Kohli, and Philip HS Torr. Associative hierarchical crfs for object class image segmentation. In *ICCV*, 2009. 1
- [38] Yann LeCun, Léon Bottou, Yoshua Bengio, and Patrick Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324, 1998. 1, 4
- [39] Qizhu Li, Xiaojuan Qi, and Philip HS Torr. Unifying training and inference for panoptic segmentation. In *CVPR*, 2020. 2
- [40] Yanwei Li, Xinze Chen, Zheng Zhu, Lingxi Xie, Guan Huang, Dalong Du, and Xingang Wang. Attention-guided unified network for panoptic segmentation. In *CVPR*, 2019. 2
- [41] Yi Li, Haozhi Qi, Jifeng Dai, Xiangyang Ji, and Yichen Wei. Fully convolutional instance-aware semantic segmentation. In *CVPR*, 2017. 1
- [42] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *ECCV*, 2014. 1, 3, 4
- [43] Shu Liu, Lu Qi, Haifang Qin, Jianping Shi, and Jiaya Jia. Path aggregation network for instance segmentation. In *CVPR*, 2018. 1
- [44] Jonathan Long, Evan Shelhamer, and Trevor Darrell. Fully convolutional networks for semantic segmentation. In *CVPR*, 2015. 1
- [45] Rohit Mohan and Abhinav Valada. Efficienttps: Efficient panoptic segmentation. *arXiv:2004.02307*, 2020. 2
- [46] Roozbeh Mottaghi, Xianjie Chen, Xiaobai Liu, Nam-Gyu Cho, Seong-Whan Lee, Sanja Fidler, Raquel Urtasun, and Alan Yuille. The role of context for object detection and semantic segmentation in the wild. In *CVPR*, 2014. 1
- [47] Pushmeet Kohli Nathan Silberman, Derek Hoiem and Rob Fergus. Indoor segmentation and support inference from rgb-d images. In *ECCV*, 2012. 1, 2
- [48] Gerhard Neuhold, Tobias Ollmann, Samuel Rota Bulò, and Peter Kotschieder. The mapillary vistas dataset for semantic understanding of street scenes. In *ICCV*, 2017. 1
- [49] Davy Neven, Bert De Brabandere, Marc Proesmans, and Luc Van Gool. Instance segmentation by jointly optimizing spatial embeddings and clustering bandwidth. In *CVPR*, 2019. 3
- [50] George Papandreou, Iasonas Kokkinos, and Pierre-Andre Savalle. Modeling local and global deformations in deep learning: Epitomic convolution, multiple instance learning, and sliding window detection. In *CVPR*, 2015. 3
- [51] George Papandreou, Tyler Zhu, Liang-Chieh Chen, Spyros Gidaris, Jonathan Tompson, and Kevin Murphy. PersonLab: Person pose estimation and instance segmentation with a bottom-up, part-based, geometric embedding model. In *ECCV*, 2018. 3
- [52] Lorenzo Porzi, Samuel Rota Bulò, Aleksander Colovic, and Peter Kotschieder. Seamless scene segmentation. In *CVPR*, 2019. 2
- [53] Haozhi Qi, Zheng Zhang, Bin Xiao, Han Hu, Bowen Cheng, Yichen Wei, and Jifeng Dai. Deformable convolutional networks – COCO detection and segmentation challenge 2017 entry. *ICCV COCO Challenge Workshop*, 2017. 3
- [54] Siyuan Qiao, Liang-Chieh Chen, and Alan Yuille. Detectors: Detecting objects with recursive feature pyramid and switchable atrous convolution. In *CVPR*, 2021. 2, 4
- [55] Siyuan Qiao, Yukun Zhu, Hartwig Adam, Alan Yuille, and Liang-Chieh Chen. ViP-DeepLab: Learning Visual Perception with Depth-aware Video Panoptic Segmentation. In *CVPR*, 2021. 1, 2, 4
- [56] Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, Alexander C. Berg, and Li Fei-Fei. ImageNet Large Scale Visual Recognition Challenge. *IJCV*, 2015. 1
- [57] Mark Sandler, Andrew Howard, Menglong Zhu, Andrey Zhmoginov, and Liang-Chieh Chen. Mobilenetv2: Inverted residuals and linear bottlenecks. In *CVPR*, 2018. 4
- [58] Ashutosh Saxena, Sung H. Chung, and Andrew Y. Ng. Learning depth from single monocular images. In *NIPS*, 2005. 2
- [59] Pierre Sermanet, David Eigen, Xiang Zhang, Michaël Mathieu, Rob Fergus, and Yann LeCun. Overfeat: Integrated recognition, localization and detection using convolutional networks. In *ICLR*, 2014. 3
- [60] Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. In *ICLR*, 2015. 3
- [61] Christian Szegedy, Vincent Vanhoucke, Sergey Ioffe, Jon Shlens, and Zbigniew Wojna. Rethinking the inception architecture for computer vision. In *CVPR*, 2016. 4
- [62] Jonas Uhrig, Eike Rehder, Björn Fröhlich, Uwe Franke, and Thomas Brox. Box2pix: Single-shot instance segmentation by assigning pixels to object boxes. In *IEEE Intelligent Vehicles Symposium (IV)*, 2018. 3
- [63] Jonas Uhrig, Nick Schneider, Lukas Schneider, Uwe Franke, Thomas Brox, and Andreas Geiger. Sparsity invariant cnns. In *3DV*, 2017. 4
- [64] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia

- Polosukhin. Attention is all you need. In *Advances in neural information processing systems*, pages 5998–6008, 2017. 4
- [65] Paul Voigtlaender, Michael Krause, Aljosa Osep, Jonathon Luiten, Berin Balachandar Gnana Sekar, Andreas Geiger, and Bastian Leibe. Mots: Multi-object tracking and segmentation. In *CVPR*, 2019. 4
- [66] Huiyu Wang, Yukun Zhu, Hartwig Adam, Alan Yuille, and Liang-Chieh Chen. MaX-DeepLab: End-to-End Panoptic Segmentation with Mask Transformers. In *CVPR*, 2021. 1, 3, 4
- [67] Huiyu Wang, Yukun Zhu, Bradley Green, Hartwig Adam, Alan Yuille, and Liang-Chieh Chen. Axial-DeepLab: Stand-Alone Axial-Attention for Panoptic Segmentation. In *ECCV*, 2020. 1, 3, 4
- [68] Xiaolong Wang, Ross Girshick, Abhinav Gupta, and Kaiming He. Non-local neural networks. In *CVPR*, 2018. 4
- [69] Mark Weber, Jonathon Luiten, and Bastian Leibe. Single-shot Panoptic Segmentation. In *IROS*, 2020. 2
- [70] Mark Weber, Jun Xie, Maxwell Collins, Yukun Zhu, Paul Voigtlaender, Hartwig Adam, Bradley Green, Andreas Geiger, Bastian Leibe, Daniel Cremers, Aljosa Osep, Laura Leal-Taixe, and Liang-Chieh Chen. STEP: Segmenting and Tracking Every Pixel. *arXiv:2102.11859*, 2021. 1, 2, 4
- [71] Zifeng Wu, Chunhua Shen, and Anton Van Den Hengel. Wider or deeper: Revisiting the ResNet model for visual recognition. *Pattern Recognition*, 2019. 4
- [72] Yuwen Xiong, Renjie Liao, Hengshuang Zhao, Rui Hu, Min Bai, Ersin Yumer, and Raquel Urtasun. UPSNet: A unified panoptic segmentation network. In *CVPR*, 2019. 2, 3
- [73] Tien-Ju Yang, Maxwell D Collins, Yukun Zhu, Jyh-Jing Hwang, Ting Liu, Xiao Zhang, Vivienne Sze, George Papandreou, and Liang-Chieh Chen. DeeperLab: Single-shot image parser. *arXiv:1902.05093*, 2019. 3
- [74] Sergey Zagoruyko and Nikos Komodakis. Wide residual networks. In *BMVC*, 2016. 4
- [75] Bolei Zhou, Hang Zhao, Xavier Puig, Tete Xiao, Sanja Fidler, Adela Barriuso, and Antonio Torralba. Semantic understanding of scenes through the ade20k dataset. *IJCV*, 2019. 1
- [76] Xingyi Zhou, Vladlen Koltun, and Philipp Krähenbühl. Tracking objects as points. *ECCV*, 2020. 4