

Exploring Vision Transformers for Fine-grained Classification

Marcos V. Conde
Universidad de Valladolid
drmarcosv@protonmail.com

Kerem Turgutlu
University of San Francisco
kcturgutlu@dons.usfca.com

Abstract

Existing computer vision research in categorization struggles with fine-grained attributes recognition due to the inherently high intra-class variances and low inter-class variances. SOTA methods tackle this challenge by locating the most informative image regions and rely on them to classify the complete image. The most recent work, Vision Transformer (ViT), shows its strong performance in both traditional and fine-grained classification tasks. In this work, we propose a multi-stage ViT framework for fine-grained image classification tasks, which localizes the informative image regions without requiring architectural changes using the inherent multi-head self-attention mechanism. We also introduce attention-guided augmentations for improving the model's capabilities. We demonstrate the value of our approach by experimenting with four popular fine-grained benchmarks: CUB-200-2011, Stanford Cars, Stanford Dogs, and FGVC7 Plant Pathology. We also prove our model's interpretability via qualitative results. See <https://github.com/mv-lab/ViT-FGVC8>.

1. Introduction

How to tell a dog's breed, a car's brand, or a bird's species?. These are all challenging tasks even to the average human and usually require expertise. Fine-Grained Visual Classification (FGVC) aims to classify the sub-categories under coarse-grained large categories. Not only does it require to recognize a dog in the image but also correctly tell whether it is a Siberian Husky or an Alaskan Malamute. FGVC is challenging because objects that belong to different categories might have similar characteristics, but differences between sub-categories might be remarkable (small inter-class variations and large intra-class variations). Because of these reasons, it is hard to obtain accurate classification results using classical Convolutional Neural Networks [13, 9, 20, 19, 21].

Recent work shows the key step of FGVC is identifying and extracting more informative regions and features in an image [14, 3, 10, 23, 24]. This can be done using a back-

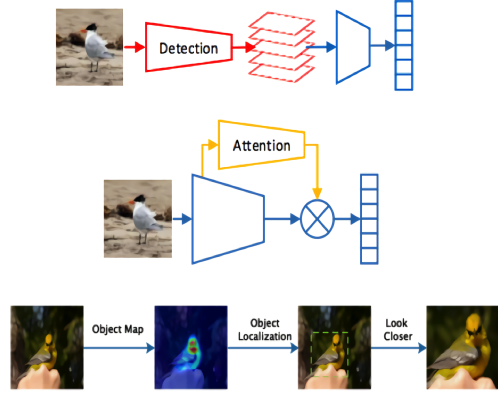


Figure 1. SOTA methods based on localization of discriminative regions. Diagrams from Chen et.al. [2] and Hu et.al. [10].

bone network (i.e. ResNet [9]) to extract features of the image and selected regions. However, this strategy inevitably leads to complex pipelines, sometimes not fully differentiable, and pushes the proposed regions to contain most of the parts of the objects. Moreover, labeling fine-grained categories is an expensive and time-consuming process that requires expertise in a specialized domain. Therefore, FGVC datasets [11, 22, 16] often have limited training data.

Our main contributions are: (i) An interpretable multi-stage model based on Vision Transformers [4] and detection-based FGVC methods, that allows to localize and recognize informative regions in the image using the inherent multi-head attention mechanism. (ii) Augmentations based on attention flow with respect to the input tokens that lead to forcing the image to learn and extract a broader set of fine-grained features. (iii) Explore potential of Visual Transformers for fine-grained classification and achieve state-of-the-art performance.

2. Approach

Our Multi-stage Multi-scale model, inspired by MMAL-Net [23] can be seen in Figure 2.

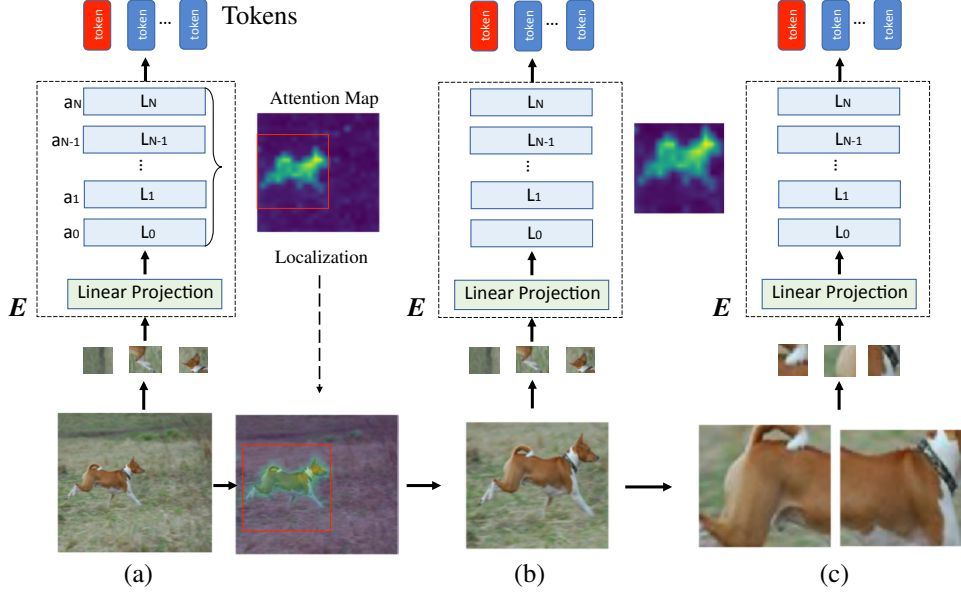


Figure 2. Summary of our approach as explained in Section 2, there are three stages a,b,c, and the ViT body is shared across them. We also show the corresponding self-attention map at stage (a) with its detected bounding box in red color.

We use a Vision Transformer (ViT) [4] for encoding images into feature representation for further downstream fine-grained classification task and use the inherent multi-head self-attention mechanism to extract attention maps with respect to the original input image using the attention flow method from Abnar et.al. [1]. Inherent multi-head self-attention allows us to simultaneously extract features and localize important regions in a single forward pass without additional memory requirements or architectural changes. In our experiments we used ViT-B/16 as our encoder E and a 2 layer MLP with $ReLU$ activation in between for the classification task. For classification, CLS token, colored in red in Figure 2, is fed to MLP . Our method composes of 3 stages in sequence:

- a **Main stage:** The main stage uses encoder E to extract attention maps. A bounding box is generated using the object localization method. In this stage, the full image feature is used for the downstream classification task. Furthermore, the object and its corresponding attention map are cropped from a higher resolution version of the full image and passed down to the object stage.
- b **Object stage:** In the object stage, cropped image feature is used for the downstream classification task.
- c **Parts stage:** Cropped attention map from previous stages is used to extract fine-grained crops from the localized object image using the discriminative regions localization method. In this stage, crops are used for the downstream classification task as independent inputs.

Note that all parameters are shared across stages as in [23], and they are optimized simultaneously using the loss function \mathcal{L}_{joint} defined in Equation 1, based on the Cross-Entropy loss denoted as \mathcal{L} , where \mathcal{L}_a , \mathcal{L}_b , \mathcal{L}_c correspond to the three stages explained in this Section and shown in Figure 2. Note that for stage c, \mathcal{L}_c is the aggregation of losses from the respective N c_i crops.

$$\mathcal{L}_{joint} = \mathcal{L}_a + \mathcal{L}_b + \sum_{i=1}^N \mathcal{L}_{c_i} \quad (1)$$

The Attention Map AM is obtained by recursively multiplying the self-attention weights $a_0 \dots a_N$ from each transformer layer $L_0 \dots L_N$, this recovers more information than using only the last layer.

2.1. Object Localization

The attention map of the full image is binarized using a histogram-based thresholding algorithm. Then, a grayscale morphological closing is applied on this binary map. Finally, the bounding box that covers the binary foreground with the maximum attention value is used for object cropping. During our experiments, we found that mean thresholding [8] to be working well.

2.2. Discriminative Regions Localization

Object part regions (c) are extracted using the attention map of the object after cropping it from the full attention map as seen in (b) from Figure 2. The strength of attention in local areas can be an indicator of the importance of

these regions captured by the model. Therefore, we search for such regions which cover the most attention and at the same time are not very overlapped. This allows us to find non-overlapping object part crops. We calculate scores for each object part region candidate in the localized object’s attention map. These scores are calculated using Average Pooling (AP) layer with a kernel size of $H \times W$ and stride $S = 1$. Stride $S = 1$ is used to search all possible regions but its value can be increased to reduce the computational overhead. We empirically found that Max Pooling layer leads to worse performance as it is too localized. However, generalized-mean (GeM) pooling can also be used [18]. Kernel size of $H \times W$ is a hyper-parameter that can be tuned based on the dataset. In our experiments, we used 0.3 of the cropped object area, which roughly accounts for a kernel size of 112x112 when object attention maps are resized to 384 px. After the scoring, we apply Non-Maximum Suppression (NMS) similar to other well know detectors [7] to get the top non-overlapping regions. We used the top 2 object regions after NMS.

2.3. Attention-based Augmentations

Data augmentation allows to increase the variety of training data, prevent overfitting and improve the performance of deep models. However, in FGVC, random data augmentation, such as random image cropping, is low-efficiency and might remove informative parts. Inspired by WS-DAN [10], we augment the image using the learned self-attention map, which represents the importance of image parts (tokens) based on the model. As shown in Figure 3, we perform cropping and erasing. Removing currently attended pixels enforces the model to consider other discriminative regions and allows feature diversity during training. In a given batch, we randomly apply random erasing on an image with a probability P by erasing all the pixels that have an attention value higher than the threshold T . Particularly *RandomErasing* [25], as a destructive augmentation, has proven to improve accuracy performance on fine-grained classification [3, 10].

3. Experiments

In this section we report the results for each benchmark dataset. In each experiment we used the same setup for training. We use augmentations proposed in Section 2.3 together with standard augmentations (*e.g.* horizontal flip, additive noise, etc.) Full images (stage a) are resized to 384 px resolution in main stage, objects (stage b) and crops (stage c) are cropped from a higher resolution and then resized to 384 px before the forward pass to the next stage.



Figure 3. Attention-based cropping and erasing (see Section 2.3).

Datasets	Category	Training	Testing
CUB-Birds [22]	200	5994	5794
Stanford Dogs [11]	120	12000	8580
Stanford Cars [12]	196	8144	8041
Plant Pathology [17]	5	9436	12595

Table 1. Summary of Datasets.

Method	Backbone	Accuracy(%)
MaxEnt [5]	DenseNet-161	83.6
FDL [REF]	DenseNet-161	84.9
RA-CNN [6]	VGG-19	87.3
Cross-X [15]	ResNet-50	88.9
API-Net [26]	ResNet-101	90.3
ViT [4]	ViT-B/16	91.7
Ours	ViT-B/16	93.2

Table 2. Comparison of different methods on Stanford Dogs and ablation of our method.

Method	Backbone	CUB	Cars
VGG-16 [19]	VGG-16	77.8	85.7
ResNet-101 [9]	ResNet-101	83.5	91.2
Inception-V3 [20]	Inception-V3	83.7	90.8
RA-CNN [6]	VGG-19	85.3	92.5
MaxEnt [5]	DenseNet-161	86.6	93.0
Cross-X [15]	ResNet-50	87.7	94.6
DCL [2]	ResNet-50	87.8	94.5
API-Net [26]	DenseNet-161	90.0	95.3
WS-DAN [10]	Inception v3	89.4	94.5
MMAL-Net [23]	ResNet-50	89.6	95.0
ViT [4]	ViT-B/16	89.4	92.8
Ours	ViT-B/16	91.0	94.3

Table 3. Comparison with state-of-the-art methods on CUB-200-2011 and Stanford Cars.

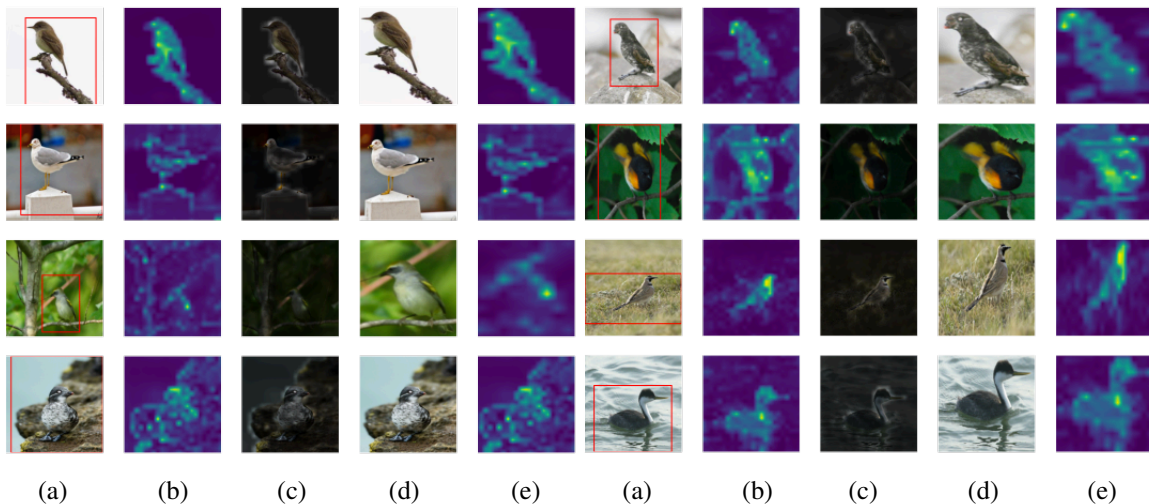


Figure 4. Results for CUB-200-2011 Dataset [22]. We show (a) input image, (b) attention map, (c) image after applying the global attention map, highlighting informative regions, (d) attention crop, from the predicted red bounding box and (e) crop’s attention map. These qualitative visualizations prove the effectiveness and the interpretability of our method. 8 complete results. Best viewed in color.

Method	Backbone	Accuracy(%)
ResNet [9]	50	89.2
EfficientNet[21]	B0	90.1
EfficientNet[21]	B2	90.4
ViT [4]	ViT-B/16	91.7
Ours	ViT-B/16	92.4

Table 4. Method comparison on FGVC7 Plant Pathology.

3.1. Results

The reported results in Tables 2,3,4 show that Vision Transformers have great potential on FGVC. Moreover, our experiments show that attention-driven augmentations and important regions detection help to improve their performance on fine-grained classification, achieving state-of-the-art performance in Stanford Dogs [11] and CUB-200-2011 [22]. However, we must expose the **limitations** of the proposed multi-branch multi-scale architecture: (i) the selection of the region of interest (ROI) based on the attention map is not fully differentiable, and thus, the model is not complete end-to-end trainable, it requires to train it in a sequential (multi-stage) way. (ii) ViT-based models require important computational power.

4. Conclusion

In this paper, we propose a multi-stage multi-scale fine-grained visual classification framework based on ViT. The multi-head self-attention mechanism can capture discriminative image features from multiple diverse local regions.

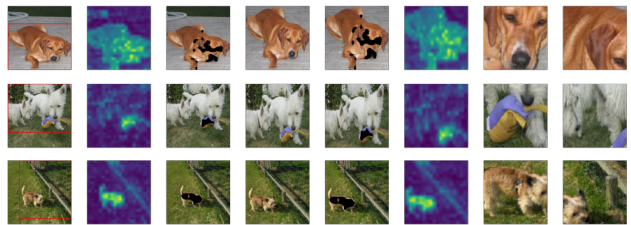


Figure 5. Qualitative results for Stanford Dogs [11]. We show 3 samples, from left to right: the input image with the predicted bounding box (red color), the global attention map, attention-based erasing augmentation (*RandomErasing*), selected crops and their attention map, the top-2 most informative regions in the image based on crop’s attention (Section 2.2). Best viewed in color.

We aim to exploit this property in our framework, and by doing it we achieve state-of-the-art results on popular fine-grained benchmarks. We also employ different attention-guided augmentations to improve our model’s generalization capability by enforcing the model to learn more diverse discriminative features. As future work, we aim towards making our framework end-to-end trainable and improve this approach by exploring detection transformers.

References

- [1] Samira Abnar and Willem Zuidema. Quantifying attention flow in transformers, 2020. 2
- [2] Yue Chen, Yalong Bai, Wei Zhang, and Tao Mei. Destruction and construction learning for fine-grained image recognition.

- In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2019. 1, 3
- [3] Yue Chen, Yalong Bai, Wei Zhang, and Tao Mei. Destruction and construction learning for fine-grained image recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2019. 1, 3
 - [4] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale, 2020. 1, 2, 3, 4
 - [5] Abhimanyu Dubey, Otkrist Gupta, Ramesh Raskar, and Nikhil Naik. Maximum-entropy fine grained classification. In S. Bengio, H. Wallach, H. Larochelle, K. Grauman, N. Cesa-Bianchi, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 31. Curran Associates, Inc., 2018. 3
 - [6] Jianlong Fu, Heliang Zheng, and Tao Mei. Look closer to see better: Recurrent attention convolutional neural network for fine-grained image recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, July 2017. 3
 - [7] Ross Girshick. Fast r-cnn, 2015. 3
 - [8] C.A. Glasbey. An analysis of histogram-based thresholding algorithms. *CVGIP: Graphical Models and Image Processing*, 55(6):532–537, 1993. 2
 - [9] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition, 2015. 1, 3, 4
 - [10] Tao Hu, Honggang Qi, Qingming Huang, and Yan Lu. See better before looking closer: Weakly supervised data augmentation network for fine-grained visual classification, 2019. 1, 3
 - [11] Aditya Khosla, Nityananda Jayadevaprakash, Bangpeng Yao, and Li Fei-Fei. Novel dataset for fine-grained image categorization. In *First Workshop on Fine-Grained Visual Categorization, IEEE Conference on Computer Vision and Pattern Recognition*, Colorado Springs, CO, June 2011. 1, 3, 4
 - [12] Jonathan Krause, Michael Stark, Jia Deng, and Li Fei-Fei. 3d object representations for fine-grained categorization. In *4th International IEEE Workshop on 3D Representation and Recognition (3dRR-13)*, Sydney, Australia, 2013. 3
 - [13] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E. Hinton. Imagenet classification with deep convolutional neural networks. NIPS’12, page 1097–1105, Red Hook, NY, USA, 2012. Curran Associates Inc. 1
 - [14] Michael Lam, Behrooz Mahasseni, and Sinisa Todorovic. Fine-grained recognition as hsnet search for informative image parts. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, July 2017. 1
 - [15] Wei Luo, Xitong Yang, Xianjie Mo, Yuheng Lu, Larry S. Davis, Jun Li, Jian Yang, and Ser-Nam Lim. Cross-x learning for fine-grained visual categorization, 2019. 3
 - [16] Subhransu Maji, Esa Rahtu, Juho Kannala, Matthew Blaschko, and Andrea Vedaldi. Fine-grained visual classification of aircraft, 2013. 1
 - [17] Ernest Mwebaze, Timnit Gebru, Andrea Frome, Solomon Nsumba, and Jeremy Tsubira. icassava 2019 fine-grained visual categorization challenge, 2019. 3
 - [18] Filip Radenović, Giorgos Tolias, and Ondřej Chum. Fine-tuning cnn image retrieval with no human annotation, 2018. 3
 - [19] Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition, 2015. 1, 3
 - [20] Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich. Going deeper with convolutions, 2014. 1, 3
 - [21] Mingxing Tan and Quoc Le. EfficientNet: Rethinking model scaling for convolutional neural networks. In Kamalika Chaudhuri and Ruslan Salakhutdinov, editors, *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 6105–6114. PMLR, 09–15 Jun 2019. 1, 4
 - [22] C. Wah, S. Branson, P. Welinder, P. Perona, and S. Belongie. The Caltech-UCSD Birds-200-2011 Dataset. Technical Report CNS-TR-2011-001, California Institute of Technology, 2011. 1, 3, 4
 - [23] Fan Zhang, Meng Li, Guisheng Zhai, and Yizhao Liu. Multi-branch and multi-scale attention learning for fine-grained visual categorization, 2020. 1, 2, 3
 - [24] H. Zheng, J. Fu, Z. Zha, and J. Luo. Looking for the devil in the details: Learning trilinear attention sampling network for fine-grained image recognition. In *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 5007–5016, 2019. 1
 - [25] Zhun Zhong, Liang Zheng, Guoliang Kang, Shaozi Li, and Yi Yang. Random erasing data augmentation, 2017. 3
 - [26] Peiqin Zhuang, Yali Wang, and Yu Qiao. Learning attentive pairwise interaction for fine-grained classification, 2020. 3