

Estimating the Robustness of Classification Models by the Structure of the Learned Feature-Space

Kalun Ho, Franz-Josef-Pfreundt
CC-HPG, Fraunhofer ITWM
Fraunhofer-Platz 1
67663 Kaiserslautern
Germany
kalun.ho@itwm.fhg.de

Janis Keuper
Institute for
Machine Learning
and Analytics
Offenburg University
Germany

Margret Keuper
Data and Web Science Group
University of Mannheim
Germany

Abstract

Over the last decade, the development of deep image classification networks has mostly been driven by the search for the best performance in terms of classification accuracy on standardized benchmarks like ImageNet. More recently, this focus has been expanded by the notion of model robustness, i.e. the generalization abilities of models towards previously unseen changes in the data distribution. While new benchmarks, like ImageNet-C, have been introduced to measure robustness properties, we argue that fixed testsets are only able to capture a small portion of possible data variations and are thus limited and prone to generate new overfitted solutions. To overcome these drawbacks, we suggest to estimate the robustness of a model directly from the structure of its learned feature-space. We introduce robustness indicators which are obtained via unsupervised clustering of latent representations from a trained classifier and show very high correlations to the model performance on corrupted test data.

1. Introduction

Deep learning approaches have shown rapid progress on computer vision tasks. Much work has been dedicated to train ever deeper models with improved validation and test accuracies and efficient training schemes [53, 19, 33, 20]. Recently, this progress has been accompanied by discussions on the robustness of the resulting model [9]. Specifically, the focus shifted towards the following two questions: 1. How can we train models that are robust with respect to specific kinds of perturbations? 2. How can we assess the robustness of a given model? These two questions represent fundamentally different perspectives on the same problem. While the first question assumes that the expected set of perturbations is known during model training, the second question rather aims at estimating a models behavior in un-

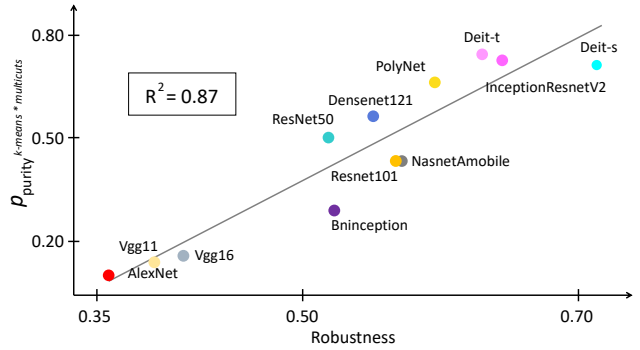


Figure 1. Predicting the robustness of models using our proposed cluster purity indicator (p_{purity}): The correlation between p_{purity} of models trained on the original ImageNet with the measured test accuracy on ImageNet-C is $R^2 = 0.87$.

foreseen cases and predict its robustness without explicitly testing on specific kinds of corrupted data.

In this paper, we address the second research question. We argue that the clustering performance in a model’s latent space can be an indicator for a model’s robustness. For this purpose, we introduce cluster purity as a robustness measure in order to predict the behavior of models against data corruption and adversarial attacks. Specifically, we evaluate various classification models [29, 53, 21, 15, 44, 52, 22, 47] on the ImageNet-C [16] dataset of corrupted ImageNet images where we measure the robustness of a model as the ratio between the accuracy on corrupted data and clean data. The key result of this paper is illustrated in figure 1: it shows that the model robustness is strongly correlated to the relative clustering performance on the models’ latent spaces, i.e. the ratio between the cluster purity and the classification accuracy, both evaluated on clean data. The clusterability of a model’s feature space can therefore be considered as an easily accessible indicator for model robustness.

In summary, our work contributes the following:

- We study the feature spaces of several ImageNet pre-trained models including the state-of-the-art CNN models [53, 21, 15, 44, 52] and the recently proposed transformer models [47] and evaluate their model robustness on the ImageNet-C dataset and against adversarial attacks.
- We show that intra- and inter-class distances extracted from classification models are not suitable as a direct indicator for a model’s robustness.
- We provide a study of two clustering methods, *K-means* and the *Minimum Cost Multicut Problem* (MP) and analyze the correlation between classification accuracy, robustness and clusterability.
- We show that the relative clustering accuracy, *i.e.* the ratio between classification and clustering performance, is a strong indicator for the robustness of the classification model under ImageNet-C corruptions.

This paper is structured as follows: We first review the related work on image classification, model robustness and deep clustering approaches in Section 2, then we propose the methodology for the feature space analysis in Section 3. Our experiments and results are discussed in Section 4.

2. Related Work

Image Classification. Convolutional neural networks (CNN) have shown great success in computer vision. In particular, from the classification of handwritten characters [32] to images [28], CNN-based methods consistently achieve state-of-the-art in various benchmarks. With the introduction of ImageNet [39], a dataset with higher resolution images and one thousand diverse classes is available to benchmark the classification accuracy of ever better performing networks [29, 53, 21, 15, 44, 52], ranging from small and compact network [19] to large models [43] with over 100 millions of parameters.

Transformers. Recently, transformer network architectures, which were originally introduced in the area of natural language processing [49], have been successfully applied to the image classification task [6, 10]. The performance of transformer networks is competitive despite having no convolutional layers. However, transformer models require long training times and large amounts of data [10] in order to generalize well. A more efficient approach for training has been proposed in [47], which is based on a teacher-student strategy (distillation). Similarly, [5] uses the same strategy on self-supervised tasks.

Model Robustness. Convolutional neural networks are susceptible to distribution shifts [38] between train and test data [36, 11, 16, 40]. This concerns both visible input domain shifts by for example considering corrupted, noisy or blurred data, as well as imperceptible changes in the input, induced by [35, 14, 31]. These explicitly maximize the error rate of classification models [45, 3] and thereby reveal model weaknesses. Many methods have been proposed to improve the adversarial robustness by specific training procedures, *e.g.* [35, 24]. In contrast, input distribution shifts induced by various kinds of noise as modeled in the ImageNet-C [16] dataset mimic the robustness of a model in unconstrained environments, for example under diverse weather conditions. This aspect is crucial if we consider scenarios like autonomous driving, where we want to ensure robust behaviour for example under strong rain. Therefore, we focus on the latter aspect and investigate the behaviour of various pre-trained models under ImageNet-C corruptions but also evaluate the proposed robustness measure on adversarial perturbations [35, 24].

Clustering. Clustering approaches, deep clustering approaches in particular, have shown to benefit from well structured feature spaces. Such approaches therefore aim at optimizing the latent representations for example using variational autoencoders or Gaussian mixture model or *K-means* priors [37, 51, 13, 12, 4]. [4] iteratively groups points using *K-means* during the latent space optimization. Conversely, we are investigating the actual feature space learned from image classification tasks using clusterability as a measure for its robustness. Therefore, we apply clustering approaches on pre-trained feature spaces. Further, while the above mentioned methods rely on a *K-means*-like clustering, *i.e.* data is clustered into a given number of clusters, we also evaluate clusters from a similarity driven clustering approach, the *Minimum Cost Multicut Problem* [1].

The Multicut Problem, aka. Correlation Clustering, groups similar data points together by pairwise terms: data (*e.g.* images) are represented as nodes in a graph. The real valued weight of an edge between two nodes measures their similarity. Clusters are obtained by cutting edges in order to decompose the graph and minimize the cut cost. This problem is known to be NP-hard [8]. In practice, heuristic solvers often perform reasonably [25, 2]. Correlational Clustering has various applications in computer vision, such as motion tracking and segmentation [26, 50], image clustering [17] or multiple object tracking [46, 17].

3. Feature Space Analysis

Our aim is to establish indicators for a model’s robustness from the structure of its induced latent space. Therefore, we first extract latent space samples, *i.e.* feature representations of input test images. The latent space structure

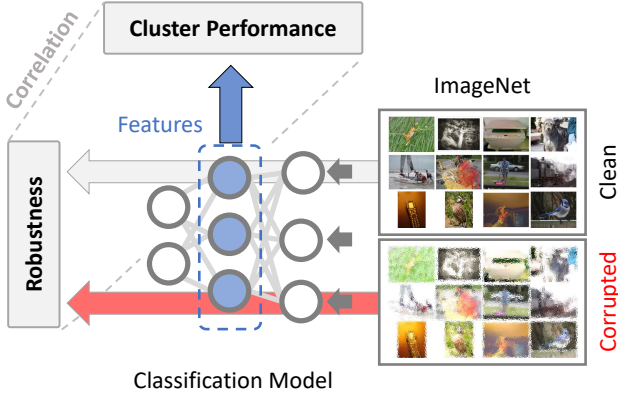


Figure 2. The robustness of a model is measured by its relative classification performance, which is the ratio between clean and corrupted (in red arrow) data.. The latent space or features (in blue) of various classification models is sampled using ImageNet images. The feature representations are then clustered with the *K-means* and *Multicut* clustering approaches. The correlation is visualized in 1.

is subsequently analyzed using two different clustering approaches. *K-means* is clustering data based on distances to a fixed number of cluster means and can therefore be interpreted as a proxy of how well the latent space distribution can be represented by a univariate Gaussian mixture model. The *Minimum Cost Multicut problem* formulation clusters data points based on their pairwise distances and therefore imposes less constraints on the data manifold to be clustered. Figure 2 gives an overview of the methodology. First, we briefly recap classification models as feature extractors in Section 3.1. The *K-means* and *Minimum Cost Multicut Problem* on the image clustering task are explained in Section 3.2. In Section 3.3, we review evaluation metrics for measuring the clustering performance and in Section 3.4, we present our proposed metrics for robustness estimation.

3.1. Extracting Features from Classification Models

Classification models with multiple classes are often trained with softmax cross-entropy and it has been shown that features, learned from vanilla softmax cross-entropy achieve a high performance in transfer accuracy [27]. In order to obtain the learned features from images, the last layer of the trained model (classifier) is removed, which is often done for instance in transfer learning [41, 42] or clustering tasks [51]. The model encodes an image x_i with a function $f_\theta(\cdot)$, with pre-trained parameters θ . Table 1 shows the different classification models with their according feature dimensions as well as the number of parameters and their top 1 classification accuracy in %. We investigate models which vary significantly in their architectures, including CNNs and transformer models, their number of

Table 1. **Classification models:** all models are trained and evaluated on the ImageNet [39] dataset, sorted by performance. We report the Top1 classification accuracy in %. The first ten models are based on convolutional layers while the last two are transformer networks.

MODEL	FEATURES	PARAM	TOP1 %
ALEXNET [29]	4096	61.1M	56.4
VGG11 [53]	4096	132.9M	69.0
VGG16 [53]	4096	138.4M	71.6
BNINCEPTION [22]	1024	11.3M	73.5
NASNETAMOBILE [53]	1056	5.3M	74.1
DENSENET121 [21]	1024	7.9M	74.6
RESNET50 [15]	2048	25.6M	76.0
RESNET101 [15]	2048	44.5M	77.4
INCR5NV2 [44]	1536	55.8M	80.2
POLYNET [52]	2048	95.3M	81.0
DEIT-TINY [47]	192	5.9M	74.5
DEIT-SMALL [47]	384	22.4M	81.2

parameters, ranging from 3.5M to 138M, as well as their test accuracy, ranging from 56.4% to 81.2% top-1 scores. We use features extracted from the full ImageNet test set as latent space samples for our analysis as shown in 2.

3.2. Latent Space Clustering

K-means. *K-means* is a simple and effective method to cluster N data points into K clusters $S_k, k = 1, \dots, K$. As K is set a priori, this method produces exactly the number of defined clusters by minimizing the intra-cluster distance:

$$\sum_{k=1}^K \sum_{x_i \in S_k} \|f(x_i) - \mu_k\|^2 \quad (1)$$

where the centroid μ_k is computed as the mean of features $\frac{1}{|S_k|} \sum_{x_i \in S_k} f(x_i)$ in cluster k .

Multicut Clustering. The Minimum Cost Multicut Problem is a graph based clustering approach. Considering an undirected graph $G = (V, E)$, with $v \in V$ being the images x_i of the dataset X with $|V| = N$ samples, a complete graph with N nodes has in total $|E| = \frac{N(N-1)}{2}$ edges. A real valued cost $w : E \rightarrow \mathbb{R}$ is assigned to every edge $e \in E$. While the decision, whether an edge is joined or cut, is made based on the edge label $y : E \rightarrow \{0, 1\}$, the decision boundary can be derived from training parameters of the model [18], directly learned from the dataset [17, 46] or simply estimated empirically (via parameter search). The inference of such edge labels is defined as follows:

$$\min_{y \in \{0, 1\}^E} \sum_{e \in E} w_e y_e \quad (2)$$

	Cluster 1	Cluster 2	Cluster 3	Cluster 4	
Majority					Total
Accuracy	6/9 = 66%	6/8 = 75%	7/7 = 100%	0/2 = 0%	19/26 = 73%
Purity	6/9 = 66%	6/8 = 75%	7/7 = 100%	2/2 = 100%	21/26 = 80%

Figure 3. Evaluation metrics with 4 clusters with 3 unique classes. **Cluster Accuracy:** The best match for class *dark circle* is cluster 3, since it contains the most frequent items from the same class. Cluster 4 is considered as false positive. **Purity score** on the other hand does not penalize cluster 4. Thus, the purity score is higher than the cluster accuracy (80% vs. 73%).

$$\text{s.t. } \forall C \in \text{cycles}(G) \quad \forall e \in C : y_e \leq \sum_{e' \in C \setminus \{e\}} y_{e'} \quad (3)$$

Here, edges with negative costs w_e have a high probability to be cut. Equation (3) enforces that for each cycle in G , a cut is only allowed if there is at least another edge being cut as well, which was shown in [7] to be sufficient to enforce on all *chordless* cycles. Practically, the edge costs are computed from pairwise distances in the feature space. The distance $d_{i,j}$ between two features $f(x_i)$ and $f(x_j)$ is calculated from the pre-trained model or encoder f , where x_i and x_j are two distinct images from the test dataset, respectively, as

$$d_{i,j} = \|f(x_i) - f(x_j)\|^2. \quad (4)$$

A logistic regression model estimates the probability $d_{i,j}$ of the edge between $f(x_i)$ and $f(x_j)$ to be cut. This cut probability is then converted into real valued edge costs w using the *logit* function $\text{logit}(p) = \log \frac{p}{1-p}$ such that similar features are connected by an edge with positive, *i.e.* attractive weight and dissimilar features are connected by edges with negative, *i.e.* repulsive weight. The decision boundary (*i.e.* the threshold on d , which indicates when to cut or to join) is estimated empirically and we will provide the details in the supplementary material.

3.3. Cluster Quality Measures

We use two popular external evaluation metrics (*i.e.* label information are used) to measure the clustering performance: Cluster Accuracy (ACC) and Purity Score. The former metric is calculated based on the Hungarian algorithm [30], where the best match between the predicted and the true labels are found. The purity score assigns data in a cluster to the class with the most frequent label [23]. Formally, given a set of K clusters S_k and a set of classes L with a total number of N data samples, the purity is computed as follows:

$$\frac{1}{N} \sum_{k \in K} \max_{\ell \in L} |S_k \cap \ell| \quad (5)$$

The advantage of using this metric is two-fold: on one hand, it is suitable if the dataset is balanced and on the other hand, purity score does not penalize having a large number of clusters. Figure 3 depicts an example of both metrics.

3.4. Performance Measure

Next, we derive a measure based on the latent space clustering performance, that allows to draw conclusions on a model’s robustness without evaluating the model on corrupted data. Thereby, we measure a model’s robustness as its relative classification accuracy, *i.e.* the ratio between its classification accuracy on corrupted data and on clean data:

$$\text{Robustness} = \frac{\text{Model}_{\text{ACC}^*_{s,c}}}{\text{Model}_{\text{ACC}}} \quad (6)$$

Parameters c and s are corruption type and severity level (or intensity), respectively for non-adversarial attacks such as ImageNet-C. The aggregated value over all severity levels $s \in \tilde{S}$ on all corruption types $c \in \text{CORR}$ is calculated as follows:

$$\text{ACC}^*_{\text{all}} = \frac{1}{|\text{CORR}|} \sum_{c \in \text{CORR}} \frac{1}{|\tilde{S}|} \sum_{s=1}^{|\tilde{S}|} \text{ACC}^*_{s,c} \quad (7)$$

According to equation 6, perfectly robust models therefore have a robustness of 1, smaller values indicate lower robustness. Based on the above considerations on model robustness and clustering performance, we propose to consider the relative clustering performance as an indicator for the model robustness and show empirically that there exists a strong correlation between both. The relative clustering performance, *i.e.* the ratio between clustering performance and classification accuracy $\text{Model}_{\text{ACC}}$ is defined as follows:

$$p = \frac{\text{clustering performance}}{\text{Model}_{\text{ACC}}} \quad (8)$$

Here, we consider the clustering accuracy C_{ACC} and purity score C_{purity} as a performance measures for our experiments, *i.e.*

$$p_{\text{ACC}} = \frac{C_{\text{ACC}}}{\text{Model}_{\text{ACC}}} \quad \text{and} \quad p_{\text{purity}} = \frac{C_{\text{purity}}}{\text{Model}_{\text{ACC}}}$$

respectively.

Correlation Metrics. The degree of correlation is computed based on the coefficient of determination R^2 and Kendall rank correlation coefficient τ , respectively with a value of 1.0 being perfectly correlated while 0 means



Figure 4. ImageNet-C dataset: first row shows the original image and the corruption *brightness* for different severity levels. Second row: examples of other corruption types at severity level 5.

no correlation at all. An example for R^2 is illustrated in Figure 1 and τ in Figure 7.

Baseline Indicator: Class Overlap Δ . Our hypothesis is that an initial well-separated feature space of a classification model provides a good estimate regarding the model robustness. A simple method to determine such a separation would be to observe the intra- and inter-class distances between data samples in the feature space. If an overlap between classes exists, they are not well separated, which may indicate weak models. We define this setting as a baseline in order to show that latent space clustering provides significantly more information.

To investigate this, we define the overlap Δ between the intra- and inter-class distances as follows:

$$\Delta = (\mu_{intra} + \sigma_{intra}) - (\mu_{inter} + \sigma_{inter}) \quad (9)$$

μ and σ represent the mean and standard deviation of the intra- and inter-class distances.

4. Experiments

This section is structured as follows: we first explain the setup of our experiments in 4.1. Then, we present the clustering results in Section 4.2 where we analyse the clustering accuracy and purity for the two considered clustering approaches on the feature spaces of the different models. Section 4.3 shows that the intra- and inter-class distances cannot directly be used as robustness indicators. In Section 4.4, we consider the relationship between the model classification robustness under corruptions and the relative clustering performance of the considered clustering methods and metrics. We show that both clustering accuracy and cluster purity, computed on the feature spaces of clean data, allow to derive indicators for a model’s expected robustness under corruptions. Thereby, the purity score is more stable than the clustering accuracy and the information provided by *k-means* clustering and *multicuts* complement one another. In Section 4.5, we evaluate the proposed robustness indicator in the context of adversarial attacks.

4.1. Setup

Our experiments are based on the ImageNet [39] dataset. All models were pre-trained on the original training dataset. We evaluate 10 CNN-based models and 2 transformer architectures *deit-t* and *deit-s* (t stands for tiny and s for small). An overview is provided in Table 1. We evaluate the robustness of the considered models against corruptions using the *ImageNet-C* [16] dataset and report the model accuracy for classification and clustering tasks. Figure 4 illustrates an example of considered image corruptions: the first row shows the different severity levels $s = 1, \dots, 5$ of the corruption *brightness*, with 1 being the lowest and 5 the strongest corruption. The second row shows other kinds of image perturbations c at severity level 5 such as *fog*, *frost*, *gaussian blur*, *jpeg.compression* or *pixelate*. Each corruption c has 5 severity levels $s = 1, \dots, 5$. All models are trained on the clean dataset and the numbers are evaluated on the full test dataset, as done in [16].

4.2. Classification vs. Clustering

Table 2 summarizes the evaluation in three categories: classification, *K-means* and *Multicuts*. There are in total $|\text{CORR}| = 19$ corruption types with each $|\hat{S}| = 5$ severity levels on ImageNet-C. For the classification task, the numbers are reported in top 1% accuracy for all five levels of corruption (denoted as 1 – 5). On *K-means* and *Multicuts*, we report the clustering metrics as presented in 3.3.

The transformer *deit-s* shows the highest top 1% accuracy on the classification task both on clean and on corrupted data for all severity levels. *Inceptionresnetv2* and *polynet* perform only slightly worse on clean data but are more strongly affected by the ImageNet-C data corruptions than *deit-s*. *Alexnet* shows the worse performance across all corruption levels. Although *resnet50* outperforms *bninception*, *nasnetamobile* and *densenet121* it is less robust against corruption. This is also illustrated in Figure 6 (right).

Considering the clustering accuracy and purity, the *K-means* and the *Multicut* behave significantly different from one another. *K-means* clustering achieves about 70% accuracy for models with the highest clean classification accuracy. Yet, its accuracy is much better for the *deit-t* latent space than for example for the *densenet121* induced latent space, although the clean classification accuracy of both networks is comparable. Overall, the *K-means* clustering works surprisingly well on the transformer models. The *Multicut* clustering showed the highest clustering accuracy on the *inceptionresnetv2* model. The cluster purity was comparably high for the best transformer model *deit-s*. Note that our goal is to derive from the clustering performance an indicator for model robustness, *i.e.* we expect clustering to be less accurate when models are less robust to noise.

Table 2. Evaluation of robustness on classification and clustering tasks with the *ImageNet C* dataset, evaluated on corruption severity levels 1 to 5. Column *CLEAN* represents the classification performance of the models on the clean dataset. Columns 1-5 show the classification accuracy (top 1%) under different severity levels of over all 19 corruptions and column ACC_{all}^* shows the mean over corruptions on all 5 severity levels. On *K-means*, *ACC* and *purity* are clustering performance on clean test data. The numbers on *multicuts* are evaluated on a subset. The best score on each column is marked in **bold**.

MODEL	CLASSIFICATION ACCURACY (TOP 1%)							<i>K-means</i>			MULTICUTS		
	CLEAN	1	2	3	4	5	ACC_{all}^*	ACC	PURITY	ACC_{all}^*	ACC	PURITY	ACC_{all}^*
ALEXNET	56.4	35.9	25.4	18.9	12.7	8.0	20.2	14.6	18.4	8.0	8.0	28.1	2.6
VGG11	69.0	47.3	35.3	25.7	16.7	10.1	27.0	28.0	32.8	12.4	15.8	27.2	2.5
VGG16	71.6	50.9	38.6	28.5	18.7	11.4	29.6	32.3	37.5	14.4	19.3	27.6	2.8
BNINCEPTION	73.5	59.4	48.4	38.8	27.2	17.7	38.3	40.5	44.0	18.0	11.5	46.6	7.9
NASNETAMOBILE	74.1	60.7	51.3	43.7	33.6	22.5	42.4	41.0	45.3	23.6	41.9	70.2	19.3
DENSENET121	74.6	60.2	50.9	42.2	31.4	21.0	41.1	48.9	52.1	23.4	16.8	80.5	8.3
RESNET50	76.0	60.1	49.8	40.1	28.9	18.8	39.6	55.8	58.6	24.9	29.3	64.3	11.1
RESNET101	77.4	63.6	54.4	45.5	34.0	22.9	44.1	59.1	61.9	29.3	28.6	53.7	16.6
INCEPTIONRESNETV2	80.2	68.8	60.8	53.5	43.5	31.6	51.7	70.0	71.2	37.4	71.3	81.3	39.8
POLYNET	81.0	68.0	58.9	49.9	38.2	26.3	48.3	67.8	69.7	34.8	54.4	76.6	24.1
DEIT-T	74.5	63.3	55.9	48.7	38.9	28.1	47.0	57.4	60.0	31.7	33.0	91.9	19.5
DEIT-S	81.2	72.1	66.1	60.2	51.3	39.7	57.9	68.8	70.8	43.4	49.4	81.1	29.6

Table 3. **Baseline** indicators for model robustness: The table shows the correlation between overlap Δ and model robustness for different corruption severity levels. Second row shows the rank correlation τ between the actual model robustness rank and the predicted rank using Δ .

METRIC	SEVERITY					TOTAL
	1	2	3	4	5	
R^2	0.27	0.29	0.27	0.25	0.26	0.27
τ	0.48	0.52	0.52	0.52	0.52	0.48

4.3. Baseline Indicators: Intra- and Inter class-distances

Table 3 shows the correlation (as R^2) and the ranking correlation τ between the class overlap baseline indicator Δ , which we detailed in section 3.3, and the model robustness, grouped by severity level. We use equation 6 to calculate the robustness for severity level s over all corruptions and compare them with Δ . The last column shows the correlation on all corruption levels. All 12 models are considered. The rank correlation τ is calculated by comparing the model’s robustness rank and the overlap Δ ranking. Initial well-separated feature spaces (thus a low Δ) should have a high correlation with their model’s robustness. Despite its simplicity, this metric Δ correlates poorly with a highest score of $R^2 = 0.29$ and $\tau = 0.52$. This observation rejects the simple hypothesis about the overlap of intra- and inter-class distances and it suggests that using Δ is not sufficiently informative as an indicator for model robustness.

4.4. Robustness Indicators: Clustering Measures

In the following we evaluate our proposed clustering driven robustness indicator. Specifically, we want to investigate the effects of different clustering measures on the correlation coefficient R^2 . Table 4 gives an overview of the strength of correlation on different severity levels and clustering metrics on *K-means* and *Multicuts*. Column Δ shows the correlation on robustness using the overlap of intra- and inter-class distances as previously discussed. Furthermore, the columns *ACC* and *P* are showing the correlation between the model robustness and the clustering accuracy and purity, respectively. The last column shows the combination of both clustering methods in one metric. *K-means* and *Multicuts* have an R^2 value of $R^2 = 0.83$ and $R^2 = 0.55$ for clustering accuracy on all corruption levels. On the purity score, both methods show a slightly higher correlation of $R^2 = 0.83$ and $R^2 = 0.71$, respectively for the sum over all corruptions (last row of Table 4). This indicated that latent space clusterability of clean test images *K-means* is a valid indicator for model robustness under corruptions. However, we show that both clustering methods are complementary when combining their purity scores with

$$p_{\text{purity}^{k\text{-means} \cdot \text{multicuts}}} = \frac{C_{\text{purity}}^{k\text{-means}} \cdot C_{\text{purity}}^{\text{multicut}}}{\text{Model}_{\text{ACC}}}. \quad (10)$$

This measure shows the highest correlation with the model robustness with $R^2 = 0.87$ (see fig. 1 for the full correlation plot). Additionally, the combination of purity scores of both methods also yields more consistent results across different severity levels.

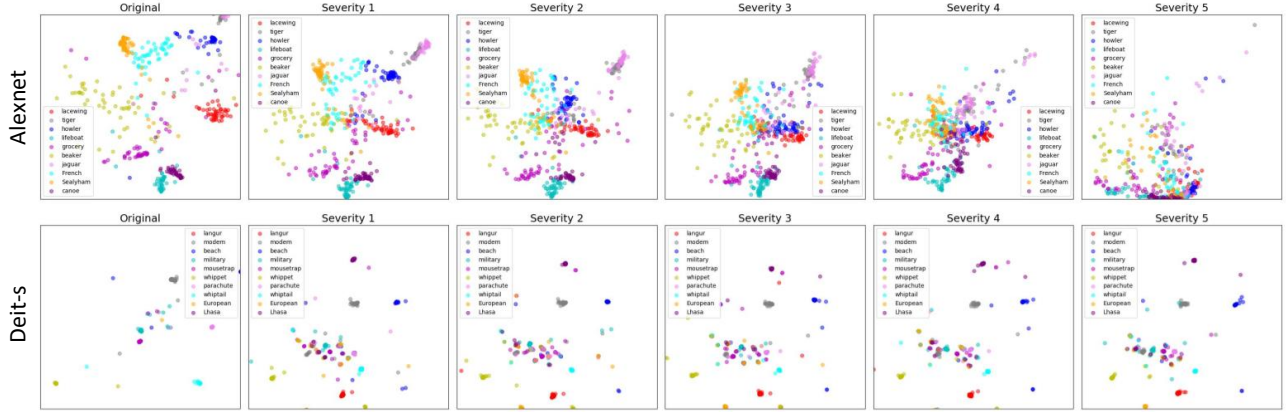


Figure 5. Visualization of feature space on *alexnet* and *deit-s* using umap. The colors correspond to the class labels, where only 10 classes were selected at random. First column shows the initial, clean latent space from the classification model. Each new column depicts the corresponding severity level of the corruption *brightness*. While *alexnet* collapses as the severity increases, the most robust model *deit-s* preserves the clusters very well even after significant corruptions and thus our proposed clusterability of latent space provides a good indicator about the model robustness.

Table 4. **Correlation with different metrics and severity levels:** the reported numbers are the coefficient of determination (R^2) on different clustering metrics. Column Δ is the overlap (from Table 3). Column *ACC* and *Purity* (denoted as *P*) are used to compute the correlation coefficient R^2 . The last column is the combination of both clustering methods, i.e. last column *Purity* is equation 10. The highest score is marked in bold.

METRIC: R^2		K-MEANS		MULTICUTS		COMBINED	
SEVERITY	Δ	ACC	P.	ACC	P.	ACC	P.
1	0.27	0.85	0.85	0.48	0.67	0.54	0.82
2	0.29	0.87	0.87	0.51	0.70	0.58	0.86
3	0.27	0.84	0.83	0.55	0.73	0.61	0.87
4	0.25	0.79	0.79	0.58	0.72	0.64	0.87
5	0.26	0.75	0.84	0.57	0.68	0.64	0.84
ALL	0.27	0.83	0.83	0.55	0.71	0.62	0.87

Model Ranking. Next, we evaluate whether our proposed robustness indicator is able to retrieve the correct ranking in terms of model robustness for our set of classification models. The rank correlation is measured as the Kendall rank coefficient τ . Table 5 shows the results for different setups. Here, *K-means* shows a more consistent and better correlation with highest rank correlation of $\tau = 0.82$ on *ACC* and *Purity*. Again, all clustering metrics outperform the Δ baseline. Figure 6 illustrates one example of the change of rank

Predicted			Actual		
$100 \times \bar{p}_{ACC^{K-means}}$	Model Name	Rank	Rank	Model Name	$100 \times \text{Robustness}$
25.9	AlexNet	12	12	AlexNet	35.8
40.6	Vgg11	11	11	Vgg11	39.1
45.1	Vgg16	10	10	Vgg16	41.3
55.1	BNInception	9	9	Resnet50	52.1
55.3	NasnetAmobile	8	8	BNInception	52.1
65.5	Densenet121	7	7	Densenet121	55.1
73.4	Resnet50	6	6	Resnet101	57.0
76.4	Resnet101	5	5	NasnetAmobile	57.2
77.0	Deit-t	4	4	PolyNet	59.6
83.7	PolyNet	3	3	Deit-t	63.1
84.7	Deit-s	2	2	InceptionResnetV2	64.5
87.3	InceptionResnetV2	1	1	Deit-s	71.3

Figure 6. Change in robustness ranking based on predicted (left) vs. actual (right) model robustness on ImageNet-C using clustering metric $p_{ACC^{K-means}}$ on total corruptions $\tau = 0.79$. Top is the least robust model (*Rank* = 12) while the bottom shows the most robust model (*Rank* = 1). The highest score is marked in bold.

between the predicted (left) and actual (right) model robustness. The prediction is done using $p_{ACC^{K-means}}$, which has a rank correlation of $\tau = 0.79$. Our proposed measure is able to rank different models according to their robustness. The three worse performing models (*alexnet*, *vgg11* and *vgg16*) are correctly retrieved. The largest ranking gap of 3 positions is observed for *nasnetamobile* and *resnet50*. In this particular example, the value for *alexnet* is calculated as follows: $\frac{14.6}{56.4} \times 100 = 25.9$ and $\frac{20.2}{56.4} \times 100 = 35.8$ for predicted and actual values, respectively.

Table 5. **Rank correlation with different metrics and severity levels:** the reported numbers are the coefficient of determination (τ) on different clustering metrics. Column Δ is the overlap (from Table 3). Column *ACC* and *Purity* (denoted as *P.*) are the used compute the rank correlation coefficient τ . The last column is the combination of both clustering methods, *i.e.* last column *Purity* is equation 10. The highest score is marked in bold.

Metric: τ		K-MEANS		MULTICUTS		COMBINED	
SEVERITY	Δ	ACC	P.	ACC	P.	ACC	P.
1	0.48	0.79	0.79	0.61	0.52	0.73	0.73
2	0.52	0.82	0.82	0.64	0.55	0.76	0.76
3	0.52	0.82	0.82	0.70	0.61	0.82	0.76
4	0.52	0.82	0.82	0.70	0.61	0.82	0.76
5	0.52	0.82	0.82	0.70	0.61	0.82	0.76
ALL	0.48	0.79	0.79	0.67	0.58	0.79	0.73

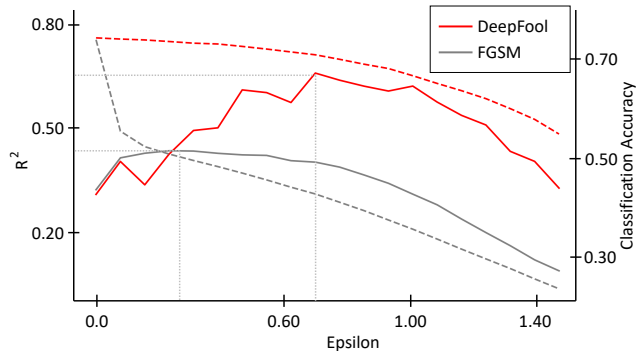


Figure 7. Correlation of our proposed clustering metric on different adversarial attacks with different strengths (*Epsilon*). Dashed line represents the classification accuracy and solid line the coefficient of determination R^2 , respectively.

Latent Space Visualization. Umap [34], a scalable dimensionality reduction method similar to the popular technique TSNE[48], has been applied to features on 10 randomly selected classes of the ImageNet dataset for visualization. Figure 5 shows one example of the corruption *brightness* for 2 different models: the first column shows features without any corruptions (clean). As the severity level increases, a collapse is observed for instance on *alexnet*: well-separated clusters (*i.e.* different colors) are being pulled into a direction in the latent space as the severity increases. The model with the highest robustness, *i.e.* *deit-s*, preserves the clusters well, which explains the high relative clustering performance. This verifies our assumption on the correlation between clusterability and robustness of classification models, that were evaluated in ImageNet-C dataset.

4.5. Adversarial Robustness

So far, we have shown that our proposed approach can effectively indicate the robustness of classification models towards visible image corruptions and shifts in the data distributions provided by the ImageNet-C benchmark. Here, we extend this evaluation to intentional, non-visible corruptions induced by adversarial attacks. Using the proposed clustering metric $p_{\text{purity}^{k-\text{means} \cdot \text{multicuts}}}$ as an estimator, we evaluate all 12 models with ImageNet test dataset under two adversarial attacks: *DeepFool* [35] and *FGSM* [14] with different perturbation sizes *epsilon*. Figure 7 shows the results of both attacks. The solid lines represent the correlation of determination R^2 while the dashed lines show the average adversarial accuracy across all 12 models. *Epsilon* (x-axis) is the perturbation size of the attacks. For small epsilon, we expect lower correlations since the model accuracy should hardly be affected. As epsilon increases, some models are more robust than others, *i.e.* better preserve their classification accuracy. In this range, we see a relatively strong correlation of the proposed indicator and the relative robust accuracy, albeit weaker than the correlation with robustness to corruptions, with $R^2 = 0.66$ and $R^2 = 0.44$ for *DeepFool* and *FGSM*, respectively. When epsilon becomes too large, the model accuracies eventually drop to very low values for all models, *i.e.* the correlation becomes weaker.

5. Conclusion

In this work, we presented a study of the feature space of several pre-trained models on ImageNet including state-of-the-art CNN models and the recently proposed transformer models and we evaluated the robustness on ImageNet-C dataset and extended our evaluation on adversarial robustness as well. We propose a novel way to estimate the robustness behavior of trained models by analyzing the learned feature-space structure. Specifically, we presented a comprehensive study of two clustering methods, *K-means* and the *Minimum Cost Multicut Problem* on ImageNet, where the classification accuracy, clusterability and robustness are analyzed. We show that the relative clustering performance gives a strong indication regarding the model’s robustness. Both considered clustering methods show complementary behaviour in our analysis: the coefficient of determination is $R^2 = 0.87$ when combining the purity scores of both methods. Our experiments also show that this indicator is lower, albeit still significant for adversarial robustness ($R^2 = 0.66$ and $R^2 = 0.44$). Additionally, our proposed method is able estimate the order of robust models ($\tau = 0.79$) on ImageNet-C. This novel method is simple yet effective and allows the estimation of robustness of any given classification model without explicitly testing on any specific test data. To the best of our knowledge, we are the first to propose such technique for estimating model robustness.

References

- [1] Nikhil Bansal, Avrim Blum, and Shuchi Chawla. Correlation clustering. *Machine Learning*, 56(1–3):89–113, 2004.
- [2] Thorsten Beier, Thorben Kroege, Jorg H Kappes, Ullrich Kothe, and Fred A Hamprecht. Cut, glue & cut: A fast, approximate solver for multicut partitioning. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 73–80, 2014.
- [3] Battista Biggio and Fabio Roli. Wild patterns: Ten years after the rise of adversarial machine learning. *Pattern Recognition*, 84:317–331, 2018.
- [4] Mathilde Caron, Piotr Bojanowski, Armand Joulin, and Matthijs Douze. Deep clustering for unsupervised learning of visual features. In *Proceedings of the European Conference on Computer Vision (ECCV)*, pages 132–149, 2018.
- [5] Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and Armand Joulin. Emerging properties in self-supervised vision transformers. *arXiv preprint arXiv:2104.14294*, 2021.
- [6] Mark Chen, Alec Radford, Rewon Child, Jeffrey Wu, Heewoo Jun, David Luan, and Ilya Sutskever. Generative pre-training from pixels. In *International Conference on Machine Learning*, pages 1691–1703. PMLR, 2020.
- [7] Sunil Chopra and M.R. Rao. The partition problem. *Mathematical Programming*, 59(1–3):87–115, 1993.
- [8] Erik D. Demaine, Dotan Emanuel, Amos Fiat, and Nicole Immorlica. Correlation clustering in general weighted graphs. *Theoretical Computer Science*, 361(2–3):172–187, 2006.
- [9] Josip Djolonga, Jessica Yung, Michael Tschannen, Rob Romijnders, Lucas Beyer, Alexander Kolesnikov, Joan Puigcerver, Matthias Minderer, Alexander D’Amour, Dan Moldovan, et al. On robustness and transferability of convolutional neural networks. *arXiv preprint arXiv:2007.08558*, 2020.
- [10] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- [11] Robert Geirhos, Carlos R Medina Temme, Jonas Rauber, Heiko H Schütt, Matthias Bethge, and Felix A Wichmann. Generalisation in humans and deep neural networks. *arXiv preprint arXiv:1808.08750*, 2018.
- [12] Kamran Ghasedi, Xiaoqian Wang, Cheng Deng, and Heng Huang. Balanced self-paced learning for generative adversarial clustering network. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4391–4400, 2019.
- [13] Kamran Ghasedi Dizaji, Amirhossein Herandi, Cheng Deng, Weidong Cai, and Heng Huang. Deep clustering via joint convolutional autoencoder embedding and relative entropy minimization. In *Proceedings of the IEEE international conference on computer vision*, pages 5736–5745, 2017.
- [14] Ian J Goodfellow, Jonathon Shlens, and Christian Szegedy. Explaining and harnessing adversarial examples. *arXiv preprint arXiv:1412.6572*, 2014.
- [15] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [16] Dan Hendrycks and Thomas Dietterich. Benchmarking neural network robustness to common corruptions and perturbations. *arXiv preprint arXiv:1903.12261*, 2019.
- [17] Kalun Ho, Amirhossein Kardoost, Franz-Josef Pfreundt, Janis Keuper, and Margret Keuper. A two-stage minimum cost multicut approach to self-supervised multiple person tracking. In *Proceedings of the Asian Conference on Computer Vision*, 2020.
- [18] Kalun Ho, Janis Keuper, Franz-Josef Pfreundt, and Margret Keuper. Learning embeddings for image clustering: An empirical study of triplet loss approaches. *arXiv preprint arXiv:2007.03123*, 2020.
- [19] Andrew G Howard, Menglong Zhu, Bo Chen, Dmitry Kalenichenko, Weijun Wang, Tobias Weyand, Marco Andreetto, and Hartwig Adam. Mobilenets: Efficient convolutional neural networks for mobile vision applications. *arXiv preprint arXiv:1704.04861*, 2017.
- [20] Jie Hu, Li Shen, and Gang Sun. Squeeze-and-excitation networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 7132–7141, 2018.
- [21] Gao Huang, Zhuang Liu, Laurens Van Der Maaten, and Kilian Q Weinberger. Densely connected convolutional networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4700–4708, 2017.
- [22] Sergey Ioffe and Christian Szegedy. Batch normalization: Accelerating deep network training by reducing internal covariate shift. In *International conference on machine learning*, pages 448–456. PMLR, 2015.
- [23] Himanshi Jain, Reshu Grover, and Alwar LIET. Clustering analysis with purity calculation of text and sql data using k-means clustering algorithm. *IJAPRR*, 4(44557):47–58, 2017.
- [24] Daniel Jakubovitz and Raja Giryes. Improving dnn robustness to adversarial attacks using jacobian regularization. In *Proceedings of the European Conference on Computer Vision (ECCV)*, pages 514–529, 2018.
- [25] Brian W Kernighan and Shen Lin. An efficient heuristic procedure for partitioning graphs. *The Bell system technical journal*, 49(2):291–307, 1970.
- [26] Margret Keuper, Siyu Tang, Bjoern Andres, Thomas Brox, and Bernt Schiele. Motion segmentation & multiple object tracking by correlation co-clustering. *IEEE transactions on pattern analysis and machine intelligence*, 42(1):140–153, 2018.
- [27] Simon Kornblith, Honglak Lee, Ting Chen, and Mohammad Norouzi. What’s in a loss function for image classification? *arXiv preprint arXiv:2010.16402*, 2020.
- [28] Alex Krizhevsky, Geoffrey Hinton, et al. Learning multiple layers of features from tiny images. 2009.
- [29] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural net-

- works. *Advances in neural information processing systems*, 25:1097–1105, 2012.
- [30] Harold W Kuhn. The hungarian method for the assignment problem. *Naval Research Logistics (NRL)*, 52(1):7–21, 2005.
- [31] Alexey Kurakin, Ian Goodfellow, and Samy Bengio. Adversarial machine learning at scale. *arXiv preprint arXiv:1611.01236*, 2016.
- [32] Yann LeCun, Léon Bottou, Yoshua Bengio, and Patrick Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324, 1998.
- [33] Chenxi Liu, Barret Zoph, Maxim Neumann, Jonathon Shlens, Wei Hua, Li-Jia Li, Li Fei-Fei, Alan Yuille, Jonathan Huang, and Kevin Murphy. Progressive neural architecture search. In *Proceedings of the European conference on computer vision (ECCV)*, pages 19–34, 2018.
- [34] Leland McInnes, John Healy, and James Melville. Umap: Uniform manifold approximation and projection for dimension reduction. *arXiv preprint arXiv:1802.03426*, 2018.
- [35] Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, and Pascal Frossard. Deepfool: a simple and accurate method to fool deep neural networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2574–2582, 2016.
- [36] Yaniv Ovadia, Emily Fertig, Jie Ren, Zachary Nado, David Sculley, Sebastian Nowozin, Joshua V Dillon, Balaji Lakshminarayanan, and Jasper Snoek. Can you trust your model’s uncertainty? evaluating predictive uncertainty under dataset shift. *arXiv preprint arXiv:1906.02530*, 2019.
- [37] Vignesh Prasad, Dipanjan Das, and Brojeshwar Bhowmick. Variational clustering: Leveraging variational autoencoders for image clustering. In *2020 International Joint Conference on Neural Networks (IJCNN)*, pages 1–10. IEEE, 2020.
- [38] Joaquin Quiñonero-Candela, Masashi Sugiyama, Neil D Lawrence, and Anton Schwaighofer. *Dataset shift in machine learning*. Mit Press, 2009.
- [39] Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, et al. Imagenet large scale visual recognition challenge. *International journal of computer vision*, 115(3):211–252, 2015.
- [40] Tonmoy Saikia, Cordelia Schmid, and Thomas Brox. Improving robustness against common corruptions with frequency biased models. *arXiv preprint arXiv:2103.16241*, 2021.
- [41] Ali Sharif Razavian, Hossein Azizpour, Josephine Sullivan, and Stefan Carlsson. Cnn features off-the-shelf: an astounding baseline for recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*, pages 806–813, 2014.
- [42] Hoo-Chang Shin, Holger R Roth, Mingchen Gao, Le Lu, Ziyue Xu, Isabella Nogue, Jianhua Yao, Daniel Mollura, and Ronald M Summers. Deep convolutional neural networks for computer-aided detection: Cnn architectures, dataset characteristics and transfer learning. *IEEE transactions on medical imaging*, 35(5):1285–1298, 2016.
- [43] Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. *arXiv preprint arXiv:1409.1556*, 2014.
- [44] Christian Szegedy, Sergey Ioffe, Vincent Vanhoucke, and Alexander Alemi. Inception-v4, inception-resnet and the impact of residual connections on learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 31, 2017.
- [45] Christian Szegedy, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian Goodfellow, and Rob Fergus. Intriguing properties of neural networks. *arXiv preprint arXiv:1312.6199*, 2013.
- [46] Siyu Tang, Mykhaylo Andriluka, Bjoern Andres, and Bernt Schiele. Multiple people tracking by lifted multicut and person re-identification. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 3539–3548, 2017.
- [47] Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Hervé Jégou. Training data-efficient image transformers & distillation through attention. *arXiv preprint arXiv:2012.12877*, 2020.
- [48] Laurens Van der Maaten and Geoffrey Hinton. Visualizing data using t-sne. *Journal of machine learning research*, 9(11), 2008.
- [49] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. *arXiv preprint arXiv:1706.03762*, 2017.
- [50] Steffen Wolf, Alberto Bailoni, Constantin Pape, Nasim Rahaman, Anna Kreshuk, Ullrich Köthe, and Fred A Hamprecht. The mutex watershed and its objective: Efficient, parameter-free graph partitioning. *IEEE transactions on pattern analysis and machine intelligence*, 2020.
- [51] Junyuan Xie, Ross Girshick, and Ali Farhadi. Unsupervised deep embedding for clustering analysis. In *International conference on machine learning*, pages 478–487. PMLR, 2016.
- [52] Xingcheng Zhang, Zhizhong Li, Chen Change Loy, and Dahua Lin. Polynet: A pursuit of structural diversity in very deep networks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 718–726, 2017.
- [53] Barret Zoph, Vijay Vasudevan, Jonathon Shlens, and Quoc V Le. Learning transferable architectures for scalable image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 8697–8710, 2018.