WORKLOAD FORECASTING AND RESOURCE MANAGEMENT MODELS BASED ON MACHINE LEARNING FOR CLOUD COMPUTING ENVIRONMENTS

A PREPRINT

Deepika Saxena*

Department of Computer Applications National Institute of Technology Kurukshetra, India deepika_6180096@nitkkr.ac.in

Ashutosh Kumar Singh

Department of Computer Applications
National Institute of Technology
Kurukshetra, India
ashutosh@nitkkr.ac.in

December 26, 2021

ABSTRACT

The workload prediction and resource allocation significantly play an inevitable role in production of an efficient cloud environment. The proactive estimation of future workload followed by decision of resource allocation have become a prior solution to handle other in-built challenges like the under/overloading of physical machines, resource wastage, Quality-of-Services (QoS) violations, load balancing, VM migration and many more. In this context, the paper presents a comprehensive survey of workload forecasting and predictive resource management models in cloud environment. A conceptual framework for workload forecasting and resource management, categorization of existing machine learning based resources allocation techniques, and major challenges of inefficient distribution of physical resource distribution are discussed pertaining to cloud computing. Thereafter, a thorough survey of existing state-of-the-art contributions empowering machine learning based approaches in the field of cloud workload prediction and resource management are rendered. Finally, the paper explores and concludes various emerging challenges and future research directions concerning elastic resource management in cloud environment.

Keywords Workload prediction · Resource allocation · VM consolidation · VM migration

1 Introduction

Across the globe, advances in commercial computing and virtualization technologies have enabled the cost-effective realization of large-scale data centers, which execute large portion of internet applications. Cloud data centers offer numerous benefits including on-demand resources, elasticity, flexibility, mobility, and disaster recovery [1], [2], [3]. Among these, elasticity is one of the most important characteristics of the cloud paradigm that allows an application to scale its resource demands anytime [4], [5]. It has enabled the trend of renting of hardware, software and network resources rather than buying and managing computation resources. User can leverage complete computation infrastructure with an internet connection. It has wide range of applications like financial management, manufacturing, marketing, business management, academia, hospital management and many more [6], [7], [8]. User is liberal to utilize high performance computation locally, can perform complex computation without bothering about its management constraints. Customers can enjoy benefits of cloud environment in the following ways:

 Cloud environment provides ubiquitous computing service with ease and flexibility to all its customer over internet.

^{*}The authors would like to thank National Institute of Technology Kurukshetra, India for financially supporting this research work.

- Minimize start-up and operating cost investment, as it allows pay as per use service model.
- Scalability feature of cloud data center enables to scale their applications by efficient utilization of IT resources, integration of distributed computing resources over the internet.
- Reduces the risk of resource allocation resulting from wrong estimation of workload or sudden power-off of resources and other management risks.
- Tenants can collapse and expand their applications as per the requirement without bothering about capacity of resources.

Consequently, massive amount of digital content is being produced through ever growing online activities such as shopping, social networking, email, and many others by the cloud clients. Cloud Service Provider (CSP) allocates computing instances called as virtual machines (VMs) to cater the resource demands of cloud clients. Though cloud computing is increasingly used by public and private sector, the research on cloud computing is still at its developing phase. Many existing challenges have not been fully addressed yet, and new issues are rising from industrial applications. Some of the prevalent research issues in cloud computing are:

• Automated Resources Provisioning

The main aim of a cloud service provider is to allocate and de-allocate resources efficiently to satisfy its SLA, while minimizing its operational cost [9], [10]. It becomes difficult to determine how to map SLA such as Quality-of-Service (QoS) constraints to low-level resource requirement such as CPU and memory requirements. Furthermore, to achieve high agility and respond to rapid demand fluctuations such as in flash crowd effect, decision of resource provisioning have to be taken online. Dynamic resource provisioning for internet applications provides solution for this.

• Reduction of Energy and Power Consumption

Excessive power consumption due to wastage of resources at data center is another big challenge to deal with. The goal is not only to scale down energy cost in data centers, but also to meet government regulations and environmental standards. The solution for this is energy efficient resource scheduling, job scheduling, power shut down if in case not in use and proper utilization of CPU and other resources [11], [12].

• Data Leakage Detection

Security of user's data is most prevalant issue as customer's have to trust the third party for privacy and maintaining security of their confidential data [13]. Though service provider promise optimum security of data, still some malicious user actively hampers victim owner data. Moreover, VM migration should be safe as during migration target VM needs to traverse several architectural layers that should be trusted. Illegal authorization and authentication access raises more security overheads in cloud environment [14].

• Traffic Management

It becomes serious issue to manage network traffic effectively so as to reduce congestion problem and other network related issues. So many reasons are there like, the density of links is much higher than that in ISPs or enterprise networks, also the applications deployed on data centers, such as MapReduce jobs, have completely different traffic pattern [15].

Task Scheduling

At cloud data centers, virtual machine allocation is done prior to the jobs arrival. Later, when applications from users arrive, they are divided into tasks that can independently execute on different VMs. It becomes a challenge to optimally distribute tasks on allocated VMs (resource provisioning) so that resources are maximum utilized and power consumption is minimum [16].

• Workload Prediction

Cloud computing promises elasticity, flexibility and cost-effectiveness to satisfy SLA conditions. To realize these promises, service providers have to quickly plan and provision computing resources, so that the capacity of the supporting infrastructure can closely match the needs of new demands. therefore, prior workload estimation is extremely important [17], [18].

• Elasticity Management

Elasticity [19] is the ability of cloud system to adapt to workload changes by allocating and de-allocating resources in self adaptive manner, such that at every instance of time the available resources match the current demand as closely as possible. It is directly related to speed of response and precision to map the tasks on VMs and VMs mapping to physical machines [3].

2 Motivation

The minimum upfront capital investment and maximum scalability features of cloud computing are fascinating to businesses, academia, research and every public or private organizations. Evidently, smooth and progressive working of all these organizations depend on the services offered by the cloud data center. The daily life examples include social networking, e-governance, online shopping and others. In 2016, operational cost expenditure on public cloud Infrastructure as a Service of hardware and software is forecast to reach \$38 B, growing to \$173 B in 2026. [20]. To meet the ever growing and dynamic demand of users, more and more virtual machines (VMs) are deployed on large number of servers and cooling devices are installed at data center that accounts for high power consumption [9]. Infact, the operational cost due to power consumption is about 30% more than resource purchase cost [21]. The energy consumption distribution of cloud data center reported in [22] reveals that major portion of energy (40%), is consumed by the number of active servers and cooling or refrigeration system employed at cloud data center. Due to these reasons data center energy efficiency is now considered a chief concern for data center operators, ahead of the traditional considerations of availability and security.

Cloud users submit different type of workloads, requiring heterogeneous resource capacities with varying priorities and pricing policies associated with their respective Service Level Agreements (SLAs). The resource demand changes over time in an hour, day, week, month and years with respect to the type of workload and deadline of execution submitted by the user. Therefore, it becomes difficult to estimate the upcoming resource demands and decide resource distribution. It is observed that most of the time resources are either under utilized or overloaded due to unbalanced VM placement leads to resource wastage and performance degradation [11]. Even when running in the idle mode, servers consume a significant amount of energy. Large savings can be made by turning off these servers. At the same time, these power saving techniques reduce system performance, pointing to a complex balance between energy savings and high performance. Typical model of resource capacity and utilization is depicted in Fig. 1.

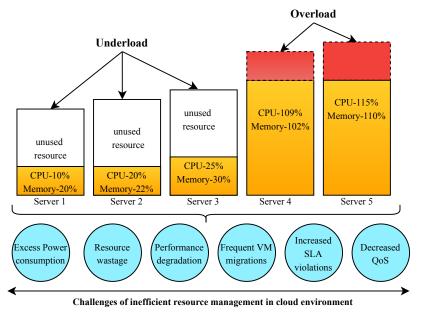


Figure 1: Typical resource utilization at cloud data center

It clearly shows the resource under-utilization and overload events during typical resource capacity of a data center. It also highlights the major challenges that arise due to inefficient distribution of physical resources at data center. To avoid such scenarios the data centers are expected to have ideal resource capacity at any point of time such that it can fulfill all incoming requests without wasting resources. Again this can be achieved if resource manager knows the upcoming workload in advance by accurate forecasting of future demands. This emphasizes the need for automatic resource management techniques that enable systems to auto-adapt according to the dynamic resource demands by using the existing resources more efficiently.

Our Contribution: This paper specifically considers and presents a comprehensive survey of workload prediction and elastic resource management models. Furthermore, emerging challenges and future research directions in cloud resource management are rendered.

3 Concepts and Categorization for Cloud Resource Management

Elastic Resource Management is the process of allocation of computing, storage, networking resources to a set of applications, in order to jointly meet the performance objectives of the applications, the cloud service providers (CSPs) and the users of the cloud resources. The objectives of the CSPs is efficient and effective resource utilization within the constraints of Service Level Agreements (SLAs) with the cloud users. Efficient resource utilization is typically achieved through virtualization technologies, which facilitate statistical multiplexing of resources across customers and applications. Fig. 2 shows conceptual framework for cloud resource management, where, m users have requested different applications to be executed at the data center. Each application has specific resource requirement that is to be

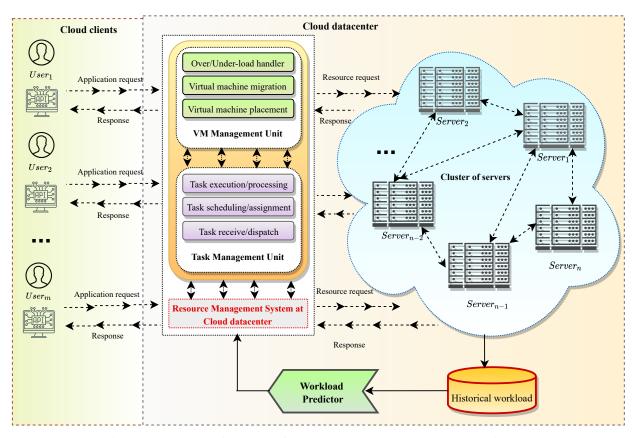


Figure 2: Conceptual framework for resource management in a cloud environment

satisfy by the data center. Resource Management System (RMS) is deployed at the data center to receive application requests from cloud clients and generate satisfactory responses for them, by allocating required capacity of resources (as per application demand) in the form of VMs. RMS consists of VM Management Unit (VMU) and Task Management Unit (TMU). VMU is responsible for VM scheduling and placement on physical machines (PMs), VM migration in case of over/under-load at PM. TMU works on applications, received from cloud clients/users, divide them into tasks, schedule and assign them on selected VMs for execution. The workload execution information is collected as a historical workload database which is used to train the workload predictor for estimation of future workload and resource utilization information. This predicted information is utilized for decision making of energy-efficient resource distribution and optimized load balancing.

Virtual Resource Management Techniques in cloud data center can be broadly categorized into workload management at application, virtual machine and physical machine levels as shown in Fig. 3. At application level, load management is required during task scheduling and assignment operations. Task scheduling means order of selection of task for execution while task assignment deals with selection of appropriate VM for task execution. Task scheduling and

assignment can be performed by applying various methods shown in Fig. 3. The traditional task scheduling methods includes First-In-First-Out (FIFO), Last-In-First-Out (LIFO), Shortest Job First (SJF), Round-Robin (RR) scheduling etc. Also, the tasks may be scheduled on the basis of execution cost and deadline, or a multi-objective combination satisfying multiple objectives simultaneously with a priority. Furthermore, the multiple constraints based VM selection for a task execution is performed by applying traditional approaches like FIFO, LIFO, sorting VMs according to resource capacity, probabilistic or maximum likely-hood method, heuristic and evolutionary optimization algorithms.

The workload management at Virtual machine level can be divided into VM assignment or placement, VM migration and VM consolidation. VM assignment is the process of deployment of VM on selected server while VM migration is a process of shifting of VMs from over/under-loaded servers to a selected optimal server, and VM consolidation is a technique to deploy VMs on minimum number of active servers to reduce power consumption and resource wastage. Fig. 3 shows existing VM placement and migration methods. The VMs can be allocated to available servers in the cluster by utilizing conventional/traditional methods like, First-Fit, Best-Fit, Random-Fit, or Worst-Fit where VMs resource requirements are satisfied by the respective server without any contention of resources. The VMs can be placed according to single objective like, deadline of user task execution, maximum CPU, reduced power consumption, security, reliability or maximum availability etc. Also, the VMs can be allocated satisfying multiple objectives concurrently with priority or non-dominated sorting based pareto-front solution. To accomplish the same, commonly used approaches are evolutionary optimization (such as PSO, ACO, Firefly, GA, and hybrid optimization algorithms etc.), Fuzzy clustering, game theory based VM allocation, greedy approach, probabilistic method, and other optimization methods. The VM allocation is further optimized by migrating VMs in case of resource contention by using live VM migration method i.e., hot VM migration and offline VM migration i.e., cold migration as per the requirement or VM movement decided by the load balancing unit. Additionally, VMs can be migrated while satisfying specific objectives including, energy-aware, network-aware, security-aware, or reliability-aware constraints etc.

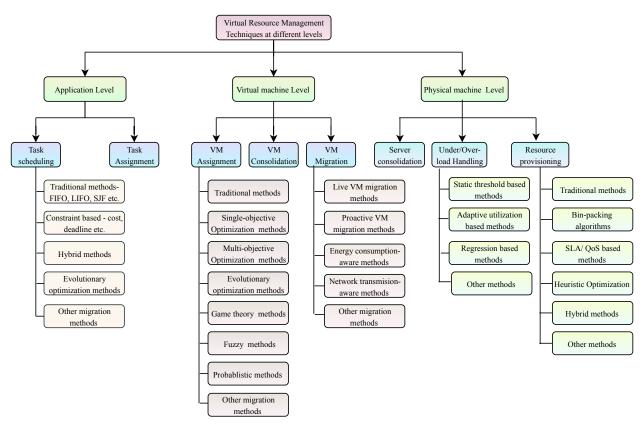


Figure 3: Categorization of Resource Management Techniques

The basic operations involved in management at *physical machine level* are server consolidation, handling over/under-load at server, server resource provisioning. The server consolidation deals with minimizing the number of active servers by applying energy-efficient VM placement techniques. The over/under-load handling includes detection of respective condition at PM and mitigate its effect by employing VM migration. Resource provisioning is the efficient distribution of physical resources among VMs prior to arrival of actual demand from cloud user. Various under/over-load

handling and resource provisioning techniques are mentioned in Fig. 3. The under/over-loading problem is tackled by migrating VMs from under/over-loaded servers to selected efficient server, where the destination server can be selected by applying different approaches such as first-fit, best-fit, random-fit, fuzzy approach based selection, or heuristic optimization etc. This problem can be confronted either reactively or proactively, where the former approach migrates VM after detection of overload, while the later approach estimates under/over-load prior to its occurrence and mitigate its effect by shifting VMs proactively. The physical resources of a server are provisioned using traditional methods, bin-packing algorithm and heuristic optimization methods while satisfying SLA and QoS constraints.

4 Workload prediction

Cloud computing enables automatic resource scaling for every online transaction systems, which is one of the distinct key characteristics that distinguishes the cloud platform from the traditional computing models. However, initializing a new virtual instance in a cloud is not instantaneous, cloud hosting platforms introduce some delay period while allocating hardware resources. Therefore, prediction based analysis of resource usage is the key to several crucial system design and virtual machine deployment decisions such as, workload management, system sizing, capacity planning and automatic rule generation in the cloud. Fig. 4 illustrates the general scenario of workload forecasting at cloud data center. Millions of users sends request over internet at cloud datacener. The requests are processed there and all the request arrived during particular prediction interval are aggregated as historical data, which is later use to forecast workload of future. The historical data is collected and pre-processed in order to normalize it. Then normalized data is transferred to prediction system to forecast future workload. This predicted workload would give prior information of forth coming load and this allows effective time for preparation and arrangements of resource provisioning, decision to manage power on or off status.




Figure 4: General Workload Forecasting Model

The general application forecast means to predict the future behavior of the application in different ways such as the expected workload and the performance. It becomes an important step to predict application in different dimensions to efficiently manage the resources in cloud. As per the expected demands of application in future, the efficient resource provisioning could be detected and the sufficient amount of resources could be planned/allocated to accomplish QoS parameters such as CPU utilization, response time, availability, reliability and security.

Different dimensions of workload forecasting

The forecasting can be realized on virtual machines and physical machines. At virtual machine level, it is necessary to maintain sufficient servers for virtual machine provisioning in order to balance upcoming workload at data center. The workload forecasting can be distributed into various dimensions depending upon the application as follows:

- *Need for Prediction:* The two very basic requirement that motivates prediction are resource management and application management. Resource management lays emphasis on efficient utilization of resources to raise fiscal gains, prevent SLA violation, to maintain consistent resource availability, prevent SLA terms and condition violation and avoid wastage of resources. Another requirement for accurate prediction is application management, which deals with load balancing of applications on virtual machines making decision related to VM migration, VM allocation, VM provisioning over physical machines.
- *Characteristics:* The various characteristics of workload prediction are accuracy of prediction outcomes, adaptability according to dynamic workload demands at different prediction intervals, proactive forecast in anticipation and effective utilization of historical data for future workload estimation.
- *Challenges:* Commonly there are three challenges in workload forecasting. Time and space complexity needed in computing predicted workload should be reasonable in a way that its deployment is affordable. Data granularity is extremely important for workload forecasting. The coarse grained and long term data

sampling causes the model to lose the dynamic and adaptive behavior of the system. On the other hand, the fine-grained and short term prediction takes excess time and includes spurious details that are irrelevant and increase complexity to capture them.

Another big challenge is to decide the length of prediction, short prediction length leads to precise accuracy but have increased complexity. With larger prediction length, the number of data samples decreases and accuracy drops down.

• Evaluation Metrics: The various metrics to evaluate prediction model are cost involved in predicting workload, success achieved in the form of accuracy of anticipating future demands, profit obtained in the form of intelligent resource management and error estimated during prediction.

4.1 Recent state-of-the-art and Comparison

This section exclusively dedicated to present a survey of recent cloud workload prediction models based on Neural Networks and Support Vector Machine as follows:

Evolutionary Neural Network

J.Kumar et.al, [23] presented workload prediction approach for cloud data centers using neural network and self adaptive differential evolution (SaDE). In this work, request coming from different users are aggregated into specific time units as historical data. Then, pre-processing of this data is done by normalizing it in the range of [0, 1]. Here, prediction model extracts patterns from actual workload and analysis of previous n workload values to predict upcoming workload on data center at n+1 time instance. Then, self-adaptive differential evolution technique is applied to train the neural network. A biphase adaptive differential evolution (BaDE) learning algorithm trained neural network prediction model was proposed in [24], which adopted dual adaptation viz., at level of crossover during exploitation process and mutation in exploration phase to improve the learning efficiency of neural network. This work outperformed [23] in terms of prediction accuracy. Later in 2020, an auto-adaptive neural network was developed in [25] where the network connection weights are optimized with a help of tri-adaptive differential evolution algorithm (TaDE). The adaptation is employed at crossover, mutation, and control parameters generation level which allows enhanced learning of evolutionary neural network.

Multi-input and Multi-output Neural Network

A multi-resource feed-forward evolutionary neural network based prediction model is proposed in [26] by modifying the functionality of an existing single input and single output (SISO) feed-forward neural network. There are sets of neural nodes instead of conventional nodes at input, hidden and output layers to receive multiple inputs and predict output based on multiple attributes. It employed combined classification and prediction operations during network weight connections learning process and concurrently classifies the predicted information of multiple attributes. It has improved efficiency in terms of prediction accuracy with lesser requirement of space and time complexity as compared to equivalent number of SISO neural networks required for prediction of same number of attributes.

SVM and Feed-forward Neural Network

Zhong et al. proposed a weighted wavelet support vector machine based host load prediction model in [27]. The approach combined the functionality of wavelet transform and support vector machine, and assigned weight to the sample, that reflected the importance of different samples and improved the accuracy of workload prediction. A Bayesian approach was proposed in [28] for virtual machine workload prediction at data center. The method used resource demand forecasts to provision resources accordingly. A future workload prediction technique based on Back-propagation training on three-layered neural network was developed in [29] that produced workload prediction with acceptable accuracy on NASA HTTP web log traces for prediction interval upto 60 seconds. Cao et al. [30] have applied historical data monitoring to predict the server load in future by applying machine learning method like Random Forest. This scheme outperformed the time series analysis method in terms of accuracy for the workload prediction.

Long Short-term Recurrent Neural Network (LSTM-RNN)

The long short-term memory model in a recurrent neural network (LSTM-RNN) for fine-grained host load prediction was presented in [31] and [32]. Though the LSTM-RNN model learns long-term dependencies and produce high accuracy for prediction of server loads, it suffer from long computation time during training due to usage of Back-propagation algorithm between recurrent layers.

Complex-Valued Neural Network

In 2018 K.Qazi et.al [33], proposed a workload prediction approach based on resource usage of host at data center. To train the prediction model, they applied neural network based on complex values that is more efficient than traditional real-valued based neural network. The complex value based neural network can further be developed as Quantum version of neural network, that would enable greater performance and speed benefits to the data center.

Ensemble Prediction Framework

CloudInsight workload prediction framework was proposed in [17] that leverages an integrated potential of multiple machine learning predictors (for e.g., SVM, Neural network, Random Forest, Linear regression etc.) concurrently for accurate prediction of heterogeneous workload in cloud data center. Multi-class regression method is used to assign weights for different predictors in the ensemble predictor framework in real-time according to the current accuracy achieved by different predictors. The ensemble prediction model is periodically optimized to tackle the sudden changes in the future workload. This prediction framework is inspired by the fact that an elastic resource management has inevitable dependency on workload predictors, which measures short-term and long-term deviations and fluctuations of heterogeneous cloud workloads. However, being pre-optimized for specific type of workload patterns learned during training via historical data, they are insufficient to estimate the real-world cloud workloads whose patterns are unseen, may dynamically change over time, and may be irregular. Consequently, these classical predictors often cause over-/under-provisioning of cloud resources. The experimental simulation based performance evaluation reveals that CloudInsight has 13%–27% higher accuracy than classical machine learning based predictors. Also, it minimized period of under-/over-provisioning contributing to high cost optimization and low SLA violations.

Quantum Neural Network

Singh et al. [34] have proposed an Evolutionary Quantum Neural Network (EQNN) for prediction of heterogeneous kinds of cloud workloads including web, cluster, and high performance computing, etc. EQNN is an intelligent integration of specific principles of quantum computing and evolutionary algorithm trained neural network that utilizes C-NOT and rotation gates as an activation function within neural network. It is believed that quantum bit values (i.e., qubits) have better potential for exploration and exploitation than real numbers that allows intuitive learning of extracted patterns during training process. The pre-processed training input data is passed in the form of qubits generated with help of rotation gate and also the qubit values are generated for network connections instead of real-numbered weights. Table 1 entails the summary of aforementioned machine learning based workload prediction approaches.

5 Elastic Resource Management

An elastic resource management in cloud environment comprises of various inter-related operations such as (i) Task Assignment, (ii) VM Migration, (iii) Resource Prediction, and (iv) VM Allocation as depicted in Fig. 5. All these operations interact with each other concurrently at common cloud platform to allow efficient distribution and management of available physical resources. Consider m cloud users have submitted their requests for execution in cloud environment (Fig. 5), where Load Management Unit distributes different requests (i.e., applications divided into various tasks) on selected VMs by performing task assignment subject to the resource capacity constraints. The general functions performed by different interacting units with respect to the load management are as follows:

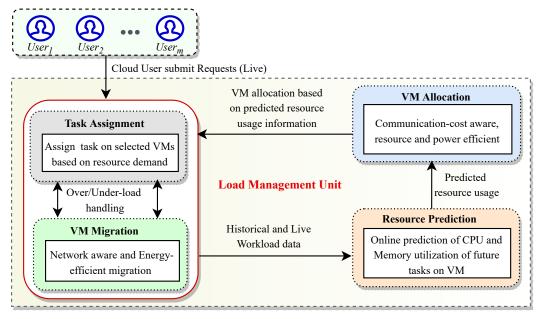


Figure 5: Elastic Resource Management Framework

Table 1: Summary of Machine Learning based Workload Prediction

Author, year	Approach	Strength	Weakness
Prevost et al., 2011 [29]	Backpropagation trained neu-	Expected load prediction per	Less accuracy, longer
	ral network	time unit	convergence time
Lu et al., 2016 [35]	Random Variable Learning	outperformed HMM	works on single solution,
	Rate Back-propagation Neu-		slow convergence
	ral Network (RVLRBPNN)		
Kumar et al., 2018 [23]	Artificial Neural Network	improved prediction accu-	static approach for pre-
	trained with SaDE evolution-	racy over Backpropagation	diction
	ary algorithm		
Kumar et al., 2018 [32]	Long short-term memory	better accuracy than ANN	long computation time
	model in a recurrent neural		
	network (LSTM-RNN)		
Zhong et al., 2018 [27]	Weighted wavelet SVM	Variable load prediction ac-	Requires hyper-
		curacy	parameters tuning
			with Longer convergence
			time
Cao et al., 2018 [30]	Random Forest ensemble ap-	Server load prediction with	Requires concisely pre-
	proach	acceptable accuracy	processed data, longer
			time
Qazi et al., 2018 [36]	Multi-layered neural net-	high capability of learning	higher time complexity
	works with multi-valued neu-	and better accuracy	than real-valued ANN
	rons (MLMVN)		
Saxena et al., 2020 [25]	Neural network optimized by	Stable prediction accuracy	High time-complexity
	tri-adaptive differential evo-		
	lution algorithm		
Kumar et al., 2020 [24]	Neural network optimized by	Faster convergence	Higher complexity than
	bi-phase adaptive differential		SaDE algorithm opti-
	evolution algorithm		mized neural network
Kim et al., 2020 [17]	Ensemble approach for adap-	Real-time learning of cloud	Higher complexity than
	tive learning of heteroge-	workload providing accept-	classical machine learn-
	neous workloads	able accuracy	ing models
Saxena et al., 2021 [26]	Multi-input and Multi-output	Multiple related attributes	High complexity
	neural network optimized by	are predicted concurrently	
	modified differential evolu-		
	tion algorithm		
Singh et al., 2021 [34]	Quantum based evolutionary	Higher and stable prediction	Higher complexity be-
	neural network optimized by	accuracy	cause of generation and
	Self-balanced adaptive differ-		processing of qubits
	ential evolution algorithm		

- *Task Assignment*: The tasks are assigned on the basis of their computational and storage requirements to the most appropriate VM and reduce wastage of resources as well. For instance, the tasks with small resource requirement are assigned to small size VM while large task to large size VM and so on, where size means resource capacity.
- Resource Prediction: The expected demand of CPU and memory utilization of future tasks is determined based on the historical and current task execution by respective VM. Also, each VM prediction information is aggregated to detect any over/under-load on the server beforehand for prior mitigation of its undesirable effects on performance of entire load management unit.
- *VM Allocation*: The VMs loaded with predicted resource usage are assigned to servers in energy efficient way such that power consumption and communication cost among inter-dependent VMs are minimum and resource utilization is maximum by applying suitable VM placement strategy.
- *VM Migration*: To handle any over/under load (which severely degrades the performance of data center) during VM allocation, migration of VM is the best solution. The predicted resource usage information is utilized for proactive detection of any such situation and handle it by applying an appropriate energy and network traffic efficient VM migration strategy so as to minimize the chances of performance degradation.

An efficient VM Assignment and migration allows energy and network traffic optimization during load management which is further optimized by applying an appropriate resource prediction. Hence, the purpose of integration of all these operations during elastic resource management is to conserve the optimization achieved at each step by applying various greedy, heuristic, fuzzy-approach, machine learning and evolutionary optimization methods and finally encapsulates the entire energy optimization to allow smooth and cost-efficient performance on cloud data center.

5.1 Recent state-of-the-art and Comparison

Hierarchical SLA-driven resource management:

Goudarzi et al. presents SLA-driven resource management specifically for reduction of SLA-violation and electrical energy consumption including cooling devices and CPU utilization at cloud data center in [37]. The authors consider VM management is the problem of deploying VMs on servers and assigning resources to them satisfying the criteria of minimizing overall operational cost and SLA terms violation subject to resource availability and QoS constraints. In this approach, a set of decentralized decision managers (power and cooling managers) generating constraints and works in cooperation to make hierarchical decision for VM management so as to reduce the operational cost of data centers. Moreover, they apply periodic optimization to assign new VMs and re-allocate active VMs to physical machines according to the expected workload during next epoch. The outcome of this work 40% reduction in operational cost of data center and execution time is seven times lesser than centralized management structure for the same operations.

Euclidean distance based multi-objective energy efficient VM placement

Sharma et al. [9] proposed an Euclidean distance based multi-objective energy efficient VM placement. This work includes energy consumption based on CPU utilization excluding cooling devices, multi-objective VM placement subject to minimum power consumption and maximum resource utilization, task scheduling and VM migration decreasing SLA violation. The authors proposed HGAPSO algorithm by combining genetic algorithm (GA) and particle swarm optimization (PSO) to allocate VMs on servers to minimize resource wastage and SLA violation. GA helps in migration of VM from source server to target server but it is slow in convergence and PSO assist GA in selecting optimal target server by allowing VM placement from non-energy efficient to energy-efficient server. Task scheduling is done subject to deadline constraint of application execution, therefore reducing chances of SLA violation. When task get completed, VMs terminates and re-allocation VM starts migrating to energy-efficient physical machine. This work is compared with branch-and-bound based exact algorithm and improves resource utilization and reduces power consumption.

Exponential Weighted Moving Average based Resource allocation

Dynamic resource allocation and VM placement is presented in [38] that assigns data center resources depending upon the application requirement and allows energy efficient resource utilization. This work contributes towards overloading avoidance and preventing resource wastage. Firstly, the authors have predicted the future needs of the resource by computing exponential weighted moving average (EWMA) using past behaviors of VMs. This predicted resource demand is later use to allocate VMs on servers accordingly. Moreover, the concept of 'skewness' to measure the unevenness or non-uniformity in resource usage of a server is introduced, which is minimize to enhance the overall resource utilization of server. To avoid overloading of servers, degree of overload is measured periodically, if threshold of resource usage reaches, VMs are migrated to less utilized server. To allow green computing, underutilized servers are shut down after migrating running VMs to energy efficient server. The outcome is load prediction with overall resource utilization is improved avoiding overloading situation as compared to without load prediction scenario.

Stochastic load balancing for VM management:

Yu et al. [39] presented stochastic load balancing to address problem of overloading of servers due to multi-dimensional and dynamic workloads for VM management at data center. Overloaded servers leads to performance degradation as each application executing on it consumes long time to response and frequent VM migrations. Firstly, expected resource demand in particular prediction interval is estimated and probabilistic distribution of prediction errors is padded to the predicted output in order to avoid SLA violations, under estimation and over estimation of resource demands occur due to errors during prediction. In addition, to handle improper VM migrations occur due to overloaded servers and inefficient resource utilization, hotspot (overloaded servers) are identified and a heuristic algorithm is proposed to decide VM migrations from hotspot to underutilized servers and fairly allocate VMs on available servers. This work outperforms deterministic load balancing schemes subject to handling overloaded servers, resource utilization and number of VM migrations. The limitation of the work is they do not consider power consumption or energy saving aspect while load balancing, security issues, network communication cost among various VMs of a user, network bandwidth required during VM migrations.

Online VM placement:

Online VM placement for raising cloud provider's revenue is proposed in [40]. The authors notify that SLA violations and VM migrations along with energy consumption degrades fiscal gain of service provider at data center. To resolve these issues, they present first-fit and harmonic algorithms for online VM placement without considering VM migration.

Moreover, they proved that problem of maximizing overall revenue subject to VM migration is NP-Hard. They devised Least Reliable First (LRF, using least number of migrations) and Decreased Density Greedy (DDG heuristic algorithm, for fine-grained greedy migrations that increase cloud provider's revenue) to handle VM migration process. During experimental evaluation, it is observed that Harmonic algorithm has more potential to raise revenue for cloud service provider as compared to First-fit algorithm. DDG is feasible for high SLA penalty scenarios, and LRF is suitable to vice-versa situation. The limitation is they ignore communication cost among VMs, bandwidth requirement during VM migration.

VM prediction and migration for overcommitted clouds:

Dabbagh et al. [11] proposed energy efficient VM prediction and migration for over-committed clouds. Resource over-commitment means placement of VMs on servers with capacities excess to their actual requirement. This leads to unnecessary reservation of resources and extravagant power consumption. In addition, new problem arises, i.e. PM overloading and VM migration overhead. To combat these issues, resource predictor and overload predictor are deployed at each VM and PM respectively, that predicts future resource demands of a VM in anticipation and accordingly VMs are placed on PMs subject to the resource capacity and overloading constraints of PM. Overload predictor of all PMs are connected to cluster manager that decides VM migration process. For energy efficiency, the idea is to deploy new VM or VMs supposed to migrate on the already running PMs satisfying overload threshold constraints rather than to start new PM. The foremost limitation of this work is deployment of resource predictor at each VM and overload predictor at every server, as it leads to unnecessary overhead of computation that consume extra time and space at each physical machine.

Secure and Energy Aware Load Balancing (SEA-LB)

Recently, Singh et al. [41] presented secure and energy aware load balancing (SEA-LB) framework for VM placement, in which they introduced concept of security by minimizing side channel attack along with power saving and efficient resource utilization while allocating PMs to VMs. To provide security to each VM seems fine however, it reduces resource utilization. In reality, every VM is not carrying confidential data and therefore, SCA prevention is not the essential requirement of every VM while load balancing. Moreover, they ignored the role of VM migration, bandwidth utilization and network communication cost during balancing VMs on PMs.

Multiobjective genetic algorithm:

Multiobjective genetic algorithm for resource prediction and allocation is proposed in [42], addressing CPU and memory utilization of VMs and PMs and overall energy consumption of data center. The GA algorithm predicts resource usage before allocating PM to VM. Then VM placement algorithm is applied to maximize resource utilization and minimize energy consumption. The limitation of this work is that SLA violations and VM migrations may increase due to prediction errors.

Multiobjective ACO:

Gao et al. [39] proposed multi-objective ant colony optimization (ACO) for optimal VM placement and efficient power consumption. The goal is to optimally place VMs on available PMs so as to minimize resource wastage and power consumption. The drawback of ACO is that it depends on quantity of pheromones to search optimal solution in search space and it is unsuitable to recursively improve the resource utilization.

Profile guided VM placement

Recently, Ding et al. [43] proposed profile-guided three-phase framework for VM placement based on profiling of applications, task classification and application assignment. However, it ignored handling of VM migration during over/under-load situations.

Traffic-aware VM Placement

Meng et al.[44] focussed on network traffic minimization and studied the effect of network resources while optimizing VM migration on host machines. A two-tier approximation algorithm is proposed to solve traffic-aware VM placement problem that resulted into increased throughput and decreased communication cost.

Secure and Multi-objective VM Placement

A Whale Optimization Genetic Algorithm (WOGA) is proposed in [45] for secure and multi-objective VM placement (i.e., SM-VMP) with multi-efficient VM migration. This work focussed on minimization of security threats, communication cost, power consumption and improved resource utilization concurrently. A novel probability based encoding-decoding system was introduced that encodes VM allocation as a whale position vector by considering heterogeneous VMs environment. The performance evaluation and comparison of this work with various existing multi-objective VMP including GA, Whale optimization, Non-dominated based GA (NSGA-II), PSO, Hybrid of GA and PSO reveals its superiority for efficient VM allocation.

Online Prediction based Multi-objective Load Balancing

An energy-efficient and online resource prediction derived multi-objective load-balancing (OP-MLB) framework is

presented in [2] where an evolutionary neural-network based prediction unit is developed and utilized to estimate the future resource utilization of VMs and proactive over/under-load estimation on servers. A non-dominated sorting based genetic algorithm is applied for a multi-objective VM placement. Additionally, an energy and network-efficient VM migration algorithm is proposed for the minimization of power consumption within data center. It allows power saving by shutting down inactive servers and minimizing the number of active servers, reducing VM migrations and maximizing the resource utilization.

Proactive VM autoscaling

To meet dynamic demands of the future applications, an energy-efficient resource provisioning framework is developed in [26]. This framework addressed the challenges including resource wastage, degradation of performance and Quality-of-Service (QoS) by comparing the application's predicted resource requirement with resource capacity of VMs and consolidating entire load on the minimum number of servers. An online multi-resource feed-forward neural network (OM-FNN) is developed to forecast the multiple resource demands and predicted VMs are placed on energy-efficient servers. This integrated approach optimized resource utilization and energy consumption.

Communication Cost Aware Resource Efficient Load Balancing

Saxena et al. [15] have presented a communication cost aware and resource efficient load balancing (CARELB) framework to reduce the communication cost among VMs within the data center, minimize power consumption and maximize resource utilization. This framework allocates VMs with high affinity and inter-dependency physically closer to each other. A Particle Swarm Optimization and non-dominated sorting based Genetic Algorithm i.e. PSOGA algorithm is proposed for optimized placement of VMs, where VM allocations are encoded as particles as well as chromosomes. The experimental analysis depicts that CARELB framework achieved stable optimization of power consumption and resource utilization during VM placement.

Security embedded dynamic resource allocation

To reduce the security risks during VM placement and sharing physical resources with multiple users, a security embedded dynamic resource allocation (SEDRA) model is proposed in [46]. This model employed an analyser for identifying co-located inter-VM relations and detect server with malicious hypervisor to mitigate security breaches. A random tree based VM threat detector and workload predictor operates in the background to allow secure and resource efficient allocation of physical resources among VMs. SEDRA a protects against the security breaches due to known user VMs and substantially decreases co-residency threats due to unknown VMs. Futher, this model is enhanced in [47] to provide security during load arrival at data center and detect any contention prior to its occurrence.

Table 2 highlights the summarised comparison of related work discussed above subject to objective of the respective proposed work, utilized approach, strength and weakness of the work.

6 Emerging Challenges and Future Research Directions

In the light of existing elastic resource management approaches, the following challenges are encapsulated for the enhancement and development of more promising and influential management of elastic resources in cloud environment:

- Improving Workload forecasting accuracy: The VM resource prediction and workload forecasting accuracy needs to be enhanced to avoid SLA violations and allow contention free execution of user applications. The accurate estimation of requirement of resources in future is inevitable in providing reliable and highly available cloud services during efficient resource management. The existing approaches are static which works on historical workload only.
- Overloading and Performance Degradation: During peak load arrival, the aggregate demand of resources of VMs exceeds the available resource capacity of the server leading to overloaded servers leading to performance degradation and SLA violations. For example, some VMs may crash, longer unavailability of resources and increased response time etc.
- Live VM migration and Downtime: In order to manage the dynamic and random requirement of excess resource capacities or handle overload, VMs migrate in real time from overloaded server to other server having sufficient resource capacity, leads to delayed execution. Another major issue is to decide which VM should migrate, when to migrate, and to which server it should migrate?
- Single resource consideration during load balancing: Most of the existing elastic resource distribution strategies considers single resource i.e. CPU only, whereas in real world cloud resource management all the resources are significant as contention of either of the resources: Memory, Bandwidth, disk usage, processor may become bottleneck degrading overall performance of the system.
- Interaction and Co-operation among related operations: Individual consideration of workload prediction, resource provisioning, VM placement and migration, though all of these operations serves common objective

Table 2: Comparative Summary

Author, objective Approach Goudarzi et al., 2015 [37], Energy efficient resource management Zhao et al., 2015 [40], Online VM placement Cano et al., 2016 [39], stochastic load balancing Prediction of overfunder-loaded servers and VM migration State of the proach of expected workload Strength SLA violations and VM migration Greedy (DDG) algorithms were proposed Value to prediction of overfunder-loaded servers and VM migration Prediction of overfunder-loaded servers and VM migration State overload prediction State overload pre
Same at al., 2016 [40], Online VM placement Case and Energy
Source management Zhao et al., 2015 [40], Online VM placement Conline VM placement
And Decreased Density Greedy (DDG) algorithms were proposed Yu et al., 2016 [39], Prediction of over/under-loaded servers and VM migration resource allocation and VM placement Ding et al., 2012 [38], Prediction of future resource demands by using EWMA classification and application and VM placement Ding et al., 2019 [43], Prediction of future resource demands by using EWMA classification and application assignment placement Nguyen et al., 2017 [48], VM consolidation Beloglazov et al., 2010 [49] Beloglazov et al., 2010 [49] Dabbagh et al., 2016 [11] Sharma et al., 2016 Hybrid of PSO and GA algorithms were provided and Energy Aware Load Balancing (SEA-LB) Gao et al., 2017 [42], Multi-objective VM placement Meng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Two-tier approximation algorithms were proposed and Decreased Density Greddy (DEG) algorithms were proposed prediction of over/under-loaded servers and improved resource utilization threshold based overload prediction entrophase framework for VM placement profile-guided three-source allocations, task classification and application and application and prediction to handle over/under-loaded servers Wang et al., 2010 [49] Wiener Filter based overload prediction in number of active source utilization proficition threshold based overload prediction in number of active inter-dependent VMs SLA violations increase due to prediction entors due to prediction entors exervers risk of SLA violations increase due to prediction entore servers of threshold based overload prediction in number of active inter-dependent VMs SLA violations increase due to prediction entors due to prediction entors due to prediction entors due to prediction entors detection in number of active source utilization provactive banding of over-loaded servers Tresp et al., 2016 [41], Ant colony optimization integrated with non-dominated sorting based overload prediction entors detection in number of active severs of prodiction of prodiction provactive due to
Greedy (DDG) algorithms were proposed were proposed prediction of over/underloaded servers and VM migration and VM placement profile get al., 2012 [38], Dynamic resource allocation and VM placement profile get al., 2019 [43], Prediction of future resource diction of VM placement profile get al., 2019 [43], Prediction of future resource diction mount of three-phase framework for VM placement profile get al., 2017 [48], VM consolidation placement profile get al., 2010 [49] while objective VM placement profile get al., 2010 [49] while objective VM placement profile get al., 2010 [41], Multi-objective VM placement profile get al., 2019 [41], Multi-objective VM placement profile get al., 2019 [42], Multi-objective VM placement profile get al., 2010 [44] Two-tier approximation algoritch average and energy Aware Load Balancing provided and provided proficed profile and provided profile provide profile provided profile profile profile provided profile
were proposed Yu et al., 2016 [39], Prediction of over/under- stochastic load balancing gration Xiao et al., 2012 [38], Prediction of future resource demands by using EWMA Ding et al., 2019 [43], profile-guided three- phase framework for VM Placement Nguyen et al., 2017 [48], VM migration after overload detection Beloglazov et al., 2010 [49] Dabbagh et al., 2016 [11] Dabbagh et al., 2016 [11] Sharma et al., 2016 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2017 [42], Multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2017 [42], Multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Two-tier approximation algo- rithm to provide network traf- fic aware Vm migration servers and improved resource utilization inter-dependent VMs SLA violations of the threshold based overload prediction in number of active servers reduction number of active inter-dependent VMs SLA violations inter-dependent violation inter-dependent violation inter-dependent violation inter-dependent violations inter-dependent violations inter-dependent violations inter-dependent violations, task classification and application and application of multiple resource utilization and application of voer-load detection Prediction of multiple resource utilization and application of voer-load detection proactive handling of over-load detection Multi-objective VM placement Meng et al., 2017 [42], Multi-objective vM placement Meng et al., 2010 [44] Wale Optimization inter-devolved and reduces power consumption inter-dependent v
were proposed Yu et al., 2016 [39], Prediction of over/under- stochastic load balancing gration Xiao et al., 2012 [38], Prediction of future resource demands by using EWMA Ding et al., 2019 [43], profile-guided three- phase framework for VM Placement Nguyen et al., 2017 [48], VM migration after overload detection Beloglazov et al., 2010 [49] Dabbagh et al., 2016 [11] Dabbagh et al., 2016 [11] Sharma et al., 2016 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2017 [42], Multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2017 [42], Multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Two-tier approximation algo- rithm to provide network traf- fic aware Vm migration servers and improved resource utilization inter-dependent VMs SLA violations of the threshold based overload prediction in number of active servers reduction number of active inter-dependent VMs SLA violations inter-dependent violation inter-dependent violation inter-dependent violation inter-dependent violations inter-dependent violations inter-dependent violations inter-dependent violations, task classification and application and application of multiple resource utilization and application of voer-load detection Prediction of multiple resource utilization and application of voer-load detection proactive handling of over-load detection Multi-objective VM placement Meng et al., 2017 [42], Multi-objective vM placement Meng et al., 2010 [44] Wale Optimization inter-devolved and reduces power consumption inter-dependent v
stochastic load balancing gration Xiao et al., 2012 [38], Dynamic resource allocation and VM placement Ding et al., 2019 [43], profile-guided three-phase framework for VM placement Nguyen et al., 2017 [48], VM consolidation Beloglazov et al., 2010 [49] Babbagh et al., 2010 [49] Sharma et al., 2010 [49] Sharma et al., 2016 [41], Singh et al., 2016 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2013 [51] Multi-objective VM placement Meng et al., 2017 [42], Multi-objective VM placement Meng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Trend et al., 2010 [44] Trend et al., 2010 [42] Ant colony optimization algorithm to provide network traffic aware Vm migration Saxena et al., 2021 [42], Secure and multi-objective VM placement Saxena et al., 2021 [42], Secure and multi-objective VM placement and et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [44] Wale Optimization interdependent VMs inter-dependent VMs interiotion, state titer very interessing the duction inter
Stao et al., 2012 [38], Dynamic resource allocation and VM placement Prediction of future resource and by using EWMA Stao violations increase demands by using EWMA Stao violations increase demands by using EWMA Stao violations increase due to prediction errors due to prediction existing and application, assignment placement Prediction of multiple resource utilization to handle over/under-loaded servers Prediction of multiple resource utilization to handle over/under-loaded servers Prediction of multiple resource utilization to handle over/under-loaded servers Prediction of multiple resource utilization of ever-load detection Prodiction of multiple resource utilization errors due to prediction Prodiction of prodiction Prodiction of prediction Prodiction Prodiction of prediction Prodiction of prediction Prodiction of prediction Prodiction Prodicti
Xiao et al., 2012 [38], Dynamic resource allocation and VM placement
Dynamic resource allocation and VM placement Ding et al., 2019 [43], profile-guided three-phase framework for VM placement Nguyen et al., 2017 [48], VM consolidation Seleglazov et al., 2010 [49] Beloglazov et al., 2010 [49] Dabagh et al., 2016 [11] Dabbagh et al., 2016 [11] Singh et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2013 [51] multi-objective VM placement Singh et al., 2017 [42], Multi-objective VM placement Tresn et al., 2017 [42], Multi-objective VM placement Singh et al., 2018 [51] Tresn et al., 2018 [51] Ant colony optimization multi-objective VM placement Tresn et al., 2017 [42], Multi-objective VM placement Singh et al., 2018 [51] Tresn et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2017 [42], Multi-objective VM placement Tresn et al., 2017 [42], Multi-objective VM placement Tresn et al., 2017 [42], Multi-objective VM placement Wheng et al., 2010 [44] Tresn et al., 2017 [42], Multi-objective VM placement Wheng et al., 2010 [44] Tresn et al., 2017 [42], Multi-objective VM placement Wheng et al., 2021 [44] Wheng et al., 2021 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration Saxena et al., 2021 [45], Secure and multi-objective VM placement objective VM placement and optimization integrated with non-dominated objective VM placement and optimization integrated with non-dominated objective VM placement objective VM placement and optimization integrated with non-dominated objective VM placement objective VM placement and optimization integrated with non-dominated objective VM placement objective VM placement and optimization integrated with non-dominated objective VM placement objective VM p
tion and VM placement Ding et al., 2019 [43], profile-guided three-phase framework for VM placement Nguyen et al., 2017 [48], VM consolidation Wang et al., 2010 [49] Wang et al., 2010 [49] Beloglazov et al., 2010 [49] Dabbagh et al., 2016 [11] Sharma et al., 2016 [19], Multi-objective VM placement Singh et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2013 [51] Gao et al., 2017 [42], Multi-objective VM placement Meng et al., 2017 [42], Multi-objective VM placement Treng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Two-tier approximation assignment in mumber of active servers improved resource utilization innumber of active servers reduction in number of active servers reduction in number of active servers reduction in number of active servers power-efficient VM management proactive handling of overload delay in execution of user application may lead to unnecessary VM migration may lead to unnecessary VM migration improves resource utilization and reduces power consumption consideration of security during load balancing while objective VM placement Two-tier approximation algorithm to provide network trafic aware Vm migration Saxena et al., 2021 [44] Two-tier approximation algorithm to provide network trafic aware Vm migration Saxena et al., 2021 [44] Saxena et al., 2021 [44] Whale Optimization integrated with non-dominated objective VM placement and optiminum power consumption of multiple clusters of server is not considered server.
Ding et al., 2019 [43], profile-guided three-phase framework for VM placement Nguyen et al., 2017 [48], VM consolidation Surgent et al., 2010 [49] Wang et al., 2010 [49] Beloglazov et al., 2010 Dabbagh et al., 2016 [11] Sharma et al., 2016 [9], Multi-objective VM placement Singh et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2017 [42], Multi-objective VM placement Meng et al., 2017 [42], Tseng et al., 2010 [44] Saxena et al., 2020 [44] Saxena et al., 2021 [44] Saxena et al., 2021 [44], Forbiling of applications and application and application in number of active servers reduction in number of active servers delay in execution of user application power-efficient VM management power-efficient VM management power efficient VM migration ignored under-loaded server resource utilization and reduces power consumption improves resource utilization and reduces power consumption consideration of security during load balancing with placement and efficient power consumption optimal VM placement and efficient power consumption placement Meng et al., 2010 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration Whale Optimization integrated with non-dominated objective VM placement and optiminum power consumption placed with non-dominated objective VM placement and with non-dominated objective VM placement and with non-dominated objective VM placement of multiple clusters of server is not considered server.
profile-guided three-phase framework for VM placement Nguyen et al., 2017 [48], VM consolidation Wang et al., 2010 [49] Beloglazov et al., 2010 Beloglazov et al., 2010 Dabbagh et al., 2016 [11] Sharma et al., 2016 [9], Multi-objective VM placement Singh et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Tosen get al., 2017 [42], Multi-objective VM placement Thesen get al., 2017 [42], Multi-objective VM placement Saxena et al., 2017 [42], Secure and Enl., 2010 [44] Meng et al., 2021 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration Saxena et al., 2021 [45], Secure and multi-objected with mon-dominated objective VM placement Saxena et al., 2021 [45], Secure and multi-objected with mon-dominated objective VM placement source ustage over load of migration integrated with non-dominated objective VM placement source wastage, server is not considered server Ition reduction in number of active servers delay in execution of user application and power-efficient VM manage detection may lead to unnecessary VM migration improves resource utilization and reduces power consumption improves resource utilization and power-efficient VM migration subjective VM placement and efficient power consumption increased throughput and derithm to provide network traffic aware Vm migration Secure VM allocation subject to minimum power consumption of multiple clusters of of multiple clusters of of multiple clusters of sumption, resource wastage, server is not considered
Phase framework for VM placement Nguyen et al., 2017 [48], VM consolidation VM migration of multiple resource utilization to handle over/under-loaded servers
Prediction of multiple resource utilization to handle over/under-loaded servers
Nguyen et al., 2017 [48], VM consolidation
Wang et al., 2010 [49] Wang et al., 2010 [49] Beloglazov et al., 2010 Dabbagh et al., 2016 [11] Wiener Filter based overload prediction Sharma et al., 2016 Hybrid of PSO and GA algorithm to provide network understoop et al., 2019 [41], Ant colony optimization Gao et al., 2013 [51] Meng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Two-tier approximation after overload detection servers power-efficient VM management proactive handling of overload productive handling of overload production improves resource utilization and reduces power consumption way lead to unnecessary VM migration proactive handling of overload productive handling
Wang et al., 2010 [49] Wang et al., 2010 [49] Wang et al., 2010 [49] Beloglazov et al., 2010 Threshold-value based overload detection Dabbagh et al., 2016 [11] Sharma et al., 2016 [9], Multi-objective VM placement Singh et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2013 [51] multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Meng et al., 2010 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration of migration integrated with non-dominated objective VM placement Saxena et al., 2021 [45], Secure and multi-objected ve VM placement and detection Wang et al., 2010 [44] Wang practive proactive handling of overload proactive handling of overload wangelication of wall placement Power efficient VM manage application of wall proactive handling of overload wangelication of wall placement Power efficient VM migration integrated with and ling of overload volument proactive handling of overload wangelication of wall placement Power efficient VM manage delay in execution of usapplication wangelication of wall placement ingolad balancing Power efficient VM migration resource utilization improves resource utilization optimal VM placement and efficient power consumption optimal VM placement and efficient resource utilization SLA violations and VM migrations SLA violations and VM migration cost fic aware Vm migration integrated with non-dominated sorting based Genetic Algo-sumption, resource wastage, server is not considered
Wang et al., 2010 [49]
Beloglazov et al., 2010 Threshold-value based over- load detection Dabbagh et al., 2016 [11] Wiener Filter based overload prediction Power efficient VM migration Gand reduces power consumption Power efficient VM migration Power efficient VM migration Gand reduces power consumption Power efficient VM migration Power efficient VM migration Gand reduces power consumption Power efficient VM migration Power efficient VM migration Power efficient VM migration Gand reduces power consumption Power efficient VM migration Powe
Beloglazov et al., 2010 [50] Threshold-value based over- load detection Dabbagh et al., 2016 [11] Wiener Filter based overload prediction Sharma et al., 2016 [11] Hybrid of PSO and GA algorithm placement Singh et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2013 [51] multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Saxena et al., 2021 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration objective VM placement oor of multiple clusters of server on may lead to unnecessary VM migration integrated with non-dominated sorting based overload prediction for vPM power efficient VM migration integrated with non-dominated sorting based Genetic Algo- sumption, resource wastage.
Isol
Dabbagh et al., 2016 [11] Wiener Filter based overload prediction Sharma et al., 2016 [9], Multi-objective VM placement Singh et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2013 [51] Ant colony optimization multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Meng et al., 2021 [44] Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Secure and Energy Amulti-objective by M placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al
Sharma et al., 2016 [9], Multi-objective VM placement Singh et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2013 [51] multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Saxena et al., 2021 [45], Secure and multi-objective VM placement and placement Singh et al., 2021 Whale Optimization integrated with non-dominated objective VM placement sumption. Secure Sharma et al., 2016 Hybrid of PSO and GA algo-improves resource utilization and reduces power consumption and reduces power consumption consideration of security during load balancing VM migration not discussed VM placement and efficient power consumption optimal VM placement and efficient resource utilization sumption SLA violations and VM migrations increased throughput and decreased communication cost server Secure VM allocation subject to minimum power consumption, resource wastage
Sharma et al., 2016 [9], Multi-objective VM placement Singh et al., 2019 [41], Multi-objective VM placement by applying NSGA-II Gao et al., 2013 [51] Ant colony optimization multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Meng et al., 2021 [45], Secure and multi-objective VM migration integrated with non-dominated objective VM placement Sharma et al., 2016 [Hybrid of PSO and GA algorithm improves resource utilization and reduces power consumption consideration of security during load balancing vM migration not discussed VM migration not discussed VM migration not discussed VM placement and efficient power consumption energy-efficient resource utilization increased throughput and decreased communication cost fic aware Vm migration Saxena et al., 2021 Whale Optimization integrated with non-dominated objective VM placement Secure VM allocation subject to minimum power consumption on and reduces power consumption consideration of security during load balancing vm placement and efficient power consumption energy-efficient resource utilization SLA violations and VM migrations increased throughput and decreased communication cost fic aware Vm migration Secure VM allocation subject to minimum power consumption, resource wastage, server is not considered
[9], Multi-objective VM placement Singh et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2013 [51] multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Meng et al., 2021 [45], Secure and multi-objective VM migration integrated with non-dominated objective VM placement Singh et al., 2019 [41], Multi-objective VM placement Multi-objective VM placement Multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Singh et al., 2019 [41], Multi-objective VM placement Multi-objective VM placement Multi-objective VM placement Saxena et al., 2021 [44] Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45],
Singh et al., 2019 [41], Secure and Energy Aware Load Balancing (SEA-LB)
Singh et al., 2019 [41], Multi-objective VM placement by applying NSGA-II ment by applying NSGA-II ment by applying NSGA-II ing load balancing (SEA-LB) Gao et al., 2013 [51] Ant colony optimization multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration Saxena et al., 2021 [45], Secure and multi-objective VM placement sorting based Genetic Algo-size and consideration of security during load balancing optimal VM placement and efficient power consumption ingload balancing optimal VM placement and efficient resource utilization unsuitable to recursively improve resource utilization SLA violations and VM migrations increased throughput and decreased communication cost fic aware Vm migration Secure VM allocation subject to minimum power consumption, resource wastage, server is not considered
Secure and Energy Aware Load Balancing (SEA-LB) Gao et al., 2013 [51] Ant colony optimization multi-objective VM placement Tseng et al., 2017 [42], GA based prediction for VM placement Meng et al., 2010 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration Saxena et al., 2021 Whale Optimization integrated with non-dominated objective VM placement Secure VM allocation subject to minimum power consumption ing load balancing cussed unsuitable to recursively improve resource utilization SLA violations and VM migrations increased throughput and decreased communication cost server Secure VM allocation subject to minimum power consumption integrated with non-dominated sorting based Genetic Algosumption, resource wastage,
Aware Load Balancing (SEA-LB) Gao et al., 2013 [51] Ant colony optimization multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Meng et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective
Gao et al., 2013 [51] Ant colony optimization multi-objective VM placement VM placement CACO) Efficient power consumption Efficient power consumption Improve resource utilization Improve resource utilization SLA violations and VM migrations SLA violations and VM migrations Improve resource utilization SLA violations and VM migrations Improve resource utilization Improve re
Gao et al., 2013 [51] Ant colony optimization multi-objective VM placement Tseng et al., 2017 [42], Multi-objective VM placement Meng et al., 2010 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration Saxena et al., 2021 [45], Secure and multi-objective VM placement sorting based Genetic Algorithm to provide deficient power consumption efficient power consumption energy-efficient resource utilization SLA violations and VM migrations signored under-loaded server Secure VM allocation subject to minimum power consumption in multiple clusters of server is not considered
multi-objective VM placement Tseng et al., 2017 [42], GA based prediction for VM placement Meng et al., 2010 [44] SLA violations and VM migrations Two-tier approximation algorithm to provide network traffic aware Vm migration Saxena et al., 2021 [45], Secure and multi-objective VM placement Saxena et al., 2021 [45], Secure and multi-objective VM placement sorting based Genetic Algorithm to provide network traffic aware Vm placement sorting based Genetic Algorithm to provide network traffic aware Vm placement sorting based Genetic Algorithm to provide network traffic aware Vm allocation subject to minimum power consumption improve resource utilization SLA violations and VM migrations Scale throughput and decreased communication cost server Secure VM allocation subject to minimum power consumption improve resource utilization SLA violations and VM migrations VM mapping to the level of multiple clusters of server is not considered
Tseng et al., 2017 [42], GA based prediction for VM Multi-objective VM placement placement Meng et al., 2010 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration Saxena et al., 2021 Whale Optimization integrated with non-dominated objective VM placement sorting based Genetic Algorithm to provide resource utilization migrations increased throughput and decreased communication cost server Secure VM allocation subject to minimum power consumption, resource wastage, server is not considered
Tseng et al., 2017 [42], Multi-objective VM placement placement Meng et al., 2010 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration Saxena et al., 2021 [45], Secure and multi-objective VM placement grated with non-dominated objective VM placement sorting based Genetic Algorithm to provide network traffic aware Vm migration integrated with non-dominated sorting based Genetic Algorithm to provide network traffic aware Vm allocation subject to minimum power consumption, resource wastage, server is not considered
Multi-objective VM placement lization migrations Meng et al., 2010 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration Saxena et al., 2021 Whale Optimization integrated with non-dominated objective VM placement sorting based Genetic Algorithm to provide network traffic aware Vm migration Secure VM allocation subject to minimum power consumption, resource wastage, server is not considered
Meng et al., 2010 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration
Meng et al., 2010 [44] Two-tier approximation algorithm to provide network traffic aware Vm migration Saxena et al., 2021 Whale Optimization integrated with non-dominated objective VM placement Secure VM allocation subject to minimum power consumption, resource wastage, server is not considered
rithm to provide network traf- fic aware Vm migration Saxena et al., 2021 Whale Optimization inte- [45], Secure and multi- objective VM placement sorting based Genetic Algo- rithm to provide network traf- creased communication cost server Secure VM allocation sub- ject to minimum power con- sumption, resource wastage, server is not considered
fic aware Vm migration Saxena et al., 2021 Whale Optimization inte- [45], Secure and multi- objective VM placement grated with non-dominated sorting based Genetic Algo- sumption, resource wastage, server is not considered
Saxena et al., 2021 Whale Optimization inte- [45], Secure and multi- grated with non-dominated objective VM placement sorting based Genetic Algo- sumption, resource wastage, server is not considered
[45], Secure and multi- objective VM placement grated with non-dominated sorting based Genetic Algo- sumption, resource wastage, server is not considered
objective VM placement sorting based Genetic Algo- sumption, resource wastage, server is not considered
THURLING TALES DECIDED TO A COMMUNICATION COST IS
achieved
Saxena et al., 2021 Online VM resource-usage Energy-efficient VM place- inaccurate overload pre-
[2], online predictive based multi-objective VM ment with proactive handling diction may lead to un-
resource management placement is proposed us- of overload necessary VM migra-
resource management placement is proposed using evolutionary optimiza- of overload necessary VM migrations

Author, objective Approach Strength Weakness Saxena et al., 2021 [26], VM resource prediction and Power efficient VM scaling ignored under-loaded clustering is utilized to deterand allocation Proactive autoscaling of server mine exact number and size **VMs** of VMs required to execute future workload Saxena et al., 2020 [15], Hybrid of PSO and NSGA-II improves resource utilization Cluster-level Communication-cost algorithm (PSOGA) is develand reduces response-time communication-cost aware VM placement aware VM mapping is oped not considered Saxena et al., 2020 [46], Workload prediction and consideration of security dur-VM migration is not disproactive VM threat detec-Security Embedded Dying load balancing cussed tion mechanisms are applied namic Resource Allocation (SEDRA) to achieve secure VM alloca-Saxena et al., 2021 Proactive detection of net-Allows secure VM inter-Over-/Under-loading of [47], Secure inter-VM work and resource congescommunication and avoids servers and VM migracommunication model tion and unauthorized VM illegal access based VM tion concepts are not with network-efficient discussed during VM access based threat mitigathreats resource allocation tion scheduling

Table 2: Comparative Summary continued

of energy-efficient resource utilization. Therefore, all the related resource management operations must be employed at uniform platform to allow interaction among them for development of a pragmatic resource management solution in cloud environment.

• Lack of security while resource allocation: Since security of data is the primary concern of every user, the physical resource distribution among different users' VMs must consider protection of data as a major perspective along with resource capacity constraints.

The following research directions are designed in order to fill the research gaps and deal with aforementioned challenges:

- An improved improved workload prediction method with high performance stability is needed to be developed. The predictor should learn dynamically in real-time by training and re-training itself with historical as well as real-time resource usage samples by various VMs and servers. Also, multiple resources should be predicted concurrently by learning utilization of different resources from the training data samples.
- An effective under/over-load prediction method is required that can proactively estimate the peak and down
 load conditions with high accuracy which would alert the proactive VM migration before actual occurrence of
 the under/over-load and minimize performance degradation.
- To optimize multi-resource utilization including CPU, memory, bandwidth concurrently during load balancing
 for contention-free execution of users' applications while conserving energy and reducing resource wastage in
 cloud environment.
- To integrate workload forecasting with an efficient load balancing approach or resource utilization model at uniform platform to enhance the efficiency during resource management.
- To manage the network traffic while tackling resource congestion problem during resource distribution and network-efficient load balancing.
- Development of secure resource distribution models for cloud data center that allows secure execution of user workload, secure inter-communication among inter-dependent VMs with alleviation of an unauthorised access.

References

- [1] R. Buyya, S. N. Srirama, G. Casale, R. Calheiros, Y. Simmhan, B. Varghese, E. Gelenbe, B. Javadi, L. M. Vaquero, M. A. Netto *et al.*, "A manifesto for future generation cloud computing: research directions for the next decade," *ACM computing surveys (CSUR)*, vol. 51, no. 5, p. 105, 2018.
- [2] D. Saxena, A. K. Singh, and R. Buyya, "OP-MLB: An online vm prediction based multi-objective load balancing framework for resource management at cloud datacenter," *IEEE Transactions on Cloud Computing*, 2021.

- [3] D. Saxena, R. Chauhan, and R. Kait, "Dynamic fair priority optimization task scheduling algorithm in cloud computing: concepts and implementations," *International Journal of Computer Network and Information Security*, vol. 8, no. 2, p. 41, 2016.
- [4] M. Dabbagh, B. Hamdaoui, M. Guizani, and A. Rayes, "Exploiting task elasticity and price heterogeneity for maximizing cloud computing profits," *IEEE Transactions on Emerging Topics in Computing*, vol. 6, no. 1, pp. 85–96, 2015.
- [5] D. Saxena and S. Saxena, "Highly advanced cloudlet scheduling algorithm based on particle swarm optimization," in 2015 Eighth International Conference on Contemporary Computing (IC3). IEEE, 2015, pp. 111–116.
- [6] K. Gai, M. Qiu, H. Zhao, and X. Sun, "Resource management in sustainable cyber-physical systems using heterogeneous cloud computing," *IEEE Transactions on Sustainable Computing*, vol. 3, no. 2, pp. 60–72, 2017.
- [7] D. Saxena, K. S. Vaisla, and M. S. Rauthan, "Abstract model of trusted and secure middleware framework for multi-cloud environment," in *International Conference on Advanced Informatics for Computing Research*. Springer, 2018, pp. 469–479.
- [8] D. Saxena and A. K. Singh, "Energy aware resource efficient-(EARE) server consolidation framework for cloud datacenter," in *Advances in communication and computational technology*. Springer, 2021, pp. 1455–1464.
- [9] N. K. Sharma and G. R. M. Reddy, "Multi-objective energy efficient virtual machines allocation at the cloud data center," *IEEE Transactions on Services Computing*, vol. 12, no. 1, pp. 158–171, 2016.
- [10] M. Amiri, L. Mohammad-Khanli, and R. Mirandola, "An online learning model based on episode mining for workload prediction in cloud," *Future Generation Computer Systems*, vol. 87, pp. 83–101, 2018.
- [11] M. Dabbagh, B. Hamdaoui, M. Guizani, and A. Rayes, "An energy-efficient vm prediction and migration framework for overcommitted clouds," *IEEE Transactions on Cloud Computing*, vol. 6, no. 4, pp. 955–966, 2016.
- [12] S. Saxena and D. Saxena, "Ewsa: An enriched workflow scheduling algorithm in cloud computing," in 2015 International Conference on Computing, Communication and Security (ICCCS). IEEE, 2015, pp. 1–5.
- [13] A. K. Singh and D. Saxena, "A cryptography and machine learning based authentication for secure data-sharing in federated cloud services environment," *Journal of Applied Security Research*, pp. 1–24, 2021.
- [14] Y. Han, J. Chan, T. Alpcan, and C. Leckie, "Using virtual machine allocation policies to defend against co-resident attacks in cloud computing," *IEEE Transactions on Dependable and Secure Computing*, vol. 14, no. 1, pp. 95–108, 2015.
- [15] D. Saxena and A. K. Singh, "Communication cost aware resource efficient load balancing (care-lb) framework for cloud datacenter," *Recent Advances in Computer Science and Communications*, vol. 12, pp. 1–00, 2020.
- [16] S. G. Domanal, R. M. R. Guddeti, and R. Buyya, "A hybrid bio-inspired algorithm for scheduling and resource management in cloud environment," *IEEE transactions on services computing*, vol. 13, no. 1, pp. 3–15, 2017.
- [17] I. K. Kim, W. Wang, Y. Qi, and M. Humphrey, "Forecasting cloud application workloads with cloudinsight for predictive resource management," *IEEE Transactions on Cloud Computing*, 2020.
- [18] J. Kumar, A. K. Singh, and R. Buyya, "Self directed learning based workload forecasting model for cloud resource management," *Information Sciences*, vol. 543, pp. 345–366, 2021.
- [19] D. Saxena and S. Chauhan, "A review on dynamic fair priority task scheduling algorithm in cloud computing," International Journal of Science, Environment and Technology, vol. 3, no. 3, pp. 997–1003, 2014.
- [20] L. Columbus, "Roundup of cloud computing forecasts and market estimates," Report, 2016.
- [21] M. Pedram, "Energy-efficient datacenters," *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, vol. 31, no. 10, pp. 1465–1484, 2012.
- [22] H. Rong, H. Zhang, S. Xiao, C. Li, and C. Hu, "Optimizing energy consumption for data centers," *Renewable and Sustainable Energy Reviews*, vol. 58, pp. 674–691, 2016.
- [23] J. Kumar and A. K. Singh, "Workload prediction in cloud using artificial neural network and adaptive differential evolution," *Future Generation Computer Systems*, vol. 81, pp. 41–52, 2018.
- [24] J. Kumar, D. Saxena, A. K. Singh, and A. Mohan, "Biphase adaptive learning-based neural network model for cloud datacenter workload forecasting," *Soft Computing*, pp. 1–18, 2020.
- [25] D. Saxena and A. K. Singh, "Auto-adaptive learning-based workload forecasting in dynamic cloud environment," *International Journal of Computers and Applications*, pp. 1–11, 2020.
- [26] S. Deepika and S. A. Kumar, "A proactive autoscaling and energy-efficient vm allocation framework using online multi-resource neural network for cloud data center," *Neurocomputing*, vol. 426, pp. 248–264, 2021.

- [27] W. Zhong, Y. Zhuang, J. Sun, and J. Gu, "A load prediction model for cloud computing using pso-based weighted wavelet support vector machine," *Applied Intelligence*, vol. 48, no. 11, pp. 4072–4083, 2018.
- [28] S. Kumaraswamy and M. K. Nair, "Intelligent vms prediction in cloud computing environment," in 2017 International Conference On Smart Technologies For Smart Nation (SmartTechCon). IEEE, 2017, pp. 288–294.
- [29] J. J. Prevost, K. Nagothu, B. Kelley, and M. Jamshidi, "Prediction of cloud data center networks loads using stochastic and neural models," in *2011 6th International Conference on System of Systems Engineering*. IEEE, 2011, pp. 276–281.
- [30] R. Cao, Z. Yu, T. Marbach, J. Li, G. Wang, and X. Liu, "Load prediction for data centers based on database service," in 2018 IEEE 42nd Annual Computer Software and Applications Conference (COMPSAC), vol. 1. IEEE, 2018, pp. 728–737.
- [31] B. Song, Y. Yu, Y. Zhou, Z. Wang, and S. Du, "Host load prediction with long short-term memory in cloud computing," *The Journal of Supercomputing*, vol. 74, no. 12, pp. 6554–6568, 2018.
- [32] J. Kumar, R. Goomer, and A. K. Singh, "Long short term memory recurrent neural network (lstm-rnn) based workload forecasting model for cloud datacenters," *Procedia Computer Science*, vol. 125, pp. 676–682, 2018.
- [33] K. Qazi and I. Aizenberg, "Cloud datacenter workload prediction using complex-valued neural networks," in 2018 IEEE Second International Conference on Data Stream Mining & Processing (DSMP). IEEE, 2018, pp. 315–321.
- [34] A. K. Singh, D. Saxena, J. Kumar, and V. Gupta, "A quantum approach towards the adaptive prediction of cloud workloads," *IEEE Transactions on Parallel and Distributed Systems*, 2021.
- [35] Y. Lu, J. Panneerselvam, L. Liu, and Y. Wu, "Rvlbpnn: A workload forecasting model for smart cloud computing," Scientific Programming, vol. 2016, 2016.
- [36] K. Qazi and I. Aizenberg, "Towards quantum computing algorithms for datacenter workload predictions," in 2018 IEEE 11th International Conference on Cloud Computing (CLOUD). IEEE, 2018, pp. 900–903.
- [37] H. Goudarzi and M. Pedram, "Hierarchical sla-driven resource management for peak power-aware and energy-efficient operation of a cloud datacenter," *IEEE Transactions on Cloud Computing*, vol. 4, no. 2, pp. 222–236, 2015.
- [38] Z. Xiao, W. Song, and Q. Chen, "Dynamic resource allocation using virtual machines for cloud computing environment," *IEEE transactions on parallel and distributed systems*, vol. 24, no. 6, pp. 1107–1117, 2012.
- [39] L. Yu, L. Chen, Z. Cai, H. Shen, Y. Liang, and Y. Pan, "Stochastic load balancing for virtual resource management in datacenters," *IEEE Transactions on Cloud Computing*, 2016.
- [40] L. Zhao, L. Lu, Z. Jin, and C. Yu, "Online virtual machine placement for increasing cloud provider's revenue," *IEEE Transactions on Services Computing*, vol. 10, no. 2, pp. 273–285, 2015.
- [41] A. Singh and J. Kumar, "Secure and energy aware load balancing framework for cloud data centre networks," *Electronics Letters*, vol. 55, no. 9, pp. 540–541, 2019.
- [42] F.-H. Tseng, X. Wang, L.-D. Chou, H.-C. Chao, and V. C. Leung, "Dynamic resource prediction and allocation for cloud data center using the multiobjective genetic algorithm," *IEEE Systems Journal*, vol. 12, no. 2, pp. 1688–1699, 2017.
- [43] Z. Ding, Y.-C. Tian, M. Tang, Y. Li, Y.-G. Wang, and C. Zhou, "Profile-guided three-phase virtual resource management for energy efficiency of data centers," *IEEE Transactions on Industrial Electronics*, 2019.
- [44] X. Meng, V. Pappas, and L. Zhang, "Improving the scalability of data center networks with traffic-aware virtual machine placement," in 2010 Proceedings IEEE INFOCOM. IEEE, 2010, pp. 1–9.
- [45] D. Saxena, I. Gupta, J. Kumar, A. Singh, and W. Xiaoqing, "A secure and multi-objective virtual machine placement framework for cloud data center," *IEEE Systems Journal*, 2021.
- [46] D. Saxena and A. Singh, "Security embedded dynamic resource allocation model for cloud data centre," *Electronics Letters*, vol. 56, no. 20, pp. 1062–1065, 2020.
- [47] D. Saxena and A. K. Singh, "OSC-MC: Online secure communication model for cloud environment," *IEEE Communications Letters*, 2021.
- [48] T. H. Nguyen, M. Di Francesco, and A. Yla-Jaaski, "Virtual machine consolidation with multiple usage prediction for energy-efficient cloud data centers," *IEEE Transactions on Services Computing*, 2017.
- [49] X. Wang and Y. Wang, "Coordinating power control and performance management for virtualized server clusters," *IEEE Transactions on Parallel and Distributed Systems*, vol. 22, no. 2, pp. 245–259, 2010.

- [50] A. Beloglazov and R. Buyya, "Adaptive threshold-based approach for energy-efficient consolidation of virtual machines in cloud data centers." *MGC*@ *Middleware*, vol. 4, 2010.
- [51] Y. Gao, H. Guan, Z. Qi, Y. Hou, and L. Liu, "A multi-objective ant colony system algorithm for virtual machine placement in cloud computing," *Journal of Computer and System Sciences*, vol. 79, no. 8, pp. 1230–1242, 2013.