
DAANY - DATA ANALYTICS ON .NET

Bahrudin Hrnjica
Faculty of Engineering Sciences
University of Bihać
Bihać, 77000, Bosnia and Herzegovina,
name.surnameunbi.ba

December 29, 2021

ABSTRACT

Daany is .NET and cross platform data analytics and linear algebra library written in C# supposed to be a tool for data preparation, feature engineering and other kind of data transformations and feature engineering. The library is implemented on top of .NET Standard 2.1 and supports .NET Core 3.0 and above separated on several Visual Studio projects that can be installed as a NuGet package. The library implements 'DataFrame' as the core component with extensions of a set of data science and linear algebra features. The library contains several implementation of time series decomposition (SSA, STL ARIMA), optimization methods (SGD) as well as plotting support. The library also implements set of features based on matrix, vectors and similar linear algebra operations. The main part of the library is the `Daany.DataFrame` with similar implementation that can be found in python based Pandas library. The paper presents the main functionalities and the implementation behind the Daany packages in the form of developer guide and can be used as manual in using the Daany in every-day work. To end this the paper shows the list of papers used the library.

1 Introduction Daany

Daany is .NET data analytic library written in C# with support various kind of data transformation, descriptive statistics and linear algebra. With Daany an user can load the data from text based file into the `DataFrame` arranged into columns, rows and index. The user can also create `Series` object - a special kind of `Daany.DataFrame` in order to work with time series data. Once the data is loaded the user can start analyzing the data by performing various transformation and results can be display as chart or tabular data.

Daany is an open source project hosted at <https://github.com/bhrnjica/daany>. In order to build and run the library from the source code, one can use Windows or Linux based distribution. The most easiest way to build the library is to use command line dotnet tool and build the binaries. Otherwise the **Visual Studio** and **Visual Studio Code** can be used for building and developing the library. The GitHub project contains documentation and unit test project for any implemented operation in the library. Also the **Daany Developer Guide** contains in details all aspects of the implementation and library features.

The library implements the `Daany.MathStuff` module which consists of of algebraic operations on matrix and vectors as well as rich set of statistics distributions and parameters. Furthermore `Daany.LinA` extends it in order to gain better performance and functionalities. The `Daany.LinA` is the .NET wrapper around the LAPACK [1] and BLAS [2] C++ libraries. Besides data analysis, the library implements a set of statistics or data science features e.g. time series decomposition, optimization performance parameters and similar. The main components of the library which can be installed separately as a NuGet package are:

- `Daany.DataFrame`,
- `Daany.DataFrame.Ext`,
- `Daany.Stat`,
- `Daany.LinA`.

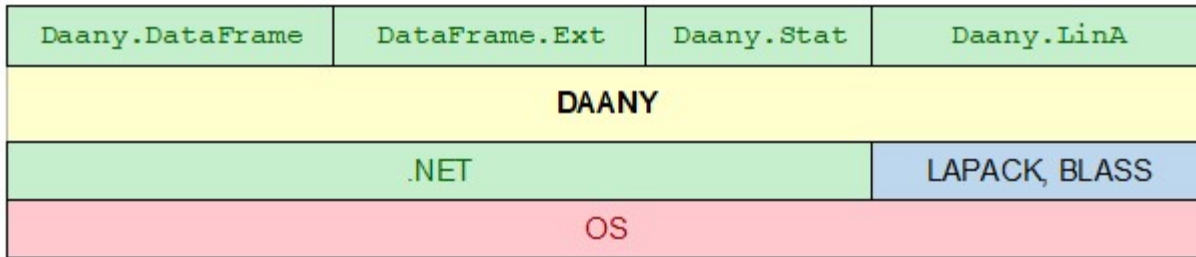


Figure 1: Architecture of Daany library

EDA Exploratory Data Analysis

In this part we are going to present the analysis of Iris data. First install some Nuget packages

```
In [2]: ▶ //Install Daany packages
#r "nuget:Daany.DataFrame"
#r "nuget:Daany.DataFrame.Ext"
#r "nuget:Daany.Stat"
```

Installed package Daany.Stat version 0.6.4

Installed package Daany.DataFrame.Ext version 0.6.4

Installed package Daany.DataFrame version 0.6.4

```
In [3]: ▶ //using statement of Daany package
using Daany;
using Daany.MathStuff;
using Daany.Ext;
```

Figure 2: Using Daany library in .NET Jupyter Notebook

2 Daany Architecture

Daany is classic .NET component implemented through the several visual studio projects. The library is based on .NET Framework and Intel MKL implementation of LAPACK and BLASS libraries. The architecture diagram of the library is described at Figure 1.

Beside as the classic .NET library usage Daany is implemented to be used for data exploration and transformation with .NET Jupyter Notebook.

When using Daany in the Jupyter Notebook a user should register the formatter for the DataFrame in order the notebook can render the DataFrame as natural tabular data. The formatter can be found later in the text.

2.1 How to start with Daany

Daany is .NET component and can be run on any platform .NET supports. It can be used by Visual Studio or Visual Studio Code. It is consisted of the five NuGet packages, so the easiest way to start with is to install the packages in the .NET application or Jupyter Notebook.

In the Nuget repositories the user can find five packages starting with Daany, which are listed at Figure 3.

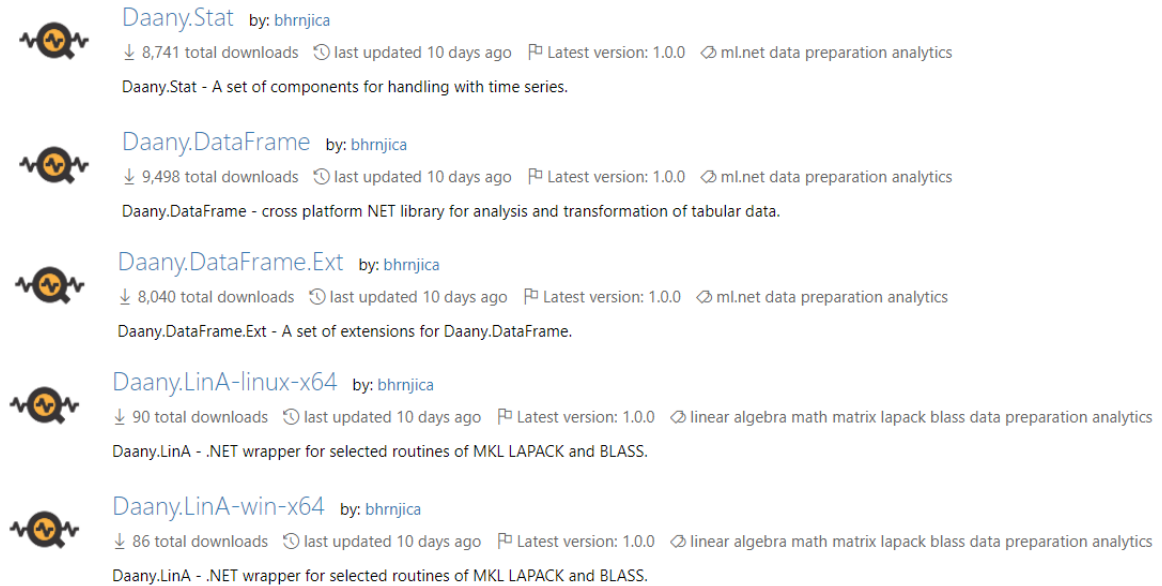


Figure 3: Nuget packages of Daany library

1. `Daany.DataFrame` - one can use this option only for data analysis and data transformation by using data frame,
2. `Daany.DataFrame.Ext` - the package contains set of DataFrame extensions for DataFrame in form of plotting support, column data transformations etc,
3. `Daany.Stat` the package already contains `Daany.DataFrame`, as well as time series decomposition and related statistics features.
4. `Daany.LinA` - the package is .NET wrapper round LAPACK and BLASS routines from the MKL. The package has two versions:
 - (a) `Daany.LinA-win-64` - windows 64 version,
 - (b) `Daany.LinA-linux-64` - Linux based distributions.

Once you install the packages, you can start developing your app using Daany packages.

2.2 Namespaces in Daany

Daany project contains several namespaces for separating different implementation. The following list contains relevant namespaces:

1. `using Daany` – data frame and related code implementation,
2. `using Daany.Ext` – data frame extensions, used with dependency on third party libraries,
3. `using Daany.Stat` – set of statistics related implementations e.g. descriptive statistic, optimizers, time series etc.
4. `'using Daany.LineA'` – set of Linear algebra routines for using LAPACK and BLASS.

3 `Daany.DataFrame` - data analysis and transformation of tabular data

The main part of Daany project is `Daany.DataFrame` - an c# implementation of data frame. A data frame is software component used for handling tabular data, especially for data preparation, feature engineering and analysis during development of machine learning models. The concept of `Daany.DataFrame` implementation is based on simplicity and .NET coding standard. It represents tabular data consisting of columns and rows. Each column has name and type

	name	sex	age	ticket	fare	embarked	home.dest	survived
0	Simmons Mr. John	male	NAN	392082	8.05	S	Cologne Germany	no
1	Stead Mr. William Thomas	male	62	113514	26.55	S	Wimbledon Park London / Hayling Island Hants	no
2	Gustafsson Mr. Johan Birger	male	28	3101277	7.925	S	Ruotsinphytaa Finland New York NY	no
3	Collyer Mr. Harvey	male	31	C.A. 31921	26.25	S	Bishopstoke Hants / Fayette Valley ID	no
4	Greenfield Mr. William Bertram	male	23	PC 17759	63.3583	C	New York NY	yes
5	Davison Mr. Thomas Henry	male	NAN	386525	16.1	S	Liverpool England Bedford OH	no
6	Johnson Mr. Malkolm Joackim	male	33	347062	7.775	S	Janjgir India / Pennsylvania	no
7	Dowdell Miss. Elizabeth	female	30	364516	12.475	S	Union Hill NJ	yes
8	Giles Mr. Ralph	male	24	248726	13.5	S	NAN	no
9	Svensson Mr. Olof	male	24	350035	7.7958	S	Janjgir India / Pennsylvania	no
10	Bryhl Miss. Dagmar Jenny Ingeborg	female	20	236854	26	S	Skara Sweden / Rockford IL	yes

Figure 4: DataFrame components

and each row has its index and label. Usually, rows indicate a zero axis, while columns indicate axis one. Figure 4 shows a data frame structure

The basic components of the data frame are:

1. header - list of column names,
2. index – list of object representing each row,
3. data – list of values in the data frame,
4. missing value – data with no values in data frame.

In order to create a DataFrame there are several options:

1. from a list of values, by specifying column names and row count
2. from a dictionary, letting keys be column names and values be column values,
3. from text-based file, where each line represents row values,
4. as a return object for almost any data frame operations.

3.1 Create Daany.DataFrame by loading data from a file

By using static method `DataFrame.FromCsv` a user can create data frame object from the csv file. Otherwise, data frame can be persisted on disk by calling static method `DataFrame.ToCsv`.

The following code shows how to use static methods `ToCsv` and `FromCsv` to show persisting and loading data to data frame:

```
string filename = "df_file.txt";
// define a dictionary of data
var dict = new Dictionary<string, List<object>>
{
    { "ID",new List<object>() { 1,2,3 } },
    { "City",new List<object>() { "Sarajevo", "Seattle", "Berlin" } },
    { "Zip Code",new List<object>() { 71000,98101,10115 } },
    { "State",new List<object>() {"BiH","USA","GER" } },
    { "IsHome",new List<object>() { true, false, false } },
    { "Values",new List<object>() { 3.14, 3.21, 4.55 } },
    { "Date",new List<object>() { DateTime.Now.AddDays(-20), DateTime.Now.AddDays(-10), DateTime.Now } },
};

// create data frame with 3 rows and 7 columns
```

```

var df = new DataFrame(dict);

// first Save data frame on disk and load it
DataFrame.ToCsv(filename , df);

// create data frame with 3 rows and 7 columns
var dfFromFile = DataFrame.FromCsv(filename , sep: ',');

// check the size of the data frame
Assert.Equal(3, dfFromFile.RowCount());
Assert.Equal(new string[] { "ID", "City", "Zip Code", "State", "IsHome", "Values", "Date"
Assert.Equal(7, dfFromFile.ColCount());

```

First, the data frame is created from the dictionary collection. Then data frame is stored to file. After successfully saving, the same data frame is created the csv file. The end of the code snippet, several asserts are defined in order to prove everything is correctly implemented.

In case the performance is important, the column types should be pass to FromCSV method in order to achieve up to 50% of loading time.

For example the following code loads the data from the file, by passing predefined column types:

```

// defined types of the column
var colTypes1 = new ColType[] { ColType.I32, ColType.IN, ColType.I32, ColType.STR, ColType
// create data frame with 3 rows and 7 columns
var dfFromFile = DataFrame.FromCsv(filename , sep: ',', colTypes: colTypes1);

```

3.2 Create Daany.DataFrame from a web url

Data can be loaded directly from the web storage by using FromWeb static method. The following code shows how to load the Concrete Slump Test data from the web. The data set includes 103 data points. There are 7 input variables, and 3 output variables in the data set: Cement, Slag, Fly ash, Water, SP, Coarse Aggr., Fine Aggr., SLUMP (cm), FLOW (cm), Strength (Mpa).

The following code load the Concrete Slump Test data set into Daany.DataFrame:

```

// define web url where the data is stored
var url = "https://archive.ics.uci.edu/ml/machine-learning-databases/concrete/slump/slump_
//
var df = DataFrame.FromWeb(url);
df.Head(5)

```

Besides presented examples, the data frame can be created as a results of any operations applied on the Daany data frame.

4 Daany.DataFrame operations

Daany.DataFrame has rich set of operations that can be classified into several groups:

1. **Add or Insert new row/column in the DataFrame**, - this group of operations are used to create a new row or column in the existing DataFrame. A created column/row can be defined as list or dictionary collections, but also can be defined dynamically based on the calculation logic from the existing columns in the data frame.
2. **Handling missing values in DataFrame** - this set of operations handle the missing values in the data frame.
3. **Aggregate** - this group of operations include performing arithmetic operation on data frame. The result of the aggregation is new list of values or new data frame containing the result of aggregation operations.
4. **Filter** - operations return data frame with specific filter condition. Beside filter the **RemoveRows** - method acts opposite and removes all rows with specified condition by using delegate implementation.
5. **Sorting** - used for sorting the rows in the Data frame. The sorting operation supports both ascending and descending order.

6. **Grouping** - used for grouping data in the data frame using one, two or three data frame's columns. Usually while grouping the data one can perform some rolling or aggregate operations which is fully supported.
7. **Joining and merging the data frames** - this set of operations are used when one data frame needs to be created from two or more data frames.
8. **Selection in data frame** this set of operation are used when selecting one or more rows/columns/cells.

5 Daany.Stat - Daany statistics

The second main daany component is Daany.Stat contains implementation of descriptive statistics, optimization, time series decomposition etc.

The following list contains some of Daany.Stat features:

1. Conversion time series into data frame and Series
2. **Seasonal and Trend decomposition using Loess** - STL time series decomposition,
3. **Singular Spectrum Analysis** SSA time series decomposition,
4. Set of Time Series operations like moving average, etc....

References

- [1] Intel® Math Kernel Library, MKL-LAPACK, Version 2019.1
- [2] Intel® Math Kernel Library, MKL-BLASS, Version 2019.1