

Approximate Normalization and Eager Equality Checking for Gradual Inductive Families

JOSEPH EREMONDI, University of British Columbia, Canada

RONALD GARCIA, University of British Columbia, Canada

ÉRIC TANTER, University of Chile, Chile

Harnessing the power of dependently typed languages can be difficult. Programmers must manually construct proofs to produce well-typed programs, which is not an easy task. In particular, migrating code to these languages is challenging. *Gradual typing* can make dependently-typed languages easier to use by mixing static and dynamic checking in a principled way. With gradual types, programmers can incrementally migrate code to a dependently typed language.

However, adding gradual types to dependent types creates a new challenge: mixing decidable type-checking and incremental migration in a full-featured language is a precarious balance. Programmers expect type-checking to terminate, but dependent type-checkers evaluate terms at compile time, which is problematic because gradual types can introduce non-termination into an otherwise terminating language. Steps taken to mitigate this non-termination must not jeopardize the smooth transitions between dynamic and static.

We present a gradual dependently-typed language that supports inductive type families, has decidable type-checking, and provably supports smooth migration between static and dynamic, as codified by the refined criteria for gradual typing proposed by Siek et al. (2015). Like Eremondi et al. (2019), we use approximate normalization for terminating compile-time evaluation. Unlike Eremondi et al., our normalization does not require comparison of variables, allowing us to show termination with a syntactic model that accommodates inductive types. Moreover, we design a novel technique for tracking constraints on type indices, so that dynamic constraint violations signal run-time errors eagerly. To facilitate these checks, we define an algebraic notion of gradual precision, axiomatizing certain semantic properties of gradual terms.

CCS Concepts: • **Theory of computation** → **Type structures; Program semantics.**

Additional Key Words and Phrases: dependent types, gradual types, inductive families, propositional equality

ACM Reference Format:

Joseph Eremondi, Ronald Garcia, and Éric Tanter. 2021. Approximate Normalization and Eager Equality Checking for Gradual Inductive Families. *Proc. ACM Program. Lang.* 37, 4, Article 111 (July 2021), 28 pages. <https://doi.org/10.1145/1122445.1122456>

1 INTRODUCTION

Dependently typed languages are an expressive tool for specifying and verifying program properties.

Terms and types may depend on each other, allowing programs, specifications, and proofs of correctness to be expressed using the same language.

Authors' addresses: Joseph Eremondi, Department of Computer Science, University of British Columbia, Canada, jeremond@cs.ubc.ca; Ronald Garcia, University of British Columbia, Canada, rxg@cs.ubc.ca; Éric Tanter, Computer Science Department (DCC), University of Chile, Chile, etanter@dcc.uchile.cl.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2021 Association for Computing Machinery.

2475-1421/2021/7-ART111 \$15.00

<https://doi.org/10.1145/1122445.1122456>

Programmers have the power of a higher-order logic available to formulate and prove program invariants.

However, when a programmer uses dependent types, they have replaced one problem with two problems: they must write a correct algorithm and also prove that it is correct. Well-typed programs in dependently-typed languages are guaranteed to meet their specifications, but producing those well typed programs is challenging. Migrating programs from non-dependently typed languages is particularly tricky. In practice, dependent types are currently used by a few experts, who often have close ties to the developers of the tools they are using [Ringer et al. 2019].

In this paper, we contribute to the recent line of work integrating *gradual types* with dependent types, with the aim of making it easier to learn and migrate code to dependently-typed languages such as Idris [Brady 2013]. Gradual types facilitate the migration of code between dynamic and static type disciplines. Programmers may assign any expression the *unknown type* `?`. For gradual type-checking, type equality is replaced with type *consistency* [Anderson and Drossopoulou 2003; Siek and Taha 2006]: equality up to occurrences of `?`, allowing terms with precise and imprecise types to be used together.

This mixing is principled: gradual languages provide *safety*, ensuring that type inconsistencies at run-time cause an error to be raised, but no other unsafe behavior is possible. Fully gradual languages satisfy the *gradual guarantees* [Siek et al. 2015], which ensure that programs can be smoothly migrated between the static and dynamic paradigms, while knowing that any errors indicate a fundamental inconsistency in the program's type structure.

Example: Migrating Quicksort.

To demonstrate the utility of gradual types for moving code to a dependently typed language, we describe the example due to Eremondi et al. [2019]: migrating quicksort. Consider the classic list type and a standard quicksort implementation.

```
data List : (X : Type) → Type where
  Nil : List X
  Cons : X → List X → List X
```

In place of lists, dependent types allow programmer to use *size-indexed vectors*:

```
data Vec : (X : Type) → (n : ℕ) → Type where
  Nil : Vec X 0
  Cons : X → Vec X n → Vec X (1 + n)
```

```
sort : List Float → List Float
sort Nil = Nil
```

```
sort (Cons h t) = (sort (filter (< h) t)) # (Cons h (sort (filter (> h) t)))
```

```
sort : (n : ℕ) → Vec Float n → Vec Float n
```

```
sort 0 Nil = Nil
```

```
sort (1 + n') (Cons h t) =
```

```
(sort [??] (filter (< h) t)) # (Cons h (sort [??] (filter (> h) t)))
```

Vectors are an *indexed inductive type family*: for each element type `X` and number `n`, `Vec X n` is a distinct type, inhabited only by vectors with `n` elements. They have the same constructors as lists, but the constructors' return types specify a value for the index `n` that reflects the length of the result. This lets programmers specify types that rule out erroneous inputs, such as `head : Vec X (1 + n) → X`, which only accepts non-empty vectors.

Although lists and vectors have the same constructors, we encounter two problems when adapting `sort` to vectors. The first problem is length indexing. The dependent `sort` needs an argument for the vector's length. What length should we give to the recursive calls? We do not statically know how many elements are smaller than `h`. Also, the result of `sort` should have length `n = 1 + n'`, but it has length `n1 + 1 + n2`, where `n1` and `n2` are the lengths of `filter (< h) t` and `filter (> h) t`. Even the type of `filter` is non-obvious: it must return type `(n : ℕ) × Vec ℕ n` i.e. a dependent pair with a length and a vector of that length.

The second problem is that the recursive calls do not take structurally smaller arguments, so termination is not obvious to the type-checker. While the programmer could use a function for well-founded induction on \mathbb{N} , they must prove that n_1 and n_2 are smaller than n .

Now, development is blocked until the above problems are solved. Both are solvable: the programmer can write a proof that $n \equiv n_1 + 1 + n_2$ and that $n_1 < n \equiv \text{true}$ and $n_2 < n \equiv \text{true}$. However, they cannot run or test their `sort` function until those proofs are provided!

Gradual Types to the Rescue:

Gradual dependent types allow the programmer to run and test their `sort` function before writing the missing proofs, by letting `?` stand in for any term. We write gradual terms using **blue serif font**, to distinguish them from the **red sans-serif font** of static terms. Instead of returning a dependent pair, we write a gradual **filter**, so that `filter (< h) t` and `filter (> h) t` check at type `Vec Float ?`. We then use `?` as the length argument for the recursive calls to `sort`, so concatenating gives length `? + 1 + ?`, which is *consistent with* `n`. We use `?` to represent imprecision in the type index, but preserve the knowledge that `sort` produces a `Vec`.

Likewise, gradual types help with the termination problem by allowing `?` as a *proof*. The programmer can show termination by using a `wfInd` library function for well-founded induction with the type $(P : \mathbb{N} \rightarrow \text{Type}) \rightarrow ((n : \mathbb{N}) \rightarrow (\text{rec} : (m : \mathbb{N}) \rightarrow m < n \equiv \text{true} \rightarrow P m) \rightarrow P n) \rightarrow (n : \mathbb{N}) \rightarrow P n$. Each call to `rec` still requires a proof that $m < n \equiv \text{true}$, but with gradual dependent types, the programmer can use `?` as a placeholder for that proof.

The resulting gradual code is:

```
sort : (n : ℕ) → Vec Float n → Vec Float n
sort = wfInd (λn → Vec Float n → Vec Float n) sort' where
  sort' 0 rec Nil = Nil
  sort' (1 + n') rec (Cons h t) = (rec ?? (filter (< h) t)) # (Cons h (rec ?? (filter (> h) t)))
```

Gradual types are useful not only because of what they allow statically, but what they prevent dynamically, and gradual dependent types are no exception. By keeping run-time information about types and indices, we ensure that unsafe operations are never performed. The keen-eyed reader will notice that **our implementation of `sort` is flawed**: the list is partitioned using `<` and `>`, so duplicate occurrences of `h` are removed. When `sort` runs on a list containing duplicates, *a run-time error is raised*, notifying the programmer that the actual length does not match the one specified in the type. A major contribution of this work is the ability to raise such errors when a list is constructed, while still satisfying important metatheoretic properties about the language.

Related Work. The flexibility of gradual typing means that some terms do not terminate [Siek and Taha 2006]. Since types depend on terms, dependent type-checking evaluates some terms at compile-time, meaning that non-termination must be managed in order for type-checking to remain decidable. We must also account for the possibility of dynamic type errors *during type-checking*. `GrInd` builds on two existing languages with different approaches to this challenge: `GDTL` [Eremondi et al. 2019] and `GCIC` [Lennon-Bertrand et al. 2020].

`GDTL` is a foundational (but minimal) calculus for gradual dependent types. Like `GDTL`, `GrInd` gives dynamic semantics to programs with `?` standing in for arbitrary types or terms. Both have an exact but possibly-diverging run-time semantics, but use *approximate normalization* to provide decidable normalization during type-checking by producing `?` when termination is not guaranteed. Unlike `GDTL`, we show that all features of `GrInd` except non-positive types can be simulated in a

strongly-normalizing language. Thus, we approximate in fewer places, allowing more types to be checked statically.

While GDTL provides dynamic checking of dependent properties like our `sort` example, the proof of decidable type-checking does not extend to inductive types. GDTL's approximate normalization was based on hereditary substitution, but extending this to inductive types is an open problem, even without gradual types.

Instead we use a syntactic model to show termination for GrInd, which is possible because GrInd defers the comparison of bound variables until they have concrete values. We can then prove termination by simulating approximate normalization in a strongly-normalizing language, which was not possible for GDTL.

GCIC provides a gradual version of the Calculus of Inductive Constructions (CIC). It integrates gradual types with inductive families in three languages, giving a choice from any two of decidable type-checking, fully embedding CIC, and graduality [New and Ahmed 2018], a strengthened version of the gradual guarantees. GrInd achieves decidable type-checking, fully embeds CIC, and satisfies the gradual guarantees. As with GCIC, we define GrInd's semantics using a gradual cast calculus, and prove decidable type-checking using simulation by CIC. However, GCIC's version of gradual propositional equality is inhabited for every pair of terms, regardless of whether they are consistent, and safety is ensured using casts when eliminating an equality proof. So for `sort`, no error is raised when wrong-sized output is given, only when that output is accessed in an unsafe way. Our version of gradual propositional equality keeps information through the run of a program, allowing more eager reporting of when gradual values do not match their types.

Our Contribution to Gradual Dependent Types.

This work contributes to the theoretical foundations of gradual dependent types, helping fulfill the goals and address the challenges above. We present GrInd, a gradual dependently-typed language with inductive families. Accompanying GrInd are proofs of important metatheoretic properties: decidable type-checking, and the criteria for principled gradual typing, namely safety and the gradual guarantees [Siek et al. 2015].

Our work has applied and theoretical contributions. **Our applied contribution** is a gradual dependently typed language with run-time checking of equality constraints. With static dependent types, the propositional equality $t_1 \equiv_{\top} t_2$ type denotes proofs that t_1 and t_2 are equal. In GrInd, the programmer can prove $t_1 \cong_{\top} t_2$ for any consistent t_1 and t_2 . We call this *propositional consistency*, since it relaxes equality to accommodate imprecision. **Our insight** is to implement propositional consistency between two terms by tracking *evidence* that the two terms are consistent, akin to the AGT [Garcia et al. 2016] or threesomes [Siek and Wadler 2010] approach. This evidence is represented by a third term at least as precise as both terms. New evidence can be composed with existing evidence. We propose that, for variables, this composition should be deferred until they have concrete values, since this allows equalities to be checked lazily as the program executes, as well as allowing us to prove important properties of GrInd.

Our theoretical contribution is a proof that GrInd satisfies both the gradual guarantees and decidable type-checking, which have never previously been achieved for a dependently-typed language with inductive types. **Our insight** is that these metatheoretic properties can be proven in a language with propositional consistency by carefully defining what it means for one term to be more precise than another. We establish decidable type-checking via the termination of approximate normalization using a *syntactic model* in the style of Boulier et al. [2017]. That is, we provide a type-preserving translation to a strongly normalizing language, and establish a simulation between the dynamic semantics. This allows the semantics of GrInd to be understood through the well-known Calculus of Inductive Constructions (CIC) [Paulin-Mohring 2015], and provides a path

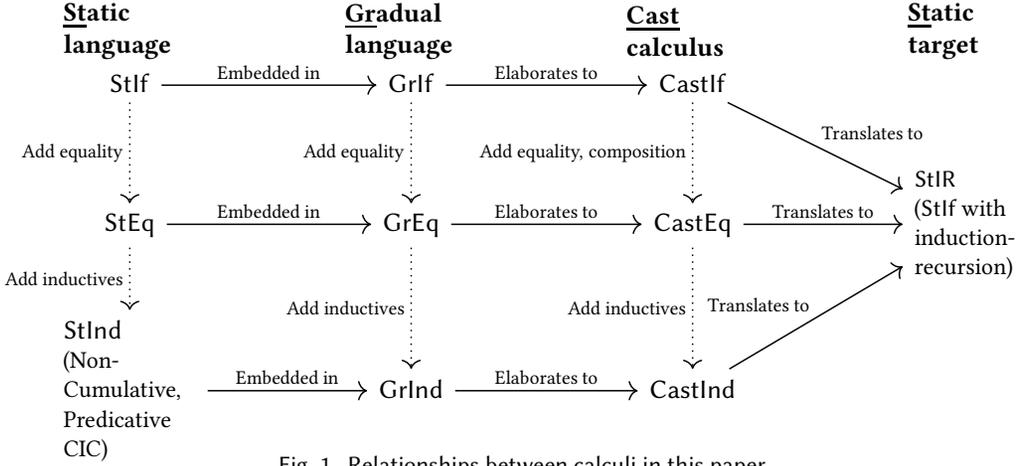


Fig. 1. Relationships between calculi in this paper

towards implementation. To establish that the gradual guarantees are compatible with evolving evidence of propositional consistency, we define *algebraic precision*. Algebraic precision extends the usual syntactic precision relation with laws about how evidence of consistency is composed in GrInd, and with laws relating casts between different types. We show that normalizing GrInd terms preserves algebraic precision, and that reducing algebraic precision of a type preserves its consistency with other types.

Road map and Calculi. To mitigate the complexity of our development, we present several languages, progressing from a small language to one with inductive types. Fig. 1 shows the relationship between these languages.

First we gradualize Stlf (§2), a subset of CIC with dependent functions, a universe hierarchy, booleans, and conditionals. We add $\?$ to obtain GrIf, our first gradual surface language (§3), which replaces type equality with type consistency. We define the dynamic semantics of GrIf terms by *elaboration* to CastIf, which extends GrIf with explicit casts (§§4 and 5). We then develop StEq, GrEq, and CastEq, which introduce propositional equality to Stlf, GrIf and CastIf respectively (§8). For the static and gradual languages, we need only the usual *refl* constructor, but for CastEq we must keep evidence of propositional equality between two terms. To compose evidence, we also add an explicit composition operator in CastEq.

We use propositional consistency to add support for inductive types (§8.3): StEq, GrEq and CastEq become StInd, GrInd, and CastInd.

In addition to defining these languages, we develop their metatheory. We first show the results for GrIf and CastIf, but they are easily extended to GrEq/CastEq and GrInd/CastInd. We present a precision relation in §6 and prove the gradual guarantees.

Likewise, we show the termination of approximate normalization by a syntactic model (§7), where we translate the cast calculi to StIR, which is StInd (i.e. predicative, non-cumulative CIC) extended with inductive-recursive types [Dybjer and Setzer 2003]. Operationally, the reader may think of StIR as being Agda [Norell 2009]. A mechanization of the translation in Agda is ongoing.

2 STIF: THE STATIC STARTING LANGUAGE

We begin with Stlf, a *Static language* with *If*-else branching, from which we progress to GrInd. Stlf is a small subset of CIC [Paulin-Mohring 2015] with dependent functions, booleans with non-dependent conditionals, and a hierarchy of type universes. For simplicity, we omit cumulativity

$\Gamma \vdash t \Rightarrow T$ (Synthesis)		$\Gamma \vdash t \Leftarrow V$ (Checking)	
$\frac{\text{SVAR}}{\Gamma(x) = T} \quad \Gamma \vdash x \Rightarrow T$	$\frac{\text{STYPE}}{\Gamma \vdash \mathbf{Type}_\ell \Rightarrow \mathbf{Type}_{1+\ell}}$	$\frac{\text{SBOOL}}{\Gamma \vdash \mathbb{B} \Rightarrow \mathbf{Type}_0}$	$\frac{\text{STF}}{b \in \{\mathbf{true}, \mathbf{false}\}} \quad \Gamma \vdash b \Rightarrow \mathbb{B}$
$\frac{\text{SASCR}}{\Gamma \vdash T \Rightarrow \mathbf{Type}_\ell} \quad \Gamma \vdash T \xrightarrow{*}_\eta V : \mathbf{Type}_\ell \quad \Gamma \vdash t \Leftarrow V$	$\frac{\text{SAPP}}{\Gamma \vdash t_0 \Rightarrow T} \quad \Gamma \vdash T \xrightarrow{*}_\eta (x : V_1) \rightarrow V_2 : \mathbf{Type}_\ell \quad \Gamma \vdash t_1 \Leftarrow V_1$	$\frac{\text{SCONV}}{\Gamma \vdash T \xrightarrow{*}_\eta V' : \mathbf{Type}_\ell} \quad \Gamma : V \Rightarrow \mathbf{Type}_\ell \quad \Gamma \vdash t \Rightarrow T \quad \Gamma \vdash T \Leftarrow \mathbf{Type}_\ell \quad V =_\alpha V'$	
$\frac{\text{SPI}}{\Gamma \vdash (x : T_1) \rightarrow T_2 \Rightarrow \mathbf{Type}_{\max(\ell_1, \ell_2)}} \quad \Gamma \vdash T_1 \Rightarrow \mathbf{Type}_{\ell_1} \quad (x : T_1) \Gamma \vdash T_2 \Rightarrow \mathbf{Type}_{\ell_2}$	$\frac{\text{SIF}}{\Gamma \vdash \text{if } t_1 t_2 t_3 \Leftarrow V} \quad \Gamma \vdash t_1 \Leftarrow \mathbb{B} \quad \Gamma \vdash t_2 \Leftarrow V \quad \Gamma \vdash t_3 \Leftarrow V$	$\frac{\text{SLAM}}{\Gamma \vdash \lambda x. t \Leftarrow (x : V_1) \rightarrow V_2} \quad (x : V_1) \Gamma \vdash t \Leftarrow V_2$	
$t_1 \rightsquigarrow t_2$ (Reduction)		$\Gamma \vdash t \xrightarrow{\eta} v : T$ (η -expansion, non-structural rules)	
$\begin{aligned} & ((\lambda x. t_2) :: (x : T_1) \rightarrow T_2) t_1 \rightsquigarrow_\beta ([t_1/x]t_2) :: [t_1/x]T_2 && \text{if true } t_1 t_2 \rightsquigarrow_{\text{true}} t_1 \\ & \text{if false } t_1 t_2 \rightsquigarrow_{\text{false}} t_2 && t :: T \rightsquigarrow_{::} t \text{ when } t \in \{\mathbf{true}, \mathbf{false}, \mathbb{B}, \mathbf{Type}_\ell\} \end{aligned}$			
$\frac{\text{ETANE}}{\Gamma \vdash N \xrightarrow{\eta} \lambda(x : V_1). v : (x : V_1) \rightarrow V_2} \quad (x : V_1) \Gamma \vdash N x \xrightarrow{\eta} v : V_2$		$\frac{t \xrightarrow{*} v' \quad \Gamma \vdash v' \xrightarrow{\eta} v : V}{\Gamma \vdash t \xrightarrow{*}_\eta v : V}$	

Fig. 2. Stlf: Static and Dynamic Semantics

and subtyping. We use Stlf to introduce the structure of a gradual surface language (§3) and cast calculus (§4).

2.1 Syntax and Typing

Stlf includes universes, variables, type ascriptions, function types, functions, applications, booleans, and if-else branching. The dependent function type $(x : T_1) \rightarrow T_2$ is like a normal function type, but the variable x is bound, and may occur in T_2 to refer to the function argument value. Normal and neutral terms are a mutually-recursively defined subset of terms: normal terms cannot be further evaluated, and neutral terms are those normal terms that are immediately blocked because they eliminate a variable.

$$\begin{aligned} \text{TERM} \ni t, T &::= \mathbf{Type}_\ell \mid x \mid t :: T \mid (x : T_1) \rightarrow T_2 \mid \lambda x. t \mid t_1 t_2 \mid \mathbb{B} \mid \mathbf{true} \mid \mathbf{false} \mid \text{if } t_1 t_2 t_3 \\ \text{NORMAL} \ni v, V &::= N \mid \mathbf{Type}_\ell \mid v :: V \mid (x : V_1) \rightarrow V_2 \mid \lambda x. v \mid \mathbb{B} \mid \mathbf{true} \mid \mathbf{false} \\ \text{NEUTRAL} \ni N &::= x \mid N v \mid \text{if } N v_2 v_3 \end{aligned}$$

The type system (Fig. 2) follow a bidirectional style [Pierce and Turner 2000]: synthesis treats the type as outputs, while checking takes as input a type and checks a term against it. We are very precise about where we normalize: before checking against a type (SAPP, SASCR), and at the synthesis-checking boundary (CONV).

The bidirectional style simplifies the process of adding gradual types to Stlf (§3), since we can check for consistency at the synthesis-checking boundary. Additionally, it allows top-level type annotations to provide information for deeper terms, so the can write fewer annotation.

The rules `SAPP` and `SCONV` enable types to depend on terms. `SAPP` allows the type of an application to depend on the argument's *value*: to synthesize an application's type, we synthesize a type for the function, normalize it to a function type, and check the argument against the domain. The return type is the codomain, but with the bound parameter replaced by the concrete argument. `SCONV` accounts for computation in types: a term checks against a type if it synthesizes a type that normalizes to (is convertible with) the checked type, modulo α -equivalence.

The remaining rules are standard. Variables synthesize types from the context (`SVAR`). The type `B` synthesizes `Type0` (`SBOOL`), while functions synthesize the greater universe of the domain and codomain universes (`SPT`). Each universe synthesizes a universe one level up (`STYPE`), while booleans synthesize `B` (`STF`). If-expressions check against a type if the scrutinee is boolean and both branches check against that type (`SIF`), and functions check against a function type if their bodies check against the return type in a context extended with the argument's type.

2.2 Semantics

We describe the semantics of `Stlf` as the compatible closure of a set of reductions. Each reduction corresponds to an elimination form in our language or the removal of a redundant annotation. The core reduction rules are defined as a relation $_ \rightsquigarrow _ \subseteq \text{TERM} \times \text{TERM}$, which we specify in Fig. 2. The reductions are standard,

including β reductions, if-branching, and removal of redundant ascriptions.

`Stlf` enjoys confluence and strong normalization, so we do not need evaluation contexts. Instead, we define a contextual step relation $_ \longrightarrow _ \subseteq \text{TERM} \times \text{TERM}$ which applies a single reduction to any sub-term. The multi-step relation $_ \longrightarrow^* _ \subseteq \text{TERM} \times \text{TERM}$ is the reflexive-transitive closure of \longrightarrow . Since normal forms do not reduce, $\mathbf{T} \longrightarrow^* \mathbf{V}$ denotes the maximally reduced form of \mathbf{T} .

As a final consideration, we wish $f : \mathbf{V}_1 \rightarrow \mathbf{V}_2$ to be equivalent to $\lambda x. f x$ when compared in e.g. `CONG`. We η -expand normal forms before comparing them syntactically.

Figure 2 includes the standard type-directed η -expansion rules: a neutral term (possibly a variable) with a function type is expanded into a λ -abstraction. Structural rules (omitted) mirror the structure of the typing rules. Note that η -expansion only takes normal forms, which simplifies the reasoning about confluence.

The η -rules provide the final piece we need to fully define our normalization relation $\Gamma \vdash t \longrightarrow_{\eta}^* v : T$: a term is contextually reduced until it is in normal form, then η -expanded (Fig. 2).

3 GRIF: THE SURFACE LANGUAGE

With our static starting point defined, we now turn to `GrIf`, a Gradual language with If-else branching. In this section, we give the syntax of `GrIf`, along with some typing intuitions. The idea behind `GrIf` is that a term checks against any type that is consistent with the type it synthesizes. Because these conversions are implicit, we elaborate them into a calculus with explicit casts (§4), for which a dynamic semantics is easily defined.

We denote `GrIf` terms with the metavariables `s` and `S`. Compared to `Stlf`, `GrIf` differs only by the introduction of `?@ ℓ` , that is, the unknown term ascribed with *the level of* its type. Using bidirectional typing means that the programmer need not ascribe `?` with its precise type. We conjecture that level annotations can be inferred in practice, and write `?` when the level is not relevant.

$$\text{TERM} \subseteq \text{GTERM} \ni s, S ::= ?@_{\ell}$$

The key feature of `GrIf` is that, whenever `Stlf` compares types for equality, `GrIf` instead compares them for consistency, which allows the programmer to use `?` to express type imprecision. Because we need to explicitly track type information to ensure safety, we cannot define a semantics for

$\Gamma \vdash s \Rightarrow S \quad \Gamma \vdash s \Leftarrow S$ (<i>Checking and Synthesis</i>)		GVAR, GTYPE, GBOOL, GTF, GIF: analogous to Stf
GLAM $\frac{S \cong^* (x : S_1) \rightarrow S_2 \quad (x : S_1) \cdot \vdash s \Leftarrow S_2}{\cdot \vdash \lambda x. s \Leftarrow S}$	GAPP $\frac{\cdot \vdash s_0 \Rightarrow S \quad S \cong^* (x : S_1) \rightarrow S_2 \quad \cdot \vdash s_1 \Leftarrow S_1}{\cdot \vdash s_0 s_1 \Rightarrow [s_1/x]S_2}$	
GASCR (GPI follows same pattern) $\frac{\cdot \vdash S \Rightarrow S_2 \quad S_2 \cong^* \mathbf{Type}_\ell \quad \cdot \vdash s \Leftarrow S}{\cdot \vdash s :: S \Rightarrow S}$	GCONV $\frac{\cdot \vdash s \Rightarrow S' \quad S \cong^* S'}{\cdot \vdash s \Leftarrow S}$	GUNK $\frac{\cdot \vdash S \Leftarrow \mathbf{Type}_\ell}{\cdot \vdash ?_{@_\ell} \Leftarrow S}$

Fig. 3. Grlf: Admissible Type Judgment Properties

Grlf directly. However, the Stf typing rules depend on the semantics (e.g SCONV), so we cannot gradualize them without a dynamic semantics.

Instead, we defer the definition of Grlf's type system until §5, but present here admissible rules conveying the essence of Grlf typing (Fig. 3). In place of equality, we use \cong^* , *syntactic consistency modulo conversion*, whose definition we defer until §5. Roughly, $T_1 \cong^* T_2$ means that T_1 and T_2 normalize to values that are equal up to occurrences of $?$. These type rules can be viewed as programmer-friendly explanation of Grlf typing. We can also view it as a list of desiderata for Grlf's full type system. Indeed, the full type system for Grlf admits each rule as a lemma.

The GUNK rule allows $?_{@_\ell}$ to check against any type, so long as that type has the correct level. The main rule is GCONV, where the equality check of SCONV is replaced by a consistency check. In particular, this ensures that any term that synthesizes a type checks against $?_{@_\ell}$. Similarly, GLAM allows functions to check against arrow types or $?_{@_\ell}$, which is also consistent with an arrow type.

In GASCR, instead of requiring that the type synthesize \mathbf{Type}_ℓ , we require that it synthesize a type consistent with \mathbf{Type}_ℓ . We omit rule GPI, but it uses the same relaxation as SPI. GAPP allows applications whose functions synthesize a type consistent with a function type, and use that function type to determine the synthesized result.

4 CASTIF: A GRADUAL CAST CALCULUS

Much of the subtlety of gradual dependent types lies in defining the run-time semantics. Because types depend on terms and type-checking normalizes terms, the dynamic semantics deeply affect typing. Here we define CastIf, a Cast calculus with If-else branching. CastIf features type imprecision while introducing explicit casts. Given these casts, we define a static and dynamic semantics for CastIf. The dynamic semantics for the surface language Grlf is defined by elaboration to CastIf.

4.1 Syntax

We denote CastIf terms using the metavariables t and T . The syntax for CastIf is mostly the same as Stf, with changes highlighted in grey.

$$\begin{aligned}
 \text{CTERM} \ni t, T & ::= \text{?}_T \mid \mathcal{U}_T \mid \langle h \rangle_\ell t \mid \langle T_2 \Leftarrow T_1 \rangle t \mid (\lambda x : T. t) \mid \text{if}_T t_1 t_2 t_3 \\
 & \quad \mid (x : T_1) \rightarrow T_2 \mid t_1 t_2 \mid \mathbb{B} \mid \text{true} \mid \text{false} \mid \mathbf{Type}_\ell \mid x \\
 \text{TYPE TAG} \ni h & ::= \Pi \mid \mathbb{B} \mid \mathbf{Type} \quad \text{TAG} \ni H ::= h \mid \lambda \mid \text{true} \mid \text{false}
 \end{aligned}$$

Conditionals and functions have type annotations: some reductions produce casts that require dynamic type information. $?_T$ is the *unknown* term of type T , and \mathcal{U}_T , the *error* term of type T . These are the least and most precise terms of type T respectively. Unlike with Grlf, we explicitly ascribe $?$ with its type, though its universe level can be synthesized from the ascribed type. Casts

$tagOf : \text{CTERM} \rightarrow \text{TAG}$	$typeTagOf : \text{CTERM} \rightarrow \text{TYPE_TAG}$	$\mathcal{L}^1_\ell : \text{TAG} \rightarrow \text{CTERM}$
$tagOf(\text{true}) = \text{true}$	$typeTagOf(\text{true}) = \mathbb{B}$	$\mathcal{L}^1_\ell(\Pi) = (x : ?_{\text{Type}_\ell}) \rightarrow ?_{\text{Type}_\ell}$
$tagOf(\text{false}) = \text{false}$	$typeTagOf(\text{false}) = \mathbb{B}$	$\mathcal{L}^1_\ell(\mathbb{B}) = \mathbb{B}$
$tagOf((\lambda x : T. v)) = \lambda$	$typeTagOf((\lambda x : T. v)) = \Pi$	$\mathcal{L}^1_\ell(\text{Type}) = \text{Type}_\ell$
$tagOf((x : V_1) \rightarrow V_2) = \Pi$	$typeTagOf((x : V_1) \rightarrow V_2) = \text{Type}$	$\mathcal{L}^1_{\ell\mathbb{N}} : \text{TAG} \rightarrow \text{CTERM}$
$tagOf(\mathbb{B}) = \mathbb{B}$	$typeTagOf(\mathbb{B}) = \text{Type}$	$\mathcal{L}^1_{\ell\mathbb{N}}(\Pi) \text{ undefined}$
$tagOf(\text{Type}_\ell) = \text{Type}$	$typeTagOf(\text{Type}_\ell) = \text{Type}$	$\mathcal{L}^1_{\ell\mathbb{N}}(h) = \mathcal{L}^1_\ell(h) \text{ o/w}$

Fig. 4. Tags and Unknown Types for Terms

$\Gamma \vdash t \Rightarrow T \quad \Gamma \vdash t \Leftarrow V(\text{Synthesis and Checking})$		CVAR, CTYPE, CBOOL, CTF, CPI, CAPP: same as Stlf	
$\frac{\text{CCONV} \quad \Gamma \vdash t \Rightarrow T' \quad \Gamma \vdash T' \Rightarrow \text{Type}_\ell \quad \Gamma \vdash T \Leftarrow \text{Type}_\ell \quad \Gamma \vdash T \xrightarrow{\eta}^* V : \text{Type}_\ell \quad \Gamma \vdash T' \xrightarrow{\eta}^* V : \text{Type}_\ell}{\Gamma \vdash t \Leftarrow T}$	$\frac{\text{CIF} \quad \Gamma \vdash t_1 \Leftarrow \mathbb{B} \quad \Gamma \vdash T \Rightarrow \text{Type}_\ell \quad \Gamma \vdash t_2 \Leftarrow T \quad \Gamma \vdash t_3 \Leftarrow T}{\Gamma \vdash \text{if}_T t_1 t_2 t_3 \Rightarrow T}$		
$\frac{\text{CCAST} \quad \Gamma \vdash T_1 \Rightarrow \text{Type}_\ell \quad \Gamma \vdash t \Leftarrow T_1 \quad \Gamma \vdash T_2 \Leftarrow \text{Type}_\ell}{\Gamma \vdash \langle T_2 \Leftarrow T_1 \rangle t \Rightarrow T_2}$	$\frac{\text{CLAM} \quad \Gamma \vdash \text{if}_T t_1 t_2 t_3 \Rightarrow T \quad (x : T_1) \Gamma \vdash t \Rightarrow T_2}{\Gamma \vdash (\lambda x : T_1. t) \Rightarrow (x : T_1) \rightarrow T_2}$		
$\frac{\text{CTAG} \quad \Gamma \vdash t \Leftarrow \mathcal{L}^1_{\ell\mathbb{N}}(h)}{\Gamma \vdash \langle h \rangle_\ell t \Rightarrow ?_{\text{Type}_\ell}}$	$\frac{\text{CTAGFUN} \quad \Gamma \vdash v \Leftarrow ?_{\text{Type}_\ell}}{\Gamma \vdash \langle \Pi \rangle_\ell (\lambda x : ?_{\text{Type}_\ell}. v) \Rightarrow ?_{\text{Type}_\ell}}$		
$\frac{\text{CUNK} \quad \Gamma \vdash T \Rightarrow \text{Type}_\ell}{\Gamma \vdash ?_T \Rightarrow T}$	$\frac{\text{CERR} \quad \Gamma \vdash T \Rightarrow \text{Type}_\ell}{\Gamma \vdash \mathcal{U}_T \Rightarrow T}$		

Fig. 5. Castlf: Typing

from T_1 to T_2 are written $\langle T_2 \Leftarrow T_1 \rangle t$. Tagged terms $\langle h \rangle_\ell t$ construct elements of $?_{\text{Type}_\ell}$. If the type of t has tag h , then we inject t into the unknown type $?_{\text{Type}_\ell}$ by tagging it.

The metafunction $typeTagOf$ gives the tag its type must have if it is well typed (Fig. 4). We also define $tagOf$ to get a term's constructor, which is useful in §8.

Normal and neutral terms are similar to those of Stlf. Terms $?_T$ and \mathcal{U}_T are normal when T is, and wrapping a normal term in $\langle h \rangle_\ell$ produces a normal term. Casts cannot reduce when either the term or the types are neutral. There are a few exceptions to this: casting \mathcal{U}_V reduces to \mathcal{U}_T for target type T , and casting to or from $\mathcal{U}_{\text{Type}_\ell}$ reduces to \mathcal{U} . Likewise, a neutral term is cast between function types by η -expanding. Casting a neutral term to $?_{\text{Type}_\ell}$ reduces by wrapping in $\langle h \rangle_\ell$ when the source type is not neutral, or produces the original term when the source type is $?_{\text{Type}_\ell}$. All reduction rules are given in §4.3.

$v, V ::= ?_V \mid \mathcal{U}_V \mid \langle h \rangle_\ell v \mid N \mid \text{Type}_\ell \mid (\lambda x : T. v) \mid (x : V_1) \rightarrow V_2 \mid \mathbb{B} \mid \text{true} \mid \text{false}$

$N ::= x \mid N v \mid \text{if}_V N v_2 v_3 \mid \langle V \Leftarrow N \rangle v_{\mathbb{B}} \mid \langle N \Leftarrow V \rangle v_{\mathbb{B}} \mid \langle V_{\mathbb{B}} \Leftarrow V_{\mathbb{B}} \rangle N \mid \langle V_{\mathbb{B}} \Leftarrow ?_{\text{Type}_\ell} \rangle N$

where $v_{\mathbb{B}}, V_{\mathbb{B}}$ is v without \mathcal{U}_V , $V_{\mathbb{B}}$ is $V_{\mathbb{B}}$ without $?_V$, $V_{\mathbb{B}} \Leftarrow V_{\mathbb{B}}$ is $V_{\mathbb{B}} \Leftarrow V_{\mathbb{B}}$ without $(x : V_1) \rightarrow V_2$

4.2 Typing

Typing for Castlf, given in Fig. 5, is similar to Stlf. However, the addition of type annotations means that all forms can synthesize, and since conversion is the only checking rule, we check against non-normal types. All casts are explicit, so we need not reason about consistency, although casts

between inconsistent types produce \mathcal{U} . CLAM and CIF are synthesis versions of the Stlf rules, and CCONV ensures synthesized and input types have the same normal form. In CUNK and CERR, $?$ and \mathcal{U} synthesize their ascriptions. In CCAST, $\langle T_2 \Leftarrow T_1 \rangle t$ synthesizes T_2 , provided t checks against T_1 .

Finally, there are rules that synthesize $?_{\text{Type}_\ell}$. TAG injects a value of non-function type $?_{\text{Type}_\ell}$ if it is tagged accordingly. The term is typed against a *level-1 unknown type*, written \mathcal{L}^1 , which is the least precise type with the given tag (Fig. 4). The name *level-1 type* refers to the depth of knowledge we have about the type: $?$ is a level-0 imprecise type (zero knowledge), $? \rightarrow ?$ is level-1 imprecise type, etc. When casting to $?$, we always cast through the corresponding \mathcal{L}^1 type first. \mathcal{L}^1 is trivial for \mathbb{B} and Type_ℓ , but is relevant with the introduction of inductive types. TAGFUN allows a function to be injected into $?_{\text{Type}_\ell}$, provided that the function does not refer to its argument. This assumption is critical for ensuring that functions are properly approximated before being cast to type $?_{\text{Type}_\ell}$.

4.3 Semantics

Reductions. Castlf's reductions (Fig. 6) come in three groups. First, we have rules inherited from Stlf: TRUE, FALSE and β . Second, we have the unknown- and error-producing rules $\beta?$, $\beta\mathcal{U}$, IF? and IF \mathcal{U} , which are versions of the Stlf rules for $?$ and \mathcal{U} . Unlike eager exceptions, an expression containing \mathcal{U} might not reduce to \mathcal{U} , such as when it is passed to a function ignoring its argument.

The remaining rules are for casts, labeled according to their source and destination types. To? does casts from non-functions to $?$ by casting through the level-1 type and affixing a tag. For functions, ? Π injects a function into $?_{\text{Type}_\ell}$. To ensure termination, we create a λ -abstraction that ignores its argument and produces the least precise value in the image of the original function. Since this upper bound has type $[?_{T_1}/x]T_2$, we cast that result into $?_{\text{Type}_\ell}$. As we show in §6, all functions in Castlf are monotone, so applying $?_{T_1}$ yields the least precise value in the function's image. The remaining rules handle trivial casts from a type to itself, as well as casts that produce \mathcal{U} , either from \mathcal{U} in the source, destination, or cast term, or from casting when tags do not match. Finally, $\Pi\Pi$ casts between function types by producing a new function that casts its argument to the source domain, applies the given function, then casts to the target codomain. Because function types are dependent, we cast the argument when computing the target return type.

η -Expansion. η -expansion is largely the same as in Stlf, but must account for $?$ and \mathcal{U} :

$$\frac{(x : V_1) \vdash V_2 \longrightarrow_{\eta} V'}{\Gamma \vdash ?_{(x:V_1) \rightarrow V_2} \longrightarrow_{\eta} (\lambda x : V_1. ?_{V'}) : (x : V_1) \rightarrow V_2} \quad \frac{}{\Gamma \vdash \mathcal{U}_{(x:V_1) \rightarrow V_2} \longrightarrow_{\eta} (\lambda x : V_1. \mathcal{U}_{V'}) : (x : V_1) \rightarrow V_2}$$

These rules allow normalization to reflect the behavioral equivalence of $?_{(x:V_1) \rightarrow V_2}$ to $\lambda x : V_1. ?_{V_2}$ and $\mathcal{U}_{(x:V_1) \rightarrow V_2}$ to $\lambda x : V. \mathcal{U}_{V_2}$ for function types.

4.4 Metatheory: Confluence and Safety

Standard techniques yield the required properties of Castlf, namely confluence, progress and preservation. By treating \mathcal{U} as a value in Castlf, we show that terms are never “stuck”, but some reach error in a controlled manner.

Castlf is confluent, which is needed to show type preservation:

LEMMA 4.1 (CONFLUENCE). *If $t \longrightarrow^* t_1$ and $t \longrightarrow^* t_2$, then $t_1 \longrightarrow^* t_3$ and $t_2 \longrightarrow^* t_3$ for some t_3 .*

Confluence allows us to show canonicity by a direct induction over typing derivations.

LEMMA 4.2 (CANONICAL FORMS). *Consider v where $\Gamma \vdash v \Leftarrow T$ or $\Gamma \vdash v \Rightarrow T$.*

(1) *If $T \longrightarrow^* (x : T_1) \rightarrow T_2$, then v is either neutral, $\mathcal{U}_{(x:T_1) \rightarrow T_2}$, $(\lambda x : T_1. v')$ for some v' , or $?_{(x:T_1) \rightarrow T_2}$;*

$t_1 \rightsquigarrow t_2$ (Reductions)	$\beta, \text{TRUE}, \text{FALSE}$ as in Stlf	
$?_{(x:T_1) \rightarrow T_2} t \rightsquigarrow_{\beta?} ?_{[t/x]T_2}$	$\mathcal{U}_{(x:T_1) \rightarrow T_2} t \rightsquigarrow_{\beta\mathcal{U}} \mathcal{U}_{[t/x]T_2}$	$\text{if}_T ?_{\mathbb{B}} t_1 t_2 \rightsquigarrow_{\text{IF}^?} ?_T$
$\text{if}_T \mathcal{U}_{\mathbb{B}} t_1 t_2 \rightsquigarrow_{\text{IF}\mathcal{U}} \mathcal{U}_T$	$\langle ?_{\text{Type}_\ell} \Leftarrow ?_{\text{Type}_\ell} \rangle t \rightsquigarrow_{\text{UNKUNK}} t$	$\frac{\text{typeTagOf}(t) = \text{Type}}{\langle \text{Type}_\ell \Leftarrow \text{Type}_\ell \rangle t \rightsquigarrow_{\text{TYPE}} t}$
$\frac{\text{tagOf}(T_1) \neq \text{tagOf}(T_2)}{\langle T_2 \Leftarrow T_1 \rangle t \rightsquigarrow_{\text{TAG}\mathcal{U}} \mathcal{U}_{T_2}}$	$\frac{h = \text{tagOf}(T)}{\langle T \Leftarrow ?_{\text{Type}_\ell} \rangle \langle h \rangle_\ell t \rightsquigarrow_{\text{FROM}^?} \langle T \Leftarrow \mathcal{L}^1_\ell(h) \rangle t}$	
$\frac{h \neq \text{tagOf}(T)}{\langle T \Leftarrow ?_{\text{Type}_\ell} \rangle \langle h \rangle_\ell t \rightsquigarrow_{?}\mathcal{U}_T}$	$\frac{h = \text{tagOf}(T)}{\langle ?_{\text{Type}_\ell} \Leftarrow T \rangle t \rightsquigarrow_{\text{To}^?} \langle h \rangle_\ell (\langle \mathcal{L}^1_{\ell\Pi}(h) \Leftarrow T \rangle t)}$	
$\frac{\text{typeTagOf}(t) = \mathbb{B}}{\langle \mathbb{B} \Leftarrow \mathbb{B} \rangle t \rightsquigarrow_{\mathbb{B}\mathbb{B}} t}$	$\langle T \Leftarrow \mathcal{U}_{\text{Type}_\ell} \rangle t \rightsquigarrow_{\text{FROM}\mathcal{U}} \mathcal{U}_T$	$\langle T_2 \Leftarrow T_1 \rangle \mathcal{U}_{T_1} \rightsquigarrow_{\text{CAST}\mathcal{U}} \mathcal{U}_{T_2}$
$\langle \mathcal{U}_{\text{Type}_\ell} \Leftarrow T \rangle t \rightsquigarrow_{\text{To}\mathcal{U}} \mathcal{U}_{\text{Type}_\ell}$		
$\langle ?_{\text{Type}_\ell} \Leftarrow (y : T_1) \rightarrow T_2 \rangle t \rightsquigarrow_{?II} \langle \Pi \rangle_\ell (\lambda x : ?_{\text{Type}_\ell} \cdot \langle ?_{\text{Type}_\ell} \Leftarrow [?_{T_1}/y]T_2 \rangle (t ?_{T_1}))$		
$\langle (x : T'_1) \rightarrow T'_2 \Leftarrow (y : T_1) \rightarrow T_2 \rangle t \rightsquigarrow_{III} (\lambda x : T'_1. \langle T'_2 \Leftarrow [(T_1 \Leftarrow T'_1)/x/y]T_2 \rangle (t \langle (T_1 \Leftarrow T'_1)/x \rangle))$		

Fig. 6. Castlf: Reductions

- (2) If $T \longrightarrow^* \mathbb{B}$, then v is neutral, $?_{\mathbb{B}}$, $\mathcal{U}_{\mathbb{B}}$, true or false;
- (3) If and $T \longrightarrow^* \text{Type}_\ell$, then v is neutral, or one of $?_{\text{Type}_\ell}$, $\mathcal{U}_{\text{Type}_\ell}$, \mathbb{B} , $\text{Type}_{\ell-1}$ (if $\ell > 0$), or $(x : V_1) \rightarrow V_2$.

COROLLARY 4.3 (PROGRESS). If $\Gamma \vdash t : T$, then t is a normal form, or $t \longrightarrow t'$ for some t' .

The final piece of the safety puzzle is showing that each reduction step preserves types.

LEMMA 4.4 (PRESERVATION). If $\Gamma \vdash t_{\text{start}} : T$ and $t_{\text{start}} \longrightarrow t_{\text{end}}$ then $\Gamma \vdash t_{\text{end}} : T$.

These together allow us to show type safety for Castlf:

THEOREM 4.5 (TYPE SAFETY). If $\Gamma \vdash t : T$, then either t diverges, or $t \longrightarrow^* v$ where $\Gamma \vdash v : T$.

Type safety is not the only important property of a gradual language. We prove the gradual guarantees and decidability of type-checking in §§6 and 7 respectively.

5 SURFACE TYPING AND ELABORATION

The trickiness of typing Grlf is that we want to consider types equivalent whenever they have consistent normal forms. Grlf does not have to specify its dynamic semantics: this was precisely why we defined Castlf. Following Lennon-Bertrand et al. [2020], we express the typing of Grlf terms in terms of Castlf types. To type applications of dependent functions, we elaborate Grlf terms into Castlf, which are substituted into the appropriate types.

We combine the typing and elaboration of Grlf terms. Once again, we use bidirectional typing. $\Gamma \vdash s \rightarrow t \Leftarrow V$ means that surface term s elaborates to Castlf term t when checked against normalized Castlf type V , while $\Gamma \vdash s \rightarrow t \Rightarrow T$ expresses that s elaborates to t while synthesizing (possibly non-normal) type T .

In several places, we must check that a given Grlf term is a type. However, in Grlf, such a term might synthesize $?_{\text{Type}_{i+r}}$, which is consistent with, but not equal to, Type_ℓ . We write $\Gamma \vdash s \rightarrow t :$

$\Gamma \vdash s \rightarrow t \Rightarrow T \quad \Gamma \vdash s \rightarrow t \Leftarrow T \quad \Gamma \vdash S \rightarrow T : \mathbf{Type}_{\Rightarrow \ell}$ (<i>Synthesis, Checking and Level Synthesis</i>)		
EVAR, ETYPE, EBOOL, ETF, ELAM, EIF: straightforward adaptations from Stlf		
EASCR (EPI <i>similar</i>) $\frac{\Gamma \vdash S \rightarrow T : \mathbf{Type}_{\Rightarrow \ell} \quad \Gamma \vdash T \xrightarrow{*}_{\eta} V : \mathbf{Type}_{\ell} \quad \Gamma \vdash s \rightarrow t \Leftarrow V}{\Gamma \vdash s :: S \rightarrow t \Rightarrow T}$	ECONSISTENT $\frac{\Gamma \vdash s \rightarrow t \Rightarrow T \quad \Gamma \vdash T \Rightarrow \mathbf{Type}_{\ell} \quad \Gamma \vdash T \xrightarrow{*}_{\eta} V' : \mathbf{Type}_{\ell} \quad \Gamma \vdash V : \mathbf{Type}_{\ell} \quad V \cong V'}{\Gamma \vdash s \rightarrow \langle V \Leftarrow V' \rangle t \Leftarrow V}$	ECONV $\frac{\Gamma \vdash s \rightarrow t \Rightarrow T \quad \Gamma \vdash t \Rightarrow \mathbf{Type}_{\ell} \quad \Gamma \vdash T \xrightarrow{*}_{\eta} V : \mathbf{Type}_{\ell} \quad V \cong V}{\Gamma \vdash s \rightarrow t \Leftarrow V}$
ELAMUNK $\frac{(x : ?_{\mathbf{Type}_{\ell}}) \Gamma \vdash s \rightarrow t \Leftarrow ?_{\mathbf{Type}_{\ell}}}{\Gamma \vdash \lambda x. s \rightarrow \langle ?_{\mathbf{Type}_{\ell}} \Leftarrow ?_{\mathbf{Type}_{\ell}} \rightarrow ?_{\mathbf{Type}_{\ell}} \rangle (\lambda x : ?_{\mathbf{Type}_{\ell}}. t) \Leftarrow ?_{\mathbf{Type}_{\ell}}}$		EUNK $\frac{\Gamma \vdash V \Rightarrow \mathbf{Type}_{\ell}}{\Gamma \vdash ?_{@ \ell} \rightarrow ?_V \Leftarrow V}$
EAPPUNK $\frac{\Gamma \vdash s_0 \rightarrow t_0 \Rightarrow T_0 \quad T_0 \xrightarrow{*}_{?_{\mathbf{Type}_{\ell}}} \Gamma \vdash s_1 \rightarrow t_1 \Leftarrow ?_{\mathbf{Type}_{\ell}}}{\Gamma \vdash s_0 s_1 \rightarrow \langle ?_{\mathbf{Type}_{\ell}} \rightarrow ?_{\mathbf{Type}_{\ell}} \Leftarrow ?_{\mathbf{Type}_{\ell}} \rangle t_0 t_1 \Rightarrow ?_{\mathbf{Type}_{\ell}}}$		ELEVEL $\frac{\Gamma \vdash S \rightarrow T \Rightarrow T' \quad T \xrightarrow{*}_{\mathbf{Type}_{\ell}}}{\Gamma \vdash S \rightarrow T : \mathbf{Type}_{\Rightarrow \ell}}$
EAPP $\frac{\Gamma \vdash s_0 \rightarrow t_0 \Rightarrow T_0 \quad \Gamma \vdash T_0 \Rightarrow \mathbf{Type}_{\ell} \quad \Gamma \vdash T_0 \xrightarrow{*}_{\eta} (x : V_1) \rightarrow V_2 \quad \Gamma \vdash s_1 \rightarrow t_1 \Leftarrow V_1}{\Gamma \vdash s_0 s_1 \rightarrow t_0 t_1 \Rightarrow [t_1/x]V_2}$		EUNKLEVEL $\frac{\Gamma \vdash S \rightarrow T \Rightarrow T' \quad T' \xrightarrow{*}_{?_{\mathbf{Type}_{1+\ell}}}}{\Gamma \vdash S \rightarrow \langle \mathbf{Type}_{\ell} \Leftarrow ?_{\mathbf{Type}_{1+\ell}} \rangle T : \mathbf{Type}_{\Rightarrow \ell}}$

Fig. 7. Grlf: Elaboration

$\mathbf{Type}_{\Rightarrow \ell}$ to check that a term's type is consistent with \mathbf{Type}_{ℓ} for some ℓ , with elaboration t , where the level ℓ is synthesized.

The elaboration rules are given in Fig. 7. We omit the direct adaptations from Stlf, including ELAM and EIF which use the type against which they check to generate the elaboration's ascriptions.

In EUNK, $?_{@ \ell}$ checks against any type with the correct level. The level ascription is necessary to avoid Girard's paradox [Coquand 1986]. ECONV checks a term against the type it synthesizes, and ECONSISTENT checks a term against a type whose normal form is consistent with its synthesized type. We insert the appropriate cast to give the elaborated term the correct type. ECONV is redundant compared with ECONSISTENT, but can be seen as an optimization since it generates no casts. EAPP works like SAPP, but substitutes the elaboration of the argument to obtain the correct return type. The rules EAPPUNK and ELAMUNK account for the fact that functions may have type $?_{\mathbf{Type}_{\ell}}$, since it is consistent with function types. They insert the appropriate casts to $? \rightarrow ?$ in their elaborations. Likewise, EASCR checks that the ascription's type is consistent with \mathbf{Type}_{ℓ} for some ℓ .

With elaboration defined in terms of Castlf types, we define typing for Grlf terms and types:

$$\frac{\cdot \vdash S \rightarrow T : \mathbf{Type}_{\Rightarrow \ell} \quad \cdot \vdash s \rightarrow t \Leftarrow T}{\cdot \vdash s : S}$$

A Grlf term is well typed if its type elaborates at some level, and the term elaborates and checks against the elaborated type. The rules of Fig. 3 hold as lemmas for this relation, with the minor modification that types are elaborated before they are added to the type environment.

The key property of elaboration is that it produces well typed Castlf expressions.

LEMMA 5.1 (ELABORATION PRESERVES TYPING). *If $\Gamma \vdash s \rightarrow t \Leftarrow T$ or $\Gamma \vdash s \rightarrow t \Rightarrow T$, then $\Gamma \vdash t \Leftarrow T$. Likewise, if $\Gamma \vdash S \rightarrow T : \mathbf{Type}_{\Rightarrow \ell}$, then $\Gamma \vdash T \Leftarrow \mathbf{Type}_{\ell}$.*

We also want Stlf to conservatively extend Grlf. There is a trivial embedding of Stlf into Grlf, since each syntactic construct of Stlf appears in Grlf.

Likewise, there is a direct

embedding of well-typed Stlf terms into Castlf. We write $\lceil t \rceil$ and $\lfloor t \rfloor$ to denote the embeddings of t from Stlf into Castlf and Grlf respectively.

LEMMA 5.2 (CONSERVATIVE EXTENSION OF Stlf). $\cdot \vdash t \Leftarrow V$ iff $\cdot \vdash \lceil t \rceil : \lfloor V \rfloor$. Moreover, if $\cdot \vdash t \Leftarrow V$ and $t \xrightarrow{\eta}^* v : V$ then $\lceil t \rceil \xrightarrow{\eta}^* \lfloor v \rfloor : \lfloor V \rfloor$

In §7 we prove strong normalization for Castlf, from which we show decidability of Grlf typing.

LEMMA 5.3 (DECIDABLE TYPE CHECKING). Given s and S , it is decidable whether $\cdot \vdash s : S$.

As a final consideration, we describe exact run-time semantics for Grlf programs. Approximate normalization is well-suited to normalizing types, but the actual execution of programs should be exact. Thankfully, exact execution is obtained with simple modifications to Castlf: CLAMUNK lets tagged functions refer to their bodies, $\text{?}\Pi$ is removed, and To? is relaxed to work on function types. The key to decidable type-checking is that elaboration (Fig. 7) and Castlf typing (Fig. 5) still use approximate normalization to normalize types.

6 PRECISION, CONSISTENCY, AND THE GRADUAL GUARANTEES

The elaboration from Grlf to Castlf refers to a consistency relation \cong that extended equality to account for imprecision. However, defining such a relation raises several challenges. There is a delicate balance between ensuring that consistency is decidable, proving the gradual guarantees, and keeping Castlf simple to prove type checking terminates. Our choices must be flexible enough to accommodate the evidence of equality from §8. In this section, we define a precision relation on Castlf terms, and use it to establish the relationship between the syntactic precision of Grlf terms and the consistency of their Castlf types. We begin by explaining the delicate balance between the above criteria, and summarizing our strategy for achieving that balance. We then define precision and consistency relations for Castlf (§§6.2 and 6.3) and establish the relationship between them (§6.4), which yields the gradual guarantees as a corollary.

6.1 Balancing Decidability and the Gradual Guarantees

In most gradually-typed languages, consistency is defined as equality up to occurrences of ? . However, because of the type-term overlap in Grlf and the desire to consider the consistency modulo normalization, elaboration to Castlf uses Castlf types, for which we have a dynamic semantics. But Castlf has casts, which our consistency relation must take into account.

Moreover, in order for the static gradual guarantee (SGG) to hold, there must be an intimate relationship between consistency and precision. For non-dependent gradual types, type precision can be defined in terms of consistency: $T \sqsubseteq T' \triangleq \forall T'' . T'' \cong T' \Rightarrow T'' \cong T$. The SGG follows from showing that syntactically precision-related terms have precision-related types. However, dependent types break this approach: types may contain terms, so we need a precision relation for arbitrary terms, that a priori preserves consistency as precision is lost. Rules like ECONSISTENT normalize terms, so precision-related terms must relate to precision-related values i.e. the dynamic gradual guarantee (DGG) must hold. EAPP uses elaborated terms in the synthesized types, so precision-related Grlf terms must have related elaborations.

However, the syntactic approach does not scale to gradual dependent types, particularly when we need to treat terms as evidence of equality, and compose that evidence. Consider $(1+x) \sqcap_{\text{T}} (1+y)$, the composition of $1+x$ and $1+y$. For this to be valid evidence that $1+x$ and $1+y$ are consistent, it should be more precise than either, but this does not hold with syntactic precision. Precision must

$\Gamma \vdash t_1 \sqsubseteq^C t_2$ (Algebraic Precision: Generating and Structural Rules)		
$\frac{\text{PRECGENUNK} \quad \Gamma \vdash t \Rightarrow^* V}{\Gamma \vdash T \xrightarrow{\eta}^* V}$	$\frac{\text{PRECGENERR} \quad \Gamma \vdash T \xrightarrow{\eta}^* V}{\Gamma \vdash t \Rightarrow^* V}$	$\frac{\text{PRECCONGAPP} \quad \Gamma \vdash t_1 \Rightarrow^* (x : V_1) \rightarrow V_2 \quad \Gamma \vdash t'_1 \Rightarrow^* (x : V_1) \rightarrow V_2}{\Gamma \vdash t_1 \sqsubseteq^C t'_1} \quad \frac{\Gamma \vdash t_1 \Rightarrow^* (x : V_1) \rightarrow V_2 \quad \Gamma \vdash t_2 \sqsubseteq^C t'_2}{\Gamma \vdash \langle T' \leftarrow T \rangle (t_1 t_2) \sqsubseteq^C t'_1 t'_2}$
$\frac{\text{PRECCONGPi} \quad \Gamma \vdash T_1 \sqsubseteq^C T'_1 \quad (x : T'_1) \Gamma \vdash \langle T_1 \leftarrow T'_1 \rangle x/x T_2 \sqsubseteq^C T'_2}{\Gamma \vdash (x : T_1) \rightarrow T_2 \sqsubseteq^C (x : T'_1) \rightarrow T'_2}$		$\frac{\text{PRECCONGCAST} \quad \Gamma \vdash t \sqsubseteq^C t'}{\Gamma \vdash \langle T_2 \leftarrow T_1 \rangle t \sqsubseteq^C \langle T_2 \leftarrow T_1 \rangle t'}$
$\frac{\text{PRECCONGLAM} \quad (x : T) \Gamma \vdash t_1 \sqsubseteq^C t_2}{\Gamma \vdash \lambda x : T. t_1 \sqsubseteq^C \lambda x : T. t_2}$	$\frac{\text{PRECCONGTAG} \quad \Gamma \vdash t_1 \sqsubseteq^C t_2}{\Gamma \vdash \langle h \rangle_{\ell} t_1 \sqsubseteq^C \langle h \rangle_{\ell} t_2}$	$\frac{\text{PRECCONGIF} \quad \Gamma \vdash t_1 \sqsubseteq^C t'_1 \quad \Gamma \vdash t_2 \sqsubseteq^C t'_2 \quad \Gamma \vdash t_3 \sqsubseteq^C t'_3}{\Gamma \vdash \text{if}_T t_1 t_2 t_3 \sqsubseteq^C \text{if}_T t'_1 t'_2 t'_3}$

Fig. 8. Algebraic Precision for CastIf: Generating and Structural Rules

reflect the *behavioral* property that the composition is more precise for *any* x and y . Similarly, we need some behavioral properties of casts to show that elaboration is monotone in the elaborated term. However, precision cannot include *all* behavioral properties: if precision relates all observationally equivalent terms, then all observationally equivalent terms should be consistent, which would either make consistency undecidable or too coarse to exclude distinct static terms.

We design a new precision relation to compare cast-calculus terms, called *algebraic precision* because, in addition to the usual syntactic rules, it has axioms describing the behavior of casts and compositions. We show that the elaborations of syntactic precision-related terms are related by algebraic precision. These in turn evaluate to precision-related terms i.e. the dynamic gradual guarantee. Reducing a term's algebraic precision keeps it consistent with everything the original term was consistent with, which lets us prove the static gradual guarantee.

Moreover, algebraic precision provides a principled framework for reasoning about the precision of casts. The return type of a dependent function application depends on the value of its argument, so terms related by syntactic precision may not have the same type. With algebraic precision such terms are compared by casting one to the type of the other: the algebraic laws establish a Galois connection between these casts, so precision holds regardless of which term we cast.

6.2 Precision

Figures 8 and 9 define algebraic precision by generating rules, structural rules, and axioms. We use \Rightarrow^* as a shorthand for synthesizing then normalizing a type. $?_T$ and \mathcal{U}_T are the least and greatest terms with type T (PRECGENUNK, PRECGENERR). PRECCONGLAM, PRECCONGTAG and PRECCONGIF are straightforward structural rules. PRECCONGCAST, allows precision related terms *for casts of the same source and destination type*. Casts with different sources are compared with the axiomatic rules below. In PRECCONGAPP, reducing the precision of the argument may reduce the precision of the application's type, so we compare the result of application after casting to the less precise type. PRECCONGPi performs a similar cast, since the bound variables may have different types.

The axiomatic rules provide the essential properties for precision. PRECAxUPDOWN and PRECAxDOWNUP establish a Galois connection for casts between precision-related types. Casting to a more precise type, then back, produces the original term, but (possibly) more precise, since new errors may have been introduced, or ascribed type information made more precise. Conversely,

$\Gamma \vdash t_1 \sqsubseteq^C t_2$ (Algebraic Precision, axiomatic rules)	$\Gamma \vdash t_1 \sqsubseteq^{C*} t_2$ (Precision Modulo Normalization)
$\frac{\text{PRECAxREFL}}{t \sqsubseteq^C t}$	$\frac{\text{PRECAxETA}}{\Gamma \vdash \langle (x : T'_1) \rightarrow T'_2 \Leftarrow (x : T_1) \rightarrow T_2 \rangle t \sqsubseteq^C \lambda x. \langle T'_2 \Leftarrow T_2 \rangle (t \langle T_1 \Leftarrow T'_1 \rangle x)}$
$\frac{\text{PRECAxCASTBOT}}{\langle T_2 \Leftarrow T_1 \rangle \mathcal{U}_{T_1} \sqsubseteq^C \mathcal{U}_{T_2}}$	$\frac{\text{PRECAxTRANS} \quad \Gamma \vdash t_1 \sqsubseteq^C t_2 \quad \Gamma \vdash t_2 \sqsubseteq^C t_3}{\Gamma \vdash t_1 \sqsubseteq^C t_3}$
$\frac{\text{PRECAxDOWNUP} \quad \Gamma \vdash T_1 \sqsubseteq^{C*} T_2}{\Gamma \vdash \langle T_2 \Leftarrow T_1 \rangle \langle T_1 \Leftarrow T_2 \rangle t \sqsubseteq^C t}$	$\frac{\text{PRECAxINTERMED} \quad \Gamma \vdash T_1 \sqsubseteq^{C*} T_2}{\Gamma \vdash \langle T' \Leftarrow T_1 \rangle \langle T_1 \Leftarrow T \rangle t \sqsubseteq^C \langle T' \Leftarrow T_2 \rangle \langle T_2 \Leftarrow T \rangle t}$
$\frac{\text{PRECAxCOMPOSEUP} \quad \Gamma \vdash T_1 \sqsubseteq^{C*} T_2 \sqsubseteq^{C*} T_3}{\Gamma \vdash \langle T_3 \Leftarrow T_2 \rangle \langle T_2 \Leftarrow T_1 \rangle t \sqsubseteq^C \langle T_3 \Leftarrow T_1 \rangle t}$	$\frac{\text{PRECAxNORM} \quad T_1 \longrightarrow^* V_1 \quad T_2 \longrightarrow^* V_2 \quad V_1 \sqsubseteq^C V_2}{\Gamma \vdash T_1 \sqsubseteq^{C*} T_2}$
$\frac{\text{PRECAxUPDOWN} \quad \Gamma \vdash T_1 \sqsubseteq^{C*} T_2}{\Gamma \vdash t \sqsubseteq^C \langle T_1 \Leftarrow T_2 \rangle \langle T_2 \Leftarrow T_1 \rangle t}$	

Fig. 9. Algebraic Precision for Castlf: Axioms and Normalization

casting to a less precise type may lose precision due to an approximation. In both cases, types must be normalized before comparing for precision.

We also have rules establishing the well-behavedness of precision and casts. Rules PRECAxREFL and PRECAxTRANS provide reflexivity and transitivity, which would otherwise be violated by the addition of axioms.

PRECAxCOMPOSE asserts that casting through an intermediate type is equivalent to casting directly, so long as all casts are upcasts. Similarly, PRECAxINTERMED asserts that casting through an intermediate type is monotone with respect to that intermediate type, regardless of the source and destination.

PRECAxCASTBOT asserts that \mathcal{U} is inescapable: we cannot take \mathcal{U} at one type and get a non-error term by casting it to a different type, so \mathcal{U} actually behaves like a dynamic error. Finally, PRECAxETA relates a cast between function types to the η -expanded version where the argument and result are cast separately.

Figure 10 gives some rules admitted by axiomatic precision, which help to show why our axioms ensure the well-behavedness of casts. For example, The rules PRECADADJR and PRECADADJL establish that, when comparing terms of different types, it does not matter whether we cast the more or less precise term. PRECADTRIVIALCAST shows that casting from a type to itself produces an equi-precise result, and PRECADISOCAST shows that casts between equi-precise types form an isomorphism (up to equi-precision).

6.3 Consistency

Figure 11 defines *consistency*, specifying how we compare terms in the ECONSISTENT elaboration rule. The rules come in three varieties. First, we have structural rules for each syntactic construct (except casts). Then, we have the CSTUNK rules: because we have an explicit error term \mathcal{U} , we want it to be inconsistent with *all types*, including itself. So we cannot allow all types to be consistent with $?$, but must check that each part is. These rules directly mirror the structural rules.

\mathcal{U} is not consistent with any terms, even itself. Finally, we have CSTCASTL, CSTCASTR, CSTTAGL and CSTTAGR, which ignore casts when comparing for precision.

Our consistency relation is big enough and small enough: we exclude all non-equal static types, but reduce precision without compromising existing consistencies that hold.

$t_1 \sqsubseteq^C t_2$ (Algebraic Precision: Admissible Rules)			
<p>PRECADADJR</p> $\frac{\Gamma \vdash T_1 \sqsubseteq^{C*} T_2 \quad \Gamma \vdash t_1 \sqsubseteq^C \langle T_1 \Leftarrow T_2 \rangle t_2}{\Gamma \vdash \langle T_2 \Leftarrow T_1 \rangle t_1 \sqsubseteq^C t_2}$	<p>PRECADADJL</p> $\frac{\Gamma \vdash T_1 \sqsubseteq^{C*} T_2 \quad \Gamma \vdash \langle T_2 \Leftarrow T_1 \rangle t_1 \sqsubseteq^C t_2}{\Gamma \vdash t_1 \sqsubseteq^C \langle T_1 \Leftarrow T_2 \rangle t_2}$		
<p>PRECADCOMPOSEDOWN</p> $\frac{\Gamma \vdash T_1 \sqsubseteq^{C*} T_2 \sqsubseteq^{C*} T_3}{\Gamma \vdash \langle T_1 \Leftarrow T_2 \rangle \langle T_2 \Leftarrow T_3 \rangle t \sqsubseteq^C \langle T_1 \Leftarrow T_3 \rangle t}$	<p>PRECADISOCAS</p> $\frac{\Gamma \vdash T_1 \sqsupseteq^{C*} T_2}{\Gamma \vdash t \sqsupseteq^C \langle T_1 \Leftarrow T_2 \rangle \langle T_2 \Leftarrow T_1 \rangle t}$		
<p>PRECADTRIVIALCAS</p> $\Gamma \vdash t \sqsupseteq^C \langle T \Leftarrow T \rangle t$			
<p>PRECADSIMPLEAPP</p> $\frac{\Gamma \vdash t_1 \Rightarrow^* V_1 \rightarrow V_2 \quad \Gamma \vdash t_1' \Rightarrow^* V_1 \rightarrow V_2 \quad \Gamma \vdash t_1 \sqsubseteq^C t_1' \quad \Gamma \vdash t_2 \sqsubseteq^C t_2'}{\Gamma \vdash t_1 t_2 \sqsubseteq^C t_1' t_2'}$			

Fig. 10. Some Admissible Rules Algebraic Precision

$v_1 \cong v_2$ (Value Consistency)		CSTCASTR, CSTTAGR defined symmetrically			
<p>CSTUNKBASE</p> <p>v is one of $?_V, x$, Type, \mathbb{B}, true, false</p> $\frac{}{?_V \cong v}$	<p>CSTUNKFLIP</p> $\frac{}{?_V \cong v}$ $v \cong ?_V$	<p>CSTUNKPI</p> $\frac{}{?_V \cong V_1 \quad ?_V \cong V_2}$ $?_V \cong (x : V_1) \rightarrow V_2$	<p>CSTUNKLAM</p> $\frac{}{?_{V_1} \cong v}$ $?_{V_1} \cong \lambda x : V. v$	<p>CSTUNKAPP</p> $\frac{}{?_V \cong N}$ $?_V \cong v$ $?_V \cong N v$	
<p>CSTUNKIF</p> $\frac{?_{\mathbb{B}} \cong N \quad ?_V \cong v_1 \quad ?_V \cong v_2}{?_V \cong \text{if}_V N v_1 v_2}$	<p>CSTBASE</p> <p>v is one of $?_V, x$, Type, \mathbb{B}, true, false</p> $\frac{}{v \cong v}$	<p>CSTIF</p> $\frac{v_1 \cong v'_1 \quad v_2 \cong v'_2 \quad v_3 \cong v'_3}{\text{if}_V v_1 v_2 v_3 \cong \text{if}_V v'_1 v'_2 v'_3}$	<p>CSTAPP</p> $\frac{}{N \cong N'}$ $v \cong v'$ $N v \cong N' v'$		
<p>CSTPI</p> $\frac{V_1 \cong V'_1 \quad V_2 \cong V'_2}{(x : V_1) \rightarrow V_2 \cong (x : V'_1) \rightarrow V'_2}$	<p>CSTLAM</p> $\frac{}{v_1 \cong v_2}$ $\lambda x : V_1. v_1 \cong \lambda x : V_2. v_2$	<p>CSTCASTL</p> $\frac{}{v_1 \cong v_2}$ $v_1 \cong \langle V_2 \Leftarrow V_1 \rangle v_2$	<p>CSTTAGL</p> $\frac{}{v_1 \cong v_2}$ $v_1 \cong \langle h \rangle_t v_2$		

Fig. 11. Consistency for CastIf

LEMMA 6.1 (CONSISTENCY OF STATIC TERMS IMPLIES α -EQUIVALENCE). *If $[v] \cong [v']$ then $v =_\alpha v'$.*

LEMMA 6.2 (REDUCING \sqsubseteq^C PRESERVES \cong). *If $v_1 \cong v_2$, $\Gamma \vdash v_1 \sqsubseteq^C v'_1$ and $v_2 \sqsubseteq^C v'_2$ then $v'_1 \cong v'_2$.*

6.4 Showing the Normalization Guarantee

We have axiomatized precision, but we still must show that those axioms are meaningful. We establish the validity of our axioms by showing that the precision properties established syntactically reflect the precision properties of the values to which they normalize. The proposition takes the form of the dynamic gradual guarantee, so we call it the *Normalization Gradual Guarantee*.

THEOREM 6.3 (NORMALIZATION GRADUAL GUARANTEE). *If $\Gamma \vdash t_1 : V$, $\Gamma \vdash t_2 : V$ and $\Gamma \vdash t_1 \sqsubseteq^C t_2$, then*

$\Gamma \vdash t_1 \longrightarrow^*_\eta v_1 : V$, $\Gamma \vdash t_2 \longrightarrow^*_\eta v_2 : V$, and $\Gamma \vdash v_1 \sqsubseteq^C v_2$ for some v_1, v_2 .

The last definition we need before stating the SGG is what precision means for GrIf. Normally, this is defined by lifting $t \sqsubseteq ?$ across each constructor, but we must account for the level ascriptions on $?$, which we do by defining precision in terms of well-typed substitutions.

Definition 6.4 (Precision for GrIf). Suppose $\mathcal{D} :: \Gamma \vdash [s'/x]s \rightarrow t \Leftarrow T$ and \mathcal{D}' is a sub-derivation of \mathcal{D} , where $\mathcal{D}' :: \Gamma' \Gamma \vdash s' \rightarrow t' \Rightarrow T'$ or $\mathcal{D}' :: \Gamma' \Gamma \vdash s' \rightarrow t' \Leftarrow T'$.

We say that $\Gamma \vdash [s'/x]s \sqsubseteq_1^S [?_{@l}/x]s$ if $\Gamma \vdash T' : \mathbf{Type}_l$.

Then \sqsubseteq^S is the transitive reflexive closure of \sqsubseteq_{1-}^S .

We now state the elaboration gradual guarantee, which relates surface term precision to elaboration synthesis and checking. The SGG and DGG follow as corollaries. The proof is omitted for space, but works by induction, using Theorem 6.3 to relate types' normalizations, and using the axioms of algebraic precision to relate terms with casts. The proof never makes use of the assumption that $To?$ does not operate on function types, so the results apply to CastIf's exact semantics (§5).

COROLLARY 6.5 (SGG FOR GrIf). *If $\vdash s : S$ and $s \sqsubseteq^S s'$, then $\vdash s' : S$.*

COROLLARY 6.6 ((SEMANTIC) DGG FOR CastIf). *Suppose $\cdot \vdash t : T$ and $\cdot \vdash t' : T$, where $\cdot \vdash t \sqsubseteq^C t'$. Then for any context $\gamma : T \rightarrow \mathbb{B}$, $\gamma t \longrightarrow^* v$ and $\gamma t' \longrightarrow^* v'$, where $\cdot \vdash v \sqsubseteq^C v'$.*

7 TRANSLATING CASTIF TO STIR

The final important property of CastIf's approximate normalization is that each term terminates, so we know type-checking is decidable. The ultimate result of this section is:

THEOREM 7.1 (STRONG APPROXIMATE NORMALIZATION). *If $\Gamma \vdash t : V$, then $t \longrightarrow^* v$ for some v .*

We show this using a *syntactic model* in the sense advocated by Boulier et al. [2017]: each CastIf term is translated into a term from a variant of static CIC such that every CastIf reduction step corresponds to at least one step in the static language, ensuring that no term reduces infinitely.

The syntactic model is useful for more than just strong normalization. It allows us to understand the dynamic semantics of CastIf through a well-known static language. Moreover, it suggests an implementation strategy: terms can be normalized by first elaborating from GrIf to CastIf (§5), then translating the CastIf term to an existing language, such as Agda or Idris.

We translate CastIf terms to StIR, a predicative variant of CIC extended with inductive-recursive types. While inductive-recursive types have been studied extensively in the context of Martin-Löf Type Theory, it is usually presented with a typed normalization relation. Conversely, CIC has an untyped reduction semantics by which we can easily show a simulation of CastIf's reduction steps. The model uses a similar technique as Lennon-Bertrand et al. [2020], but it serves as the foundation for our novel approach to equality (§8).

We use Agda-like syntax for readability.

7.1 Supporting Definitions

Type Definitions.

To translate from CastIf to StIR, we define and use several types and functions. In Fig. 12, we define **GBool** to represent CastIf booleans, **GUnk_l** for $?_{\mathbf{Type}_l}$, and **Err** for \perp . Additionally, we define an inductive-recursive *universe à la Tarski*: a datatype **Code_l** whose elements describe the structure of types, and a function **El_l** interpreting those descriptions back into types.

The idea is that, while StIR has no type-case operator, **Code** is a regular data type that we can pattern match against. **El_l** turns these descriptions of types into actual types, but because types

```

data GBool : Type where
  BUnk : GBool
  BErr : GBool
  BTrue : GBool
  BFalse : GBool
data GUnkℓ : Typeℓ where
  UUnk : GUnkℓ
  UErr : GUnkℓ
  UBool : GBool → GUnkℓ
  UFun : (1 → GUnkℓ) → GUnkℓ
  UCode : Codeℓ-1 → GUnkℓ

data Codeℓ where
  CUnk : Codeℓ
  CErr : Codeℓ
  CType : Codeℓ
  CPi : (c : Codeℓ) →
    ((x : Elℓ c) → Codeℓ) → Codeℓ
  CBool : Codeℓ
data GErrℓ : Typeℓ where
  Err : GErr

Elℓ : Codeℓ → Typeℓ
Elℓ CUnk = GUnkℓ
Elℓ CErr = GErrℓ
Elℓ CType = Codeℓ-1
Elℓ (CPi dom cod) =
  (x : Elℓ dom) → Elℓ (cod x)
Elℓ CBool = GBool

```

Fig. 12. Inductive-recursive definition of codes and their interpretations

```

T- : (c : Codeℓ) → Elℓ
TCUnk = UUnk
TCErr = Err
TCType = CUnk
T(CPi dom cod) = (x : Tdom) → Tcod x
TCBool = BUnk
T- : (c : Codeℓ) → Elℓ
⊥CUnk = UErr
⊥CErr = Err
⊥CType = CErr
⊥(CPi dom cod) = (x : ⊥dom) → ⊥cod x
⊥CBool = BErr

is⊥ : (c : Codeℓ) → Elℓ → B
is⊥ CUnk UErr = true
is⊥ CUnk ⊥ = false
is⊥ CErr Err = true
is⊥ CErr ⊥ = false
is⊥ CType CErr = true
is⊥ CType ⊥ = false
is⊥ (CPi dom cod) f = is⊥ (cod Tdom) (f Tdom)
is⊥ CBool BErr = true
is⊥ CBool ⊥ = false

glf : (c : Codeℓ) → GBool →
  Elℓ c → Elℓ c → Elℓ c
glf c GTrue t1 t2 = t1
glf c GFalse t1 t2 = t2
glf c BUnk t1 t2 = Tc
glf c BErr t1 t2 = ⊥c

```

Fig. 13. Top, bottom, bottom-checking and gradual conditionals

may depend on values, the definition of the inductive type `Code` refers to the recursive function `Elℓ` that matches on `Code` values (thus the name inductive-recursive type). This technique is standard for dependent type introspection [Boulier et al. 2017; Lennon-Bertrand et al. 2020]. As a notational shorthand in Fig. 12, we assume that `Codeℓ-1` is empty when ℓ is 0. Note that `GUnkℓ` only depends on the definition of `Codeℓ` from strictly lower universe levels: just as `?Type0` cannot contain values from `Typeℓ`, `GUnk0` does not embed `Codeℓ`.

?, \mathcal{U} and Error Detection. `CastIf` has `?` and `\mathcal{U}` for every type. We account for this by denoting special top and bottom elements for each code’s interpretation. Additionally, several reduction rules explicitly check if a term is `\mathcal{U}` , so we need a way to check if a term is the translation of one that is η -equivalent to `\mathcal{U}` . We define such functions (Fig. 13), named `T-`, `⊥` and `is⊥` respectively.

One subtlety arises when deciding whether a function is equivalent to `\mathcal{U}` . The term `$\mathcal{U}_{(x:T_1 \rightarrow T_2)}$` is η -equivalent to `$\lambda x. \mathcal{U}_{T_2}$` , which eliminates the need to check if each function is `\mathcal{U}` before applying. However, given an arbitrary function, how can we determine whether it produces `\mathcal{U}` on all inputs? The key is monotonicity: §6 shows that `CastIf` functions are monotone with respect to their input. So a function is equivalent to `\mathcal{U}` if and only if it produces `\mathcal{U}` when given `?` as input.

Casts and Conditionals. In addition to representing `CastIf` values, we also need to represent computation. Applications are represented by applications. We need not handle `?` or `\mathcal{U}` specially, since they are η -expanded in `T-` and `⊥`. So the β , $\beta?$ and $\beta\mathcal{U}$ rules are handled.

$\text{cast} : (c_1 c_2 : \text{Code}_\ell) \rightarrow \text{El}_\ell c_1 \rightarrow \text{El}_\ell c_2$ $\text{cast } c_1 c_2 x \mid \text{is}\perp c_1 x = \perp_{c_2} \text{ (CAST}\overline{\text{U}})$ $\text{cast } \text{CErr } c_2 x = \perp_{c_2} \text{ (FROM}\overline{\text{U}})$ $\text{cast } c_1 \text{ CErr } x = \text{Err} \text{ (TO}\overline{\text{U}})$ $\text{cast } (\text{CPi dom cod}) \text{ Unk } f =$ $\quad \text{UFun}(\lambda x. \text{cast } (\text{cod } \tau_{\text{dom}}) \text{CUnk}(f \tau_{\text{dom}})) \text{ (?II)}$ $\text{cast } \text{CBool } \text{Unk } b = \text{UBool } b \text{ (TO?)}$ $\text{cast } \text{CType } \text{Unk } c = \text{UCode } c \text{ (TO?)}$ $\text{cast } \text{Unk } (\text{CPi dom cod}) \text{ (UFunf)} =$ $\quad \lambda x. \text{cast } \text{CUnk } (\text{cod } x) \text{ (f (cast dom CUnk)) (FROM?)}$	<p style="text-align: center;"><i>...continued</i></p> $\text{cast } \text{Unk } \text{CBool } (\text{UBool } b) = b \text{ (FROM?)}$ $\text{cast } \text{Unk } \text{CType } (\text{UCode } c) = c \text{ (FROM?)}$ $\text{cast } (\text{CPi dom1 cod1}) (\text{CPi dom2 cod2}) f =$ $\quad \lambda x. \text{cast } (\text{cod1 } x') (\text{cod2 } x) (f x') \text{ (III)}$ $\quad \text{where } x' = \text{cast dom2 dom1 } x$ $\text{cast } \text{CType } \text{CType } c = c \text{ (TYPE TYPE)}$ $\text{cast } \text{CBool } \text{CBool } b = b \text{ (BB)}$ $\text{cast } \text{CUnk } \text{CUnk } d = d \text{ (??)}$ $\text{cast } ___ = \text{err } c_2 \text{ otherwise (TAG}\overline{\text{U}}, \text{?}\overline{\text{U}})$
---	--

Fig. 14. Conversion functions between interpretations of codes

$\mathcal{T}[(x : T_1) \rightarrow T_2] = \text{CPi } \mathcal{T}[T_1] (\lambda x. \mathcal{T}[T_2])$ $\mathcal{T}[\langle T_2 \leftarrow T_1 \rangle t] = \text{cast } \mathcal{T}[T_1] \mathcal{T}[T_2] \mathcal{T}[t]$ $\mathcal{T}[\langle \text{Type} \rangle_\ell T] = \text{GCode } \mathcal{T}[T]$ $\mathcal{T}[\text{Type}_\ell] = \text{CType}$ $\mathcal{T}[\text{if}_T t_1 t_2 t_3] = \text{glf } \mathcal{T}[T] \mathcal{T}[t_1] \mathcal{T}[t_2] \mathcal{T}[t_3]$	$\mathcal{T}[\mathbb{B}] = \text{CBool}$ $\mathcal{T}[\text{true}] = \text{BTrue}$ $\mathcal{T}[\text{false}] = \text{BFalse}$ $\mathcal{T}[\text{?}_T] = \text{T}\mathcal{T}[T]$ $\mathcal{T}[\text{U}_T] = \perp \mathcal{T}[T]$	$\mathcal{T}[x] = x$ $\mathcal{T}[\langle \Pi \rangle_\ell t] = \text{GFun } \mathcal{T}[t]$ $\mathcal{T}[\langle \mathbb{B} \rangle_\ell t] = \text{GBool } \mathcal{T}[t]$ $\mathcal{T}[\lambda x : T. t] = \lambda x. \mathcal{T}[t]$ $\mathcal{T}[t_1 t_2] = \mathcal{T}[t_1] \mathcal{T}[t_2]$
--	--	---

Fig. 15. Translation from CastIf into StIR

To handle conditionals, we define a pattern matching function **glf** (Fig. 13), which acts like a normal conditional, but takes a code for the result type, which is given to \top or \perp if the scrutinee is **BUnk** or **BErr**. The cases correspond to **IfTrue**, **IfFalse**, **If?** and **IfU**.

CastIf allows casts between arbitrary types, so we define casts between the interpretations of arbitrary codes by pattern matching on the given codes (Fig. 14). The cases directly correspond to the cast reduction rules of Fig. 6, although we break **TO?** and **FROM?** into separate rules for each tag.

7.2 The Translation

Our supporting definitions make it straightforward to define the full translation (Fig. 15). The translation is compositional, and CastIf has enough type ascriptions that the translation need not be type-directed. Functions are translated to functions, and other types are translated into the types from Fig. 12. We translate **?** and **U** using **top** and \perp , and use **cast** to translate casts.

To show that the result of translation is terminating, we need to know that it is well typed in StIR. The explicitness of our cast calculus makes this easy to show: each type translates to a well-typed code, and each term translates to an element of the interpretation of its type's translation.

LEMMA 7.2 (TRANSLATED TYPE PRESERVATION). *The following hold:*

- If $\Gamma \vdash V : \text{Type}_\ell$, then $\mathcal{T}[\Gamma] \vdash \mathcal{T}[V] : \text{Code}_\ell$
- If $\Gamma \vdash t : V$, then $\mathcal{T}[\Gamma] \vdash \mathcal{T}[t] : \text{El}_\ell \mathcal{T}[V]$

The main property we need for the termination of CastIf terms is *simulation*: each CastIf step corresponds to one or more StIR steps. This bounds the number of steps a CastIf term takes, so combined with progress and preservation, we deduce strong normalization.

LEMMA 7.3 (SIMULATION). *If $\Gamma \vdash t : V$ and $t \rightarrow t'$, then t' is $\overline{\text{U}}$ or $\mathcal{T}[t] \rightarrow^+ \mathcal{T}[t']$.*

$$\begin{array}{l}
\mathcal{V}[\text{CPi } v_{c1} (\lambda x. v_{c2})] = (x : \mathcal{V}[v_{c1}]) \rightarrow \mathcal{V}[v_{c2}] \\
\mathcal{V}[\text{CPi } v_{c1} N] = (x : \mathcal{V}[v_{c1}]) \rightarrow \mathcal{V}[N] \ x \\
\mathcal{V}[(x : V_1) \rightarrow V_2] = (x : \mathcal{V}[c_1]) \rightarrow \mathcal{V}[c_2] \\
\mathcal{V}[\text{glf } v_c N v_1 v_2] = \text{if}_{\mathcal{V}[v_c]} \mathcal{V}[N] \ \mathcal{V}[v_1] \ \mathcal{V}[v_2] \\
\mathcal{V}[\text{cast } v_{c1} v_{c2} v] = \langle \mathcal{V}[v_{c2}] \leftarrow \mathcal{V}[v_{c1}] \rangle \mathcal{V}[v] \\
\quad \text{where one of } v_{c1}, v_{c2}, v \text{ neutral} \\
\mathcal{V}[\text{UUnk} : \text{GUnk}_\ell] = ?_{\text{Type}_\ell} \\
\mathcal{V}[\text{UErr} : \text{GUnk}_\ell] = \bar{\mathcal{U}}_{\text{Type}_\ell} \\
\mathcal{V}[\text{UFun } v : \text{GUnk}_\ell] = \langle \Pi \rangle_\ell \mathcal{V}[v] \\
\mathcal{V}[\text{UBool } v : \text{GUnk}_\ell] = \langle \mathbb{B} \rangle_\ell \mathcal{V}[v] \\
\mathcal{V}[\text{UCode } v : \text{GUnk}_\ell] = \langle \text{Type}_\ell \rangle_\ell \mathcal{V}[v] \\
\mathcal{V}[x] = x \\
\mathcal{V}[\text{Code}_\ell] = \text{Type}_\ell \\
\mathcal{V}[\text{CType}] = \text{Type}_\ell \\
\mathcal{V}[\text{CBool}] = \mathbb{B} \\
\mathcal{V}[\text{GBool}] = \mathbb{B} \\
\mathcal{V}[\text{CErr} : \text{Code}_\ell] = \bar{\mathcal{U}}_{\text{Type}_\ell} \\
\mathcal{V}[\text{GErr}_\ell] = \bar{\mathcal{U}}_{\text{Type}_\ell} \\
\mathcal{V}[\text{CUnk} : \text{Code}_\ell] = ?_{\text{Type}_\ell} \\
\mathcal{V}[\text{GUnk}_\ell] = ?_{\text{Type}_\ell} \\
\mathcal{V}[\lambda(x : V). t] = \lambda(x : \mathcal{V}[V]). \mathcal{V}[t] \\
\mathcal{V}[\text{BTrue}] = \text{true} \\
\mathcal{V}[\text{BFalse}] = \text{false} \\
\mathcal{V}[\text{BUnk}] = ?_{\mathbb{B}} \\
\mathcal{V}[\text{BErr}] = \bar{\mathcal{U}}_{\mathbb{B}} \\
\mathcal{V}[\top_N] = ?_{\mathcal{V}[N]} \\
\mathcal{V}[\perp_N] = \bar{\mathcal{U}}_{\mathcal{V}[N]} \\
\mathcal{V}[N v] = \mathcal{V}[N] \ \mathcal{V}[v]
\end{array}$$

Fig. 16. Back-translation from StIR into CastIf

7.3 Values and the Back-Translation

In addition to showing strong normalization, we can view our translation as a form of compilation. The translation of a CastIf term reduces in a similar enough way to the original term that we recover its evaluation from the evaluation of the translation.

To achieve this, we define a *back-translation* (Fig. 16) from StIR to CastIf. One difficulty in defining such a translation is handling neutral terms, since not all pattern matches in StIR correspond to matches in CastIf. However, we take advantage of how CastIf cannot pattern match on **Type**, so any match on a value of type **Code**_ℓ was produced by **⊤**, **⊥**, **cast** or **El**. Another challenge is in handling codes: since $\mathcal{T}[\llbracket \cdot \rrbracket]$ produces calls to **El**_ℓ, evaluating the resulting StIR term produces a type. So we translate both types and codes from StIR into CastIf types.

The back-translation is given in Fig. 16. as a partial function from StIR values to CastIf values. For readability, we write the neutral forms of pattern matches in terms of the functions generating those matches, with the understanding that the actual StIR values would have the function names replaced with their bodies. For example, the rule producing **if** actually checks that the argument is of the form **match** t_1 with $\{\text{GTrue} \Rightarrow t_2; \text{GFalse} \Rightarrow t_3; \text{GUnk} \Rightarrow \tau_c; \text{GErr} \Rightarrow \perp_c\}$. Likewise, we assume the back-translation has access to a full typing derivation for the StIR term, so that functions may be ascribed with their argument types, $?_{\text{Type}_\ell}$ may be ascribed with the proper level, etc. For brevity, we omit the derivation from the definition.

The important property of back-translation is that it respects CastIf's evaluation: translating a value, then back-translating, yields the original value. As a corollary, we obtain the algorithm for computing approximate normal forms by executing StIR terms.

LEMMA 7.4 (VALUE BACK-TRANSLATION CORRECTNESS). *If* $\Gamma \vdash v : V'$ *then* $\mathcal{V}[\mathcal{T}[\llbracket v \rrbracket]]V' = v$.

COROLLARY 7.5 (NORM. BY TRANSLATION). *If* $\Gamma \vdash t : V$, *then* $t \longrightarrow^* \mathcal{V}[v]$ *where* $\mathcal{T}[\llbracket t \rrbracket] \longrightarrow^* v$.

8 ADDING PROPOSITIONAL EQUALITY AND INDUCTIVE TYPES

GrIf and CastIf are too minimal to be practically useful, but they lay the foundation on which we build a more fully-featured gradual dependently typed language. To handle arbitrary user-defined inductive type families, the key is specifying a gradual representation for propositional equality, since this can be used to represent constructors' constraints on index values.

We present GrEq and CastEq, which extend GrIf and CastIf respectively with support for propositional equality. We add types and constructors for evidence-based *propositional consistency*, which

extends propositional equality to accommodate imprecision among gradual dependent types. We also introduce *explicit composition expressions* for evidence, so that composing two pieces of evidence is a syntactic construct within `CastEq` itself. Our previous proofs of safety, strong normalization, and the gradual guarantees are all easily modified to encompass these new language features. Once equality is added, inductive families are implemented in terms of propositional consistency.

8.1 Overview of Propositional Consistency

Thus far, we have alluded to dynamic checks that ensure gradual type safety. But what do those checks actually entail? We affix a tag to values of type `?`, denoting the top-level type constructor. When casting from `?` to a more precise type, we fail if the stored tag does not match the target type.

However, for indexed type families, the type constructor does not provide all the information we need. Knowing that a value is a `Vec` does not say if it is safe to convert from `Vec Float ?` to `Vec Float 1`. So we must also track constraints on the type indices.

Tracking Index Consistency.

Consider how our incorrect `sort` from §1 operates on the list `[3.3, 3.3] : Vec Float 2`. In the simply-typed version, `sort` partitions the tail into `[]` and `[]`, sorts each partition, and produces the incorrect result `[3.3]`. We can detect this by tracking the equations induced by constraints on type indices. The calls `filter (> 3.3) [3.3]` and `filter (> 3.3) [3.3]` each produce `[] : Vec Float 0`, which is cast to `Vec Float ?` to match the return type of `filter`. Critically, *we remember that the original length was 0*: `Vec` elaborates to a `CastInd` inductive type, where there is an extra field storing `0` as evidence that `0` is consistent with `?`. Then, `Cons 3.3 [] = [3.3] : Vec Float (1 + ?)`, but we compose this with the evidence on `[]` to get `1` as witness between the consistency of `1 + ?` and `1 + 0`. The error is discovered when we cast from `Vec Float (1 + ?)` to `Vec Float 2`, the return type specified by the given signature. During this cast, we compose the target index `2` with `1`, the evidence on `[3.3]`, which fails when the distinct precise values `1` and `2` compose to `U`.

Abstracting Out Propositional Consistency. While it is easy to compare and compose members of `N`, not all compositions are so simple. We need a representation of evidence that captures plausible equalities between any two gradual values of the same type. Since inductive families may be indexed by any type, we need a general way of tracking indices and composing evidence. This is precisely the purpose of propositional consistency: just as the static `refl : t ≡T t` witnesses propositional equality of two terms, in `GrInd` `reflt-t1≅t2` : `t1≅Tt2` witnesses that `t1` and `t2` *could plausibly be equal*, given their imprecision. `t` is a term which is as precise as both `t1` and `t2`. If `t` is not `U`, then we cannot immediately conclude that `t1` and `t2` are inconsistent.

`GrEq` has a propositional equality type with the usual constructors, but this elaborates to propositional consistency, so that the equalities can be tracked during normalization. We elaborate `refl` with the initial evidence `t1 ⊔T t2`. As the notation suggests, this is the precision greatest lower-bound of `t1` and `t2`, so it is the least precise evidence for the consistency of `t1` and `t2`.

Once we have propositional consistency, we can handle inductive families. Elaboration uses a known technique where all inductive families are turned into parameterized inductive types, so that each constructor has the same return type, but takes equality proofs as arguments to constrain the indices [Chapman et al. 2010; McBride 2000].

For example, `Vec` is represented as

```
data Vec : (X : Type) → (n : N) → Type where
  Nil : n≅N0 → Vec X n   |   Cons : (m : Nat) → X → Vec X m > n≅N1 + m → Vec X n
```

$\Gamma \vdash t : T$ (CastEq typing, new rules)		
$\frac{\text{CEq} \quad \Gamma \vdash T \Rightarrow \mathbf{Type}_\ell \quad \Gamma \vdash t_1 \Leftarrow T \quad \Gamma \vdash t_2 \Leftarrow T}{\Gamma \vdash t_1 \cong_T t_2 \Rightarrow \mathbf{Type}_\ell}$	$\frac{\text{CREFL} \quad \Gamma \vdash t_1 \Rightarrow T \quad \Gamma \vdash t_2 \Leftarrow T \quad \Gamma \vdash t_3 \Leftarrow T \quad \Gamma \vdash t_1 \sqsubseteq^C t_2 \quad \Gamma \vdash t_1 \sqsubseteq^C t_3}{\Gamma \vdash \mathbf{refl}_{t_1+t_2 \cong t_3} \Rightarrow t_2 \cong_T t_3}$	$\frac{\text{CCOMP} \quad \Gamma \vdash t_1 \Rightarrow T \quad \Gamma \vdash t_2 \Leftarrow T}{\Gamma \vdash t_1 \sqcap_T t_2 \Rightarrow T}$
$\text{CSUBST} \quad \Gamma \vdash \mathbf{subst} \Rightarrow (X : \mathbf{Type}_\ell) \rightarrow (X_P : X \rightarrow \mathbf{Type}_{\ell'}) \rightarrow (y : X) \rightarrow (z : X) \rightarrow X_P y \rightarrow y \cong_{XZ} \rightarrow X_P z$		

Dealing with Neutrals.

The subtlety of defining propositional consistency, and the related composition operator, lies with neutral terms. When we cast between propositional consistency types, we must compose the evidence to ensure monotonicity. But the terms we are composing might have variables. Consider $(\lambda x y. x) \sqcap_{\mathbb{N} \rightarrow \mathbb{N} \rightarrow \mathbb{N}} (\lambda x y. y)$. This expression cannot produce an error, as we would need to compare variables for equality, but languages like CIC do not have such reflection capabilities, so such comparisons cannot be directly included in a syntactic model. If it does not produce an error, then the expression is evidence that $\lambda x y. x$ and $\lambda x y. y$ are propositionally consistent, despite being non-equal static terms.

Our approach is to make syntactic consistency stronger than propositional consistency. When comparing terms for consistency during type-checking, x and y must be inconsistent, so that we conservatively extend CIC. Conversely, composition is lazy, so neutral terms are consistent with all other terms of the same type. When values are provided for variables, we can evaluate further and possibly produce an error. For our example, $(\lambda x y. x) \sqcap_{\mathbb{N} \rightarrow \mathbb{N} \rightarrow \mathbb{N}} (\lambda x y. y)$ reduces to $\lambda x y. (x \sqcap_{\mathbb{N}} y)$.

8.2 GrInd and CastEq: Adding Propositional Consistency

GrEq extends GrIf with the usual propositional equality type constructor \equiv and proof term \mathbf{refl} , plus an elimination principle \mathbf{subst} , so the complexity of propositional consistency is hidden from the surface language. CastEq, conversely, extends CastIf with propositional consistency, to which GrEq's propositional equality elaborates, and an explicit composition operator. Evidence ought to be viewed as a separate language from terms: evidence represents a slice of the plausible equalities that could hold between two gradual terms. Composition is only needed for terms representing evidence, but all CastEq features are present in the evidence language, so we do not distinguish it from CastEq.

$$t ::= t_1 \cong_T t_2 \mid \mathbf{refl}_{t_1+t_2 \cong t_3} \mid \mathbf{subst} \mid t_1 \sqcap_T t_2$$

The introduction form is $\mathbf{refl}_{t_1+t_2 \cong t_3}$, where t_1 is *evidence* of consistency between t_2 and t_3 . The composition $t_1, t_2 : T$ as $t_1 \sqcap_T t_2$ computes a *precision lower bound* of t_1 and t_2 , an invariant we formalize below. Normals, neutrals and term heads (omitted) are like in CastIf. The term $t_1 \sqcap_T t_2$ is neutral if either t_1 or t_2 is, unless one is $?$ or \bar{U} , in which case we can reduce.

For typing, the interesting rule is CREFL, where $\mathbf{refl}_{t_1+t_2 \cong t_3}$ synthesizes $t_2 \cong_T t_3$ so long as t_1 is at least as precise as both t_2 and t_3 , and all three have the same type.

Apart from that, \cong and \mathbf{subst} are typed the same as their static counterparts, and $t_1 \sqcap_T t_2$ has type T so long as its inputs do.

Semantics. CastEq extends CastIf with two new computational forms and a new type family within which we can cast, so we introduce new reduction rules (Fig. 17). The first reductions we need are for eliminating via \mathbf{subst} . A J reduction transports a value across an equality by casting it through the evidence type, which ensures monotonicity, as [New and Ahmed \[2018\]](#) observed.

$t_1 \rightsquigarrow t_2$ (CastEq Reduction))	\sqcap structural rules omitted, $\sqcap\text{UR}$ and $\sqcap\text{?R}$ defined symmetrically
$\text{subst } T \text{ } T_P \ t_1 \ t_2 \ t_{P t_1} \ \text{refl}_{t_{ev} \vdash t_1 \cong t_2} \rightsquigarrow_J \langle T_P \ t_2 \Leftarrow T_P \ t_{ev} \rangle \langle T_P \ t_{ev} \Leftarrow T_P \ t_1 \rangle t_{P t_1}$ where $t_{ev} \cong t_{ev}$	
$\text{subst } T \text{ } T_P \ t_1 \ t_2 \ t_{P t_1} \ ?_{t_1 \cong_T t_2} \rightsquigarrow_J \langle T_P \ t_2 \Leftarrow T_P \ (t_1 \sqcap_T t_2) \rangle \langle T_P \ (t_1 \sqcap_T t_2) \Leftarrow T_P \ t_1 \rangle t_{P t_1}$	
$\frac{t_{ev} \neq t_{ev}}{\text{subst } T \text{ } T_P \ t_1 \ t_2 \ t'' \ t_{ev} \rightsquigarrow_{J\text{U}} \text{U}_{(T_P \ t_2)}} \quad (\lambda x : T. t_1) \sqcap_{(x:T) \rightarrow T'} (\lambda x : T. t_2) \rightsquigarrow_{\sqcap\lambda} \lambda(x : T). t_1 \sqcap_{T'} t_2$	
$\langle t'_1 \cong_{T'} t'_2 \Leftarrow t_1 \cong_T t_2 \rangle \text{refl}_{t_{ev} \vdash t_1 \cong t_2} \rightsquigarrow_{\text{Eq}} \text{refl}_{t'_1 \sqcap_{T'} t'_2 \sqcap_{T'} \langle T' \Leftarrow T \rangle t_{ev} \vdash t'_1 \cong t'_2}$	$\frac{\text{tagOf}(t_1) \neq \text{tagOf}(t_2)}{t_1 \sqcap_T t_2 \rightsquigarrow_{\sqcap\text{HEADU}} \text{U}_T}$
$?_T \sqcap_T t \rightsquigarrow_{\sqcap?L} t \quad \text{U}_T \sqcap_T t \rightsquigarrow_{\sqcap\text{UL}} \text{U}_T \quad \text{refl}_{t \vdash t_1 \cong t_2} \sqcap_{t_1 \cong_T t_2} \text{refl}_{t'_1 \vdash t_1 \cong t'_2} \rightsquigarrow_{\sqcap\text{REFL}} \text{refl}_{t \sqcap_{T'} t' \vdash t_1 \cong t_2}$	
$T'' = T \sqcap_{\text{Type}_e} T'$	
$\frac{t_1 \cong_T t_2 \sqcap_{\text{Type}_e} t'_1 \cong_{T'} t'_2 \rightsquigarrow_{\sqcap\text{EQ}} \langle T'' \Leftarrow T \rangle t_1 \sqcap_{T''} \langle T'' \Leftarrow T' \rangle t'_1 \cong_{T''} \langle T'' \Leftarrow T \rangle t_2 \sqcap_{T''} \langle T'' \Leftarrow T' \rangle t'_2}{T_3 = [\langle T_1 \Leftarrow T_1 \sqcap_{\text{Type}_e} T'_1 \rangle x/x] T_2 \quad T'_3 = [\langle T'_1 \Leftarrow T_1 \sqcap_{\text{Type}_e} T'_1 \rangle x/x] T'_2}$	
$(x : T_1 \rightarrow T_2) \sqcap_{\text{Type}_e} (x : T'_1) \rightarrow T'_2 \rightsquigarrow_{\sqcap\Pi} (x : T_1 \sqcap_{\text{Type}_e} T'_1) \rightarrow (T_3 \sqcap_{\text{Type}_e} T'_3)$	

Fig. 17. Additional Reduction Rules for CastEq

Rule J does the same when given $?$, but casts through the meet of the start and target type. So $?_{t_1 \cong_T t_2}$ behaves like $\text{refl}_{t_1 \sqcap_T t_2 \vdash t_1 \cong t_2}$. In $J\text{U}$, applying subst to U produces U at the target type.

Second, we need rules for casting between equality types (EQ), which rely heavily on the meet. When we cast $\text{refl}_{t \vdash t_1 \cong t_2}$ to $t'_1 \cong_{T'} t'_2$, there is no guarantee that t'_1 and t'_2 are consistent or that t is valid evidence for t'_1 and t'_2 . So we cast our evidence into the target type, then compose with the endpoints of the target equality to ensure we satisfy the precision requirement of CREFL . So even if t'_1 and t'_2 are consistent, we will produce U if they are not consistent with the evidence t .

To give an example, suppose we have $\text{refl}_{\text{true} \vdash \text{true} \cong \text{true}} : \text{true} \cong \text{true}$. We could cast this to $\text{true} \cong \text{false}$, but then $\text{refl}_{\text{true} \vdash \text{true} \cong \text{false}}$ would not be well typed at this type. So we compose with $\text{true} \sqcap_{\text{B}} \text{false}$, which normalizes to $\text{refl}_{\text{U}_B \vdash \text{true} \cong \text{false}}$.

Finally, we have reductions for composition. Composing with U produces U ($\sqcap\text{UL}, \sqcap\text{UR}$), and $?$ acts as an identity ($\sqcap?L, \sqcap?R$). Functions compose by composing their bodies, and $\text{refl}_{\vdash \cong}$ composes by composing the evidence with which it is ascribed. Terms with different tagOf values compose to U in $\sqcap\text{TAGU}$. Rules $\sqcap\Pi$ and $\sqcap\text{EQ}$ work like structural rules, but because of type dependencies, adds casts to preserve typing. The remaining meet rules (omitted) are structural rules for terms with the same tagOf : we apply the constructor to the meet of the arguments.

In addition to our reductions, we add two η -laws. First, we have $?_{t_1 \cong_T t_2} \longrightarrow_{\eta} \text{refl}_{t_1 \sqcap_T t_2 \vdash t_1 \cong t_2}$, which avoids having subst produce $?$ any time it is given $?$, so potential equalities are dynamically tracked even if $?$ is provided in place of refl . Second, we have $\text{refl}_{\text{U}_T \vdash t_1 \cong t_2} \longrightarrow_{\eta} \text{U}_{t_1 \cong_T t_2}$: if U is the only term we know is more precise than t_1 and t_2 , then we have failed to show they could be equal.

Elaboration. GrEq elaborates to CastEq much like GrIf does to CastIf (Fig. 18). Equality is elaborated directly (EEQ). A proof term refl is elaborated by taking composing the equated terms. We also check that the terms are syntactically consistent, to avoid accepting fully static terms like $\text{refl} : x \equiv y$. Like with functions, we have an extra rule EREFLUNK that generates refl with $?$ evidence when the target type is $?$, since this is consistent with an equality type.

In EREFL , since the meet was used as the initial evidence of consistency, if our elaboration is to be type preserving, the meet must always be a lower-bound of its inputs. For neutral terms, this means we add axioms to precision.

$\Gamma \vdash s \rightarrow t \Rightarrow T \mid \Gamma \vdash s \rightarrow t \Leftarrow T$ (GrEq elaboration)			EEQ omitted
$\frac{\text{EREFL} \quad \Gamma \vdash t_1 \Leftarrow T \quad \Gamma \vdash t_1 \xrightarrow{*}_{\eta} v_1 \quad t_1 \cong t_2}{\Gamma \vdash \text{refl} \rightarrow \text{refl}_{t_1 \sqcap_T t_2 + t_1 \cong t_2} \Leftarrow t_1 \cong_T t_2} \quad \text{EREFLUNK} \quad \text{refl} \rightarrow \langle \text{Eq} \rangle_{\ell} \text{refl}_{?_{\text{Type}_{\ell}} \vdash ?_{\text{Type}_{\ell}} \cong ?_{\text{Type}_{\ell}}} \Leftarrow ?_{\text{Type}_{\ell}}$			
$\Gamma \vdash t_1 \sqsubseteq^C t_2$ (CastEq precision)		$v_1 \cong v_2$ (CastEq consistency)	
CSTUNKEQ, CSTUNKSUBST, CSTUNKREFL, CSTMEETR omitted			
$\frac{\text{PRECONGEQ} \quad \Gamma \vdash T \sqsubseteq^C T' \quad \Gamma \vdash \langle T' \Leftarrow T \rangle t_1 \sqsubseteq^C t'_1}{\Gamma \vdash \langle T' \Leftarrow T \rangle t_2 \sqsubseteq^C t'_2} \quad \text{PREACXGREATEST} \quad \frac{\Gamma \vdash t_3 \sqsubseteq^C t_1 \quad \Gamma \vdash t_3 \sqsubseteq^C t_2}{\Gamma \vdash t_3 \sqsubseteq^C t_1 \sqcap_T t_2} \quad \text{PRECONGREFL} \quad \frac{\Gamma \vdash t \sqsubseteq^C t'}{\Gamma \vdash \text{refl}_{t+t_1 \cong t_2} \sqsubseteq^C \text{refl}'_{t+t_1 \cong t_2}}$			
$\frac{\text{PREACXBOUND} \quad i \in \{1, 2\}}{\Gamma \vdash t_1 \sqcap_T t_2 \sqsubseteq^C t_i} \quad \text{PREACXTHROUGH} \quad \frac{}{\Gamma \vdash \langle T_2 \Leftarrow T_1 \rangle t \sqsupseteq^C \langle T_2 \Leftarrow T_1 \sqcap_{\text{Type}_{\ell}} T_2 \rangle \langle T_1 \sqcap_{\text{Type}_{\ell}} T_2 \Leftarrow T_1 \rangle}$			
$\frac{\text{CSTEQ} \quad v_1 \cong v'_1 \quad v_2 \cong v'_2}{v_1 \cong v_2 \cong v'_1 \cong v'_2} \quad \text{CSTSUBST} \quad \frac{}{\text{subst} \cong \text{subst}} \quad \text{CSTREFL} \quad \frac{}{\text{refl}_{t+t_1 \cong t_2} \cong \text{refl}'_{t+t_1 \cong t_2}} \quad \text{CSTMEETL} \quad \frac{t_1 \cong t_3 \quad t_2 \cong t_3}{t_1 \sqcap_T t_2 \cong t_3}$			

Fig. 18. GrEq and CastEq: New Elaboration, Precision, and Consistency Rules

$\Gamma \vdash t_1 \sqsubseteq^C t_2$ (CastEq precision, new admissible rules)		
$\frac{\text{PREACDMEET} \quad \Gamma \vdash t_1 \sqsubseteq^C t'_1 \quad \Gamma \vdash t_2 \sqsubseteq^C t'_2}{\Gamma \vdash t_1 \sqcap_T t_2 \sqsubseteq^C t'_1 \sqcap_T t'_2} \quad \text{PREACDINTERMED} \quad \frac{\Gamma \vdash T_1 \sqsubseteq^{C*} T_2}{\Gamma \vdash \langle T' \Leftarrow T_1 \rangle \langle T_1 \Leftarrow T \rangle t \sqsubseteq^C \langle T' \Leftarrow T_2 \rangle \langle T_2 \Leftarrow T \rangle t}$		
$\frac{\text{PREACDCOMMUT}}{\Gamma \vdash t_1 \sqcap_T t_2 \sqsupseteq^C t_2 \sqcap_T t_1} \quad \text{PREACDABSORB} \quad \frac{}{\Gamma \vdash t_1 \sqsubseteq^C t_2} \quad \text{PREACDIDEM} \quad \frac{}{\Gamma \vdash t \sqcap_T t \sqsupseteq^C t}$		

Fig. 19. Precision: Admissible Rules for CastEq

Precision. In Fig. 18 we define the laws for algebraic precision. PREACXBOUND establishes that $t_1 \sqcap_T t_2$ is a lower bound for t_1 and t_2 at type T , and PREACXGREATEST establishes that it is the greatest such lower bound. PREACXTHROUGH establishes that casting between two types is equivalent to casting *through* their meet, making PREACXINTERMED redundant.

Our new syntactic forms also require structural rules. PREACONGREFL compares by evidence ascriptions, and PREACONGEQ compares the equated terms after being cast into the type of the (potentially) more precise equality, similar to how PREACONGPI works (Fig. 9). From these rules, we can define all the properties that are expected of a preorder's meet operator.

Consistency. Consistency must account for our new syntactic forms (Fig. 18). For equality, we add the necessary structural rules, along with the CSTUNK rules for consistency with $?$. For the meet,

we need to make sure upward-closure still holds. The precision rules `PRECAXBOUND` and `PRECAXGREATEST` mean that the composition $t_1 \sqcap_T t_2$ is only consistent with terms that are consistent with both t_1 and t_2 (`CSTMEETL`, `CSTMEETR`).

Syntactic Model.

Extending our syntactic model to include equality is once again easy. Just as we wrote a function `cast` : $(c_1 c_2 : \text{Code}_\ell) \rightarrow \text{El}_\ell c_1 \rightarrow \text{El}_\ell c_2$, we write a function `comp` : $(c : \text{Code}_\ell) \rightarrow (x y : \text{El}_\ell c) \rightarrow \text{El}_\ell c$, which directly implements the reductions for \sqcap in `StIR`. New `Code` and `Unk` variants are added for \cong , and the `cast` case between equality codes are implemented using `comp`. The type and eliminator for propositional equality/consistency are:

```
data GEq(c : Codeℓ)(x y : Elℓ c) : Type where | GRefℓ : (z : Elℓ c) → GEq c x y
gSubst : (c : Codeℓ) → (P : Elℓ c → Codeℓ') → (x y : Elℓ c) → Elℓ' (P x) → GEq c x y → Elℓ' (P y)
```

We allow any term to act as evidence in `GRefℓ`: `CREFL` requires that evidence be more precise than the equated terms, but this restriction is for monotonicity, not safety. The function `gSubst` casts through the evidence in the given `GEq` argument like the `J` reduction rule.

8.3 GrInd: Realizing Inductive Families with Propositional Consistency

We now have everything we need to extend `GrEq` with inductive types to create `GrInd`. Having added propositional equality, most of the work is done, since a *family* of types can be turned into a single parameterized inductive type whose constructors use equality proofs to constrain the possible values of indices. Likewise, by expressing `CastEq` casts in terms of type tags, our formalism easily accommodates a fixed set of user-defined types.

Inductive types in `CIC` are notoriously expansive in their formal notation, so we focus on giving the intuition behind the formalization. We refer the reader to [Paulin-Mohring 2015] or [Dybjer 1994] for a standard reference on the formalism behind static inductive types.

$$s ::= C \bar{s} \mid D \bar{s} \mid \text{ind}_C x s. \overline{D \bar{y}} \mapsto s \quad t ::= C \bar{t} \mid D \bar{t} \mid \text{ind}_C x t. \overline{D \bar{y}} \mapsto t$$

A `GrInd` inductive type is declared by specifying a type constructor `C` with (possibly dependent) typing $C : (x : S) \rightarrow \text{Type}_\ell$, along with some fixed number of data constructors $D_1 \dots D_n$ typed as $D_i : (\bar{y} : \bar{S}) \rightarrow C \bar{s}$. In `CastInd`, the syntax is the same, but the return of each constructor is $C \bar{x}$. We follow Lennon-Bertrand et al. [2020] use an induction form `ind` that pattern-matches on the given value, but binds a name for self-reference in each branch. Termination is guaranteed with an external structural recursion check, that is standard and orthogonal to our work. Typing `ind` as a checking form (omitted) helps reduce the number of type ascriptions required, compared to the usual `CIC` presentation. Likewise, precision and consistency differ only in the addition of new structural rules.

The typing rules for gradual inductives (omitted) are identical to their static counterparts: the difficulty is handled by using propositional equality for index constraints.

Elaboration.

Inductive families are transformed into inductive types with equality constraints during elaboration via the standard translation. Any time a type constructor gives a specific expression `s` for an index, either of a recursive argument in the return type, the expression is replaced with a fresh parameter `x`, and an argument of type $x \cong t$ is added to the constructor. Likewise, the eliminator for an inductive family elaborates to the eliminator for the corresponding constrained inductive type, but rewrites the goal type using `subst`.

The last thing we consider is the elaboration of constructors. We could elaborate `GrInd` constructors directly into `CastInd` constructors, adding the initial evidence to `refl`. However, this is too lazy to obtain the dynamic-checking behavior discussed in our introduction. In the example

we gave above, we could `Nil` with evidence $\text{refl}_{0-0 \cong ?}$, and `Cons 3.3 Nil` with evidence $\text{refl}_{1+?|-1+? \cong 1+?}$. This is well typed according to the definition of `Vec'` using \cong , but it does not eagerly find the error, because we have a length-2 of propositional consistencies that we have not composed.

We solve this issue by inserting an extra composition into the elaboration of data constructors. Every elaborated constructor carries evidence of consistency between the actual index and the return index of the constructor. Each constructor's elaboration accesses this evidence for each inductive argument, use `subst` to lift it to a propositional consistency on the return index, and compose it with the index specified by the constructor. For our `Vec` example, `Nil` has evidence $\text{refl}_{0-0 \cong ?}$. `Cons` is used at type $\text{Float} \rightarrow \text{Vec Float ?} \rightarrow \text{Vec Float (1 + ?)}$, so we elaborate with evidence $\text{refl}_{1+?|-1+? \cong 1+?}$. Evidence from `Nil` is lifted by `subst` to $\text{refl}_{1|-1+? \cong 1+?}$, and composed with the initial evidence to produce $\text{refl}_{1|-1+? \cong 1+?}$. Then composition fails when we cast to `Vec Float 2`. In the case where the inductive argument is not a member of the inductive type but a function producing a member of the inductive type, we can supply `?` for all arguments bound function image's evidence.

Semantics.

The interesting part of adding inductive types is handling casts between these types, but again, the work is done for us by propositional equality. We define the singular cast rule between inductive types: $\langle C \bar{t}_2 \Leftarrow C \bar{t}_1 \rangle (D \bar{t}) \rightsquigarrow_{\text{CTOR}} D \langle \overline{[t_2/x]} T \Leftarrow \overline{[t_1/x]} T \rangle \bar{t}$ where $D : (\bar{y} : T) \rightarrow C \bar{x}$. That is, we cast between different parameterizations of an inductive type by casting each field of a constructor to a type with the new parameters replacing the old ones. Index conversions are handled by casts on \cong types.

All other casts are handled by the existing rules, which are generic in the type tags involved. Likewise, the (omitted) rules for reducing `indC` are nearly identical to the static form, since elaboration inserts all the necessary casts. Applying `ind` to `?` or `U` produces `?` or `U` respectively.

Like with `subst`, we add a check that the term under elimination is self-consistent, which ensures that if the evidence of index consistency ever becomes `U` for a member of an inductive type, that value behaves as `U`.

Finally, we add an η rule that $\Gamma \vdash D \bar{t} \longrightarrow_{\eta} \bigcup_{C \bar{t}'_i}^i : C \bar{t}'$ whenever $t_i \longrightarrow_{\eta} \bar{U}_{T_i}$. So casts between types with incompatible indices produce `U` immediately, unlike GCIC [Lennon-Bertrand et al. 2020] where inconsistencies are only discovered during elimination.

The above semantic features are easily incorporated in our syntactic model, for any fixed set of inductive types. We add constructors to `Code` and `Unk` and add cases to `cast` and `meet`. For each inductive type `C`, we define a static type `GC`, with `C`'s constructors plus `DCUnk` and `DCErr` denoting `?` and `U` respectively. Since the structure of `GC` and `C` are the same, `indC` is easily represented by the elimination of inductive datatypes in `StIR`.

9 DISCUSSION

Related Work. `GrInd` builds on long line of work mixing dynamic and static enforcement of specifications, most prominently GDTL [Eremondi et al. 2019] and GCIC [Lennon-Bertrand et al. 2020]. Ou et al. [2004] support mixed static and dynamic checking of boolean-valued properties. Similarly, Tanter and Tabareau [2015] develop a system of casts for Coq, using an unsound axiom to represent type errors. The casts supported subset types i.e. a value paired with a proof that some boolean-valued function returns true for that value, but not general inductive types.

Osera et al. [2012] present *dependent interoperability* for principled mixing of dependently typed and non-dependently typed programs. This was extended by Dagand et al. [2016, 2018], who provide a general mechanism for lifting higher-order programs to the dependently-typed setting.

All of these approaches presuppose separate simple and dependent versions of types, related by boolean-valued predicates. Our composition of evidence provides similar checks, but by keeping evidence of propositional consistency, we do not need types to be reformulated in terms of subset types or boolean predicates.

Our technique of representing inductive types by codes dates back to at least [McBride 2011], and has been used to produce very minimal dependently-typed core languages [Chapman et al. 2010], to model constructors and eliminators generically [Diehl and Sheard 2014], and to model a dependent type-case [Boulier et al. 2017]. The representation of ? and U we use in inductive types is essentially that of Exceptional Type Theory [Pédrot and Tabareau 2018; Pédrot et al. 2019], where extra constructors are added to account for the additional possibilities for each type.

Our notion of algebraic precision bears some resemblance to the embedding-projection pairs that New and Ahmed [2018] use to provide a semantic account of gradual typing. However, the embedding-projection property is too restrictive for approximate normalization, so we are unable to show the same properties that they show in a non-dependently typed setting.

Limitations and Future Work. GrInd shows that when programming with gradual types and inductive families, the programmer can have confidence that their compiler will eventually terminate, and that type errors always reflect true type inconsistencies. Programmers can omit proofs, yet test their programs, and receive feedback on which equalities did or did not hold during execution, specifying those equalities as dependent types.

Our work leaves ample room for future developments. While GrInd supports inductive types, its translation supports an arbitrary but fixed set of inductive types. This is suitable for proofs, but means that the translation can only work on whole programs. Also, the translation currently does not support exact evaluation: while we can adapt the translation to target a non-total language and never approximate, there would be well-typed terms that were not well-typed in the target, since their types have no exact normal-form.

Our algebraic precision relation compares values of the same type, making it stricter than that of Lennon-Bertrand et al. [2020] or Siek et al. [2015], so there is room to explore whether algebraic precision can be used to reason in more traditional gradual languages. Also, we suspect that the reasoning principles provided by algebraic precision could be used to drive optimizations of gradual types, such as removing unnecessary casts. Both Abstracting Gradual Typing [García et al. 2016] and our work rely on Galois connections as a key property, which warrants investigation of a deeper connection. Likewise, while we cannot show a full embedding-projection pair for approximate normalization, there may be a stronger property about exact semantics that we can show, which could capture the fact that reducing then increasing precision is never a lossy operation for exact execution.

REFERENCES

- Christopher Anderson and Sophia Drossopoulou. 2003. BabyJ: From Object Based to Class Based Programming via Types. *Electronic Notes in Theoretical Computer Science* 82, 8 (2003), 53–81. [https://doi.org/10.1016/S1571-0661\(04\)80802-8](https://doi.org/10.1016/S1571-0661(04)80802-8)
- WOOD2003, Workshop on Object Oriented Developments (Satellite Event of ETAPS 2003).
- Simon Boulier, Pierre-Marie Pédrot, and Nicolas Tabareau. 2017. The next 700 Syntactical Models of Type Theory. In *Proceedings of the 6th ACM SIGPLAN Conference on Certified Programs and Proofs* (Paris, France) (CPP 2017). Association for Computing Machinery, New York, NY, USA, 182–194. <https://doi.org/10.1145/3018610.3018620>
- Edwin Brady. 2013. Idris, a general-purpose dependently typed programming language: Design and implementation. *Journal of Functional Programming* 23, 5 (2013), 552–593. <https://doi.org/10.1017/S095679681300018X>
- James Chapman, Pierre-Évariste Dagand, Conor McBride, and Peter Morris. 2010. The Gentle Art of Levitation. In *Proceedings of the 15th ACM SIGPLAN International Conference on Functional Programming* (Baltimore, Maryland, USA) (ICFP '10). ACM, New York, NY, USA, 3–14. <https://doi.org/10.1145/1863543.1863547>

- Thierry Coquand. 1986. An Analysis of Girard’s Paradox. In *LICS*. IEEE Computer Society, 227–236. <http://dblp.uni-trier.de/db/conf/lics/lics86.html#Coquand86>
- Pierre-Évariste Dagand, Nicolas Tabareau, and Éric Tanter. 2016. Partial Type Equivalences for Verified Dependent Interoperability. In *Proceedings of the 21st ACM SIGPLAN Conference on Functional Programming (ICFP 2016)*. ACM Press, Nara, Japan, 298–310.
- Pierre-Évariste Dagand, Nicolas Tabareau, and Éric Tanter. 2018. Foundations of dependent interoperability. *Journal of Functional Programming* 28 (2018), e9. <https://doi.org/10.1017/S0956796818000011>
- Larry Diehl and Tim Sheard. 2014. Generic Constructors and Eliminators from Descriptions: Type Theory As a Dependently Typed Internal DSL. In *Proceedings of the 10th ACM SIGPLAN Workshop on Generic Programming (Gothenburg, Sweden) (WGP ’14)*. ACM, New York, NY, USA, 3–14. <https://doi.org/10.1145/2633628.2633630>
- Peter Dybjer. 1994. Inductive families. *Formal Aspects of Computing* 6, 4 (01 Jul 1994), 440–465. <https://doi.org/10.1007/BF01211308>
- Peter Dybjer and Anton Setzer. 2003. Induction–recursion and initial algebras. *Annals of Pure and Applied Logic* 124, 1 (2003), 1 – 47. [https://doi.org/10.1016/S0168-0072\(02\)00096-9](https://doi.org/10.1016/S0168-0072(02)00096-9)
- Joseph Eremondi, Éric Tanter, and Ronald Garcia. 2019. Approximate Normalization for Gradual Dependent Types. *Proc. ACM Program. Lang.* 3, ICFP, Article 88 (July 2019), 30 pages. <https://doi.org/10.1145/3341692>
- Ronald Garcia, Alison M. Clark, and Éric Tanter. 2016. Abstracting Gradual Typing. In *Proceedings of the 43rd Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages (St. Petersburg, FL, USA) (POPL ’16)*. ACM, New York, NY, USA, 429–442. <https://doi.org/10.1145/2837614.2837670>
- Meven Lennon-Bertrand, Kenji Maillard, Nicolas Tabareau, and Éric Tanter. 2020. Gradualizing the Calculus of Inductive Constructions. arXiv:2011.10618 [cs.PL]
- Conor McBride. 2000. *Dependently typed functional programs and their proofs*. Ph.D. Dissertation. University of Edinburgh, UK. <http://hdl.handle.net/1842/374>
- Conor McBride. 2011. Ornamental algebras, algebraic ornaments. <http://plv.mpi-sws.org/plerg/papers/mcbride-ornaments-2up.pdf>
- Max S. New and Amal Ahmed. 2018. Graduality from Embedding–Projection Pairs. *Proc. ACM Program. Lang.* 2, ICFP, Article 73 (July 2018), 30 pages. <https://doi.org/10.1145/3236768>
- Ulf Norell. 2009. Dependently Typed Programming in Agda. In *Proceedings of the 4th International Workshop on Types in Language Design and Implementation (Savannah, GA, USA) (TLDI ’09)*. ACM, New York, NY, USA, 1–2. <https://doi.org/10.1145/1481861.1481862>
- Peter-Michael Osera, Vilhelm Sjöberg, and Steve Zdancewic. 2012. Dependent Interoperability. In *Proceedings of the Sixth Workshop on Programming Languages Meets Program Verification (Philadelphia, Pennsylvania, USA) (PLPV ’12)*. ACM, New York, NY, USA, 3–14. <https://doi.org/10.1145/2103776.2103779>
- Xinming Ou, Gang Tan, Yitzhak Mandelbaum, and David Walker. 2004. Dynamic Typing with Dependent Types. In *Exploring New Frontiers of Theoretical Informatics*, Jean-Jacques Levy, Ernst W. Mayr, and John C. Mitchell (Eds.). Springer US, Boston, MA, 437–450.
- Christine Paulin-Mohring. 2015. Introduction to the Calculus of Inductive Constructions. In *All about Proofs, Proofs for All*, Bruno Woltzenlogel Paleo and David Delahaye (Eds.). Studies in Logic (Mathematical logic and foundations), Vol. 55. College Publications. <https://hal.inria.fr/hal-01094195>
- Pierre-Marie Pédro and Nicolas Tabareau. 2018. Failure is Not an Option. In *Programming Languages and Systems*, Amal Ahmed (Ed.). Springer International Publishing, Cham, 245–271.
- Pierre-Marie Pédro, Nicolas Tabareau, Hans Jacob Fehrmann, and Éric Tanter. 2019. A Reasonably Exceptional Type Theory. *Proc. ACM Program. Lang.* 3, ICFP, Article 108 (July 2019), 29 pages. <https://doi.org/10.1145/3341712>
- Benjamin C. Pierce and David N. Turner. 2000. Local Type Inference. *ACM Trans. Program. Lang. Syst.* 22, 1 (Jan. 2000), 1–44. <https://doi.org/10.1145/345099.345100>
- T. Ringer, K. Palmkog, I. Sergey, M. Gligoric, and Z. Tatlock. 2019. *QED at Large: A Survey of Engineering of Formally Verified Software*. now. <https://ieeexplore.ieee.org/document/8824174>
- Jeremy G. Siek and Walid Taha. 2006. Gradual Typing for Functional Languages. In *Scheme and Functional Programming Workshop*. 81–92.
- Jeremy G. Siek, Michael M. Vitousek, Matteo Cimini, and John Tang Boyland. 2015. Refined Criteria for Gradual Typing. In *1st Summit on Advances in Programming Languages (SNAPL 2015) (Leibniz International Proceedings in Informatics (LIPIcs), Vol. 32)*, Thomas Ball, Rastislav Bodik, Shriram Krishnamurthi, Benjamin S. Lerner, and Greg Morrisett (Eds.). Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, Dagstuhl, Germany, 274–293. <https://doi.org/10.4230/LIPIcs.SNAPL.2015.274>
- Jeremy G. Siek and Philip Wadler. 2010. Threesomes, with and Without Blame. In *Proceedings of the 37th Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages (Madrid, Spain) (POPL ’10)*. ACM, New York, NY, USA, 365–376. <https://doi.org/10.1145/1706299.1706342>

Éric Tanter and Nicolas Tabareau. 2015. Gradual Certified Programming in Coq. In *Proceedings of the 11th Symposium on Dynamic Languages* (Pittsburgh, PA, USA) (*DLS 2015*). ACM, New York, NY, USA, 26–40. <https://doi.org/10.1145/2816707.2816710>