

# Evaluation of Human-AI Teams for Learned and Rule-Based Agents in Hanabi

Ho Chit Siu \*   Jaime D. Peña \*   Yutai Zhou \*   Edenna Chen †   Victor J. Lopez ‡  
 Kyle Palko ‡   Kimberlee C. Chang \*   Ross E. Allen \*

## Abstract

Deep reinforcement learning has generated superhuman AI in competitive games such as Go and StarCraft. Can similar learning techniques create a superior AI teammate for human-machine collaborative games? Will humans prefer AI teammates that improve objective team performance or those that improve subjective metrics of trust? In this study, we perform a single-blind evaluation of teams of humans and AI agents in the cooperative card game *Hanabi*, with both rule-based and learning-based agents. In addition to the game score, used as an objective metric of the human-AI team performance, we also quantify subjective measures of the human’s perceived performance, teamwork, interpretability, trust, and overall preference of AI teammate. We find that humans have a clear preference toward a rule-based AI teammate (SmartBot) over a state-of-the-art learning-based AI teammate (Other-Play) across nearly all subjective metrics, and generally view the learning-based agent negatively, despite no statistical difference in the game score. This result has implications for future AI design and reinforcement learning benchmarking, highlighting the need to incorporate subjective metrics of human-AI teaming rather than a singular focus on objective task performance. <sup>4</sup>

## 1 Introduction

Advances in artificial intelligence (AI) have resulted in agents that perform at superhuman levels within domains previously thought to be solely the purview of human intelligence. Such performance has been demonstrated through application of reinforcement learning (RL) in environments such as board games [6, 39], arcade games [31], real-time strategy games [44], multiplayer online battle arenas [4], and simulated aerial dogfights [11].

In nearly all cases, these demonstrations of AI superiority are in purely adversarial, one- or two-player games. However, in order to achieve real-world applicability and adoption, AI must be able to demonstrate *teaming intelligence*, particularly with human teammates [23]. Due to the focus on adversarial games, teaming intelligence has been understudied in RL research. AI teammates must also exhibit behavior that engenders an appropriate level of certain human reactions, such as trust, mental workload, and risk perception [26, 37]. Failure to do so risks the same kind of misuse, disuse, and abuse that Parasuraman and Riley illustrated with traditional automation systems [37]. These issues are distinct from much of current multi-agent AI work, as AI that is able to team effectively with other AI agents has failed to work effectively with humans [9].

\*MIT Lincoln Laboratory, {hochit.siu,jdpena,yutai.zhou,chestnut,ross.allen}@ll.mit.edu

†MIT Department of Electrical Engineering and Computer Science, edenna@mit.edu

‡U.S. Air Force Artificial Intelligence Accelerator, {victor.lopez.10,kyle.palko.1}@us.af.mil

<sup>4</sup>DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

The objective of this paper is to evaluate human-AI teaming in the cooperative, imperfect-information game of Hanabi. We consider not only the *objective* performance of a human-AI team, but also the *subjective* human reactions and preferences when working with different kinds of AI teammates. Based on the success of applying deep reinforcement learning to create superhuman AI in adversarial games, we hypothesize that similar RL techniques can render collaborative AI that outperform and are preferred over rule-based agents in human-AI Hanabi teams. Our results show that this hypothesis is *not* supported given the current state of the art of collaborative RL agents. Human participants show a clear preference toward rule-based AI even though the learning-based AI perform no worse and are specifically optimized for teaming with previously unknown partners (e.g. humans) [21]. To the best of our knowledge, this is the first comparative study of objective performance of rule-based and learning-based Hanabi AI in human-teaming experiments, as well as the first quantified study of subjective human preferences toward such AI.

## 2 Background

### 2.1 Hanabi

*Hanabi* is a cooperative card game in which two to five players attempt to stack twenty-five cards into five different fireworks (piles), one for each suit (color) and by ascending rank (number). We consider only the standard, two-player version, where the deck is composed of 50 cards, five suits, each suit having three 1s, two 2s, two 3s, two 4s, and one 5, and each player is dealt a hand of five cards. Hanabi’s difficulty lies in the fact that players can only see their teammate’s hand and never their own and communication about cards is strictly limited.

Games start with eight *hint tokens* and three *bomb tokens*. Each turn, a player may *discard* a card from their hand, *play* a card from their hand, or give a *hint* to a teammate. Whenever a card is played or discarded, it is revealed and a new card is drawn from the deck. A correctly-played card is placed in the appropriate firework; an incorrectly-played card is discarded and the team loses one bomb. Hinting costs one hint token and allows a player to reveal either all cards of a certain suit or rank in their teammate’s hand. Hint tokens are earned back when a card is discarded, or when a 5 card is successfully played. The final score is the sum of the top card in each firework, for a maximum of 25 points. The game ends when all fireworks have been completed, the deck is empty (and each player has one additional turn), or the team loses 3 bombs.

Hanabi is a *purely cooperative* game with imperfect information, and limited, codified communication. These properties make it an interesting challenge for teaming since players must consider the reasons for their teammates’ actions and any implied information, while avoiding misinterpretations. Bard et al. [2] presents a more complete treatment of Hanabi and its properties as an AI problem.

### 2.2 Training and Evaluating AI Teams

Hanabi’s uniquely collaborative nature has made it the subject of several AI challenges in recent years [2, 46]. In these challenges AI agents are paired with other teammate agents, and their performance is measured based on the paradigms of *self-play* and *cross-play* [21].

Self-play (SP) is when an AI plays a game with a copy of itself as the opponent (adversarial games) or teammate (cooperative games like Hanabi). Self-play can be used as a form of RL training [1, 20], and/or as a form of evaluation [2].

Cross-play (XP) is an evaluation-only paradigm where an agent is teamed with other agents (AI or humans) that were not encountered during training, measuring how well an agent can cooperate with previously-unseen teammates. SP-trained agents can achieve high SP-scores by developing “secretive conventions” that are not understood by agents not present during training, thus completely failing in the XP setting [21]. Cross-play with humans (*human-play*) is of particular importance as it measures human-machine teaming (HMT) and is the foundation for the experiments in our paper.

Cross-play can be evaluated under the zero-shot coordination (ZSC) [21] or ad-hoc teaming [40] settings. ZSC assumes that teams are formed between agents that have no prior knowledge of each other; therefore it is impossible to train an agent to bias towards teammate idiosyncrasies, though the agents may agree to a common training strategy beforehand. On the other hand, ad-hoc teaming attempts to achieve coordination by having agents update their policy while interacting with other

Table 1: Survey of Rule-based and Learning-Based Hanabi AI Performance in 2-Player Games

Hanabi AI	Original Author	References	Self-Play	Cross-Play	Human-Play
Van den Bergh	Van den Bergh 2016	[42, 45, 15]	13.8	10.8	–
Self-Recognition	Osawa 2015	[36, 15]	15.9	–	–
Piers	Walton-Rivers 2017	[45, 38]	17.3	11.2	–
Intentional AI	Eger 2017	[13, 8]	12.6	<b>13.8</b>	<b>15.0</b>
Expectimax	Bouzy 2017	[5, 15]	19.0	–	–
MirrorSituational	Canaan 2018	[7, 15]	20.1	12.4	–
RIS-MCTS	Goodman 2019	[15, 8]	20.6	13.3	–
WTFWThat	J. Wu 2018	[48, 2, 15]	19.5	–	–
FireFlower	D. Wu 2018	[47, 2, 14]	22.7	–	–
Implicature AI	Liang 2019	[28, 8]	18.9	–	~ 15
<b>SmartBot (SB)</b>	O’Dwyer 2019	[33, 2, 15]	<b>23.0</b>	–	–
IL-Valuebot	Sarmasi 2021	[38, 33]	18.0	–	–
ACHA	Bard 2020	[2, 20]	22.7	1.0	–
BAD	Foerster 2019	[14, 2, 20]	23.9	–	–
SAD	Hu 2019	[20, 21]	24.0	3.0	–
SAD+AUX	Hu 2019	[20, 21]	24.0	21.1	9.2
SPARTA	Lerer 2020	[27, 8]	<b>24.6</b>	–	–
<b>Other-Play (OP)</b>	Hu 2020	[21]	24.1	<b>22.5</b>	<b>15.8</b>

We provide Hanabi AI agents’ scores as they are reported in existing literature. This gives a notional perspective of the current state of the art; however, we note that evaluation conditions have not been standardized throughout previous literature (i.e. number of game seeds for self-play, pool of teammates for cross-play, etc.). Therefore some caution is needed when making direct comparisons between reported scores. Please see respective literature for details on evaluation conditions.

agents, and the the pool of partner agents can be known in advance (though it can be of arbitrarily large size, making such knowledge practically impossible to exploit).

### 2.3 AI for Hanabi

Table 1 summarizes the most salient published Hanabi AI agents in 2-player games with game score in self-play, cross-play, and human-play. The table is separated into *rule-based* (top) and *learning-based* (bottom) agent types. Rule-based agents have a policy composed of a predefined set of rules to follow given any particular game situation, and the rules are often derived from human domain knowledge. Learning-based agents, on the other hand, use statistical learning methods to adjust the parameters of their policy. The mechanism governing what action the policy will choose is learned via the agent’s experience, without the need for human domain knowledge.

Most early work focused on rule-based AI [36, 42, 45]. Goodman won the 2018 CoG Hanabi Competition [46] with a rule-based Monte Carlo Tree Search agent. O’Dwyer’s SmartBot (SB) is the highest performing rule-based agent created to date, in terms of self-play [33, 2, 15]. Due to its state-of-the-art SP score, as well as a readily available implementation [33], we select SB as our rule-based agent in the human-AI experiments presented in Sections 3 and 4. We found no previous work that evaluated SB in the cross-play or human-play settings.

Recently developed learning-based agents have demonstrated breakthrough Hanabi performance. Sarmasi et al. provide a collection of agents trained with imitation learning that nearly match the performance of the rule-based agents from which they were trained [38]. A sequence of publications [14, 20, 27, 21] offered reinforcement learning agents that each advanced the state of the art self-play and/or cross-play performance at the time of publication. This culminated with the SPARTA [27] and Other-Play (OP) [21] agents; which, respectively, represent the highest performance to date in self-play and cross-play of any agent type.

The OP agent is selected as the learning-based agent for study in our human-AI experiments described in Sections 3 and 4. We choose OP, not only for its state-of-the-art cross-play performance, but also because it uses a learning objective function specifically designed to optimize for zero-shot coordination settings. Due to this optimization, we expect that humans would subjectively prefer and

objectively perform better with OP agent teammates over other AI teammates that were not designed for the zero-shot coordination setting, such is SmartBot.

A handful of works have conducted human-play experiments; however these works are uncommon due to the significant time and effort required to conduct such experiments. Both Eger et al. [13] and Liang et al. [28] propose rule-based AI derived from Gricean maxims [17] and achieved an average human-play score of approximately 15.0 over a set of experiments that included hundreds of human participants. The learning-based Other-Play agent is arguably the highest performer in terms of human-play with an average score of 15.8, however the experiments were run with a much smaller pool of human participants [21]. No prior works were found that provide a comparative study of rule-based and learning-based Hanabi AI in human experiments.

## 2.4 Human-AI Teaming and Metrics

Human-machine interaction evaluations typically consider two broad categories of metrics: objective performance metrics (raw score, error rates, accuracy, time required, etc.), and subjective team- or human-focused metrics (situation awareness, trust, workload, etc.). Measurement of the former is heavily task-dependent, and are often the primary evaluation metrics of AI systems. The latter, however, can also involve metrics for probing systems and teams in a quantitative way, with important implications for how technology is used and adopted [37].

One key metric of teaming is *trust*, which is defined by Lee and See as “the attitude that an agent will help achieve an individual’s goals in a situation characterized by uncertainty and vulnerability” [26]. Potential difficulties with trust include *trust calibration* (whether one’s trust of an agent is commensurate with its capabilities) and *trust resolution* (whether the range of situations where a human trusts a system is commensurate with its range of capabilities).

Closely related to trust are the notions of *legibility* (being expressive of one’s intent) and *predictability* (matching one’s expectations) [12]. In measuring teaming, one might directly ask humans about their teammates’ intent and their own expectations, particularly in relation to shared goals. Dragan et al. [12] argue that these two ideas trade off in the context of robot motion, but that legibility is the more important factor when working in close collaboration with a human. Similar arguments may also be made in the context of Hanabi, where maximum legibility is key to guiding a team’s actions in the tightly-coupled, imperfect-information scenario.

Hoffman [19] proposes a set of subjective and objective methods (overlapping with the aforementioned ideas) to measure *fluency* in human-robot interaction, defined as the “coordinated meshing of joint activities between members of a well-synchronized team.” Fluency encompasses subjective elements such as teamwork, trust, and positive perception; and objective measures of timing and concurrency.

Much of the contemporary work on learning-based agents has not evaluated such teaming metrics, due to their focus on single-player [3] or adversarial games [39, 43]. In this work, we consider the use of both objective performance and subjective teaming-based measurement of human-AI pairs in the context of Hanabi. We aim to provide a more thorough analysis of the human-AI teaming data than previously-discussed Hanabi HMT studies [13, 28, 21]. Rather than proposing a new AI with better raw performance, we are interested in the subjective aspects of human-AI teaming with state-of-the-art rule- and learning-based AI, and how they might drive future AI development.

## 3 Methods

### 3.1 Human-AI Teaming Experiment

Experiments consisted of two-player Hanabi games played by teams of one human participant and one AI agent. Experiments aimed to measure the objective team performance and subjective human reactions to different types of AI. The AI agents used in experiments were the Other-Play RL agent [21] (specifically the *OP+SAD+AUX* agent, hereafter referred to as the *OP* bot) and the “SmartBot” agent [33] (hereafter referred to as the *SB* bot), both of which have MIT Licenses. These agents were chosen because they were the top-performing learning-based and rule-based Hanabi AI, respectively at the time of the experiment.

Participants were first introduced to the experiment and the rules of Hanabi as defined in Section 2.1. The experiment followed with a brief familiarization game so participants could acquaint themselves with the game interface. Then, each participant played two sets (blocks) of three games, with each set using a different AI teammate. The participant was not informed which AI teammate played each block of games and the order of the AI teammates was counterbalanced over the course of the study. Participants answered Likert scale surveys after each game (Table 2, left), a NASA Task Load Index (TLX) survey after each block [18], and a Likert scale survey after both blocks that directly compared their experience with both agents (Table 2, right). Likert scale survey questions were largely derived from a compilation of similar questions in Hoffman et al. [19]. Unless otherwise noted, Likert scales were arranged with 1 corresponding to “strongly disagree” and 7 corresponding to “strongly agree.”

A total of 29 adult participants completed an experiment and each provided written, informed consent. The protocol was approved by the MIT Committee on the Use of Humans as Experimental Subjects (protocol E-2520) and the United States Department of Defense Human Research Protection Office (protocol MITL20200003). Participants received a \$10 USD gift card at the end of their experiment, and the highest-scoring participant received an additional \$50 gift card. Each experiment took approximately 1.5 to 2.5 hours. The total amount spent on participant payment was \$350, with one participant being paid twice due to technical difficulties ending their initial session early. Experiments were conducted virtually, with all interactions occurring through video-conference, online surveys, and the Hanabi game interface, adapted from [27]. No personally-identifiable information was collected, and no significant risk to participants was expected.

Liang et al. [28] conducted human experiments with subjective survey questions; however the only significant result reported was that humans were more likely to mistake Implicature AI as another human. Although Hu et al. [21] conducted some human experiments with the OP bot and a self-play RL bot, their experiments only focused on game score, involved only one game with each agent, and did not consider participant expertise in Hanabi.

Table 2: Post-Game (Left) and Post-Experiment (Right) Evaluation Statements

	7-point Likert Scale statement		7-point Likert Scale statement
G1	I am playing well.	E1	Which agent did you prefer playing with?
G2	The agent is playing poorly.	E2	Which agent did you trust more? <i>[trust]</i>
G3	The team is playing well.	E3	Which agent did you understand more? <i>[legibility]</i>
G4	This game went well.	E4	Which agent understood you better? <i>[legibility]</i>
G5	The agent and I have good teamwork. <i>[fluency]</i>	E5	Which agent was the better Hanabi player?
G6	The agent is contributing to the success of the team.	E6	Which agent was more reliable? <i>[predictability]</i>
G7	I understand the agent’s intentions. <i>[legibility]</i>	E7	Which agent had a better understanding of the game on average?
G8	The agent does not understand my intentions. <i>[legibility]</i>	E8	Which agent caused you to have a greater mental workload? <i>[mental workload]</i>
G9	I feel comfortable playing with this agent.		
G10	I do not trust the agent. <i>[trust]</i>		
G11	The agent is not a reliable teammate. <i>[predictability]</i>		
G12	I am not confident in my gameplay.		

Left: Statement order was randomized when presented to participants.

Right: Rating 1 is “strongly prefer first agent” and rating 7 is “strongly prefer second agent.”

Items associated with particular human factors constructs have the construct name in brackets (not shown to participants).

### 3.2 Statistical Analysis

We evaluated both objective and subjective metrics of human-AI teaming, with the overall hypothesis that the Other-Play RL agent (OP) is preferred over- and would outperform the rule-based SmartBot (SB) agent. As an objective measure, we consider the team score during each game. For subjective measures, we consider outcomes related to perceived performance, teamwork, legibility, comfort, trust, and workload as measured by the Likert surveys. Linear mixed-effects regression models were used for both objective and subjective variables, following the recommendation of Norman [32].

Due to space constraints, we do not present the results of the TLX here, but include one question on mental workload from the post-experiment survey (Table 2, E8).

Both objective and subjective omnibus tests for post-game results used second-order mixed-effects models with fixed factors of (1) AI agent, (2) self-rated Hanabi experience, (3) block (the first or second set of three games), and (4) game number (first, second, or third game within a block), and a random factor of participant number. AI agent and participant number were considered categorical variables. Post-experiment surveys were evaluated separately with one-sample  $t$ -tests, and a Holm–Bonferroni multiple comparison correction, since these tests were looking for differences from a neutral value on the Likert scale, and there were multiple hypotheses being tested. Additionally, correlations between self-rated experience, and post-game responses were checked against game score.

## 4 Results

We present the results of the teaming experiment. Our results indicate that despite *no significant difference in objective performance* between teaming with the two agents (Section 4.1), human sentiment results (Sections 4.2 and 4.3) show a *clear preference toward a rule-based agent over a learning-based agent*.

For context, we have colored most of the plots to show the self-rated Hanabi experience level of the participant with which the data are associated, and we note that our participant pool is skewed towards higher-self-rated-experience players. Self-rated Hanabi experience was based on ratings of the demographic survey statement “I am experienced in Hanabi” (see supplemental materials for demographic survey results).

### 4.1 Game Score

The mixed-effects regression *did not* support score differences due to agent type ( $t(158) = 0.374, p = 0.709$ ) or self-rated Hanabi experience ( $t(158) = 1.228, p = 0.221$ ) (Figure 1). This means that the data do not support OP under-performing relative to SB.

The dependent variable of game score only has a significant effect of block ( $b = 5.282, t(158) = 2.636, p = 0.009$ ), and a near-significant effect of game number ( $b = 2.957, t(158) = 1.887, p = 0.061$ ). The positive regression slope in both cases indicates that this is likely a learning effect over time; i.e. the human participant adapts his/her play over time.

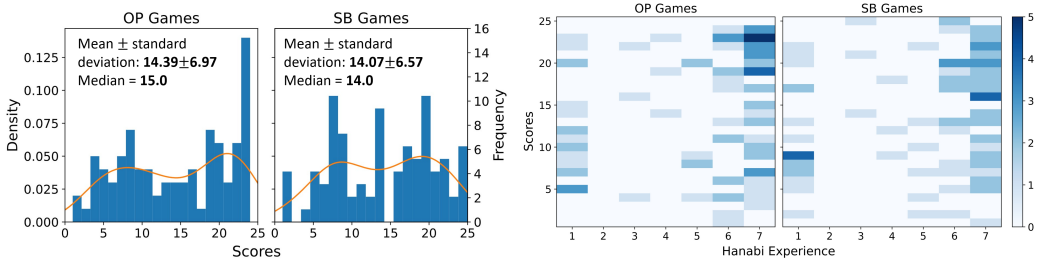


Figure 1: Game scores by agent type (left) and self-rated player experience (right). No significant differences were found when teaming with either agent, and correlation with self-rated experience was significant only for SmartBot games.

Since score is the primary performance metric of interest in Hanabi, and acts as the reward function for RL agents in this domain, we examined a few additional correlations with score. Note that since these are bivariate correlations, they are not as complete as the aforementioned statistical regression.

Self-rated Hanabi experience and score had a small, but significant positive correlation when pooling both agents’ games ( $p = 0.0053, r = 0.214$ ). Correlation remains significant for the subset of SB games ( $p = 0.0023, r = 0.247$ ), but is not significant for OP games ( $p = 0.0867, r = 0.1881$ ), indicating that for this bivariate analysis, experience only correlates with score for SB, not with OP.

A small, but significant positive correlation was found between subjective team performance (G3, G4) and score ( $p = 0.0003$ ,  $r = 0.275$  and  $p = 0.0002$ ,  $r = 0.280$ ). However, subjective ratings of self- and agent-performance (G1, G2) were not significantly correlated to score.

When participants were ordered by the absolute differences in their total scores with each agent, the ten subjects with the greatest differences (max/min point differences of 57 and 17), six of the ten had better performance with OP, but when considering only the top five subjects in terms of score difference (max/min differences of 57 and 28), only the participant with the greatest difference performed better with SB, and all four others performed better with OP. A full plot of scores by subject and agent type is in the supplemental materials.

## 4.2 Post-Game Sentiments

Significant effects in post-game subjective measures are summarized in Table 3. Although the statistical model considers factors of block and game, which were sometimes significant, we do not report these main effects or their interactions in the table, in order to focus on the independent variables of greater interest.

In all cases where the interaction of agent type and Hanabi experience was found to be significant, more experienced Hanabi players rated the Other-Play agent much more negatively than the SmartBot agent, while novices rated the two similarly (Figure 2). However, there was no significant difference between novice and expert ratings of the SmartBot agent. Cases where neither agent nor experience were significant factors are shown in Figure 3.

Table 3: Post-Game Sentiment Statistics (Statistically-Significant Factors Only)

Dependent Variable	Factor	$t$	$p$
I am playing well (G1)	experience	2.698	0.008
The agent is playing poorly (G2)	experience	4.044	< 0.0001
The team is playing well (G3)	agent:experience	-2.082	0.039
The agent and I have good teamwork (G5)	agent	2.578	0.011
	agent:experience	-3.021	0.003
I understand the agent’s intentions (G7)	agent:experience	-2.273	0.024
The agent does not understand my intentions (G8)	experience	2.098	0.037
	agent:experience	-3.166	0.002
I feel comfortable playing with this agent (G9)	agent	3.302	0.001
	agent:experience	-3.561	< 0.0001
The agent is not a reliable teammate (G11)	experience	3.159	0.002

Degrees of freedom for  $t$ -tests are 164 in all cases. *Agent* is agent type (SmartBot or Other-Play), and *experience* is self-rated Hanabi experience. *Agent:experience* is the interaction effect of agent and experience

To specifically examine the effect of self-rated player experience, we performed post-hoc pairwise comparisons in cases where experience was significant. Participants were pooled into “novice” ( $n = 10$ , self-rated experience of  $\leq 5$ ) and “expert” ( $n = 19$ , self-rated experience of  $> 5$ ) groups, and comparisons were made on ratings of each agent in the cases where an interaction effect was significant (G3, G5, G7, G8, G9). The groups did not rate SB significantly differently, but experts always rated OP worse than novices did. The difference in G3 “the team is playing well” ( $t(85) = 3.551$ ,  $p < 0.001$ , effect size  $d = 0.752$ ) was not as stark as the others ( $t(85) = 5.068$  to  $5.855$ ,  $p < 0.0001$ ,  $|d| > 1.0$ ), but all were still clearly significant, and all but one case had large effect sizes.

## 4.3 Post-Experiment Sentiments

Participants’ direct comparisons of the agents (Table 2) are shown in Figure 4. The statements were presented to participants as comparing the “first” and “second” agents (without reference to agent type, which was not disclosed to participants). For ease of interpretation, we matched the responses to the agent type, and flipped the scale as appropriate. All positively-framed questions (E1 to E8) showed a strong preference to SB over OP (corrected  $p < 0.05$ ), while mental workload (E8) was split.

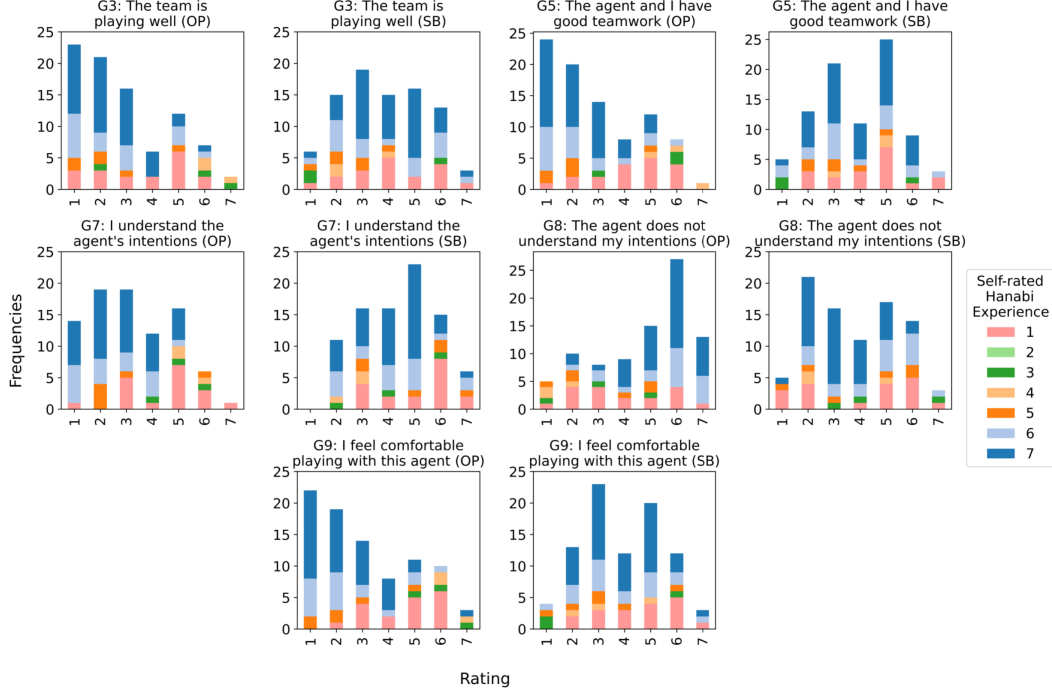


Figure 2: Participant rating for post-game questions by self-rated Hanabi experience (SB vs OP), where statistically significant differences related to factors of agent and/or experience were found (Table 3). The scale ranges from 1-7, corresponding to "strongly disagree" to "strongly agree".

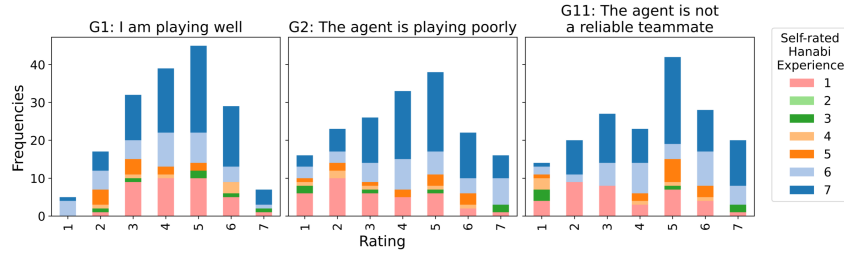


Figure 3: Participant rating for post-game questions by self-rated Hanabi experience where no statistically significant differences related to factors of agent and/or experience were found. The scale ranges from 1-7, corresponding to "strongly disagree" to "strongly agree".

We note there were three participants who obtained a score of 24 with OP, with one of these participants obtaining 24 twice (no player achieved a 25 with OP). All three replied at the extreme end of our Likert scale (i.e., 1 or 7) for question E1 with a preference for SB. Interestingly, their cumulative scores for OP and SB, respectively, were: Participant 6 (played with OP first, self-rated experience of 7): 57 and 28; Participant 19 (SB first, experience 7): 68 and 48; Participant 20 (OP first, experience 6): 70 and 35. The participant with the highest cumulative score (Participant 2, OP first, experience 7) had cumulative scores of 68 (OP) and 54 (SB) and preferred SB with a Likert rating of 6. All participant scores are provided in the Appendix (Figure 7).

Participant commentary indicated that low mental workload when working with OP was often caused by frustration with the agent and giving up on teaming with it. For example, after the OP bot failed to act on several hints from the human ("I gave him information and he just throws it away") a participant commented that "At this point, I don't know what the point is," regarding working with the agent.



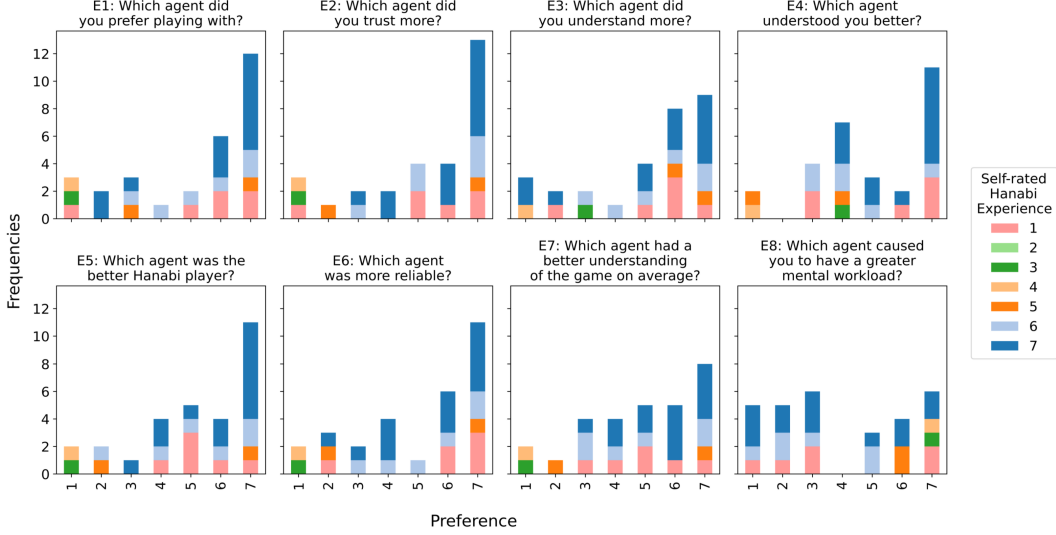


Figure 4: Post-experiment questions. All showed a statistically significant preference for the rule-based SmartBot ( $p < 0.05$ ), except the question on workload (E8). The scale ranges from 1 ("strongly prefer OP") to 7 ("strongly prefer SB").

## 5 Discussion

### 5.1 Other-Play Agent Performance

Other-Play (OP) training is designed to avoid the creation of “secretive” conventions that can result from self-play training. However, even though OP agents can pair well with previously-unseen teammates, there are still assumptions placed on the types of teammates OP agents will encounter. Notably, OP assumes that teammates are also optimized for zero-shot coordination [21]. In contrast, human Hanabi players typically do not learn with this assumption. Pre-game convention-setting and post-game reviews are common practices for human Hanabi players, making human learning more akin to *few-shot* coordination. Furthermore, Hu et al. note that, due to practical implementation details, OP does not always avoid secretive conventions. For example, some OP agents use color hints to indicate discarding of the 5th card [21]. Such conventions are not legible to a human teammate without extensive observation.

### 5.2 Implications for Human-AI Teaming

The results shown here have important implications for the development of learning-based, human-teaming agents. Regardless of the objective performance of AI systems, “teaming intelligence” is ultimately required for real-world deployment. The difference between rule-based and learning-based systems is particularly poignant here, where humans strongly favored a rule-based agent over an RL agent in many subjective metrics (and never significantly favored the RL agent) despite achieving objective scores that were not significantly different across the two agent types. Caution should be exercised when generalizing our results beyond Hanabi, though there is some indication of cross-domain consistency. The negative post-experiment sentiments expressed towards OP by some participants are similar to those expressed by participants during the DotA2 OpenAI Five games where RL players exhibited playstyles that were not immediately understood by human players, even though they were successful [34, 35].

An additional consideration is the user base of future learning-based systems. We note that between post-game and post-experiment surveys, nearly all statements/questions associated with human factors constructs (except workload) had differences related to the agent and/or the participant’s experience level. Experienced players rated the OP agent particularly negatively (Figure 2, Table 3), despite similarity in scores. As domain experts are likely to be the first users of AI technology in operational settings, their perception of AI is a key factor to its adoption. Part of the experts’ negativity toward OP may come from the way human experts make decisions in uncertain situations.

Klein’s recognition-primed decision-making model [25] indicates that experts typically rely on a base of knowledge to recognize “prototypical” situations and alleviate much of the mental burden of decision-making. Working with an unpredictable and illegible teammate breaks experts’ ability to rely on much of their knowledge base. This notion is also supported by the score/experience correlations (Figure 1) which were only significant for SB games.

This work indicates a need for RL methods that produce legible and predictable policies. Methods in this direction generally involve either building inherently transparent models, or procedures for post-hoc analysis. The former includes human-language-driven policy specification [41], or explanation learning through construction of causal diagrams [30]. The latter includes saliency maps for visual domains, and action preference explanation through reward decomposition [24].

### 5.3 Limitations and Future Work

The tight coupling of coordination and performance, and the codification of communication, make Hanabi a unique test bed. Games without these properties may elicit different responses from human-AI teams, so generalization of this experiment beyond Hanabi must be treated carefully.

Due to the manual and time-intensive experimental procedure—as well as the lack of readily available implementations for many pre-existing Hanabi agents such as Intentional [13] and Implicature AI [28]—we were limited in our pool of participants and agents. Future work could increase both by using an online, operator-free game-play and survey platform.

While we made an effort to recruit participant with a diverse level of experience, the participant pool was still skewed towards those with higher self-rating (though it is likely less biased than the pool from [28], who recruited exclusively from online gaming communities). Since Hanabi performance is heavily dependent on the *team*, it is difficult to obtain an objective single-player skill rating. Still, the relatively tight clustering of many (self-rated) experts’ responses to OP in particular is notable.

Game outcomes and the feasibility of perfect games (i.e. score 25) are dependent on the starting deck. We did not control for deck configuration to avoid the issue encountered in Hu et al. [21], who explored a relatively narrow portion of the game space due to using only two deck seeds.

Interesting extensions to this Hanabi experiment include varying participants’ knowledge of their teammates, increasing the number of games played, and adding additional metrics of teaming, such as positive listening and positive signalling [22, 29]. Modifications to the agents may include adding logic filters to prevent learning-based agents from making “obvious” mistakes, or modifying the reward function to more heavily penalize “trust-breaking” moves. Beyond the domain of Hanabi, other candidates for human-AI teaming experiments include StarCraft (which to date has only shown adversarial RL agent performance with humans [44]), Overcooked [9], and mixed cooperative-competitive environments like Bridge [49] and Diplomacy [16].

## 6 Conclusion

This study measured the game performance and human reactions in mixed human-AI teams in the cooperative card game Hanabi, comparing outcomes when humans were paired with a rule-based agent and when paired with a reinforcement-learning-based “Other-Play” agent designed to maximize zero-shot coordination. Despite achieving similar scores between these teams, human players strongly preferred working with the rule-based agent, and view the Other-Play agent quite negatively, citing their bilateral understanding, trust, comfort, and perceived performance as reasons. The ability of AI agents to team with humans is an important determinant of whether they can be deployed in many real-world situations. These results show that even state-of-the-art RL agents largely fail to convince humans that they are good teammates, and suggest that human perception of AI needs greater consideration in future AI design and development if it is to achieve real-world adoption.

## Acknowledgments and Disclosure of Funding

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited. This material is based upon work supported by the Under Secretary of Defense for Research and Engineering under Air Force Contract No. FA8702-15-D-0001. Any opinions, findings, conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the Under Secretary of Defense for Research and Engineering. © 2021 Massachusetts Institute of Technology. Delivered to the U.S. Government with Unlimited Rights, as defined in DFARS Part 252.227-7013 or 7014 (Feb 2014). Notwithstanding any copyright notice, U.S. Government rights in this work are defined by DFARS 252.227-7013 or DFARS 252.227-7014 as detailed above. Use of this work other than as specifically authorized by the U.S. Government may violate any copyrights that exist in this work.

The authors would like to thank our experiment participants for their time. We thank Hengyuan Hu for providing the Other-Play model. We thank Peter Morales for his guidance during the early phase of this work.

## References

- [1] Trapit Bansal, Jakub Pachocki, Szymon Sidor, Ilya Sutskever, and Igor Mordatch. Emergent complexity via multi-agent competition. *arXiv preprint arXiv:1710.03748*, 2017.
- [2] Nolan Bard, Jakob N Foerster, Sarath Chandar, Neil Burch, Marc Lanctot, H Francis Song, Emilio Parisotto, Vincent Dumoulin, Subhodeep Moitra, Edward Hughes, et al. The hanabi challenge: A new frontier for ai research. *Artificial Intelligence*, 280:103216, 2020.
- [3] Marc G Bellemare, Yavar Naddaf, Joel Veness, and Michael Bowling. The arcade learning environment: An evaluation platform for general agents. *Journal of Artificial Intelligence Research*, 47:253–279, 2013.
- [4] Christopher Berner, Greg Brockman, Brooke Chan, Vicki Cheung, Przemysław Dębiak, Christy Dennison, David Farhi, Quirin Fischer, Shariq Hashme, Chris Hesse, et al. Dota 2 with large scale deep reinforcement learning. *arXiv preprint arXiv:1912.06680*, 2019.
- [5] Bruno Bouzy. Playing hanabi near-optimally. In *Advances in Computer Games*, pages 51–62. Springer, 2017.
- [6] Murray Campbell, A Joseph Hoane Jr, and Feng-hsiung Hsu. Deep blue. *Artificial intelligence*, 134(1-2):57–83, 2002.
- [7] Rodrigo Canaan, Haotian Shen, Ruben Torrado, Julian Togelius, Andy Nealen, and Stefan Menzel. Evolving agents for the hanabi 2018 cig competition. In *2018 IEEE Conference on Computational Intelligence and Games (CIG)*, pages 1–8. IEEE, 2018.
- [8] Rodrigo Canaan, Xianbo Gao, Julian Togelius, Andy Nealen, and Stefan Menzel. Generating and adapting to diverse ad-hoc cooperation agents in hanabi. *arXiv preprint arXiv:2004.13710*, 2020.
- [9] Micah Carroll, Rohin Shah, Mark K Ho, Thomas L Griffiths, Sanjit A Seshia, Pieter Abbeel, and Anca Dragan. On the utility of learning about humans for human-ai coordination. *arXiv preprint arXiv:1910.05789*, 2019.
- [10] Jacob Cohen. *Statistical power analysis for the behavioral sciences*. Academic Press, New York, 1977. ISBN 0-12-179060-6.
- [11] DARPA. AlphaDogfight Trials Foreshadow Future of Human-Machine Symbiosis. <https://www.darpa.mil/news-events/2020-08-26>, 2020.
- [12] Anca D Dragan, Kenton CT Lee, and Siddhartha S Srinivasa. Legibility and predictability of robot motion. In *2013 8th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 301–308. IEEE, 2013.

- [13] Markus Eger, Chris Martens, and Marcela Alfaro Córdoba. An intentional ai for hanabi. In *2017 IEEE Conference on Computational Intelligence and Games (CIG)*, pages 68–75. IEEE, 2017.
- [14] Jakob Foerster, Francis Song, Edward Hughes, Neil Burch, Iain Dunning, Shimon Whiteson, Matthew Botvinick, and Michael Bowling. Bayesian action decoder for deep multi-agent reinforcement learning. In *International Conference on Machine Learning*, pages 1942–1951. PMLR, 2019.
- [15] James Goodman. Re-determinizing information set monte carlo tree search in hanabi. *arXiv preprint arXiv:1902.06075*, 2019.
- [16] Jonathan Gray, Adam Lerer, Anton Bakhtin, and Noam Brown. Human-level performance in no-press diplomacy via equilibrium search. *arXiv preprint arXiv:2010.02923*, 2020.
- [17] Herbert P Grice. Logic and conversation. In *Speech acts*, pages 41–58. Brill, 1975.
- [18] Sandra G Hart and Lowell E Staveland. Development of nasa-tlx (task load index): Results of empirical and theoretical research. In *Advances in psychology*, volume 52, pages 139–183. Elsevier, 1988.
- [19] Guy Hoffman. Evaluating fluency in human–robot collaboration. *IEEE Transactions on Human-Machine Systems*, 49(3):209–218, 2019.
- [20] Hengyuan Hu and Jakob N Foerster. Simplified action decoder for deep multi-agent reinforcement learning. *arXiv preprint arXiv:1912.02288*, 2019.
- [21] Hengyuan Hu, Adam Lerer, Alex Peysakhovich, and Jakob Foerster. “other-play” for zero-shot coordination. In *International Conference on Machine Learning*, pages 4399–4410. PMLR, 2020.
- [22] Natasha Jaques, Angeliki Lazaridou, Edward Hughes, Caglar Gulcehre, Pedro Ortega, DJ Strouse, Joel Z Leibo, and Nando De Freitas. Social influence as intrinsic motivation for multi-agent deep reinforcement learning. In *International Conference on Machine Learning*, pages 3040–3049. PMLR, 2019.
- [23] Matthew Johnson and Alonso Vera. No ai is an island: the case for teaming intelligence. *AI Magazine*, 40(1):16–28, 2019.
- [24] Zoe Juozapaitis, Anurag Koul, Alan Fern, M. Erwig, and Finale Doshi-Velez. Explainable reinforcement learning via reward decomposition. 2019.
- [25] Gary A Klein. A recognition-primed decision (rpd) model of rapid decision making. *Decision making in action: Models and methods*, 5(4):138–147, 1993.
- [26] John D Lee and Katrina A See. Trust in automation: Designing for appropriate reliance. *Human factors*, 46(1):50–80, 2004.
- [27] Adam Lerer, Hengyuan Hu, Jakob Foerster, and Noam Brown. Improving policies via search in cooperative partially observable games. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 7187–7194, 2020.
- [28] Claire Liang, Julia Proft, Erik Andersen, and Ross A Knepper. Implicit communication of actionable information in human-ai teams. In *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems*, pages 1–13, 2019.
- [29] Ryan Lowe, Jakob Foerster, Y-Lan Boureau, Joelle Pineau, and Yann Dauphin. On the pitfalls of measuring emergent communication. *arXiv preprint arXiv:1903.05168*, 2019.
- [30] Prashan Madumal, T. Miller, L. Sonenberg, and F. Vetere. Explainable reinforcement learning through a causal lens. In *AAAI*, 2020.
- [31] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Alex Graves, Ioannis Antonoglou, Daan Wierstra, and Martin Riedmiller. Playing atari with deep reinforcement learning. *arXiv preprint arXiv:1312.5602*, 2013.

- [32] Geoff Norman. Likert scales, levels of measurement and the “laws” of statistics. *Advances in health sciences education*, 15(5):625–632, 2010.
- [33] Arthur O’Dwyer. quuxplusone/hanabi: framework for writing bots that play hanabi. <https://github.com/Quuxplusone/Hanabi/>, 2019.
- [34] OpenAI. Openai five defeats dota 2 world champions, Apr 2019. URL <https://openai.com/blog/openai-five-defeats-dota-2-world-champions/>.
- [35] OpenAI. Openai five, Dec 2019. URL <https://openai.com/five/>.
- [36] Hirotaka Osawa. Solving hanabi: Estimating hands by opponent’s actions in cooperative game with incomplete information. In *Workshops at the Twenty-Ninth AAAI Conference on Artificial Intelligence*, 2015.
- [37] Raja Parasuraman and Victor Riley. Humans and automation: Use, misuse, disuse, abuse. *Human factors*, 39(2):230–253, 1997.
- [38] Aron Sarmasi, Timothy Zhang, Chu-Hung Cheng, Huyen Pham, Xuanchen Zhou, Duong Nguyen, Soumil Shekdar, and Joshua McCoy. Hoad: The hanabi open agent dataset. In *Proceedings of the 20th International Conference on Autonomous Agents and MultiAgent Systems*, pages 1646–1648, 2021.
- [39] David Silver, Thomas Hubert, Julian Schrittwieser, Ioannis Antonoglou, Matthew Lai, Arthur Guez, Marc Lanctot, Laurent Sifre, Dhharshan Kumaran, Thore Graepel, et al. A general reinforcement learning algorithm that masters chess, shogi, and go through self-play. *Science*, 362(6419):1140–1144, 2018.
- [40] P. Stone, G. Kaminka, S. Kraus, and J. Rosenschein. Ad hoc autonomous agent teams: Collaboration without pre-coordination. In *AAAI*, 2010.
- [41] Pradyumna Tambwekar, Andrew Silva, Nakul Gopalan, and Matthew Gombolay. Interpretable policy specification and synthesis through natural language and rl. *arXiv preprint arXiv:2101.07140*, 2021.
- [42] Mark JH van den Bergh, Anne Hommelberg, Walter A Kusters, and Flora M Spieksma. Aspects of the cooperative card game hanabi. In *Benelux Conference on Artificial Intelligence*, pages 93–105. Springer, 2016.
- [43] Oriol Vinyals, Timo Ewalds, Sergey Bartunov, Petko Georgiev, Alexander Sasha Vezhnevets, Michelle Yeo, Alireza Makhzani, Heinrich Küttler, John Agapiou, Julian Schrittwieser, et al. Starcraft ii: A new challenge for reinforcement learning. *arXiv preprint arXiv:1708.04782*, 2017.
- [44] Oriol Vinyals, Igor Babuschkin, Wojciech M Czarnecki, Michaël Mathieu, Andrew Dudzik, Junyoung Chung, David H Choi, Richard Powell, Timo Ewalds, Petko Georgiev, et al. Grandmaster level in starcraft ii using multi-agent reinforcement learning. *Nature*, 575(7782):350–354, 2019.
- [45] Joseph Walton-Rivers, Piers R Williams, Richard Bartle, Diego Perez-Liebana, and Simon M Lucas. Evaluating and modelling hanabi-playing agents. In *2017 IEEE Congress on Evolutionary Computation (CEC)*, pages 1382–1389. IEEE, 2017.
- [46] Joseph Walton-Rivers, Piers R Williams, and Richard Bartle. The 2018 hanabi competition. In *2019 IEEE Conference on Games (CoG)*, pages 1–8. IEEE, 2019.
- [47] D. Wu. lightvector/fireflower: a rewrite of hanabi-bot in scala. <https://github.com/lightvector/fireflower>, 2018.
- [48] J. Wu. wuthefwasthat/hanabi.rs: Hanabi simulation in rust. <https://github.com/WuTheFWasThat/hanabi.rs>, 2018.
- [49] Chih-Kuan Yeh, Cheng-Yu Hsieh, and Hsuan-Tien Lin. Automatic bridge bidding using deep reinforcement learning. *IEEE Transactions on Games*, 10:365–377, 2018.

## Checklist

1. For all authors...
  - (a) Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope? [\[Yes\]](#)
  - (b) Did you describe the limitations of your work? [\[Yes\]](#) See Section 5.3
  - (c) Did you discuss any potential negative societal impacts of your work? [\[Yes\]](#) See Section 5.2
  - (d) Have you read the ethics review guidelines and ensured that your paper conforms to them? [\[Yes\]](#)
2. If you are including theoretical results...
  - (a) Did you state the full set of assumptions of all theoretical results? [\[N/A\]](#)
  - (b) Did you include complete proofs of all theoretical results? [\[N/A\]](#)
3. If you ran experiments...
  - (a) Did you include the code, data, and instructions needed to reproduce the main experimental results (either in the supplemental material or as a URL)? [\[Yes\]](#) See supplemental materials.
  - (b) Did you specify all the training details (e.g., data splits, hyperparameters, how they were chosen)? [\[N/A\]](#) We did not train new models.
  - (c) Did you report error bars (e.g., with respect to the random seed after running experiments multiple times)? [\[Yes\]](#) We reported dispersion measures and test statistics where appropriate. All histograms represent exact counts of the data.
  - (d) Did you include the total amount of compute and the type of resources used (e.g., type of GPUs, internal cluster, or cloud provider)? [\[No\]](#) Compute was not significant since we were not training new models.
4. If you are using existing assets (e.g., code, data, models) or curating/releasing new assets...
  - (a) If your work uses existing assets, did you cite the creators? [\[Yes\]](#) See Section 3.1
  - (b) Did you mention the license of the assets? [\[Yes\]](#) See Section 3.1
  - (c) Did you include any new assets either in the supplemental material or as a URL? [\[N/A\]](#)
  - (d) Did you discuss whether and how consent was obtained from people whose data you're using/curating? [\[Yes\]](#) See Section 3.1
  - (e) Did you discuss whether the data you are using/curating contains personally identifiable information or offensive content? [\[Yes\]](#) See Section 3.1. No PII was collected, and no offensive content was used/shown.
5. If you used crowdsourcing or conducted research with human subjects...
  - (a) Did you include the full text of instructions given to participants and screenshots, if applicable? [\[Yes\]](#) See supplemental materials.
  - (b) Did you describe any potential participant risks, with links to Institutional Review Board (IRB) approvals, if applicable? [\[Yes\]](#) See Section 3.1. No significant participant risks were expected, no adverse events occurred during the course of the experiment. IRB approval link and institution name removed for anonymous review stage; will be added back for later stage.
  - (c) Did you include the estimated hourly wage paid to participants and the total amount spent on participant compensation? [\[Yes\]](#) See Section 3.1

## Supplemental Materials

For data transparency and completeness, we detail our participant recruitment process, participant instructions, relevant aggregate data (demographics, scores, surveys), as well as the results from statistical tests that we conducted, but were not part of the main paper due to space constraints. We do not include the results of the NASA Task Load Index survey here because those were not analyzed for this study.

### 6.1 Participant Recruitment

Participants for this experiment were recruited via convenience and snowball sampling, with initial emails to MIT research groups and social mailing lists, as well as some for other Cambridge-areas groups. We note that 6 out of 29 participants belonged to the *hanab.live* Hanabi gaming community. Other than those, participants were novices to Hanabi, did not play consistently, or came from several distinct and unrelated Hanabi groups.

### 6.2 Introductory Slides and Game Interface


These are the slides shown to experiment participants at the very beginning of the session. All subjects were shown the same slides.

---

## Hanabi for Human-AI Teaming



### Experiment Timeline

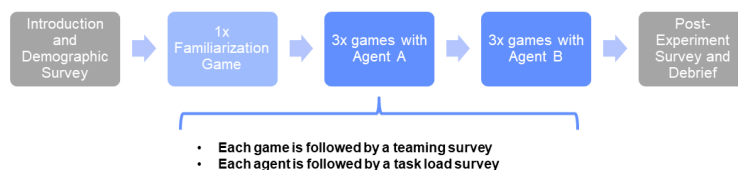


You should stop the familiarization game when you feel comfortable with the interface.

You are free to stop the experiment and withdraw at any time.



## Hanabi Rules and Game Interface

You can see your teammate's cards, but not your own  
You can see the hints you have given your teammate, and the hints they have given you

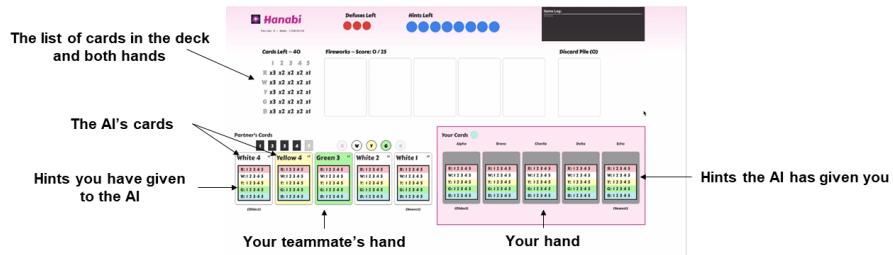


Human-AI Training 3  
HCC 10/30/2020

LINCOLN LABORATORY  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY



## Hanabi Rules and Game Interface

On your turn you can....

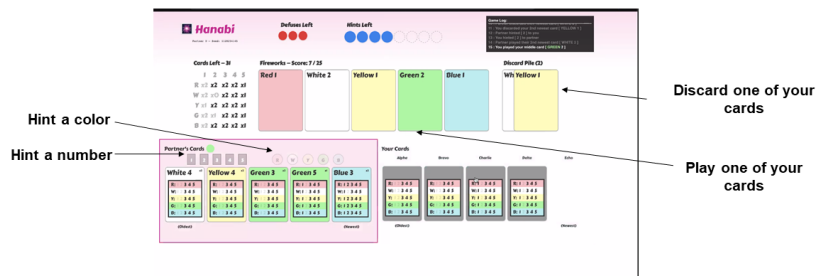


Human-AI Training 4  
HCC 10/30/2020

LINCOLN LABORATORY  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY



## Hanabi Rules and Game Interface

The goal is to play 5 cards of each color in ascending order  
i.e. Red 1, then Red 2, through Red 5

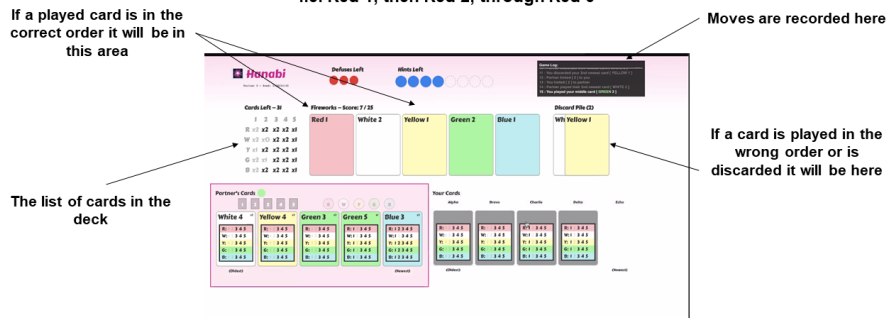

Human-AI Training 5  
HCC 10/30/2020

LINCOLN LABORATORY  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY





## Hanabi Rules and Game Interface

If a played card is in the wrong order, the defuses left will decrement

If a card is discarded, the hint tokens will increment  
If a hint is given, the hint tokens will decrement



If there are 8 hint tokens, you must play a card or hint, you can not discard  
If there are no hint tokens, you must play a card or discard

Human-AI Training 5  
HCC 10/30/2020


LINCOLN LABORATORY  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY



## Hanabi Rules and Game Interface

Cards that have been played are greyed out

Cards that can still be played are black, and the number indicates how many are not in the discard pile

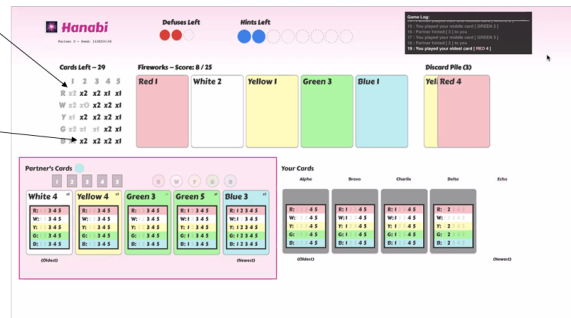

Human-AI Training 7  
HCC 10/30/2020

LINCOLN LABORATORY  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY




## Hanabi Rules and Game Interface

The game ends under one of three conditions

There are no defuses left

After the last card is drawn, each player has one more turn

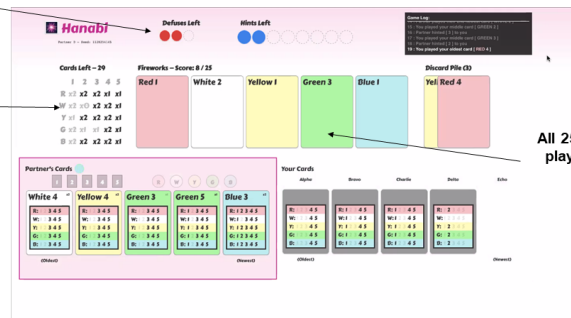

All 25 cards have been played in the correct order

Human-AI Training 8  
HCC 10/30/2020

LINCOLN LABORATORY  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

### 6.3 Demographic Survey

Questions 1-4 are two pairs of multiple choice and free response questions. Questions 5-10 are Likert scale statements with a scale from 1 (strongly disagree) to 7 (strongly agree). Questions 9 and 10 also include a free response ("Explain") if the participant indicates agreement with the statement.

Table 4: Demographic Survey Prompt and Response Choices

	Prompt	Response Choices
D1	How often do you play card or board games?	[Never, <1 hour/week, 1-3 hours/week, >3 hours/week]
D2	Which games or types of games do you play?	free response
D3	How often do you play video games?	[Never, <1 hour/week, 1-3 hours/week, >3 hours/week]
D4	Which game or types of video games do you play?	free response
D5	I am experienced in cooperative card games.	Likert Scale
D6	I am experienced in cooperative board games.	Likert Scale
D7	I am experienced in cooperative video games.	Likert Scale
D8	I am experienced in Hanabi.	Likert Scale
D9	I am experienced in interacting with artificial intelligence agents (including voice assistants, game AIs, etc).	Likert Scale, free response ( <i>optional</i> )
D10	I am experienced in developing artificial intelligence agents.	Likert Scale, free response ( <i>optional</i> )

## 6.4 Demographic Survey Responses

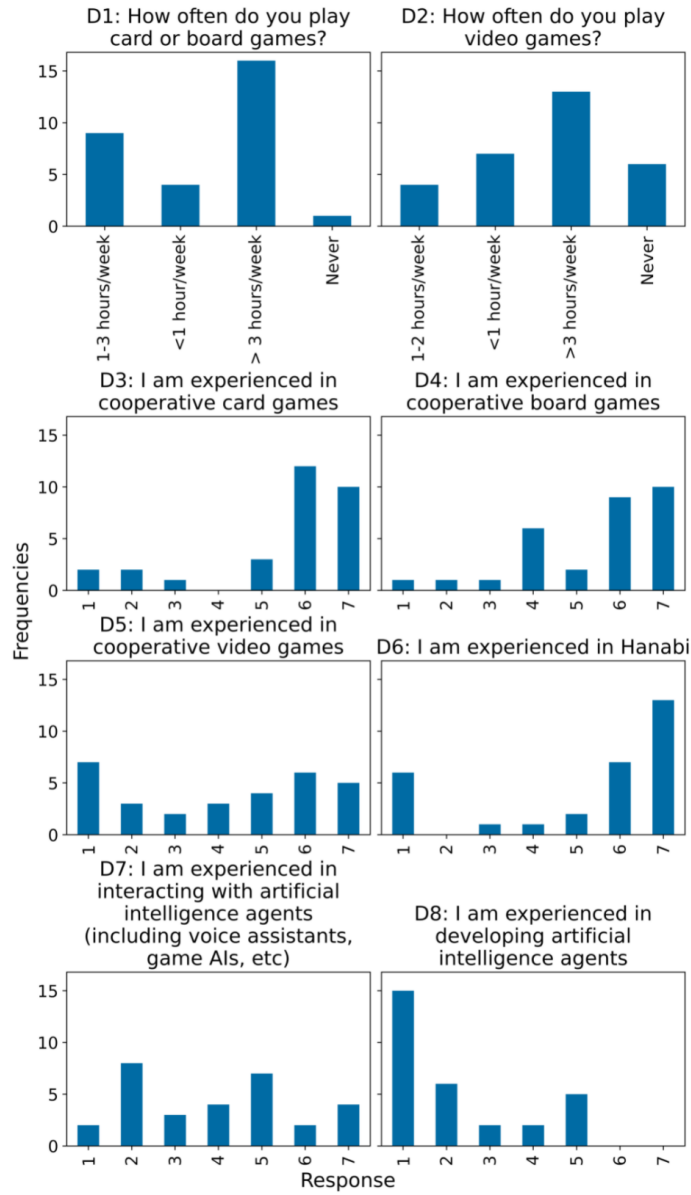


Figure 5: Histograms of all numerical and categorical demographic survey responses.

## 6.5 Post-Game Likert Scale Question Responses

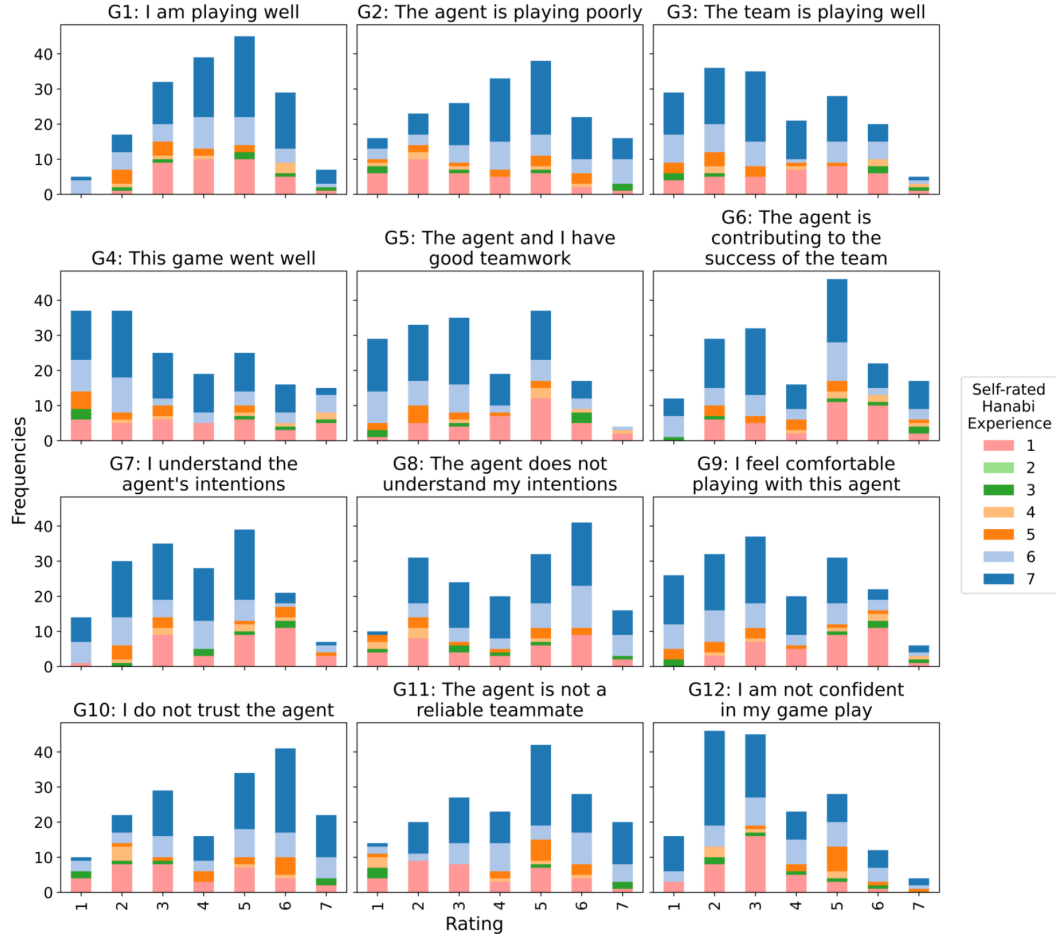


Figure 6: Participant rating for all post-game questions by self-rated Hanabi experience where statistically significant differences related to factors of agent and/or experience were presented in Section 4.2 . The scale ranges from 1-7, corresponding to "strongly disagree" to "strongly agree".

## 6.6 Participant Scores

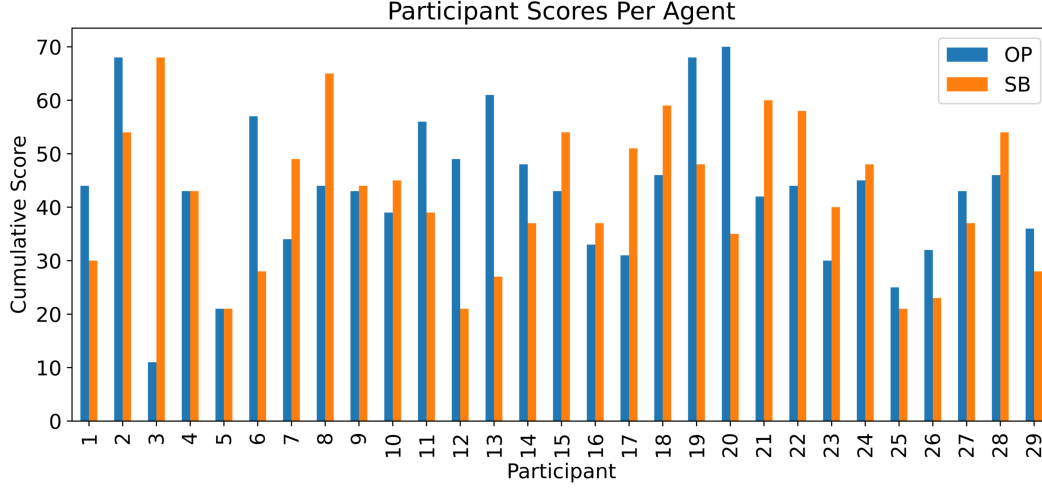


Figure 7: Cumulative game score for each participant across their six games, split by their three games with each agent type. The maximum achievable cumulative score per agent type is 75, and 150 for both. Participant 2 achieved the highest cumulative score of 122.

## 6.7 Post-Game Survey Statistics

Objective and subjective data were fit to second-order mixed-effects models with fixed factors of (1) AI agent, (2) self-rated Hanabi experience, (3) block (the first or second set of three games), and (4) game number (first, second, or third game within a block), and a random factor of participant number. AI agent and participant number were considered categorical variables.

*Agent* refers to the AI agent type (OP or SB).

*Experience* refers to the self-reported Hanabi experience level (question D8).

*Lower* and *Upper* are the values for the 95% confidence intervals.

Table 5: Model fit to response variable of game score

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	1.6084	4.2962	0.37438	158	0.70863	-6.877	10.094
Block	5.282	2.0039	2.6358	158	<b>0.0092295</b>	1.3241	9.2398
Game	2.9572	1.567	1.8872	158	0.060961	-0.13765	6.0521
Experience	0.7736	0.62989	1.2281	158	0.22122	-0.4705	2.0177
Agent : Block	-3.6394	1.9493	-1.867	158	0.063748	-7.4893	0.21061
Agent : Game	1.1848	1.1962	0.99047	158	0.32346	-1.1778	3.5473
Block : Game	-0.90997	0.9963	-0.91335	158	0.36245	-2.8778	1.0578
Agent : Experience	-0.20234	0.41707	-0.48515	158	0.62824	-1.0261	0.62141
Block : Experience	0.15829	0.36415	0.43468	158	0.66439	-0.56094	0.87751
Game : Experience	-0.13373	0.23366	-0.57233	158	0.56791	-0.59524	0.32777

Table 6: Model fit to response variable of “I am playing well” (G1)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	1.9694	1.0546	1.8674	164	0.063637	-0.11304	4.0518
Block	1.9168	0.39977	4.7948	164	<b>3.6319e-06</b>	1.1274	2.7062
Game	1.2204	0.30518	3.9989	164	<b>9.6048e-05</b>	0.6178	1.823
Experience	0.32729	0.12129	2.6985	164	<b>0.0076942</b>	0.087808	0.56678
Agent : Block	-0.80197	0.62076	-1.2919	164	0.19821	-2.0277	0.42375
Agent : Game	-0.37579	0.20773	-1.809	164	0.072285	-0.78597	0.034391
Block : Game	-0.39684	0.18093	-2.1934	164	<b>0.029688</b>	-0.75409	-0.039593
Agent : Experience	-0.097033	0.073054	-1.3282	164	0.18595	-0.24128	0.047215
Block : Experience	-0.12775	0.065443	-1.952	164	0.052636	-0.25696	0.0014721
Game : Experience	-0.033548	0.041611	-0.80624	164	0.42127	-0.11571	0.048614

Table 7: Model fit to response variable of “The agent is playing poorly” (G2)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	-0.33608	1.0745	-0.31277	164	0.75485	-2.4577	1.7856
Block	0.83106	0.50514	1.6452	164	0.10184	-0.16635	1.8285
Game	1.1238	0.3918	2.8684	164	<b>0.0046687</b>	0.35021	1.8975
Experience	0.62968	0.15572	4.0436	164	<b>8.0826e-05</b>	0.3222	0.93717
Agent : Block	0.45465	0.48308	0.94115	164	0.34801	-0.49921	1.4085
Agent : Game	-0.11362	0.29781	-0.38151	164	0.70332	-0.70165	0.47441
Block : Game	-0.29889	0.24918	-1.1995	164	0.23207	-0.7909	0.19313
Agent : Experience	0.16086	0.10481	1.5348	164	0.12677	-0.046092	0.36782
Block : Experience	-0.16477	0.091074	-1.8092	164	0.072251	-0.3446	0.015057
Game : Experience	-0.10097	0.058624	-1.7223	164	0.086904	-0.21672	0.014788

Table 8: Model fit to response variable of “The team is playing well” (G3)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	1.3927	0.98213	1.418	164	0.15807	-0.54654	3.3319
Block	2.4468	0.46171	5.2995	164	<b>3.6985e-07</b>	1.5352	3.3585
Game	1.065	0.35812	2.9739	164	<b>0.0033848</b>	0.35787	1.7721
Experience	-0.032564	0.14234	-0.22878	164	0.81933	-0.31361	0.24848
Agent : Block	-0.58469	0.44155	-1.3242	164	0.18729	-1.4565	0.28716
Agent : Game	-0.22945	0.2722	-0.84293	164	0.4005	-0.76692	0.30803
Block : Game	-0.56663	0.22776	-2.4879	164	<b>0.01385</b>	-1.0163	-0.11692
Agent : Experience	-0.19952	0.095802	-2.0826	164	<b>0.03884</b>	-0.38868	-0.010353
Block : Experience	-0.076342	0.083244	-0.91709	164	0.36044	-0.24071	0.088027
Game : Experience	0.051342	0.053584	0.95816	164	0.33939	-0.054461	0.15715

Table 9: Model fit to response variable of “The game went well” (G4)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	0.76539	1.1659	0.65651	164	0.51242	-1.5366	3.0674
Block	2.0535	0.54808	3.7468	164	<b>0.00024779</b>	0.97132	3.1357
Game	1.8013	0.42511	4.2372	164	<b>3.7659e-05</b>	0.96187	2.6407
Experience	-0.16132	0.16896	-0.95475	164	0.34111	-0.49494	0.17231
Agent : Block	-0.34362	0.52415	-0.65558	164	0.51301	-1.3786	0.69133
Agent : Game	-0.076741	0.32312	-0.2375	164	0.81257	-0.71476	0.56128
Block : Game	-0.90768	0.27036	-3.3573	164	<b>0.00097855</b>	-1.4415	-0.37384
Agent : Experience	-0.17102	0.11372	-1.5038	164	0.13455	-0.39557	0.053529
Block : Experience	0.086306	0.098817	0.8734	164	0.38372	-0.10881	0.28142
Game : Experience	-0.00048774	0.063608	-0.0076679	164	0.99389	-0.12608	0.12511

Table 10: Model fit to response variable of “The agent and I have good teamwork” (G5)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	2.3867	0.92567	2.5783	164	<b>0.010807</b>	0.55891	4.2145
Block	2.5072	0.43517	5.7614	164	<b>4.0236e-08</b>	1.6479	3.3664
Game	1.2232	0.33753	3.6238	164	<b>0.00038684</b>	0.55669	1.8896
Experience	-0.026039	0.13415	-0.1941	164	0.84634	-0.29093	0.23885
Agent : Block	-0.84574	0.41617	-2.0322	164	<b>0.043746</b>	-1.6675	-0.024003
Agent : Game	-0.36521	0.25656	-1.4235	164	0.15649	-0.87179	0.14137
Block : Game	-0.59262	0.21467	-2.7607	164	<b>0.0064254</b>	-1.0165	-0.16876
Agent : Experience	-0.27275	0.090295	-3.0207	164	<b>0.0029261</b>	-0.45105	-0.094464
Block : Experience	-0.080736	0.078459	-1.029	164	0.30499	-0.23566	0.074185
Game : Experience	0.024633	0.050504	0.48775	164	0.62638	-0.075089	0.12435

Table 11: Model fit to response variable of “The agent is contributing to the success of the team” (G6)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	1.782	1.191	1.4963	164	0.13651	-0.56962	4.1336
Block	2.441	0.48735	5.0086	164	<b>1.4056e-06</b>	1.4787	3.4032
Game	1.4781	0.37685	3.9222	164	<b>0.00012878</b>	0.73397	2.2222
Experience	0.1814	0.14897	1.2177	164	0.22509	-0.11275	0.47556
Agent : Block	-0.74292	0.65379	-1.1363	164	0.25747	-2.0338	0.548
Agent : Game	-0.23663	0.2688	-0.88034	164	0.37997	-0.76739	0.29412
Block : Game	-0.62886	0.23001	-2.7341	164	<b>0.0069428</b>	-1.083	-0.1747
Agent : Experience	-0.17078	0.094562	-1.806	164	0.072747	-0.3575	0.015934
Block : Experience	-0.070518	0.083572	-0.8438	164	0.40001	-0.23553	0.094498
Game : Experience	-0.065545	0.053426	-1.2268	164	0.22164	-0.17104	0.039946

Table 12: Model fit to response variable of “I understand the agent’s intentions” (G7)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	1.4938	0.86912	1.7188	164	0.087537	-0.22226	3.2099
Block	2.6995	0.40858	6.6069	164	<b>5.2348e-10</b>	1.8927	3.5062
Game	1.6848	0.31691	5.3164	164	<b>3.4175e-07</b>	1.0591	2.3106
Experience	-0.011884	0.12596	-0.09435	164	0.92495	-0.26059	0.23682
Agent : Block	-0.55231	0.39074	-1.4135	164	0.1594	-1.3238	0.21922
Agent : Game	-0.42332	0.24088	-1.7574	164	0.08072	-0.89895	0.05231
Block : Game	-0.78483	0.20155	-3.8939	164	<b>0.00014328</b>	-1.1828	-0.38686
Agent : Experience	-0.19273	0.084778	-2.2734	164	<b>0.024301</b>	-0.36013	-0.025335
Block : Experience	-0.10565	0.073666	-1.4341	164	0.15343	-0.2511	0.039808
Game : Experience	0.019661	0.047418	0.41464	164	0.67895	-0.073968	0.11329

Table 13: Model fit to response variable of “The agent does not understand my intentions” (G8)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	1.1503	1.2751	0.90212	164	0.36831	-1.3675	3.6682
Block	1.3412	0.51911	2.5838	164	<b>0.010645</b>	0.31625	2.3662
Game	1.3544	0.40121	3.3757	164	<b>0.00091923</b>	0.56216	2.1466
Experience	0.3328	0.15861	2.0982	164	<b>0.037422</b>	0.019612	0.64598
Agent : Block	-0.84719	0.70374	-1.2039	164	0.23038	-2.2367	0.54236
Agent : Game	-0.23748	0.28536	-0.83219	164	0.40651	-0.80093	0.32598
Block : Game	-0.43934	0.24444	-1.7974	164	0.074115	-0.92199	0.043303
Agent : Experience	0.3178	0.10039	3.1657	164	<b>0.0018446</b>	0.11958	0.51602
Block : Experience	-0.048055	0.088791	-0.54122	164	0.58909	-0.22338	0.12727
Game : Experience	-0.10706	0.056744	-1.8867	164	0.060972	-0.2191	0.0049858

Table 14: Model fit to response variable of “I feel comfortable playing with this agent” (G9)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	3.143	0.95194	3.3017	164	<b>0.0011796</b>	1.2633	5.0226
Block	2.5133	0.44752	5.616	164	<b>8.1919e-08</b>	1.6296	3.3969
Game	1.0899	0.34711	3.1398	164	<b>0.0020055</b>	0.40448	1.7752
Experience	-0.023996	0.13796	-0.17393	164	0.86213	-0.29641	0.24841
Agent : Block	-1.0492	0.42798	-2.4516	164	<b>0.015273</b>	-1.8943	-0.20415
Agent : Game	-0.34819	0.26384	-1.3197	164	0.18877	-0.86914	0.17277
Block : Game	-0.49785	0.22076	-2.2552	164	<b>0.025444</b>	-0.93375	-0.061956
Agent : Experience	-0.33071	0.092857	-3.5614	164	<b>0.00048298</b>	-0.51406	-0.14736
Block : Experience	-0.081598	0.080686	-1.0113	164	0.31336	-0.24092	0.077719
Game : Experience	0.022646	0.051937	0.43602	164	0.66339	-0.079906	0.1252

Table 15: Model fit to response variable of “I do not trust the agent” (G10)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	-0.80019	1.0903	-0.73389	164	0.46406	-2.9531	1.3527
Block	1.0878	0.51258	2.1221	164	<b>0.03533</b>	0.075645	2.0999
Game	1.1899	0.39758	2.9929	164	<b>0.0031911</b>	0.40487	1.9749
Experience	0.6055	0.15802	3.8318	164	<b>0.00018089</b>	0.29349	0.91752
Agent : Block	0.83804	0.4902	1.7096	164	0.089233	-0.12987	1.806
Agent : Game	-0.20681	0.3022	-0.68436	164	0.49472	-0.80351	0.38989
Block : Game	-0.37637	0.25285	-1.4885	164	0.13854	-0.87564	0.1229
Agent : Experience	0.203	0.10636	1.9086	164	0.058055	-0.0070082	0.413
Block : Experience	-0.17691	0.092417	-1.9143	164	0.057328	-0.35939	0.0055706
Game : Experience	-0.076328	0.059488	-1.2831	164	0.20127	-0.19379	0.041133

Table 16: Model fit to response variable of “The agent is not a reliable teammate” (G11)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	0.34397	1.1345	0.3032	164	0.76212	-1.8961	2.584
Block	1.0037	0.53332	1.8821	164	0.061598	-0.049315	2.0568
Game	1.0982	0.41366	2.6549	164	<b>0.0087148</b>	0.28145	1.915
Experience	0.51945	0.16441	3.1594	164	<b>0.0018826</b>	0.19481	0.84409
Agent : Block	0.12847	0.51003	0.25188	164	0.80145	-0.87861	1.1355
Agent : Game	-0.1499	0.31442	-0.47675	164	0.63417	-0.77074	0.47094
Block : Game	-0.30352	0.26308	-1.1537	164	0.2503	-0.82299	0.21595
Agent : Experience	0.12813	0.11066	1.1579	164	0.24859	-0.090369	0.34664
Block : Experience	-0.088578	0.096156	-0.9212	164	0.3583	-0.27844	0.10128
Game : Experience	-0.097645	0.061895	-1.5776	164	0.11659	-0.21986	0.024569

Table 17: Model fit to response variable of “I am not confident in my gameplay” (G12)

Name	Estimate	SE	<i>t</i>	df	<i>p</i>	Lower	Upper
Agent	1.4796	1.2583	1.1758	164	0.24137	-1.005	3.9641
Block	1.5481	0.4575	3.3839	164	<b>0.00089398</b>	0.64478	2.4515
Game	0.61849	0.34399	1.798	164	0.074017	-0.060728	1.2977
Experience	0.26304	0.13801	1.906	164	0.058405	-0.0094638	0.53554
Agent : Block	-1.1132	0.76425	-1.4565	164	0.14716	-2.6222	0.39588
Agent : Game	0.037263	0.22698	0.16417	164	0.8698	-0.41092	0.48544
Block : Game	-0.29982	0.20014	-1.498	164	0.13605	-0.69501	0.095368
Agent : Experience	0.031346	0.079802	0.39279	164	0.69498	-0.12623	0.18892
Block : Experience	-0.044646	0.07217	-0.61861	164	0.53703	-0.18715	0.097857
Game : Experience	-0.048831	0.045717	-1.0681	164	0.28704	-0.1391	0.041439



## 6.8 Novice vs Expert Post-Game $t$ -Tests

Post-hoc pairwise comparisons of novice vs expert in cases where agent and self-reported Hanabi experience have significant interaction effects, as described in Section 4.2.

Table 18: Two-sample  $t$ -tests of post-game sentiment, comparing novice and expert reactions.

Question	Agent	$t$	$p$	corrected $p$	$d$
G5	SB	0.35599	0.72273	1.00000	0.080708
G5	OP	5.1395	1.7334e-06	<b>1.38672e-05</b>	1.0185
G9	SB	0.25536	0.79906	1.00000	0.057915
G9	OP	5.8552	8.7246e-08	<b>7.85214e-07</b>	1.1214
G8	SB	0.61126	0.54266	1.00000	0.13838
G8	OP	-5.9229	6.5231e-08	<b>6.52310e-07</b>	-1.1306
G3	SB	-1.1856	0.2391	0.956400	-0.26679
G3	OP	3.5514	0.00062779	<b>3.76674e-03</b>	0.75189
G7	SB	1.652	0.10223	0.511150	0.36893
G7	OP	5.0678	2.3171e-06	<b>1.62197e-05</b>	1.0076

## 6.9 Post-Experiment $t$ -Tests

One-sample  $t$ -tests of post-experiment sentiment. Some responses were flipped on the Likert scale for directional consistency, based on which agent was seen first, since the ends of the scale were labeled as the “first” and “second” agent for the participants. Preference directionality is such that 1 is towards OP and 7 is towards SB.  $t$  statistics greater than 0 indicate answering towards SB. The Holm–Bonferroni step-down method was used for multiple comparisons correction.  $d$  is the Cohen’s effect size. In general, thresholds for “small,” “medium,” and “large” effect sizes are considered to be  $|d| = 0.2, 0.5$ , and  $0.8$  respectively [10].

Table 19: One-sample  $t$ -tests of post-experiment sentiment.

Question	$t$	$p$	corrected $p$	$d$
Which agent did you prefer playing with?	2.90633	0.00707	<b>0.03969</b>	0.549
Which agent did you trust more?	3.40564	0.00201	<b>0.01610</b>	0.644
Which agent did you understand more?	2.88618	0.00743	<b>0.03969</b>	0.545
Which agent understood you better?	2.93369	0.00661	<b>0.03969</b>	0.554
Which agent was the better Hanabi player?	3.36011	0.00226	<b>0.01610</b>	0.635
Which agent was more reliable?	2.86217	0.00788	<b>0.03969</b>	0.541
Which agent had a better understanding of the game on average?	2.68186	0.01214	<b>0.03969</b>	0.507
Which agent caused you to have a greater mental workload?	-0.16385	0.87103	0.87103	-0.031

## 6.10 Post-Experiment Participant Preference and Free Response

Post-experiment ratings of agent preference and explanation of the preference. The “Preference” heading corresponds to a Likert-scale response to the question “Which agent did you prefer playing with?” where 1 was “the first agent” and 7 was “the second agent.” “Explanation” was a free-response field with the question “Why did you prefer the agent that you did?”

Table 20: Post-experiment ratings of agent preference and explanation

Participant	Order	Preference	Explanation
1	SB, OP	5	first agent felt like it was learning; really bad to begin with; had to "teach" them how to play hanabi; second agent felt like someone who knew how to play hanabi and wanted to trick you; broke my trust in 2nd game; in 3rd game was "trust me"; don't like playing with 2nd agent.

2	OP, SB	6	It seemed to have a better understanding of not just what hints to give, but when to give them. I think a lot of the strategies cascaded from that - both my strategy and its. It just had a better understanding of the tempo of the game. If you think of it as - every time I get a hint, I have to perform an MLE, and when I give a hint, that's what they have to perform - if you just take the clue at face value; you can think about "why am I giving this hint" the second agent thought about "why am I getting/giving this hint NOW" while the first agent didn't.
3	SB, OP	1	It knew the rules of the game. It knew how to play.
4	OP, SB	4	I thought the first one was dumber but more consistent. The second one - I thought I was starting to understand it in the second game, but then in the third game, I completely didn't understand what it was doing at all.
5	SB, OP	1	Second agent made an obvious mistake quite frequently. There are some cases where it was clear that if the agent played a card, we would lose the game, but it played it anyway. Sometimes it would also give me hints that I already know.
6	OP, SB	7	better able to understand what it's clues meant and how to give it clues that would result in the correct actions
7	SB, OP	3	The first agent was more predictable, even if I didn't necessarily agree with their strategy. Both of them made dumb choices, like playing cards that were clearly not playable when they had full information on them (or at least enough information), or they discarded cards with full information and were playable.
8	OP, SB	7	The second agent seemed to be more capable of inductive reasoning than the first. Both has similar styles of inductive clues, but it seemed like the second took inductive clues better. The discard strategy of the first agent felt worse than the discard strategy of the second.
9	SB, OP	1	agent 1 was more consistent; even if i didn't understand what they were doing, i could more reliably assume they would play or discard cards if they knew they were playable; I feel I bombed the second one whenever i clued it; did not know how it would react
10	OP, SB	6	Maybe it's because the first one was so terrible that it made me have zero expectation of the second one. So even though the second agent wasn't that much better, and I was confused by its strategy, I was used to being confused and wasn't surprised anymore. It took less willpower to go through the games [with the second agent].
11	SB, OP	7	Gave me info; seemed to act on cues better; it felt like there was 2-way comms as opposed to 1-way; also it didn't throw away cards (e.g., knew perfect info on)
12	OP, SB	7	It provided more challenge and interest. Because I could reasonably play with it. It let me play at a more satisfying level.

13	SB, OP	1	Agent 1 seemed to have a better model of the game in the sense that it deliberately played playable cards and discarded unplayable cards more frequently; as opposed to the 2nd agent that played known unplayable cards and did not play cards when it had the chance to; first agent was more inline with game of Hanabi rules of playing all cards when possible; first agent played a way that was more familiar; First agent still used strategies that were more human friendly; i understood it better and it understood me better
14	OP, SB	3	I felt like the first agent was improving and started understanding my strategy more, whereas the second one wasn't learning from the errors or mistakes that both of us made.
15	SB, OP	6	The rules that the second (2nd) agent was following was easier to understand; specifically the discarding strategy was much more predictable; first agent may have predictable discarding strategy, but the 2nd agent is much easier to play with
16	OP, SB	7	I probably had some learning effects for the game so I understood things better, however, I also found that it was easier to get into a cadence of play with the second agent. I think I understood the intention of the second agent and it understood me.
17	SB, OP	1	The first agent played cards and hinted cards consistently. The second agent by contrast did not play multiply-hinted cards and gave hints that were not necessarily playable. With the first agent, I could reasonably expect to perform well and to trust his decision whereas with the second agent, I found myself trying to compensate for his lack of reliability.
18	OP, SB	2	i was better at predicting what the first agent would do; after first 2 games i understood the agent's strategy though i didn't agree with it; with 2nd agent i couldn't figure out how it's saves and discards worked and that made it impossible for me to tell it to save cards i wanted to protect
19	SB, OP	1	because i could understand what it would do and i can predict what they would do better; and i have opinion that i can understand the clue of the first agent and what the agent tries to force me to do; the first agent preferred to play instead of discarding; second agent prefers to discard instead of play which is sub-optimal in hanabi game (i.e., it had full info about a card and still chose to discard)
20	OP, SB	7	It does understand rules of Hanabi among humans.
21	SB, OP	7	It gave me more hints and it didn't make inexplicable discard decisions that were clearly suboptimal based on information that it had at the time. It was also the only one of the six games that we completed (25 pts).
22	OP, SB	6	second agent played color clues that i gave
23	SB, OP	5	I felt that the second agent understood some clues better than the first even though i think they are very very similar; similar strategy on saving discarding cluing; main difference for the second one was that it would clue sooner than the first one; it wouldn't delay cluing even though it had cards; 3 games is a bit short to determine/assess strategy;
24	OP, SB	6	The main reason was that Agent 2 was willing to change its discard behavior to match mine, as I strongly prefer discarding the oldest card instead of the newest. The other reason is the second agent was a little better at giving clues to me that I understood the meaning of.

25	SB, OP	7	It seemed more cooperative in that it was giving a lot of hints and it seemed like we had a similar strategy. Early on, we'd tell each other when we had ones, and then giving full information, giving the appropriate hints for the state of the game. Seemed like we had good teamwork. They were giving hints, and also taking hints.
26	OP, SB	7	The second agent understood my strategy better; it was easier for me to follow it's pattern/strategy; and because we got closer to winning, ergo, it was doing something right
27	SB, OP	2	the first agent provides more certainty even though the game progresses slower, it acts upon certainty and minimizes guessing;
28	OP, SB	6	i felt like the second agent was playing with easier to understand set of rules; they appeared to be more mindful of hints or number of hints remaining, so there is a better back-and-forth depending on who what playable cards or not;
29	SB, OP	3	To my understanding, the strategy seemed very consistent and simple. Agent 2's strategy seemed more complex and less predictable. It seemed more random which is less preferable.