SeismographAPI: Visualising Temporal-Spatial Crisis Data

Raphael Lepuschitz* raphael.lepuschitz@gmail.com University of Innsbruck Innsbruck, Austria

ABSTRACT

Effective decision-making for crisis mitigation increasingly relies on visualisation of large amounts of data. While interactive dashboards are more informative than static visualisations, their development is far more time-demanding and requires a range of technical and financial capabilities. There are few open-source libraries available, which is blocking contributions from low-resource environments and impeding rapid crisis responses. To address these limitations, we present *SeismographAPI*, an open-source library for visualising temporal-spatial crisis data on the country- and sub-country level in two use cases — *Conflict Monitoring Map* and *Pandemic Monitoring Map*. The library provides easy-to-use data connectors, broad functionality, clear documentation and run time-efficiency.

CCS CONCEPTS

• Human-centered computing \rightarrow Visualization toolkits; • Information systems \rightarrow Spatial-temporal systems.

KEYWORDS

Open-Source Software, Human-Centred Data Visualisation KDD Workshop on Data-driven Humanitarian Mapping

1 INTRODUCTION

For mitigating large-scale crises such as armed conflicts, pandemics and natural disasters, incorporation of data in decision-making is becoming indispensable [1, 3, 7, 10, 13]. However, insights from large amounts of data remain untapped if they are not detected and communicated by means of intuitive, accurate and preferably interactive scientific visualisation [5, 8]. Particularly, the development of interactive visualisation dashboards requires a broad skill set, ranging from statistical, design and programming knowledge to domain expertise [6]. Academic environments, non-governmental and humanitarian aid organisations often lack the required resources which hinders urgently needed contributions. The demand for quick crisis responses stands in stark contrast to time-consuming, expensive development stages. SeismographAPI is an actively maintained, open-source library for the visualisation of temporal-spatial crisis data that combines plug-and-play visualisations with versatile functionality.

2 EXEMPLARY USE CASES

SeismographAPI is designed for data analysts to identify patterns in rapid prototyping. Due to its run time and memory-efficiency, it can also be deployed as a permanent visualisation tool for use by

27th ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD '21)

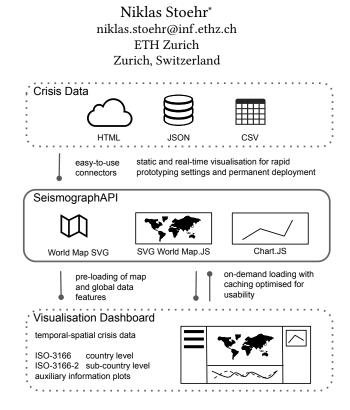


Figure 1: Technical overview of SeismographAPI

decision-makers. To motivate and demonstrate *SeismographAPI*, we sketch out two practical use cases that are inspired by real-world visualisation needs [2, 4, 7, 11, 13].

Conflict Monitoring. With the help of *SeismographAPI*, we visualise a huge dataset comprising 20 years of conflict data on 141 countries, constructed from *ACLED* [9] and *UCDP GED* [12] data. Per country and month, our dataset features 60 socio-economic and political indicators, which are all displayed in our *Conflict Monitoring Map*.

Pandemic Monitoring. Our second demonstration case is the *Pandemic Monitoring Map*, a visualisation of *COVID-19* infection numbers. The data is borrowed from Johns Hopkins University [2].

3 MAIN FUNCTIONALITY

World Map (center). The SVG Choropleth map represents the core part of *SeismographAPI*. It allows visualising data at the countryand subcountry-level (political subdivisions) based on the ISO-3166 and ISO-3166-2 norm. Additional information, such as country-level infection numbers, can be easily displayed on click and hover as exemplified in the *Pandemic Monitoring Map*.

^{*}Both authors contributed equally to this work.

^{© 2021} Association for Computing Machinery.

KDD Workshop on Data-driven Humanitarian Mapping, August 2021, Singapore

Raphael Lepuschitz and Niklas Stoehr

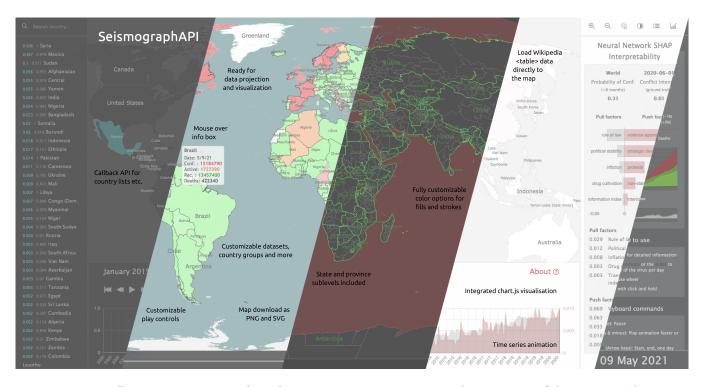


Figure 2: Conflict Monitoring Map and Pandemic Monitoring Map: two exemplary use cases of the SeismographAPI

Time Series Chart (bottom). The time series chart not only visualises, but allows navigating the temporal dimension. For instance, the *Conflict Monitoring Map* even features two time lines, one showing the prediction and another showing the ground truth conflict intensity. When hovering or clicking a point in time, all other panels synchronise. With the help of the "play" controls, users can watch all data panels as they change over time in a timemachine manner.

Auxiliary Information Panel (right). At the top of the auxiliary information panel, our library provides a menu allowing to interactively customise the dashboard. Users can hide information and panels, such as country names and the country list on the left hand side, zoom-in, choose a night mode and open a "help" window. To simplify the interface between analysis, report and decision-making, the library has built-in functionality for screen recording. Due to tight integration with Chart.js, any chart visualisation can be selected and displayed in the right-hand panel based on data suitability and information needs. For instance, the *Conflict Monitoring Map* displays the most important data features considered for conflict prediction as a horizontal bar chart. The *Pandemic Monitoring Map* relies on stacked line charts to map out infection numbers.

4 TECHNICAL BACKGROUND

Run time and Memory. SeismographAPI builds upon two fast, open-source libraries, Chart.js and SVG World Map JS. The time required for data loading is mainly determined by the size of the central SVG world map: ~1,3 MB for ISO-3166-2 country-level and ~3,8 MB including all subdivision data. Depending on the chosen map, rendering starts between 300ms and 800ms, document completion is done between 400ms and 2.6s and the full loading time varies from ~3s to ~10s. To optimise loading and usability, *SeismographAPI* can also be initialised asynchronously with the JavaScript async/await/resolve method. After the first initialisation of the map, this enables loading data chunks on demand, which increases smoothness. This is demonstrated in the *Conflict Monitoring Map*, where all global conflict data (~1,1MB) is loaded at startup, but the large amount of detailed conflict data (~80KB per country, ~21MB in total) is loaded asynchronously on request. Thus, *SeismographAPI* is able to visualise more than N = 170,000 data points in the *Conflict Monitoring Map* in about 3 seconds or nearly N = 400,000 data points in the *Pandemic Monitoring Map* in about 10 seconds.

Ease of Use. With an intuitive interface and simple data connectors, *SeismographAPI* is designed for ease of use in common visualisation tasks and workflows. Data can be loaded directly via JSON, CSV or as an HTML table. We even offer a Pandas extension to load Pandas Dataframes (as JSON) and Wikipedia tables. The library features clear readme instructions and rich documentation.

5 CONCLUSION

Future versions will include more data connectors, default charts, more detailed guidelines for deployment and options for switching between different data within one map. We presented *SeismographAPI*, an open-source library aimed at reducing resource constraints and easing swift data visualisation, thereby improving data-driven decision-making for humanitarian purposes.

SeismographAPI: Visualising Temporal-Spatial Crisis Data

KDD Workshop on Data-driven Humanitarian Mapping, August 2021, Singapore

REFERENCES

- Nathaniel Beck, Gary King, and Langche Zeng. 2000. Improving Quantitative Studies of International Conflict: A Conjecture. American Political Science Review 94, 1 (2000), 21–35. https://doi.org/10.1017/S0003055400220078 Edition: 2014/08/01 Publisher: Cambridge University Press.
- [2] Ensheng Dong, Hongru Du, and Lauren Gardner. 2020. An interactive web-based dashboard to track COVID-19 in real time. *Lancet Infectious Diseases* (2020). https://doi.org/10.1016/S1473-3099(20)30120-1
- [3] Fabian Falck, Julian Marstaller, Niklas Stoehr, Sören Maucher, Jeana Ren, Andreas Thalhammer, Achim Rettinger, and Rudi Studer. 2020. Measuring Proximity Between Newspapers and Political Parties: The Sentiment Political Compass. *Policy & Internet* 12, 3 (Sept. 2020), 367–399. https://doi.org/10.1002/poi3.222
- [4] Håvard Hegre, Joakim Karlsen, Håvard Mokleiv Nygård, Håvard Strand, and Henrik Urdal. 2013. Predicting Armed Conflict, 2010–2050. International Studies Quarterly 57, 2 (2013), 250–270. http://www.jstor.org/stable/24016137 Publisher: Wiley.
- [5] Yea-Seul Kim, Katharina Reinecke, and Jessica Hullman. 2017. Explaining the Gap: Visualizing One's Predictions Improves Recall and Comprehension of Data. In Proceedings of the 2017 CHI Conference on Human Factors in Computing Systems. ACM, Denver Colorado USA, 1375–1386. https://doi.org/10.1145/3025453.3025592
- [6] Heidi Lam, Enrico Bertini, Petra Isenberg, Catherine Plaisant, and Sheelagh Carpendale. 2012. Empirical Studies in Information Visualization: Seven Scenarios. *IEEE Transactions on Visualization and Computer Graphics* 18, 9 (Sept. 2012), 1520–1536. https://doi.org/10.1109/TVCG.2011.279
- [7] Sean P. O'Brien. 2010. Crisis Early Warning and Decision Support: Contemporary Approaches and Thoughts on Future Research. *International Studies Review* 12, 1 (March 2010), 87–104. https://doi.org/10.1111/j.1468-2486.2009.00914.x
- [8] Jesse Piburn, Robert Steward, Aaron Myers, and Alexandre Sorokine. 2015. World Spatiotemporal Analytics and Mapping Project (WSTAMP): Discovering, Exploring, and Mapping Spatiotemporal Patters across the World's Largest Open Source Data Sets. In ISPRS Annals of the Photogrammetry, Remote Sensing and Spatial Information Sciences, Vol. II-4/W2. 95–102. https://doi.org/10.5194/isprsannals-

II-4-W2-95-2015

- [9] Clionadh Raleigh, Andrew Linke, Håvard Hegre, and Joakim Karlsen. 2010. Introducing ACLED-Armed Conflict Location and Event Data. *Journal of Peace Research* 47, 5 (2010), 651–660. https://journals.sagepub.com/doi/10.1177/ 0022343310378914
- [10] Didier Sornette. 2006. Endogenous versus Exogenous Origins of Crises. In Extreme Events in Nature and Society, The Frontiers Collection. Center for Frontier Sciences. https://doi.org/10.1007/3-540-28611-X_5
- [11] Fabian Stephany, Niklas Stoehr, Philipp Darius, Leonie Neuhauser, Ole Teutloff, and Fabian Braesemann. 2020. The CoRisk-Index: A data-mining approach to identify industry-specific risk assessments related to COVID-19 in real-time. arXiv 2003.12432 (2020). https://arxiv.org/abs/2003.12432
- [12] Ralph Sundberg and Erik Melander. 2013. Introducing the UCDP Georeferenced Event Dataset. Journal of Peace Research 50, 4 (July 2013), 523-532. https: //doi.org/10.1177/0022343313484347
- [13] Nils Weidmann and Michael Ward. 2010. Predicting Conflict in Space and Time. Journal of Conflict Resolution 54, 6 (July 2010), 883–901. https://doi.org/10.1177/ 0022002710371669 Publisher: SAGE Publications Inc.

A APPENDIX

A.1 Links

SeismographAPI Github

https://github.com/conflict-AI/seismographAPI

Conflict Monitoring Map

https://conflict-ai.github.io/seismographAPI/conflict-map.html Pandemic Monitoring Map

https://conflict-ai.github.io/seismographAPI/covid-map.html