

Computing Balanced Solutions for Large International Kidney Exchange Schemes ^{*}

Márton Benedek^{1,2}, Péter Biró^{1,2}, Walter Kern³, and Daniel Paulusma⁴

¹ KRTK, Hungary {`peter.biro,marton.benedek`}@krtk.hu

² Corvinus University of Budapest

³ University of Twente `w.kern@utwente.nl`

⁴ Durham University `daniel.paulusma@durham.ac.uk`

Abstract. To overcome incompatibility issues, kidney patients may swap their donors. In international kidney exchange programmes (IKEPs), countries merge their national patient-donor pools. We consider a recent credit system where in each round, countries are given an initial kidney transplant allocation which is adjusted by a credit function yielding a target allocation. The goal is to find a solution in the patient-donor compatibility graph that approaches the target allocation as closely as possible, to ensure long-term stability of the international pool. As solutions, we use maximum matchings that lexicographically minimize the country deviations from the target allocation. We first give a polynomial-time algorithm for computing such matchings. We then perform, for the first time, a computational study for a *large* number of countries. For the initial allocations we use, besides two easy-to-compute solution concepts, two classical concepts: the Shapley value and nucleolus. These are hard to compute, but by using state-of-the-art software we show that they are now within reach for IKEPs of up to fifteen countries. Our experiments show that using lexicographically minimal maximum matchings instead of ones that only minimize the largest deviation from the target allocation (as previously done) may make an IKEP up to 52% more balanced.

1 Introduction

For kidney patients, kidney transplantation is still the most effective treatment. However, a kidney transplantation might not be possible due to blood-type or tissue-type incompatibilities between a patient and a willing donor. The solution is to place all patient-donor pairs in one pool such that donors can be swapped. A *kidney exchange programme* (KEP) is a centralized program where the goal is to find an optimal kidney exchange scheme in a given pool of patient-donor pairs.

Recently, national KEPs started to collaborate, leading to a number of *international* KEPs. In 2016, the first international kidney exchange took place, between Austria and Czech Republic [18]. In 2018, Italy, Spain and Portugal started to collaborate. In 2019, ScandiTransplant, an organization for sharing deceased organs among six Scandinavian countries, started an international KEP involving Swedish and Danish transplant centers. Even though overall solutions will improve, *individual rationality* might not be guaranteed, that is, individual countries could be worse off. To improve the stability of an international KEP, the following question is therefore highly relevant:

What kind of fairness must we guarantee to ensure that all countries in an international KEP place all their patient-donor pairs in an international pool?

Individual rationality [5,6] and fairness versus optimality [4,16,27,38] were initially studied for national KEPs, in particular in the US. However, the US situation is different from many other countries. The US has three nationwide KEPs (UNOS, APD, NKR) [2], and US hospitals work independently and compete with each other. Hence, US hospitals tend to register only the hard-to-match pairs to the national KEPs. As a consequence, the aforementioned papers focused on mechanisms that give incentives for hospitals to register all their patient-donor pairs at the KEP.

^{*} We dedicate this paper to the memory of Walter Kern, who passed away this year. Biró acknowledges the support of the Hungarian Scientific Research Fund, OTKA, Grant No. K129086.

Our Setting. We consider the setting of European KEPs which are scheduled in rounds, typically once in every three months [10]. Unlike the US setting, this setting allows a search for optimal exchange schemes. The search can be done in polynomial time for 2-way exchanges (*matchings*), but is NP-hard if 3-way exchanges are permitted [1]. Below we discuss existing work for this setting.

Known Results. Carvalho and Lodi [20] used a 2-round system for ensuring stability of international KEPs with 2-way exchanges only: in the first round each country selects an internal matching, and in the second round a maximum matching is selected for the international exchanges. They gave a polynomial-time algorithm for computing a Nash-equilibrium that maximizes the total number of transplants, improving the previously known result of [19] for two countries.

Sun et al. [37] also considered 2-way exchanges only. They defined so-called selection ratios using various lower and upper target numbers of kidney transplants for each country. In their setting, a solution is considered to be fair if the minimal ratio across all countries is maximized. They also required a solution to be a maximum matching and individual rational. They gave theoretical results specifying which models admit solutions with all three properties and they provided polynomial-time algorithms for computing such solutions, if they exist.

Klimentova et al. [31] introduced a credit system, where the number of kidney transplants for a country is specified by a “fair” target number for that country. The differences between the actual number of transplants for a country and its target number are used as *credits* for the next round. In their simulations, they allowed 3-way exchanges for four countries and considered the potential and benefit values as target allocations, the latter yielding slightly more balanced solutions. Biró et al. [12] compared the benefit value with the Shapley value. In their simulations, for three countries allowing 3-way exchanges, they found that the Shapley value produced smaller deviations from the targets on average. Biró et al. [15] considered credit-based compensation systems from a theoretical point of view. They only allowed for 2-way exchanges but unlike [12,31], with the possibility of having weights for representing transplant utilities. They gave a polynomial-time algorithm for finding a maximum matching that minimized the largest deviation from a target allocation. They also showed that the introduction of weights makes the problem NP-hard.

Our Contribution. In Section 2 we explain the credit system of [12,15,31] and our settings. We only allow 2-way exchanges (just as [19,20,37], but unlike [12,31]) and do not consider weights (just as [12,31]). In Section 3, we generalize the above polynomial-time result of [15] by giving a polynomial-time algorithm for computing a maximum matching that *lexicographically minimizes* the country deviations from a given target allocation. In Section 4 we complement this result with a simulation for up to even *fifteen* countries in contrast to the previous studies [12,31] for 3–4 countries, and we do this both for equal and varying country sizes. Our motivation is twofold. Firstly, international KEPs have a growing number of countries. Secondly, we aim to measure the effect of using maximum matchings that are lexicographically minimal, which requires a large number of countries. Motivated by the promising results for the Shapley value [12], we also considered the effect of using more widely accepted solution concepts from Cooperative Game Theory. Hence, we chose to take as target allocation the Shapley value and the nucleolus and compare these against the benefit value and the contribution value, a natural variant of the benefit value (see Section 2).

As mentioned, we only allow 2-way exchanges and do not consider weights: if 3-way exchanges [1] or weights [15] are allowed, the problem becomes NP-hard, and with the current technology it is not possible to perform a study on such a large scale as ours. We note that some countries, such as France and Hungary, are legally bound to using only 2-way exchanges.

Our experiments show that a credit system using lexicographically minimal maximum matchings instead of ones that minimize the largest deviation make an international KEP up to 52% more balanced, without decreasing the overall number of transplants. The exact improvement depends on the solution concept used. Choosing the latter is up to the policy makers of the international KEP. From our experiments, however, the Shapley value turned out, again, to yield the best results, namely on average a (relative) deviation of up to 0.52% from the target allocation (whereas the other three solution concept stay within 1.23%).

2 Our Model

We model a KEP as follows. A *compatibility graph* is a directed graph $D = (V, E)$ with an arc weighting w . Each vertex in V is a patient-donor pair, and there is an arc from patient-donor pair i to patient-donor pair j if the donor of pair i is compatible with the patient of pair j . The associated weight w_{ij} indicates the utility of the transplantation. An *exchange cycle* is a directed cycle C in D . The *weight* of a cycle C is the sum of the weights of its arcs. An *exchange scheme* X is a union of pairwise vertex-disjoint exchange cycles in D . The weight of X is the sum of the weights of its cycles. The goal is to find an exchange scheme of maximum weight, subject to a fixed *exchange bound* ℓ , which is an upper bound on the length of the exchange cycles that may be used.

We obtain an international KEP by partitioning V into sets V_1, \dots, V_n , where n is the number of countries involved and V_p is the set of patient-donor pairs of country p . The objective is still to find an exchange scheme of D that has maximum weight subject to the exchange bound ℓ . In this setting, we must now in addition ensure that the countries accept the proposed exchange schemes.

Assumptions. We set $\ell = 2$ and $w \equiv 1$. As $\ell = 2$, we can make D undirected by adding an edge between two vertices i and j if and only if (i, j) and (j, i) are in A (see Figure 1). So, from now on, compatibility graphs are undirected.

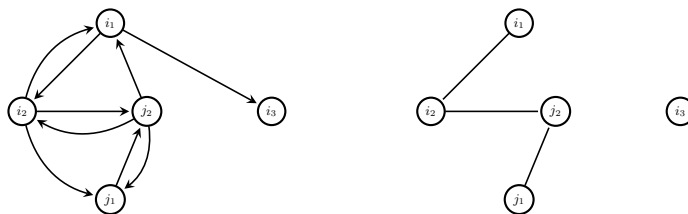


Fig. 1. A directed compatibility graph (left) which we make undirected (right). Here, $\mathcal{M} = \{M\}$, where $M = \{i_1 i_2, j_1 j_2\}$. If $V_1 = \{i_1, i_2, i_3\}$ and $V_2 = \{j_1, j_2\}$, then $s_1(M) = s_2(M) = 2$.

We now explain the recent credit system from [15,31] for international KEPs, which run in rounds. Let $N = \{1, \dots, n\}$ be the set of countries and for some $h \geq 1$, let D_h be the compatibility graph in round h with set of countries V_1^h, \dots, V_n^h . Let μ_h be the size of a maximum matching in D_h , so $2\mu_h$ is the maximum number of kidney transplants possible in round h . As we optimize social welfare, we define an *allocation* for round h as a vector $x^h \in \mathbb{R}^N$ with $x^h(N) = 2\mu_h$, where we write $x^h(S) = \sum_{p \in S} x_p^h$ for a subset $S \subseteq N$. Thus, x_p^h describes the share of $x^h(N) = 2\mu_h$ that is allocated to country p . We can only allocate integer numbers (kidneys), but nevertheless we do allow allocations x^h to be non-integer, as we will explain later.

Assume that we are given a “fair” allocation y^h for round $h \geq 1$, together with a *credit function* $c^h : N \rightarrow \mathbb{R}$, which satisfies $\sum_{p \in N} c_p^h = 0$; we let $c^1 \equiv 0$ and define c^h for $h \geq 2$ below. For $p = 1, \dots, n$, we set $x_p^h = y_p^h + c_p^h$. Then x^h is an allocation, as y^h is an allocation and $\sum_{p \in N} c_p^h = 0$. We call x^h the *target allocation* and y^h the *initial allocation* for round h .

We now define c^h for $h \geq 2$. Let \mathcal{M}^h be the set of all maximum matchings of D_h . As we optimize social welfare, we choose a matching $M^h \in \mathcal{M}^h$. The set $\{(i, j) \in E \mid ij \in M^h, j \in V_p^h\}$ consists of all kidney transplants in round h that involve patients in country p (with donors both from country p and other countries). We let $s_p(M^h)$ denote the size of this set, or equivalently, $s_p(M^h) = |\{j \in V_p^h \mid ij \in M^h\}|$ (see Figure 1). We now compute a new credit function c^{h+1} by setting $c_p^{h+1} = x_p^h - s_p(M^h)$ and note that $\sum_{p \in N} c_p^{h+1} = 0$, as required. For round $h + 1$, a new initial allocation y^{h+1} is given. For $p = 1, \dots, n$, we set $x_p^{h+1} = y_p^{h+1} + c_p^{h+1}$ and repeat the process. Note that $c_p^h = \sum_{t=1}^{h-1} (y_p^t - s_p(M^t))$ for a country p and round $h \geq 2$, so credits are in fact the accumulation of the deviations from the initial allocations.

We now specify our choices for the initial allocations y^h and maximum matchings $M^h \in \mathcal{M}^h$.

Choosing the initial allocation y . As mentioned, we use a cooperative game-theoretic perspective. A (*cooperative*) *game* is a pair (N, v) , where N is a set $\{1, \dots, n\}$ of *players* and $v : 2^N \rightarrow \mathbb{R}_+$ is a *value function* with $v(\emptyset) = 0$. A *coalition* is a subset $S \subseteq N$. If $v(N)$ is maximum over all partitions of N , then the players have an incentive to form the *grand coalition* N . The central problem is then how to distribute $v(N)$ amongst the players in such a way that players are not inclined to leave the grand coalition. In this context, an *allocation* is a vector $x \in \mathbb{R}^N$ with $x(N) = v(N)$. A *solution concept* prescribes a set of “fair” allocations for cooperative games, where the notion of fairness depends on context. The *core* of a game (N, v) consists of all allocations $x \in \mathbb{R}^N$ with $x(S) \geq v(S)$ for every $S \subseteq N$. Core allocations offer no incentive for a group of players to leave the grand coalition N and form a coalition on their own, so they ensure that N is stable. However, games may have an empty core.

For an allocation x and a coalition $\emptyset \neq S \neq N$ in a game (N, v) , we define the *excess* $e(S, x) := x(S) - v(S)$ and obtain the *excess vector* $e(x) \in \mathbb{R}^{2^n - 2}$ by ordering the $2^n - 2$ in a non-decreasing sequence. The *nucleolus* of a game (N, v) is the unique allocation [36] that lexicographically maximizes $e(x)$ over the set of allocations x with $x_p \geq v(\{p\})$ for every $p \in N$ (note that the latter set is nonempty for generalized matching games). The nucleolus is a core allocation if the core is nonempty. The *Shapley value* $\phi(N, v)$ of a game (N, v) , which does not necessarily belong to the core, is defined by setting for every $p \in N$,

$$\phi_p(N, v) = \sum_{S \subseteq N \setminus \{p\}} \frac{|S|!(n - |S| - 1)!}{n!} \left(v(S \cup \{p\}) - v(S) \right). \quad (1)$$

The *surplus* of a game (N, v) is $\text{surp} = v(N) - \sum_{p \in N} v(\{p\})$. For $p \in N$ we can allocate $v(\{p\}) + \alpha_p \cdot \text{surp}$ for some α with $\sum_{p \in N} \alpha_p = 1$. We obtain the *benefit value* [31] if for each $p \in N$,

$$\alpha_p = \frac{v(N) - v(N \setminus \{p\}) - v(\{p\})}{\sum_{p \in N} (v(N) - v(N \setminus \{p\}) - v(\{p\}))}.$$

We obtain the *contribution value* by setting for each $p \in N$,

$$\alpha_p = \frac{v(N) - v(N \setminus \{p\})}{\sum_{p \in N} (v(N) - v(N \setminus \{p\}))}.$$

A *generalized matching game* [15] is a game (N, v) on an undirected graph $D = (V, E)$ with an edge weighting w and a partition (V_1, \dots, V_n) of V . For $S \subseteq N$, we let $V(S) = \bigcup_{p \in S} V_p$. The value $v(S)$ of coalition S is the maximum weight of a matching in the subgraph of D induced by $V(S)$. If $w \equiv 1$, then $v(S)$ is the maximum size of a matching in the subgraph of D induced by $V(S)$. In particular $v(N) = \mu$, where μ is the size of a maximum matching in D . If $V_p = \{p\}$ for $p = 1, \dots, n$, then we obtain the classical *matching game* (see, for example, [13,23,28,29,32]).

In our setting, N is a set of countries. So, player $p \in N$ represents country p , which has set of patient-donor pairs V_p and *size* $|V_p|$. Recall also that we set $w \equiv 1$. For the initial allocation y in a round we consider four solution concepts of the corresponding generalized matching game: two *computationally involved* ones, namely the nucleolus and the Shapley value and two *easy-to-compute* ones, namely the benefit value and the contribution value. Recall that $x(N) = 2\mu$ for an allocation x , as we count the number of kidney transplants instead of the number of patient-donor swaps. To resolve this incompatibility, we simply multiply the allocations prescribed by the above four solution concepts by two.

Choosing the solution M . Recall that in order to optimize social welfare we choose a maximum matching in each round. Ideally, each country p should receive a number of kidney transplantations for its patients that is close to its target allocation x for the round under consideration. In [15] a polynomial-time algorithm was given for finding a maximum matching M that minimizes

$$d_1 := \max_{p \in N} \{|x_p - s_p(M)|\}.$$



Fig. 2. A compatibility graph with a set $N = \{1, 2, 3\}$ of three countries. Suppose in round 1 (left) $V_1 = \{i_1\}$, $V_2 = \{i_2, i_3\}$ and $V_3 = \{i_4\}$ and in round 2 (right) $V_1 = \{j_1\}$, $V_2 = \{j_2\}$ and $V_3 = \{j_3\}$. Using the Shapley value yields in round 1, $x^1 = y^1 = (\frac{2}{3}, \frac{8}{3}, \frac{2}{3})$, $M^1 = \{(i_1, i_2), (i_3, i_4)\}$, $s(M^1) = (1, 2, 1)$ and $c^2 = y^1 - s(M^1) = (-\frac{1}{3}, \frac{2}{3}, -\frac{1}{3})$, and in round 2, $y^2 = (\frac{4}{3}, \frac{1}{3}, \frac{1}{3})$, $x^2 = y^2 + c^2 = (1, 1, 0)$, $M^2 = \{(j_1, j_2)\}$ and $c^3 = x^2 - s(M^2) = (0, 0, 0)$. Using the nucleolus yields the same for round 1, but in round 2, $y^2 = (2, 0, 0)$, and hence $x^2 = y^2 + c^2 = (\frac{5}{3}, \frac{2}{3}, -\frac{1}{3})$, $M^2 = \{(j_1, j_2)\}$ and $c^3 = x^2 - s(M^2) = (\frac{2}{3}, -\frac{1}{3}, -\frac{1}{3})$.

Let $\delta(M) = (|x_{p_1} - s_{p_1}(M)|, \dots, |x_{p_n} - s_{p_n}(M)|)$ be the vector obtained by reordering the components $|x_p - s_p(M)|$ non-increasingly. We say that M is *lexicographically minimal* for an allocation x if $\delta(M)$ is lexicographically minimal over all matchings $M \in \mathcal{M}$. Note that every lexicographically minimal matching in \mathcal{M} is a matching that minimizes $\max_{p \in N} \{|x_p - s_p(M)|\}$, but the reverse might not be true. In each round of our credit-based model we propose to take a maximum matching that is lexicographically minimal; see Figure 2 for an example. In the next section, we show how to compute such a matching in polynomial time.

Remark. Recall that $c_p^h = \sum_{t=1}^{h-1} (y_p^t - s_p(M^t))$ for a country p and round $h \geq 2$. Hence, credits for a country can build up over time even with our choice of fair target allocations. For instance, consider the example in Figure 2. Suppose every future round looks the same as round 2 and the nucleolus is used as the target allocation. Then, $c_{i_1}^h = c_{i_1}^{h-1} + 1$ for $h \geq 3$. However, these situations did not occur in any of our experiments where we used the credit function (see Section 4).

3 Computing a Lexicographically Minimal Maximum Matching

Let (N, v) be a generalized matching game with a set V of patient-donor pairs. Let \mathcal{M} be the set of maximum matchings in the corresponding compatibility graph D , and let x be an allocation. We will show how to compute a maximum matching from \mathcal{M} that is lexicographically minimal for x . We need the $O(|V|^3)$ -time algorithm from [15] which computes for a set of closed intervals I_1, \dots, I_n , a maximum matching $M \in \mathcal{M}$ with $s_p(M) \in I_p$ for $p = 1, \dots, n$ or find that such a matching does not exist (the algorithm constructs in linear time an auxiliary graph G' on $O(|V|)$ vertices and then finds a maximum weight perfect matching of G' in $O(|V|^3)$ time by using Edmonds' algorithm [26]). Now suppose we are given a set of intervals I_1, \dots, I_n , some of which are open instead of closed. Let I_p be an open interval. Recall that the s -values are sizes of subsets of matching edges and thus are integers. Hence, we may replace I_p by the largest closed interval with integer end-points contained in I_p if this closed interval exists. If not, then a matching $M \in \mathcal{M}$ with $s_p(M) \in I_p$ does not exist. In other words, we found the following corollary of the result of [15].

Corollary 1. *For a generalized matching game (N, v) with set V of patient-donor pairs and (not necessarily closed) intervals I_1, \dots, I_n , we can find in $O(|V|^3)$ time a matching $M \in \mathcal{M}$ with $s_p(M) \in I_p$ for each $p \in \{1, \dots, n\}$ or find that such a matching does not exist.*

Using Corollary 1, our algorithm **Lex-Min** computes for a generalized matching game (N, v) and allocation x , values d_1, \dots, d_t with $d_1 > \dots > d_t$ for some integer $t \geq 1$, and returns a matching $M \in \mathcal{M}$ that is lexicographically minimal for x ; see also the proof of Theorem 1.

Lex-Min

input : a generalized matching game (N, v) and an allocation x

output : a matching $M \in \mathcal{M}$ that is lexicographically minimal for x .

Step 1. Compute the smallest number $d_1 \geq 0$ such that there exists a matching $M \in \mathcal{M}$ with $|x_p - s_p(M)| \leq d_1$ for all $p \in N$.

Step 2. Compute a minimal set $N_1 \subseteq N$ (with respect to set inclusion) such that there exists a matching $M \in \mathcal{M}$ with

$$\begin{aligned} |x_p - s_p(M)| &= d_1 && \text{for all } p \in N_1 \\ |x_p - s_p(M)| &< d_1 && \text{for all } p \in N \setminus N_1. \end{aligned}$$

Step 3. Proceed in a similar way for $t \geq 1$:

- **while** $N_1 \cup \dots \cup N_t \neq N$ **do**
 - $t \leftarrow t + 1$.
 - $d_t \leftarrow$ smallest d such that there exists a matching $M \in \mathcal{M}$ with

$$\begin{aligned} |x_p - s_p(M)| &= d_j && \text{for all } p \in N_j, j \leq t - 1 \\ |x_p - s_p(M)| &\leq d_t && \text{for all } p \in N \setminus (N_1 \cup \dots \cup N_{t-1}). \end{aligned}$$

- $N_t \leftarrow$ inclusion minimal subset of $N \setminus (N_1 \cup \dots \cup N_{t-1})$ such that there exists a matching $M \in \mathcal{M}$ with

$$\begin{aligned} |x_p - s_p(M)| &= d_j && \text{for all } p \in N_j, j \leq t - 1 \\ |x_p - s_p(M)| &= d_t && \text{for all } p \in N_t \\ |x_p - s_p(M)| &< d_t && \text{for all } p \in N \setminus (N_1 \cup \dots \cup N_t). \end{aligned}$$

Step 4. Return a matching $M \in \mathcal{M}$ with $|x_p - s_p(M)| = d_j$ for all $p \in N_j$ and all $j \in \{1, \dots, t\}$.

We say that the countries in a set $N \setminus (N_1 \cup \dots \cup N_{t-1})$ are *unfinished* and that a country is *finished* when it is placed in some N_t . Note that **Lex-Min** terminates as soon as all countries are finished. We can now prove our theoretical result.

Theorem 1. *The Lex-Min algorithm is correct and runs in $O(n|V|^3 \log |V|)$ time for a generalized matching game (N, v) with an allocation x .*

Proof. We first prove the correctness of **Lex-Min**. Let (N, v) be a generalized matching game and let x be an allocation. Let \overline{M} be the matching from \mathcal{M} that is returned by **Lex-Min**. We claim that \overline{M} is a lexicographically minimal matching for x . In order to prove this, let $M^* \in \mathcal{M}$ be a lexicographically minimal matching. Since both \overline{M} and M^* are maximum matchings, we have $M^* = \overline{M} \oplus \mathcal{P} \oplus \mathcal{C}$, where \mathcal{P} and \mathcal{C} are sets of even alternating paths and (even) alternating cycles, respectively. We make the additional assumption that among all the lexicographically minimal matchings in \mathcal{M} , M^* is chosen as *closest* to \overline{M} in the sense that $|\mathcal{P}| + |\mathcal{C}|$ is as small as possible.

We claim that $\mathcal{C} = \emptyset$. Otherwise, we would switch M^* to another maximum matching along an alternating cycle $C \in \mathcal{C}$. This yields a new matching $M^* \oplus C \in \mathcal{M}$ which is again lexicographically minimal, as the switch does not affect any $s_p(M^*)$. Moreover, $M^* \oplus C$ is closer to \overline{M} , contradicting our choice of M^* . Hence, there exists a disjoint union of paths P_1, \dots, P_k such that $M^* = \overline{M} \oplus P_1 \oplus \dots \oplus P_k$. We claim that each P_j has endpoints in different countries; otherwise switching from M^* to \overline{M} along P_j would not affect any $s_p(M^*)$ and so again leads to a new lexicographically minimal matching closer to \overline{M} .

Let $d_1^* > d_2^* > \dots$ denote the different values of $|x_p - s_p(M^*)|$ and let $N_j^* \subseteq N$ denote the corresponding sets of players $p \in N$ with $|x_p - s_p(M^*)| = d_j^*$. We prove by induction on t that for every t , it holds that $d_t^* = d_t$ and $N_t^* = N_t$, which implies that $M^* = \overline{M}$ and thus \overline{M} is lexicographically minimal. Let $t = 1$. In Claims 1 and 2, we prove that $d_1^* = d_1$ and $N_1^* = N_1$.

Claim 1: $d_1^* = d_1$.

Proof: As M^* is lexicographically minimal, $d_1^* \leq d_1$. If $d_1^* < d_1$, then d_1 was not chosen as small as possible, since $M = M^*$ satisfies $|x_p - s_p(M)| \leq d_1^*$ for every $p \in N$. Hence $d_1^* = d_1$. \diamond

Claim 2: $N_1^* = N_1$.

Proof: If $N_1^* \subsetneq N_1$, then N_1 is not minimal, as $|x_p - s_p(M^*)| \leq d_1^* = d_1$ for $p \in N_1^*$ and $|x_p - s_p(M^*)| < d_1^* = d_1$ for $p \in N \setminus N_1^*$. This contradicts Step 2 of **Lex-Min**. Hence, $N_1^* \not\subsetneq N_1$. Let $p_0 \in N_1^* \setminus N_1$. So, $|x_{p_0} - s_{p_0}(M^*)| = d_1^* = d_1 > |x_{p_0} - s_{p_0}(\overline{M})|$. We distinguish two cases.

Case 1. $s_{p_0}(M^*) = x_{p_0} + d_1^*$.

Then $s_{p_0}(M^*) > s_{p_0}(\overline{M}) \geq 0$, so there exists an even path, say, P_1 starting in V_{p_0} with an M^* -edge and ending in some V_{p_1} with an \overline{M} -edge. Recall that the endpoints of P_1 are in different countries, hence $p_1 \neq p_0$. Note that replacing M^* by $M^* \oplus P_1$ would decrease $s_{p_0}(M^*)$ and increase $s_{p_1}(M^*)$.

Assume first that $s_{p_1}(M^*) \geq s_{p_1}(\overline{M})$. As P_1 ends in V_{p_1} , we have $s_{p_1}(\overline{M}) \geq 1$. Hence, there exists an alternating path, say P_2 , that starts with an M^* -edge in V_{p_1} and ends with an \overline{M} -edge in some V_{p_2} , $p_2 \neq p_1$. If $p_2 = p_0$, then $M^* \oplus P_1 \oplus P_2$ would be lexicographically minimal and closer to \overline{M} , a contradiction. Hence $p_2 \notin \{p_0, p_1\}$ and in case $s_{p_2}(M^*) \geq s_{p_2}(\overline{M})$, we may continue to construct a sequence p_0, p_1, p_2, \dots in this way. Note that whenever we run into a cycle, that is, when $p_s = p_r$ for some $r > s$, then we get a contradiction by observing that $M^* \oplus P_{r+1} \oplus \dots \oplus P_s$ is also lexicographically minimal (indeed switching M^* to \overline{M} along P_{r+1}, \dots, P_s does not affect any $s_p(M^*)$) and closer to \overline{M} . Hence, eventually, our sequence p_0, p_1, \dots, p_r must end up with $s_{p_r}(M^*) < s_{p_r}(\overline{M})$. We then derive that $s_{p_r}(M^* \oplus P_1 \oplus \dots \oplus P_r) \leq s_{p_r}(\overline{M}) \leq x_{p_r} + d_1$. If $p_r \notin N_1$, then we even get $s_{p_r}(M^* \oplus P_1 \oplus \dots \oplus P_r) \leq s_{p_r}(\overline{M}) < x_{p_r} + d_1$. We now define the matching $M' := M^* \oplus P_1 \oplus \dots \oplus P_r$. Note that M' is a maximum matching closer to \overline{M} . To obtain a contradiction with our choice of M^* it remains to show that M' is lexicographically minimal.

We first consider $p = p_r$. We have $s_{p_r}(M') = s_{p_r}(M^*) + 1 \geq x_{p_r} - d_1 + 1 > x_{p_r} - d_1$. Combining this with the upper bound found above, we obtain

$$\begin{aligned} x_{p_r} - d_1 < s_{p_r}(M') &\leq x_{p_r} + d_1 \text{ if } p_r \in N_1 \\ x_{p_r} - d_1 < s_{p_r}(M') &< x_{p_r} + d_1 \text{ if } p_r \notin N_1. \end{aligned} \quad (2)$$

For $p = p_0$, we have that $s_{p_0}(M') = s_{p_0}(M^*) - 1 = x_{p_0} + d_1 - 1$, where the last equality holds because $p_0 \in N_1^*$. Hence, we found that

$$|s_{p_0}(M') - x_{p_0}| = d_1 - 1. \quad (3)$$

From (2) and (3) and the fact that $|s_p(M') - x_p| = |s_p(M^*) - x_p|$ if $p \notin \{p_0, p_r\}$, we conclude that either M' is lexicographically minimal, which yields our contradiction, or $p_r \in N_1$ and $s_{p_r}(M') = x_{p_r} + d_1$. Assume that the latter case holds. Then we have $s_{p_r}(M^*) = s_{p_r}(M') - 1 = x_{p_r} + d_1 - 1$. However, then M^* and M' are symmetric with respect to p_0 and p_r , namely, $|s_{p_0}(M^*) - x_{p_0}| = d_1 = |s_{p_r}(M') - x_{p_r}|$ and $|s_{p_r}(M^*) - x_{p_r}| = |d_1 - 1| = |s_{p_0}(M') - x_{p_0}|$. Combining these equalities with the fact that $|s_p(M') - x_p| = |s_p(M^*) - x_p|$ if $p \notin \{p_0, p_r\}$ implies that M' is lexicographically minimal, our desired contradiction. Hence, $N_1^* \setminus N_1 = \emptyset$. As $N_1^* \not\subsetneq N_1$, we conclude that $N_1^* = N_1$.

Case 2. $s_{p_0}(M^*) = x_{p_0} - d_1^*$.

In this case we have $s_{p_0}(M^*) < s_{p_0}(\overline{M})$. Hence, there must exist an alternating path P_1 that starts in V_{p_0} with an \overline{M} -edge and that ends in some V_{p_1} with an M^* -edge. Just as in Case 1, it holds that $p_1 \neq p_0$. If $s_{p_1}(M^*) \leq s_{p_1}(\overline{M})$, we may continue with an alternating path P_2 starting from V_{p_1} and ending in some V_{p_2} with $p_2 \notin \{p_0, p_1\}$, and continuing in this way we eventually end up with a sequence p_0, p_1, \dots, p_r such that $s_{p_r}(M^*) > s_{p_r}(\overline{M})$. Then $M' := M^* \oplus P_1 \oplus \dots \oplus P_r$ has $s_{p_0}(M') = s_{p_0}(M^*) + 1$ and $s_{p_r}(M') = s_{p_r}(M^*) - 1$. By the same arguments that we used in Case 1, we prove that M' is a maximum matching that is lexicographically minimal and that is closer to \overline{M} than M^* is. This contradicts our choice of M^* , and we have proven Claim 2. \diamond

Now let $t \geq 2$. Assume that $d_1^* = d_1, \dots, d_{t-1}^* = d_{t-1}$ and $N_1^* = N_1, \dots, N_{t-1}^* = N_{t-1}$. By using the same arguments as in the proof of Claim 1, we find that $d_t^* = d_t$. By using the same arguments as in the proof of Claim 2, we find that $N_t^* \not\subseteq N_t$. We will now show that $N_t^* = N_t$. We consider a country $p_0 \in N_t^* \setminus N_t$ and split the proof into two cases similar to Cases 1 and 2 for the case $t = 1$, namely when $s_{p_0}(M^*) = x_{p_0} + d_1^*$ and $s_{p_0}(M^*) = x_{p_0} - d_1^*$. We will only show the first case in detail, as the proof of the other case is similar. Hence, from now on we assume that $s_{p_0}(M^*) = x_{p_0} + d_t^*$.

We know that $p_0 \in N_t^*$, so $p_0 \notin N_1^* \cup \dots \cup N_{t-1}^* = N_1 \cup \dots \cup N_{t-1}$. Hence $s_{p_0}(\overline{M}) \leq x_{p_0} + d_t$, and $p_0 \notin N_t$ implies $s_{p_0}(\overline{M}) < x_{p_0} + d_t$, so that $s_{p_0}(M^*) > s_{p_0}(\overline{M})$. So there is an alternating path P_1 starting in V_{p_0} with an M^* -edge and ending in some V_{p_1} with an \overline{M} -edge. Again, we may assume that $p_1 \neq p_0$. If $s_{p_1}(M^*) \geq s_{p_1}(\overline{M})$, then there must be some alternating P_2 starting in V_{p_1} with an M^* -edge and leading to some V_{p_2} with $p_2 \notin \{p_0, p_1\}$ and so on, until eventually we obtain a sequence p_0, p_1, \dots, p_r with $s_{p_r}(M^*) < s_{p_r}(\overline{M})$.

As before, we let $M' := M^* \oplus P_1 \cdots \oplus P_r$ and note that $M' \in \mathcal{M}$ is closer to \overline{M} than M^* is. Hence, to obtain a contradiction, it remains to show that M' is lexicographically minimal. As $p_0 \notin N_1 \cup \dots \cup N_t$, we find that $s_{p_0}(M') = s_{p_0}(M^*) - 1 \geq s_{p_0}(\overline{M}) > x_{p_0} - d_t$. On the other hand, $s_{p_0}(M') < s_{p_0}(M^*) = x_{p_0} + d_t$. Hence

$$|s_{p_0}(M') - x_{p_0}| < d_t. \quad (4)$$

Now consider $p = p_r$. We first rule out that $p_r \in N_1 \cup \dots \cup N_{t-1}$. Assume to the contrary that $p_r \in N_j$ for some $j \in \{1, \dots, t-1\}$. Then as lower bound we have $s_{p_r}(M') = s_{p_r}(M^*) + 1 \geq x_{p_r} - d_j + 1 > x_{p_r} - d_j$, and as upper bound, $s_{p_r}(M') = s_{p_r}(M^*) + 1 \leq s_{p_r}(\overline{M}) \leq x_{p_r} + d_j$. Hence,

$$|s_{p_r}(M') - x_{p_r}| \leq d_j. \quad (5)$$

Inequality (5), together with (4) and the fact that $|s_p(M') - x_i| = |s_p(M^*) - x_i|$ for $p \notin \{p_0, p_r\}$ shows that M' is lexicographically smaller than M^* , a contradiction. We conclude that $p_r \notin N_1 \cup \dots \cup N_{t-1}$.

We now have $s_{p_r}(\overline{M}) \leq x_{p_r} + d_t$ if $p_r \in N_t$ and $s_{p_r}(\overline{M}) < x_{p_r} + d_t$ if $p_r \notin N_t$. Hence, we can repeat the arguments that we used for the case where $t = 1$ to obtain our contradiction. This completes the correctness proof of **Lex-Min**.

Running time analysis. As x_p is fixed and $s_p(M)$ is an integer between 0 and $|V|/2$, there are $O(|V|)$ values for $|x_p - s_p(M)|$. Hence, we can find d_t by binary search in $O(\log |V|)$ time. This requires $O(\log |V|)$ applications of Corollary 1, each of which taking time $O(|V|^3)$. So, finding a d_t takes $O(|V|^3 \log |V|)$ time. Each time we find a d_t , the number of finished countries increases by at least one. As the number of countries is n , the total running time of **Lex-Min** is $O(n|V|^3 \log |V|)$. \square

4 The Simulations

Our goals are to examine the benefits of using **Lex-Min** instead of a maximum matching that minimizes the largest country deviation d_1 from the target allocation x (we find such a matching by only performing Step 1 of **Lex-Min**) and to test the effect of several (sophisticated) solution concepts. We therefore perform simulations for a large number of countries, as we explain below.

Simulation instances. Using the generator [34]⁵ we obtain 100 compatibility graphs D_1, \dots, D_{100} , each of size roughly 2000. We then construct 100 compatibility graphs D_1^1, \dots, D_{100}^1 for round 1, where for $i \in \{1, \dots, 100\}$, D_i^1 is a subgraph of D_i of size roughly 500. So, a quarter of the patient-donor pairs will enter the program in round 1. The remaining patient-donor pairs will be added as vertices to the compatibility graph randomly, by a uniform distribution between the remaining

⁵ This is an updated version of [39], a data generator which is commonly used in experimental studies (see e.g. [17,21,30,33]) but nowadays (e.g. in [22]) it is replaced by [34].

rounds. Our code is available in GitHub repository [8], along with the data from [34] describing the compatibility graphs and the seeds used for the randomization.

We perform simulations for n countries with $n = 4, \dots, 15$.⁶ For every n , we first divide the vertices of each D_i in an arbitrary but equal way between the countries, so countries have the same size. For $i \in \{1, \dots, 100\}$, we set $D_i^1(n) = D_i^1$. Then, for each $D_i^1(n)$ we start a 6-year international KEP with quarterly matching rounds, that is, a simulation that consists of 24 rounds in total. In this way we obtain 24 compatibility graphs $D_i^1(n), \dots, D_i^{24}(n)$ for each simulation.

Let $M_i^j(n)$ be the maximum matching that we compute for $D_i^j(n)$. If $j \leq 23$, then we construct $D_i^{j+1}(n)$ as follows. First, we remove the vertices that are matched by $M_i^j(n)$; the corresponding patient-donor pairs have been helped. If $j \geq 4$, then we also remove those vertices from $D_i^j(n)$ that are not in $M_i^j(n)$ but that do belong to $D_i^{j-3}(n)$. This is because in real life, patients may seek for alternative treatment or may have deceased after one year in the KEP. Finally, we add the vertices that correspond to the patient-donor pairs that were assigned, in advance of the simulation, to enter the program in round $j + 1$.

A *simulation instance* consists of the data needed to generate a graph $D_i^1(n)$ and its successors $D_i^2(n), \dots, D_i^{24}(n)$, together with specifications for the initial allocation y and maximum matching M to be used in each round. We now discuss how we computed these choices.

Initial allocations. Recall from Section 2 that we consider the Shapley value, nucleolus, benefit value and contribution value as initial allocations. These solution concepts are defined in terms of values $v(S)$ of the generalized matching game (N, v) on a compatibility graph $D_i^j(n)$. Recall that for a coalition of countries $S \subseteq N$, $v(S)$ is the size of a maximum matching in the subgraph of $D_i^j(n)$ induced by the vertices of the countries of S . We compute the size of a maximum matching efficiently, using the package of [24]. The contribution value and benefit value can now be efficiently computed, using their definitions. For the Shapley value, we were still able to implement a naive approach relying directly on (1). However, computing the nucleolus of a generalized matching game is highly nontrivial for the number of countries we consider: we had to use the *Lexicographical Descent* method of [9], which is the state-of-the-art method in nucleolus computation.⁷

Solutions. As mentioned, we aim to examine the benefits of using solutions (maximum matchings) prescribed by **Lex-Min** instead of those that give us a deviation of d_1 from the target allocation. For the latter it suffices to perform only the first step of **Lex-Min**. In both cases we apply Corollary 1. As explained in Section 3 (see also [15]), applying Corollary 1 requires solving a maximum weight perfect matching problem. In order to do the latter efficiently, we again used the package of [24]. We refer to Appendix A for further details of the implementation of **Lex-Min**.

Credit system. Similar to the previous studies [12,31], we expect that the credit function c will make the KEP more balanced. To distinguish between the effect of **Lex-min** and the effect of c we run the same simulations for the following four *scenarios*:

1. *lexmin+c*: M is the maximum matching returned by **Lex-Min** and $x = y + c$.
2. *lexmin*: M is the maximum matching returned by **Lex-Min** and $x = y$.
3. *d1+c*: M is a maximum matching that minimizes d_1 and $x = y + c$.
4. *d1*: M is a maximum matching that minimizes d_1 and $x = y$.

Computational environment and scale. We ran all simulations on a desktop PC with Intel Core i7-6700 3.4 GHz CPU and 8 GB of RAM, running on Windows 10 OS and C++ implementation

⁶ We set D_1, \dots, D_{100} have size 2000 to be able to go up to $n = 15$. As we also did a simulation with a size of 1000 for up to $n = 10$ and found similar results, we believe our choice of 2000 is robust.

⁷ Lexicographical descent breaks down the computation of the nucleolus into $O(n)$ linear programs (LPs), which still have exponential size, but can be easier handled, through the solution of small dual relaxations combined with easily generated primal feasible starting points. The run time is still exponential, but in this way we are able to deal with significantly larger problem instances than in previous approaches.

in Visual Studio. Our code [8] use the open-source code [7] of the Lexicographical Descent method for computing the nucleolus. The scale of our experiments for international KEPs is *unprecedented*: the total number of simulations we ran is equal to $4 \times 4 \times 12 \times 100 = 19200$ (namely, four initial allocations y ; four scenarios; twelve country sizes n ; and 100 initial compatibility graphs D_i).

Evaluation measure. To measure balancedness we do as follows. After the 24 matching runs of a single instance, we will have a total target allocation x^* , which is defined as the sum of the 24 target allocations, and a maximum matching M^* , which is the union of the chosen matchings in each of the 24 matching runs. Note that the total number of kidney transplants is $2|M^*|$. We now define the *total relative deviation* as $\frac{\sum_{p \in N} |x_p^* - s_p(M^*)|}{2|M^*|}$. Recall that for each triple that consists of a country set size, choice of allocation and choice of scenario, we run 100 instances. We take the average of the 100 relative deviations. This gives us the *average total relative deviation*. We use this measure to take into account the scale of the international KEP. We also took the *maximum relative deviation*, which is defined as $\frac{\max_{p \in N} |x_p^* - s_p(M^*)|}{2|M^*|}$, leading to the *average maximum relative deviation*. In both cases, exactly the same conclusions can be drawn: see Appendix F for the latter.

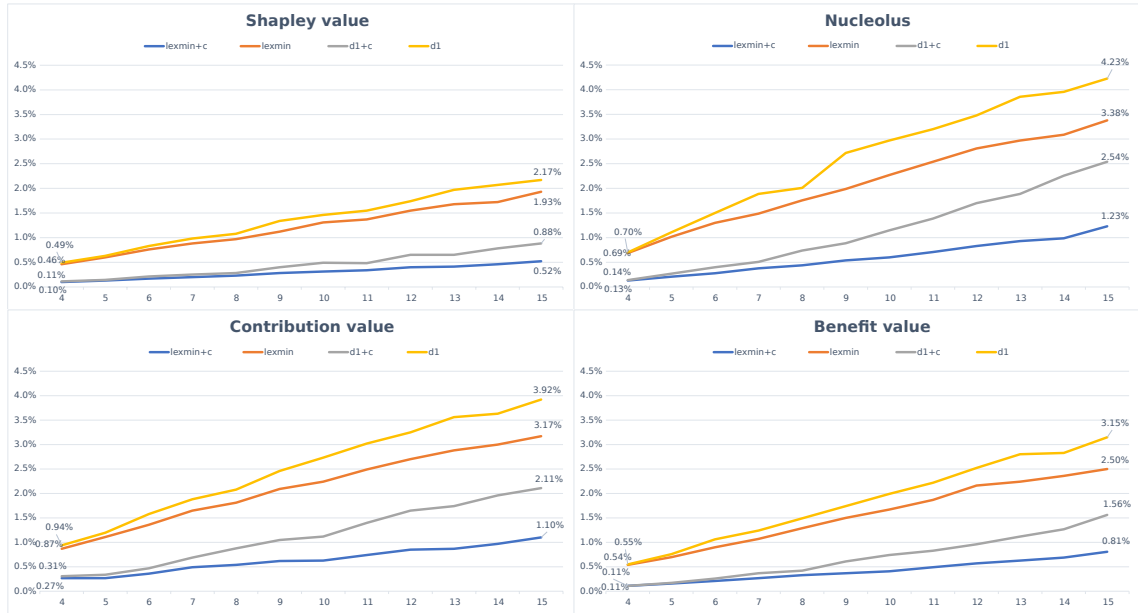


Fig. 3. Average total relative deviations where n is ranging from 4 to 15.

Results and Evaluation. Figure 3 shows our main results. Our main conclusion from Figure 3 is that *lexmin+c* yields the lowest average total relative deviation for all four initial allocation y , with larger differences when the number of countries is growing. From Figure 3 we can also compute the *relative improvement* of *lexmin+c* over *d1+c*. For example, for $n = 15$, this percentage is $(2.54 - 1.23) / 2.54 = 52\%$ for the nucleolus, whereas for the other solution concepts it is 41% (Shapley value); 48% (contribution value); and 48% (benefit value). Considering the average improvement over $n = 4, \dots, 15$ yields percentages of 48% (nucleolus); 33% (Shapley value); 44% (contribution value) and 40% (benefit value). As mentioned, the choice for initial allocation is up to the policy makers of the international KEP. However, from Figure 4 we see that the Shapley value in the *lexmin+c* scenario consistently provides the smallest deviations from the target allocations (0.52% for $n = 15$), while the contribution value for $n \leq 12$ and the nucleolus for $n \geq 13$ perform the worst. We now evaluate some other aspects of our experiments:

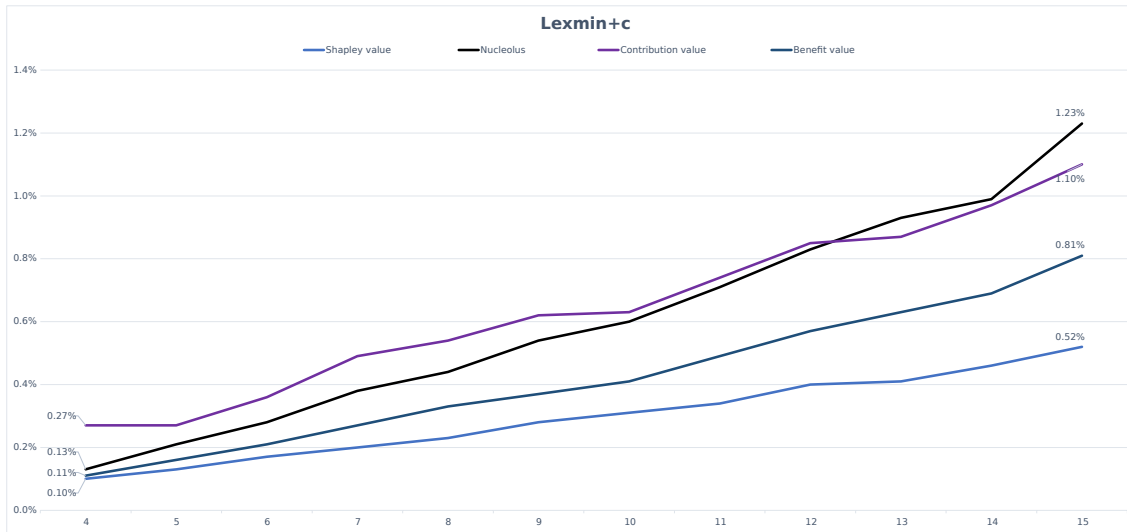


Fig. 4. Displaying the four *lexmin+c* graphs of Figure 3 in one plot.

1. As a sanity check, we also tested the scenario of using arbitrary maximum matchings. As expected, this makes the kidney exchange scheme significantly more unbalanced, with average total relative deviations above 14% for all four initial allocations y (see Appendix B).
2. From Figure 3 we can compare *lexmin+c* with *lexmin*, and *d1+c* with *d1* to see that using c has a substantial effect. However, using *lexmin+c* is the best: whilst *lexmin* ensures that allocations stay close to the target allocations, the role of c is to keep the deviations small and to guarantee fairness for the participating countries over a long time period.
3. In Section 2, we gave an example where credits build up over time infinitely. However, this behaviour did not happen in any of our 24-round simulations (as argued above). We performed a refined analysis to verify if such behaviour could be expected if the number of rounds is larger than 24. We did not see any such indication; see Appendix C.
4. The computational time saved by *d1+c* compared to *lexmin+c* is negligible. As for the other computation requirements, while the *exponential explosion* in generating the cooperative games (that is, computing the 2^n values $v(S)$) is dominating after a while, building the compatibility graph took most of the time initially (up to $n = 12$). We refer to Appendix D for the details.
5. Cooperation between countries leads to a significantly larger number of total kidney transplants than non-cooperation, especially when more countries are participating. See Appendix E.
6. In our cooperative setting, we still maximize total welfare and therefore choose maximum matchings. However, a change in parameter may result in a change in maximum matching size (total number of kidney transplants). However, these differences turned out to be negligible (between 0.01% and 0.1% on average). See again Appendix E for details.
7. *Lex-min* computes at most $n - 1$ d_i -values, and in our experiments we actually found instances where d_{n-1} was computed even for $n = 10$.
8. We also performed a coalitional stability check to see if the initial allocations and solutions (actual allocations) are in the core of the associated generalized matching game. We found a high and similar level of stability for all four scenarios that is slightly decreasing when the number of countries is increasing. Although the Shapley value provides consistently the smallest deviations (see Figure 4), Table 1 shows that the nucleolus and the benefit values provide higher levels of coalitional stability (measured in the distance of violating a core inequality) not only at the level of initial allocations, but even with respect to the actual number of transplants within the international KEP. See Appendix G for further details.

Allocations	Shapley value	Nucleolus	Benefit value	Contribution value
Initial allocation	50.46	53.34	53.40	48.15
Solution	50.39	53.10	53.19	48.13

Table 1. Average distances, over n ranging from 4 to 15, of accumulated initial allocations $y = \sum_{h=1}^{24} y^h$ and accumulated number of kidney transplants $s = \sum_{h=1}^{24} s(M^h)$ (where M^h is the chosen matching in period h) respectively, from violating a core inequality of the accumulated generalized matching games under the *lexmin+c* scenario. The *accumulated generalized matching game* is obtained from the generalized matching games (N, v^h) on compatibility graphs D^h for $h = 1, \dots, 24$ by setting $v = \sum_{h=1}^{24} v^h$. For example, by using the Shapley value as the initial allocation, every coalition has a minimum guaranteed surplus of 50.39 kidney transplants on average by participating in the international KEP.

Varying country sizes. We repeated our *whole* experimental study (19200 simulations) for varying country sizes with ratio small:medium:large=1:2:3. As can be verified in Appendix H, we can draw exactly the same conclusions from these simulations.

5 Conclusions

We extended the theoretical study of Biró et al. [15] on credit systems in international KEPs by proving that we can even compute, in polynomial time, a maximum matching that is lexicographically minimal with respect to the country deviations from target allocations. Our experiments showed that using these solutions leads to a significant improvement especially when the number of countries is large. This is relevant, as international KEPs, such as Eurotransplant, are under development and others, such as Scandiarttransplant, are expected to grow.

We also advocate the use of lexicographically minimal matchings as we now have a polynomial-time algorithm for computing them. Moreover, our simulations show that computing them instead of maximum matchings that only minimize the maximum deviation indeed does not require any significant additional computational time (see Appendix D). A challenging part of our project was to compute the nucleolus of generalized matching games consisting of up to fifteen countries. For this we used the state-of-the-art *Lexicographical Descent* method of [9].

Future Research. All the above findings for 2-way exchange cycles are also interesting to research for a setting with ℓ -way exchange cycles for $\ell \geq 3$. The previous experimental studies [12,31] for $\ell = 3$ only considered 3–4 countries. To do meaningful experiments for a large number of countries, a new practical approach is required to deal with the computational hardness of computing optimal solutions (recall the aforementioned NP-hard result of [1] for the case where $\ell \geq 3$).

We also plan to consider directed compatibility graphs with *weights* $w(i, j)$ on the arcs (i, j) representing the utility of transplant (i, j) . Computing a maximum-weight solution that minimizes the weighted country deviation d_1 now becomes NP-hard [15]. However, we could still consider the set of maximum-size solutions as our set \mathcal{M} instead of the set of maximum-weight solutions. We can then find a maximum-weight matching that lexicographically minimizes the original country deviations $|x_p - s_p(M)|$. The main challenge is to set weights $w(i, j)$ appropriately, since optimization policies may vary widely in national KEPs: in Europe, maximizing the number of transplants is the first objective (cf. our setting in which $w \equiv 1$) but further scores are based on different objectives, such as improving the quality of the transplants, easing the complexity of the logistics or giving priority to highly sensitized patients; see [11] for further details.

References

1. D. Abraham, A. Blum, and T. Sandholm, Clearing algorithms for Barter exchange markets: Enabling nationwide kidney exchanges, *Proc. EC 2007*, 295–304, 2007.

2. N. Agarwal, I. Ashlagi, E. Azevedo, C. R. Featherstone, and Ö. Karaduman, Market failure in kidney exchange, *Technical report*, National Bureau of Economic Research, 2018.
3. T. Andersson and J. Kratz, Pairwise kidney exchange over the blood group barrier, *Lund University Department of Economics Working Paper 2016:11*, 2016.
4. I. Ashlagi, F. Fischer, I. Kash, and A. Procaccia, Mix and match: A strategyproof mechanism for multi-hospital kidney exchange, *Games and Economic Behavior* 91:284–296, 2015.
5. I. Ashlagi and A. Roth, New challenges in multihospital kidney exchange, *American Economic Review* 102:35–359, 2012.
6. I. Ashlagi and A. Roth, Free riding and participation in large scale, multi-hospital kidney exchange, *Theoretical Economics* 9:817–863, 2014.
7. M. Benedek, Nucleolus, <https://github.com/blrzsvrzs/nucleolus>, 2018.
8. M. Benedek, International Kidney Exchange Scheme, https://github.com/blrzsvrzs/int_kidney_exchange, 2021.
9. M. Benedek, J. Fliege, and T. D. Nguyen, Finding and verifying the nucleolus of cooperative games, *Mathematical Programming*, to appear.
10. P. Biró, B. Haase, J. van de Klundert et al., Building kidney exchange programmes in Europe – An overview of exchange practice and activities, *Transplantation* 103:1514–1522, 2019.
11. P. Biró, J. van de Klundert, D.F. Manlove et al., Modelling and optimisation in European Kidney Exchange Programmes, *European Journal of Operational Research* 291:447–456, 2021.
12. P. Biró, M. Gyetvai, X. Klimentova, J. P. Pedroso, W. Pettersson, and A. Viana, Compensation scheme with Shapley value for multi-country kidney exchange programmes, *Proc. ECMS 2020*, 129–136, 2020.
13. P. Biró, W. Kern, and D. Paulusma, Computing solutions for matching games, *International Journal of Game Theory* 41:75–90, 2012.
14. P. Biró, W. Kern, D. Paulusma, and P. Wojtuczky, The stable fixture problem with payments, *Games and Economic Behaviour* 108:245–268, 2018.
15. P. Biró, W. Kern, D. Pálvölgyi, and D. Paulusma, Generalized matching games for international kidney exchange, *Proc. AAMAS 2019*, 413–421, 2019.
16. A. Blum, I. Caragiannis, N. Haghtalab, A. D. Procaccia, E. B. Procaccia, and R. Vaish, Opting into optimal matchings, *Proc. SODA 2017*, 2351–2363, 2017.
17. A. Blum, J. P. Dickerson, N. Haghtalab, A. D. Procaccia, T. Sandholm, and A. Sharma, Ignorance is almost bliss: Near-optimal stochastic matching with few queries, *Operations Research*, 68:16–34, 2020.
18. G. A. Böhmig, J. Fronek, A. Slavcev, G. F. Fischer, G. Berlakovich, and O. Viklicky, Czech-Austrian kidney paired donation: first European cross-border living donor kidney exchange, *Transplant International* 30:638–639, 2017.
19. M. Carvalho, A. Lodi, J.P. Pedroso, and A. Viana, Nash equilibria in the two-player kidney exchange game, *Mathematical Programming* 161:389–417, 2017.
20. M. Carvalho and A. Lodi, Game theoretical analysis of kidney exchange programs, *arXiv preprint arXiv:1911.09207*, 2019.
21. M. Delorme, S. Garcia, J. Gondzio, J. Kalcsics, D.F. Manlove, and W. Pettersson, New algorithms for hierarchical optimisation in kidney exchange programmes, *Technical report ERGO 20–005*, Edinburgh Research Group in Optimization 2020.
22. M. Delorme, S. Garcia, J. Gondzio, J. Kalcsics, D.F. Manlove, W. Pettersson, and J. Trimble, A new heuristic and improved instance generation for kidney exchange programmes, Manuscript, 2021.
23. X. Deng, T. Ibaraki, and H. Nagamochi, Algorithmic aspects of the core of combinatorial optimization games, *Mathematics of Operations Research* 24:751–766, 1999.
24. B. Dezső, A. Jüttner, and P. Kovács, LEMON—an open source C++ graph template library, *Electronic Notes in Theoretical Computer Science* 264:23–45, 2011.
25. J.P. Dickerson, A.M. Kazachkov, A.D. Procaccia, and T. Sandholm, Small representations of big kidney exchange graphs, *Proc. AAAI 2017*, 487–493, 2017.
26. J. Edmonds, Maximum matching and a polyhedron with 0,1-vertices, *Journal of Research of the National Bureau of Standards Section B*, 69B:125–130, 1965.
27. C. Hajaj, J. Dickerson, A. Hassidim, T. Sandholm, and D. Sarne, Strategy-proof and efficient kidney exchange using a credit mechanism, *Proc. AAAI 2015*, 921–928, 2015.
28. T. Ito, N. Kakimura, N. Kamiyama, Y. Kobayashi, and Y. Okamoto, Efficient stabilization of cooperative matching games, *Proc. AAMAS 2016*, 41–49, 2016.
29. W. Kern and D. Paulusma, Matching games: the least core and the nucleolus, *Mathematics of Operations Research* 28:294–308, 2003.

30. X. Klimentova, J. P. Pedroso, and A. Viana, Maximising expectation of the number of transplants in kidney exchange programmes, *Computers & Operations Research*, 73:1–11, 2016.
31. X. Klimentova, A. Viana, J. P. Pedroso, and N. Santos, Fairness models for multi-agent kidney exchange programmes, *Omega* 102:102333, 2021.
32. J. Könemann, K. Pashkovich, and J. Toth, Computing the nucleolus of weighted cooperative matching games in polynomial time, *Mathematical Programming* 183:555–581, 2020.
33. R. S. Mincu, P. Biró, M. Gyetvai, A. Popa, and U. Verma, IP solutions for international kidney exchange programmes, *Central European Journal of Operations Research*, 29(2):403–423, 2021.
34. W. Pettersson and J. Trimble, Kidney Matching Tools Data Set Generator, <https://wpettersson.github.io/kidney-webapp/#/generator>, 2021.
35. N. Santos, P. Tubertini, A. Viana, and J. P. Pedroso, Kidney exchange simulation and optimization, *Journal of the Operational Research Society* 68:1521–1532, 2017.
36. D. Schmeidler, The nucleolus of a characteristic function game, *SIAM Journal on Applied Mathematics* 17:1163–1170, 1969.
37. Z. Sun, T. Todo, and T. Walsh, Fair pairwise exchange among groups, *Proc. IJCAI 2021*, 419–425, 2021.
38. P. Toulis and D. Parkes, Design and analysis of multi-hospital kidney exchange mechanisms using random graphs, *Games and Economic Behavior* 91:360–382, 2015.
39. J. Trimble, GitHub repository, Kidney Matching Tools Data Set Generator, <https://jamestrimble.github.io/kidney-webapp/#/generator>, 2016.

A Implementation of Lex-Min

We implemented **Lex-Min** as follows. Instead of a binary search for finding the smallest deviation d_t , we performed a greedy search for simplicity. We gradually try to decrease the deviations of the countries in a greedy way, starting with the ones that have the largest deviation. We maintain a set of countries already finished, which initially is the empty set. In every iteration we take one of the unfinished countries, say country p , with the largest deviation $\delta_p = |x_p - s_p(M)|$ where $M \in \mathcal{M}$ is the last maximum matching we computed. We then try to decrease this deviation without allowing a deviation of another unfinished country to increase above δ_p . If no decrease is possible, then we fix country p and move to the next unfinished country with the largest deviation. If a decrease is possible, then we consider the newly found maximum matching and repeat the process. That is, we consider again a country (possibly country p) with the largest deviation.

We briefly discuss the running time of the greedy variant. In each iteration, either we finish a country or we shrink the deviation interval of a country by an integer step. Therefore the number of iterations is upper bounded by the number n of countries plus the sum of the upper integer part of the initial deviations, which is $O(|V|)$. As an application of Corollary 1 takes $O(|V|^3)$ time, the total running time is $O((|V| + n)|V|^3)$. This running time can be worse than the running time of the binary search version, which is $O(n|V|^3 \log |V|)$, as $n \log(|V|)$ may be smaller than $|V| + n$. However, for the instances in our simulations the difference in run time appeared to be negligible.

Below we provide the pseudo-code of the greedy search version of **Lex-Min** that we implemented for doing our computational experiments. The difference of this pseudo-code and the pseudo-code of **Lex-Min** given in Section 3 is that in the pseudo-code outlined here we combine Steps 1 and 2 of **Lex-Min** together and we do the same for Steps 3 and 4 of **Lex-Min**.

ALGORITHM 1: Algorithm Greedy Lex-Min

Input: A generalized matching game (N, v) and an allocation x .

Output: A matching $M \in \mathcal{M}$ that is lexicographically minimal for x .

```

let  $r = 1$  % $r - 1$  is the number of countries already finished;
compute an arbitrary maximum matching  $M \in \mathcal{M}$ ;
for every country  $p$ , let  $\delta_p = |x_p - s_p(M)|$ ;
let  $\pi = (\pi_1, \dots, \pi_n)$  be an order of the countries by weakly decreasing  $\delta$ -values;
while  $r \leq n$  %for the unfinished countries do
    if  $\delta_{\pi_r} \leq 0.5$  then
        | STOP and RETURN  $M$  % $M$  is lexicographically minimal;
    end
    let  $R_{\pi_r} = ]x_{\pi_r} - \delta_{\pi_r}, x_{\pi_r} + \delta_{\pi_r}[$  %trying to reduce the difference of country  $\pi_r$ ;
    for  $k = r + 1, \dots, n$  do
        | if  $\delta_{\pi_k} = \delta_{\pi_r}$  then
            | | let  $R_{\pi_k} = ]x_{\pi_k} - \delta_{\pi_r}, x_{\pi_k} + \delta_{\pi_r}[$ ;
        | else
            | | let  $R_{\pi_k} = ]x_{\pi_k} - \delta_{\pi_r}, x_{\pi_k} + \delta_{\pi_r}[$ ;
        | end
    end
    let  $I_{\pi_k}$  be the largest non-negative integer sub-interval of  $R_{\pi_k}$ ,  $k = r, \dots, n$ ;
    if Corollary 1 returns a matching  $M'$  for intervals  $I_{\pi_r}, \dots, I_{\pi_n}$  then
        | let  $M = M'$  and recompute  $\pi$ 
        | % $\pi$  is a new order with respect to the new deviations  $|x_p - s_p(M')|$ ;
    else
        | % $\delta_{\pi_r}$  is fixed and country  $\pi_r$  is finished, we keep  $\pi$  and  $M$  the same
        | let  $r = r + 1$ ;
    end
end

```

B Choosing Arbitrary Matchings

We refer to Figure 5. This figure serves as a “sanity check” and shows that picking arbitrary maximum matchings as solutions makes the kidney exchange scheme significantly more unbalanced, with average total relative deviations above 14% for all four initial allocations y . (Note that under this scenario, using the credit function c is meaningless, as in each round we pick an arbitrary maximum matching, independently from what happened in the previous round).



Fig. 5. Enhancing Figure 3 with the scenario of choosing an arbitrary maximum matching in each round.

C Credit Accumulation

In Section 2, we gave a theoretical example where credits build up over time for a certain country and are essentially meaningless. However, this behaviour did not happen in any of our 24-round simulations. We performed for every number n of countries with $n \in \{4, \dots, 15\}$, a refined analysis, just to verify if such behaviour could be expected if the number of rounds is larger than 24.

First recall that for a single instance, $c_p^h = x_p^h - y_p^h$ and also that $c_p^h = \sum_{t=1}^{h-1} (y_p^t - s_p(M^t))$ for country p and round $h \geq 2$. That is, credits are the difference between the initial and target allocations in each round, as well as the accumulation of the deviations from the initial allocations. The latter is the accumulation we would like to avoid from happening by using the credit function c . In order to assess credit accumulation over time, we define the *average accumulated deviation* at round h as the average of $\sum_{p \in N} |c_p^h|$ over the 100 instances corresponding to a certain scenario and choice of initial allocation.

In Figure 6 we show the results of our analysis. The results displayed are only for $n = 15$ as the figures for $n \in \{4, \dots, 14\}$ turned out to be very similar. As Figure 6 shows, the behaviour of credit accumulation is similar for each choice of initial allocation y . Moreover, as expected, the average total deviation is clearly accumulating over time if arbitrary maximum matchings are chosen as solutions (see the left side figures). Under *lexmin* and *d1* there is still accumulation, but the credit system is indeed successfully mitigating against this effect, as the plots for *lexmin+c* and *d1+c* show (see the right side figures). In particular, there is no indication that this behaviour will change if the number of rounds is larger than 24.

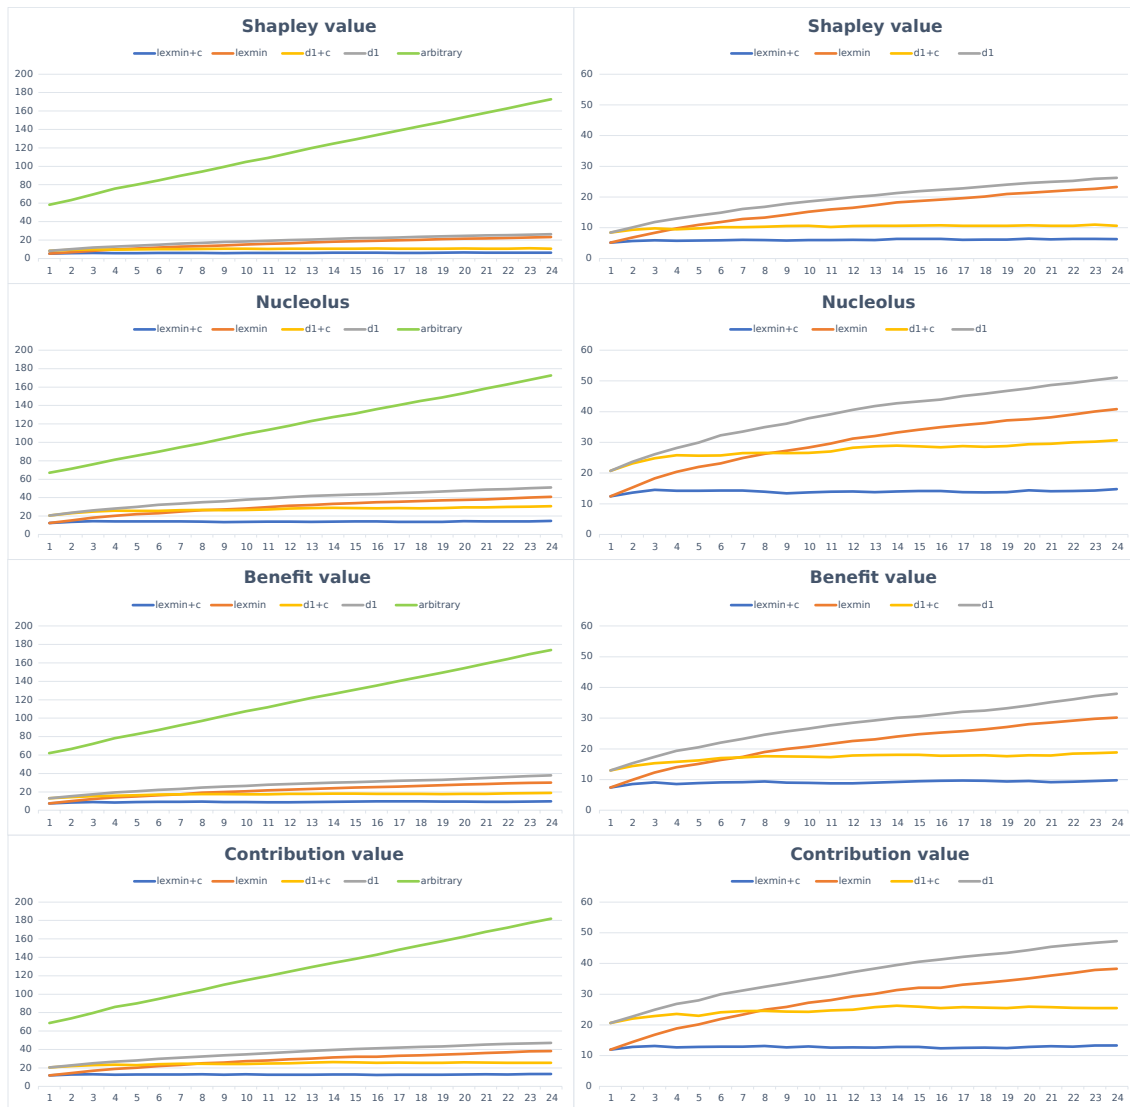


Fig. 6. The average accumulated deviation over the 24 rounds when the number of countries $n = 15$. The right side of the figure is taken from the left side after omitting the additional scenario where arbitrary maximum matchings are chosen.

D Computational Time

We refer to Table 2 for an overview of various computational times by our simulations. In particular this table shows that using lexicographically minimal maximum matchings instead of ones that only minimize the largest deviation d_1 from the target allocation does not require a significant amount of additional computation time. It can also be noticed from Table 2 that, as expected, computing the Shapley value and the nucleolus is more expensive than computing the contribution value and the benefit value, especially as the number of countries n is growing. Finally, we see from Table 2 that the *game generation*, that is, computing the 2^n values $v(S)$, is by far the most expensive part when n is growing.

CPU times / Countries	4	5	6	7	8	9	10	11	12	13	14	15
Data preparation	0.38	0.37	0.40	0.39	0.38	0.38	0.39	0.42	0.43	0.36	0.43	0.44
Graph building	25.27	27.13	27.06	26.97	26.97	26.83	27.07	26.93	26.82	27.00	27.21	27.82
Game generation	0.07	0.12	0.27	0.48	0.89	1.70	3.36	6.49	12.65	25.35	49.67	101.34
Shapley value	10^{-5}	10^{-4}	10^{-4}	10^{-4}	10^{-3}	10^{-3}	10^{-3}	0.01	0.02	0.04	0.09	0.18
Nucleolus	10^{-3}	10^{-3}	0.01	0.02	0.02	0.03	0.05	0.08	0.13	0.23	0.46	0.94
Contribution	10^{-5}	0.00	10^{-5}	0.00	10^{-6}	0.00	0.00	10^{-5}	10^{-5}	10^{-5}	0.00	10^{-5}
Benefit	10^{-5}	0.00	10^{-5}	10^{-6}	10^{-5}	0.00	10^{-6}	10^{-5}	10^{-5}	10^{-5}	10^{-5}	10^{-5}
Matching	1.13	1.27	1.26	1.30	1.33	1.39	1.47	1.45	1.53	1.60	2.33	2.61
Total: lexmin+c	26.95	28.94	28.99	29.14	29.58	30.32	32.29	35.32	41.47	54.37	79.78	132.48
Total: d1+c	26.51	28.39	28.42	28.51	28.90	29.57	31.48	34.47	40.58	53.43	78.39	130.85
Total: lexmin	26.54	28.44	28.48	28.59	29.01	29.70	31.63	34.63	40.74	53.59	78.60	131.14
Total: d1	26.50	28.35	28.36	28.43	28.81	29.45	31.35	34.34	40.40	53.21	78.07	130.39
Total: arbitrary matching	25.82	27.68	27.71	27.82	28.22	28.88	30.78	33.80	39.89	52.72	77.36	129.80

Table 2. Computational times for a single instance, broken down to the different computation tasks for *lexmin+c*, while the total rows for the different scenarios are averaged over the four initial allocations.

E Number of Kidney Transplants

We refer to Table 3 for the effect of cooperation on total welfare as shown in our simulations.

Allocations & scenarios / Countries	4	5	6	7	8	9
Without cooperation	1124.28	974.56	850.60	759.40	687.28	628.92
Shapley value:						
arbitrary matching	108.5%	125.2%	142.9%	159.5%	175.7%	191.5%
d1	108.7%	125.3%	143.1%	159.7%	175.8%	191.6%
d1+c	108.7%	125.3%	143.0%	159.6%	176.0%	191.4%
lexmin	108.6%	125.3%	143.1%	159.7%	175.9%	191.6%
lexmin+c	108.6%	125.3%	143.1%	159.7%	175.8%	191.7%
Nucleolus:						
arbitrary matching	108.5%	125.2%	142.9%	159.5%	175.7%	191.5%
d1	108.6%	125.4%	143.1%	159.7%	175.9%	191.6%
d1+c	108.7%	125.4%	142.9%	159.7%	175.9%	191.5%
lexmin	108.6%	125.4%	143.1%	159.6%	175.9%	191.6%
lexmin+c	108.7%	125.4%	143.1%	159.5%	175.8%	191.6%
Contribution value:						
arbitrary matching	108.5%	125.2%	142.9%	159.5%	175.7%	191.5%
d1	108.6%	125.3%	143.0%	159.6%	176.2%	191.8%
d1+c	108.7%	125.3%	143.1%	159.7%	175.9%	191.6%
lexmin	108.6%	125.4%	143.0%	159.7%	175.9%	191.8%
lexmin+c	108.6%	125.4%	143.1%	159.6%	176.0%	191.6%
Benefit value:						
arbitrary matching	108.5%	125.2%	142.9%	159.5%	175.7%	191.5%
d1	108.6%	125.3%	143.1%	159.7%	175.9%	191.6%
d1+c	108.7%	125.4%	143.1%	159.7%	175.9%	191.9%
lexmin	108.6%	125.5%	142.9%	159.7%	176.0%	191.7%
lexmin+c	108.6%	125.4%	143.0%	159.7%	176.0%	191.7%
Allocations & scenarios / Countries	10	11	12	13	14	15
Without cooperation	583.84	538.68	497.72	474.92	440.52	421.88
Shapley value:						
arbitrary matching	209.2%	224.0%	240.2%	253.2%	270.1%	285.7%
d1	209.2%	224.3%	240.5%	253.2%	270.0%	286.0%
d1+c	209.3%	224.2%	240.6%	253.1%	270.0%	286.3%
lexmin	209.5%	224.1%	240.4%	253.3%	270.3%	286.0%
lexmin+c	209.4%	224.0%	240.6%	253.5%	270.4%	286.3%
Nucleolus:						
arbitrary matching	209.2%	224.0%	240.2%	253.2%	270.1%	285.7%
d1	209.4%	224.2%	240.5%	253.6%	270.3%	286.4%
d1+c	209.3%	224.2%	240.4%	253.6%	270.4%	286.2%
lexmin	209.3%	224.3%	240.6%	253.3%	270.2%	286.2%
lexmin+c	209.2%	224.3%	240.6%	253.3%	270.1%	286.2%
Contribution value:						
arbitrary matching	209.2%	224.0%	240.2%	253.2%	270.1%	285.7%
d1	209.4%	224.2%	240.5%	253.6%	270.4%	286.0%
d1+c	209.6%	224.3%	240.5%	253.4%	270.2%	286.1%
lexmin	209.5%	224.2%	240.5%	253.4%	270.2%	286.2%
lexmin+c	209.4%	224.2%	240.6%	253.3%	270.3%	286.3%
Benefit value:						
arbitrary matching	209.2%	224.0%	240.2%	253.2%	270.1%	285.7%
d1	209.4%	224.4%	240.7%	253.7%	270.3%	286.1%
d1+c	209.4%	224.3%	240.6%	253.7%	270.1%	286.2%
lexmin	209.4%	224.4%	240.6%	253.7%	270.3%	286.3%
lexmin+c	209.6%	224.1%	240.6%	253.2%	270.4%	286.2%

Table 3. For $n = 4, \dots, 15$, the improvement on the average number of kidney transplants if cooperation is allowed. For example, if $n = 4$, y is the Shapley value and the scenario is *lexmin+c*, then the average number of kidney transplants changes from 1124.28 (no cooperation) to $1.086 \times 1124.28 = 1220.97$.

F Average Maximum Relative Deviations

We refer to Figures 7, 8 and 9 as the counterparts of Figures 3, 4 and 5 using the average maximum relative deviation as evaluation measure instead of the average total relative deviation. Although the plots behave differently for increasing n (as expected from the different definitions) we can draw the same conclusions from these figures as from the ones for the average total relative deviation.

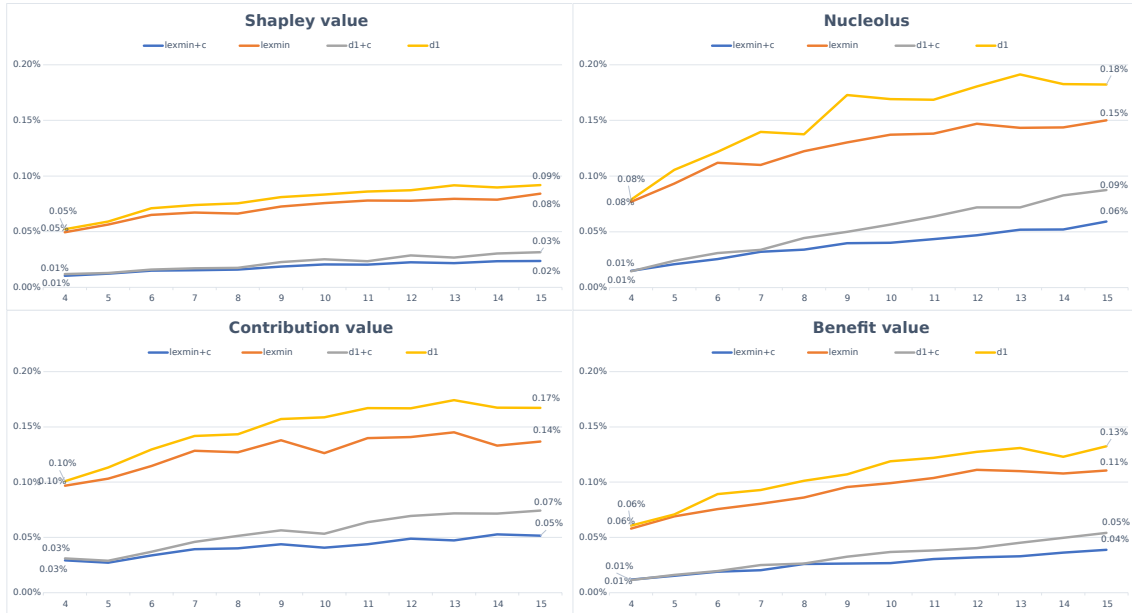


Fig. 7. Average maximum relative deviations where n is ranging from 4 to 15.

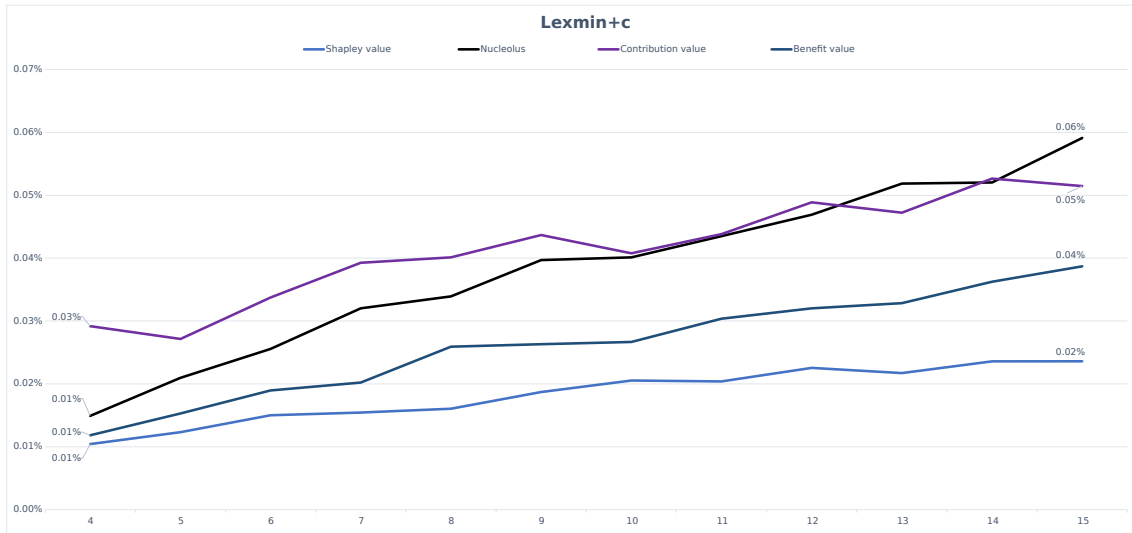


Fig. 8. Displaying the four $lexmin+c$ graphs of Figure 7 in one plot.

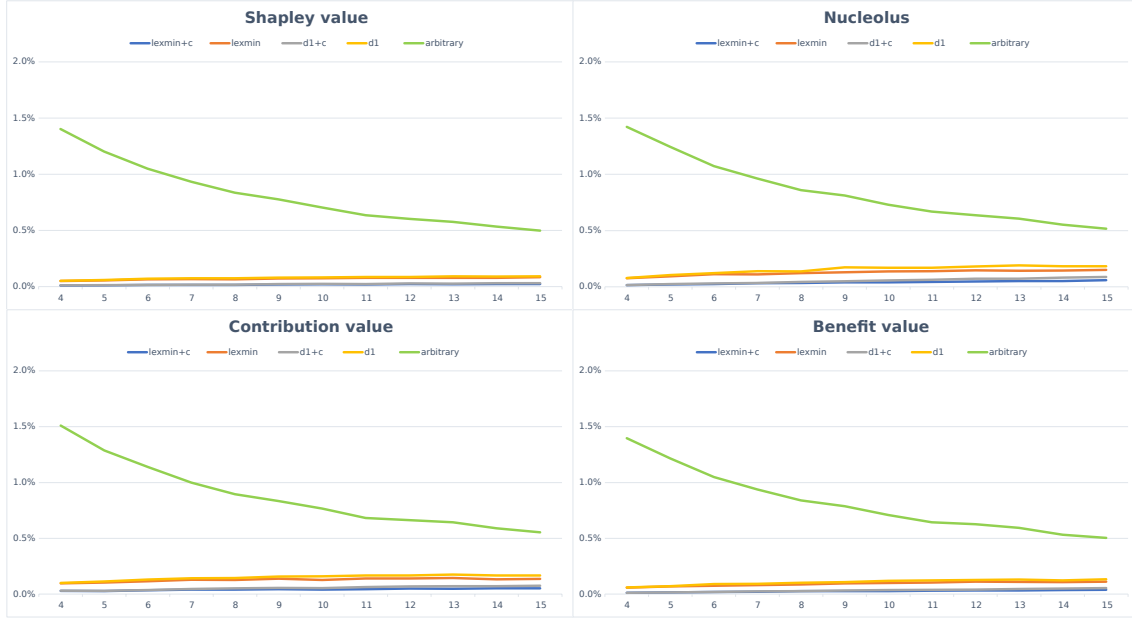


Fig. 9. Enhancing Figure 7 with the scenario of choosing an arbitrary maximum matching in each round.

G Coalitional Stability

In order to assess the long-term coalitional stability of an international KEP, we turn our focus towards the core of the generalized matching games. More specifically, we analyze the accumulated generalized matching games (recall that these are obtained by summing up the 24 generalized matching games of each of the twenty-four periods). All the accumulated generalized matching games in our simulation had a non-empty core. In Table 4 we evaluate the levels of non-emptiness of these cores by showing the radius of the largest ball that can be fit into the core. Unsurprisingly, this radius is decreasing as the number of countries is increasing. Moreover, this distance is practically the same, independently of the chosen initial allocation or scenario.

In order to compare the levels of core stability, we also consider the *accumulated initial allocations* and the *accumulated number of transplants* (recall that a solution is maximum matching that gives us the actual allocation of kidney transplants for each country). These are obtained by summing up the 24 initial allocations and number of transplants, respectively, of each period. In our simulation the accumulated initial allocations and accumulated number of transplants are always within the core of the accumulated generalized matching games. Tables 5 and 6 show the average distances of accumulated initial allocations and accumulated number of transplants, respectively, from violating a core inequality. From these two tables we observe the following:

- The distances from violating a core inequality are decreasing when the number of countries increases.
- There is a significant difference in the levels of stability both when accumulated initial allocations and when accumulated number of transplants are considered: the Shapley value is less stable from a coalitional standpoint than the nucleolus and the benefit value.
- The sanity check of choosing arbitrary maximum matchings shows a significant less stable performance (see Table 6 and recall that initial allocations are irrelevant when arbitrary maximum matchings are chosen as solutions).

Allocations & policies	4	5	6	7	8	9	
Shapley:							
lexmin+c	114.37	94.62	80.65	69.60	61.30	54.86	
lexmin	114.46	94.60	80.41	69.45	61.38	54.69	
d1+c	114.61	94.87	80.16	69.58	61.84	54.95	
d1	114.59	94.60	80.35	69.61	61.39	54.77	
arbitrary	114.47	94.73	80.20	69.52	61.57	54.99	
Nucleolus:							
lexmin+c	114.77	94.22	80.50	69.44	61.21	54.84	
lexmin	114.31	94.39	80.36	69.56	61.36	54.73	
d1+c	114.26	94.75	80.06	69.56	61.30	55.01	
d1	114.17	94.38	80.41	70.00	61.33	54.74	
arbitrary	114.47	94.73	80.20	69.52	61.57	54.99	
Benefit:							
lexmin+c	114.70	95.01	80.74	69.41	61.76	55.08	
lexmin	114.55	94.66	80.16	69.11	61.64	54.95	
d1+c	114.17	94.98	80.15	69.39	61.58	54.78	
d1	114.25	94.86	80.28	69.21	61.66	54.94	
arbitrary	114.47	94.73	80.20	69.52	61.57	54.99	
Contribution:							
lexmin+c	114.21	94.74	80.55	69.47	61.67	55.02	
lexmin	114.25	94.70	80.34	69.77	61.56	55.05	
d1+c	114.65	94.32	80.21	69.65	61.23	54.96	
d1	114.43	94.32	80.06	69.64	61.73	55.07	
arbitrary	114.47	94.73	80.20	69.52	61.57	54.99	
Allocations & policies	10	11	12	13	14	15	Total
Shapley:							
lexmin+c	50.95	45.44	41.81	38.65	36.14	34.16	60.21
lexmin	51.09	45.51	41.83	38.48	36.20	34.02	60.18
d1+c	50.44	45.49	41.53	38.54	35.84	33.89	60.15
d1	50.72	45.82	41.70	38.66	35.95	34.06	60.18
arbitrary	51.07	45.42	41.51	38.63	35.93	33.91	60.16
Nucleolus:							
lexmin+c	50.83	45.58	41.75	38.49	35.98	34.00	60.13
lexmin	50.75	45.75	41.76	38.56	36.03	34.05	60.13
d1+c	50.67	45.50	41.51	38.46	36.06	34.09	60.10
d1	50.77	45.60	41.66	38.47	36.04	34.16	60.14
arbitrary	51.07	45.42	41.51	38.63	35.93	33.91	60.16
Benefit:							
lexmin+c	50.91	45.54	41.71	38.34	36.07	34.05	60.28
lexmin	50.62	45.65	41.63	38.66	35.97	34.07	60.14
d1+c	50.75	45.65	41.62	38.52	35.90	34.00	60.13
d1	50.62	45.61	41.54	38.69	36.01	34.01	60.14
arbitrary	51.07	45.42	41.51	38.63	35.93	33.91	60.16
Contribution:							
lexmin+c	50.86	45.69	41.87	38.63	36.05	33.90	60.22
lexmin	50.77	45.57	41.74	38.57	35.93	33.97	60.19
d1+c	50.81	45.59	41.81	38.36	35.90	33.97	60.12
d1	50.85	45.51	41.61	38.61	36.06	33.95	60.15
arbitrary	51.07	45.42	41.51	38.63	35.93	33.91	60.16

Table 4. Average radius of the largest ball fitted into the core of the accumulated generalized matching games for the four initial allocations, the four scenarios and the sanity check of choosing an arbitrary maximum matching, for the twelve country set sizes as well as the total average over all country set sizes.

Allocations & policies	4	5	6	7	8	9	
Shapley:							
lexmin+c	105.25	85.64	70.31	59.65	51.39	44.60	
lexmin	106.08	85.29	69.95	59.25	51.54	44.70	
d1+c	106.12	85.84	69.93	59.29	52.06	45.21	
d1	106.15	85.09	70.03	59.46	51.30	44.58	
Nucleolus:							
lexmin+c	108.84	88.40	73.63	62.84	54.48	47.92	
lexmin	108.40	88.39	73.81	63.19	54.84	48.03	
d1+c	108.68	88.79	73.76	63.03	54.00	48.44	
d1	108.34	88.33	73.96	63.52	54.57	47.86	
Benefit:							
lexmin+c	107.45	87.47	73.18	62.11	54.62	48.21	
lexmin	107.43	87.32	72.52	61.57	54.11	47.93	
d1+c	107.37	87.55	72.60	61.90	54.67	47.87	
d1	106.95	87.52	72.56	61.40	54.58	48.28	
Contribution:							
lexmin+c	101.26	81.72	67.48	55.60	48.95	42.44	
lexmin	101.69	81.48	66.79	56.16	49.17	42.85	
d1+c	101.43	81.10	66.52	55.89	49.00	42.30	
d1	101.98	81.12	66.53	56.31	49.40	42.66	
Allocations & policies	10	11	12	13	14	15	Total
Shapley:							
lexmin+c	40.43	35.65	32.31	28.78	26.86	24.71	50.46
lexmin	40.99	35.60	32.42	28.75	27.13	24.21	50.49
d1+c	40.04	35.44	32.19	28.72	26.69	24.13	50.47
d1	40.57	36.01	32.01	29.07	26.76	24.35	50.45
Nucleolus:							
lexmin+c	43.85	38.55	34.49	31.22	29.01	26.81	53.34
lexmin	43.43	38.52	34.37	31.34	29.31	26.64	53.36
d1+c	43.55	38.30	34.26	31.42	29.06	26.80	53.34
d1	43.77	38.37	34.12	31.43	29.00	26.80	53.34
Benefit:							
lexmin+c	43.66	38.87	35.25	32.07	30.03	27.92	53.40
lexmin	43.21	38.65	35.06	32.29	30.01	27.71	53.15
d1+c	43.36	38.83	35.19	32.46	29.86	27.79	53.29
d1	43.13	38.92	34.95	32.30	29.81	27.71	53.18
Contribution:							
lexmin+c	38.69	33.61	31.07	27.72	26.09	23.13	48.15
lexmin	38.47	33.69	30.90	28.04	25.88	23.43	48.21
d1+c	38.49	33.66	30.83	27.62	26.06	23.16	48.01
d1	38.61	33.76	30.94	27.72	26.22	23.21	48.21

Table 5. Average distance of accumulated initial allocations from violating a core inequality of the accumulated generalized matching games for the four initial allocations, the four scenarios and the twelve country set sizes as well as total average over all country set sizes.

Allocations & policies	4	5	6	7	8	9	
Shapley:							
lexmin+c	105.24	85.58	70.22	59.57	51.37	44.55	
lexmin	105.79	84.85	69.60	58.51	50.77	43.77	
d1+c	106.17	85.84	69.98	59.32	51.98	45.06	
d1	105.83	84.61	69.69	58.88	50.36	43.22	
arbitrary	47.92	35.98	29.64	22.49	19.99	14.50	
Nucleolus:							
lexmin+c	108.75	88.27	73.37	62.59	54.28	47.60	
lexmin	107.19	86.75	72.14	61.53	52.39	46.01	
d1+c	108.64	88.66	73.72	62.80	53.76	48.08	
d1	106.94	86.64	71.98	60.43	52.31	44.02	
arbitrary	47.92	35.98	29.64	22.49	19.99	14.50	
Benefit:							
lexmin+c	107.48	87.39	73.02	61.88	54.39	47.99	
lexmin	107.03	86.29	71.51	60.26	52.36	46.17	
d1+c	107.32	87.50	72.55	61.76	54.53	47.52	
d1	106.37	86.66	71.23	59.91	52.67	46.03	
arbitrary	47.92	35.98	29.64	22.49	19.99	14.50	
Contribution:							
lexmin+c	101.15	81.79	67.55	55.62	48.85	42.31	
lexmin	102.06	82.25	66.94	56.30	49.76	42.49	
d1+c	101.57	81.20	66.79	55.84	49.25	42.33	
d1	102.38	81.24	66.72	56.17	49.50	42.19	
arbitrary	47.92	35.98	29.64	22.49	19.99	14.50	
Allocations & policies	10	11	12	13	14	15	Total
Shapley:							
lexmin+c	40.39	35.55	32.19	28.74	26.68	24.60	50.39
lexmin	39.89	34.58	31.43	27.68	25.99	23.10	49.66
d1+c	39.90	35.33	32.08	28.58	26.48	24.07	50.40
d1	39.53	34.76	30.70	27.50	25.27	22.93	49.44
arbitrary	13.81	11.19	8.11	7.23	7.52	6.79	18.76
Nucleolus:							
lexmin+c	43.65	38.22	34.28	31.06	28.79	26.36	53.10
lexmin	41.46	36.29	32.43	28.96	27.07	24.37	51.38
d1+c	43.01	37.65	33.48	30.56	28.13	25.69	52.85
d1	40.48	34.94	30.74	27.60	25.14	23.40	50.38
arbitrary	13.81	11.19	8.11	7.23	7.52	6.79	18.76
Benefit:							
lexmin+c	43.45	38.59	34.94	31.82	29.69	27.58	53.19
lexmin	41.22	36.78	32.63	30.09	27.68	25.14	51.43
d1+c	42.91	38.54	34.56	31.85	29.26	26.85	52.93
d1	40.33	36.12	31.98	28.82	26.68	24.39	50.93
arbitrary	13.81	11.19	8.11	7.23	7.52	6.79	18.76
Contribution:							
lexmin+c	38.71	33.73	31.11	27.58	25.98	23.18	48.13
lexmin	38.57	33.79	30.45	27.63	25.57	23.24	48.25
d1+c	38.40	33.48	30.41	27.44	25.95	23.15	47.98
d1	37.57	33.59	29.87	26.90	24.57	22.33	47.75
arbitrary	13.81	11.19	8.11	7.23	7.52	6.79	18.76

Table 6. Average distance of accumulated number of transplants from violating a core inequality of the accumulated generalized matching games for the four initial allocations, the four scenarios and the sanity check of arbitrary matching, for the 12 country set sizes as well as total average over all country set sizes.

H Varying Country Sizes

We repeated our *whole* experimental study (19200 simulations) for varying country sizes with ratio small:medium:large=1:2:3 while keeping all other parameters (number of instances, number of rounds, size of the starting compatibility graphs and so on) the same.

Our main conclusion from Figure 10 (the analogue to Figure 3) is that with varying country sizes *lexmin+c* still yields the lowest average relative deviation. Moreover, the differences become larger when the number of countries is growing, albeit to a lesser extent compared to the previous setting in which all countries have equal size.

From Figure 10 we can also compute the *relative improvement* of *lexmin+c* over *d1+c*. For example, for $n = 15$, this percentage is $(2.45 - 1.13)/2.45 = 54\%$ for the nucleolus, whereas for

the other solution concepts it is 38% (Shapley value); 53% (contribution value); and 48% (benefit value). Recall that for the setting in which all countries have equal size these four percentages were 52%, 41%, 48% and 48%, respectively.

Considering the average improvement over $n = 4, \dots, 15$ yields percentages of 48% (nucleolus); 32% (Shapley value); 47% (contribution value) and 39% (benefit value). To compare, for the situation with equal-size countries these percentages were 48%, 33%, 44% and 40%, respectively.

From Figure 12 we see that the Shapley value in the *lexmin+c* scenario consistently provides the smallest deviations from the target allocations (**0.55%** for $n = 15$), while the contribution value for $n \leq 13$ and the nucleolus for $n \geq 14$ perform the worst. Recall that in the previous setting this percentage was 0.52% and the jump occurred from $n = 12$ to $n = 13$.

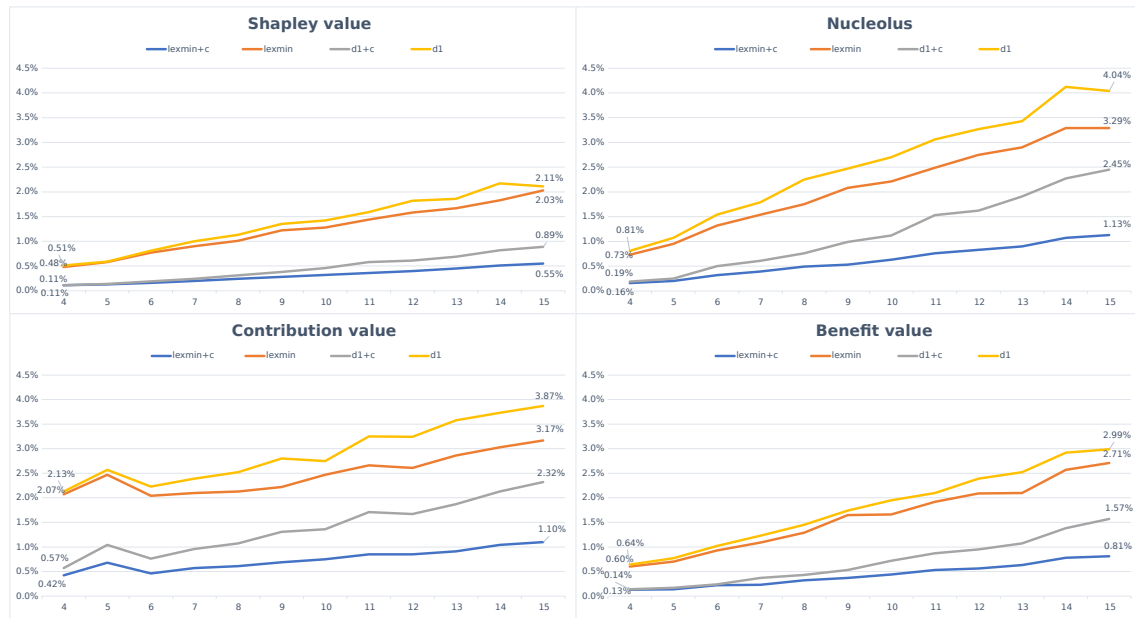


Fig. 10. Average total relative deviations where n is ranging from 4 to 15.

As a sanity check, we also tested the scenario of choosing maximum matchings arbitrarily. As expected, choosing an arbitrary maximum matching makes the kidney exchange scheme significantly more unbalanced in the setting of varying country sizes as well, with an average relative deviation above 10.6% for all four initial allocations y . See Figure 12 for details. In the equal size setting this percentage was 14%.

Figures 13, 14 and 15 are the counterparts of Figures 10, 11 and 12 with maximum relative deviations instead of total relative deviations. Just as for the equal-size countries, we can draw the same conclusions from these figures as from the ones for the average total relative deviation.

In Figure 16 we show the average accumulated deviation for $n = 15$; again the situation is comparable with the situation for equal-size countries.

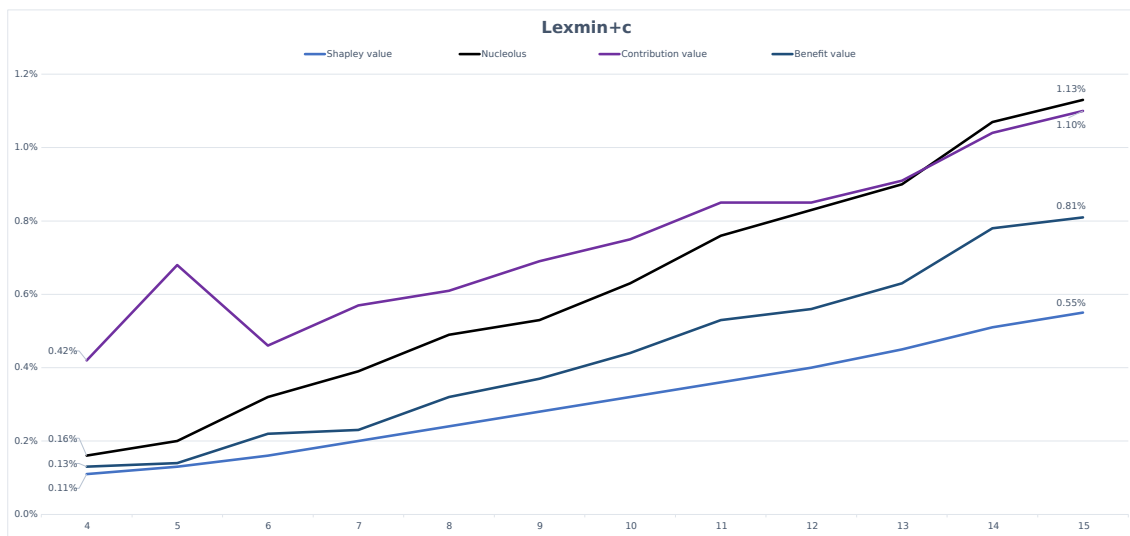


Fig. 11. Displaying the four *lexmin+c* graphs of Figure 10 in one plot.



Fig. 12. Enhancing Figure 10 with the scenario of choosing an arbitrary maximum matching in each round.

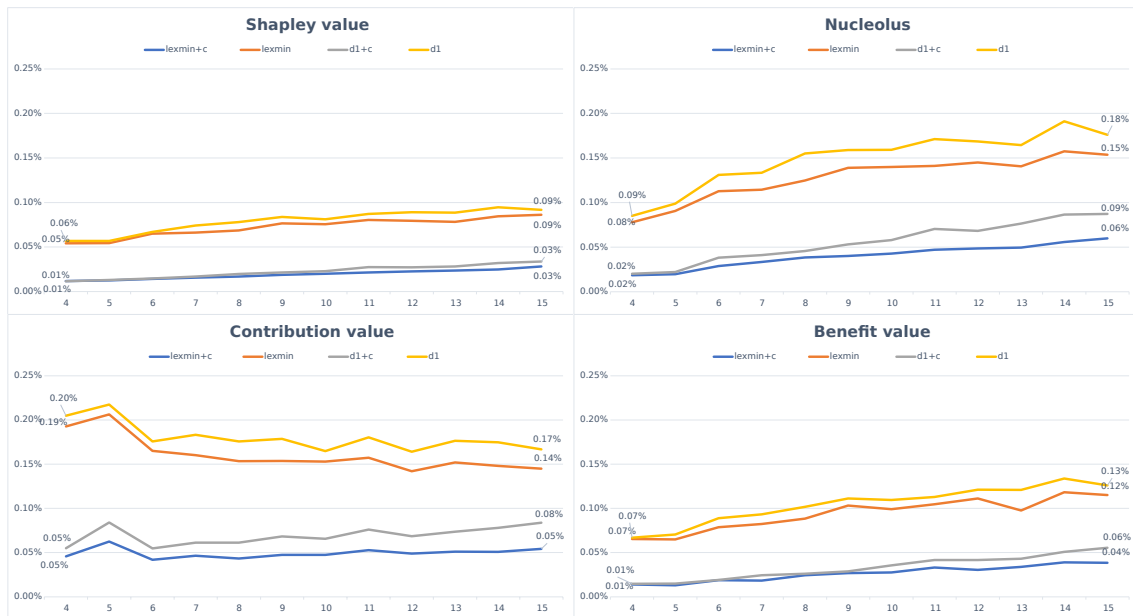


Fig. 13. Average maximum relative deviations where n is ranging from 4 to 15.

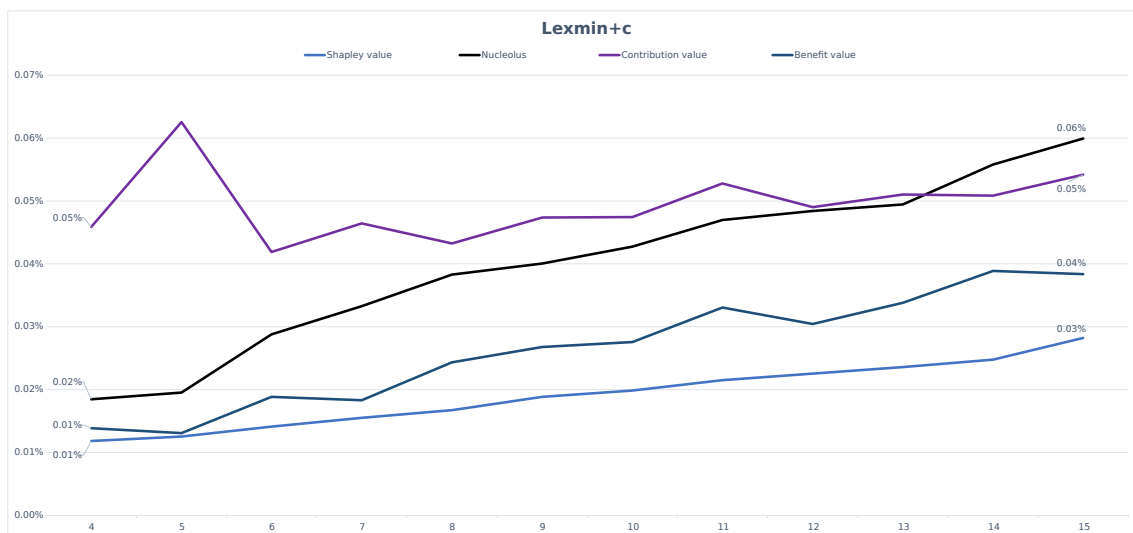


Fig. 14. Displaying the four lexmin+c graphs of Figure 13 in one plot.

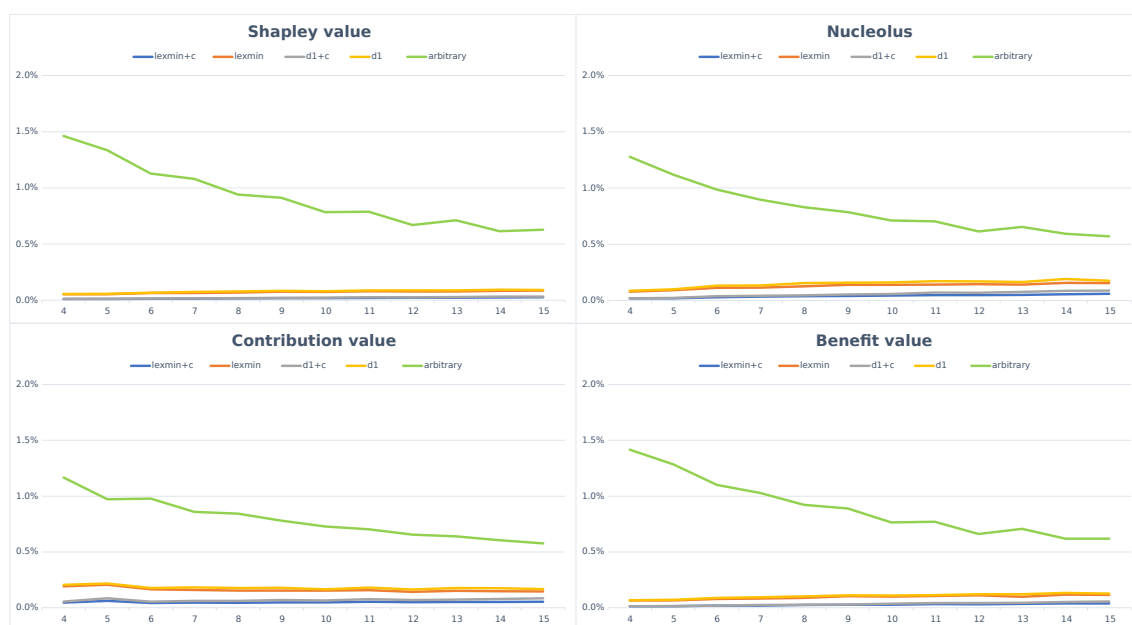


Fig. 15. Enhancing Figure 13 with the scenario of choosing an arbitrary maximum matching in each round.

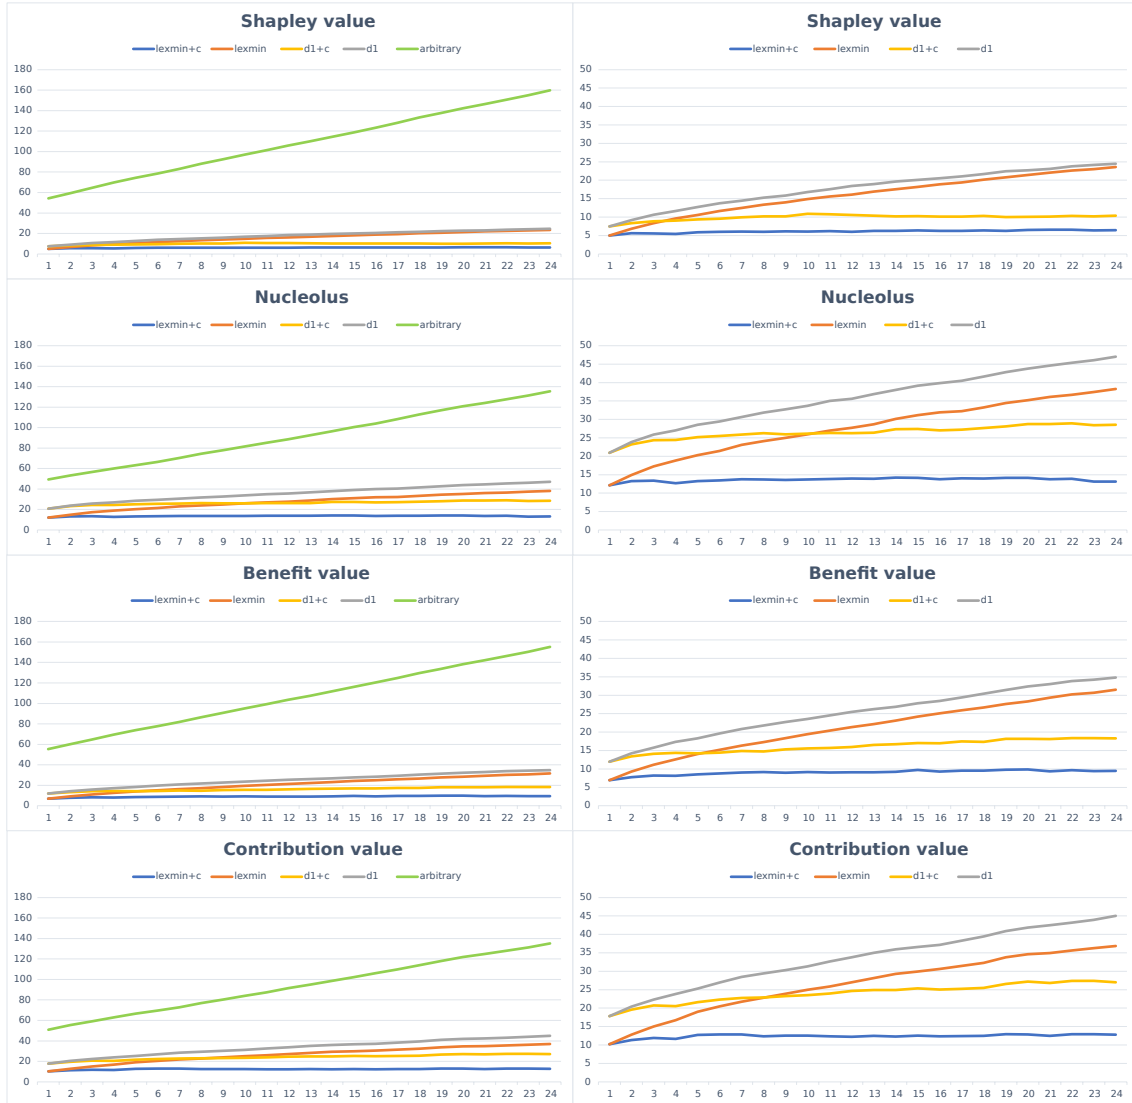


Fig. 16. The average accumulated deviation over the 24 rounds when the number of countries $n = 15$. The right side of the figure is taken from the left side after omitting the additional scenario where arbitrary maximum matchings are chosen.