

MOVER: Mask, Over-generate and Rank for Hyperbole Generation

Yunxiang Zhang, Xiaojun Wan

Peking University
{yx.zhang, wanxiaojun}@pku.edu.cn

Abstract

Despite being a common figure of speech, hyperbole is under-researched with only a few studies addressing its identification task. In this paper, we introduce a new task of hyperbole generation to transfer a literal sentence into its hyperbolic paraphrase. To tackle the lack of available hyperbolic sentences, we construct HYPO-XL, the first large-scale hyperbole corpus containing 17,862 hyperbolic sentences in a non-trivial way. Based on our corpus, we propose an unsupervised method for hyperbole generation with no need for parallel literal-hyperbole pairs. During training, we fine-tune BART to infill masked hyperbolic spans of sentences from HYPO-XL. During inference, we mask part of an input literal sentence and over-generate multiple possible hyperbolic versions. Then a BERT-based ranker selects the best candidate by hyperbolicity and paraphrase quality. Human evaluation results show that our model is capable of generating hyperbolic paraphrase sentences and outperforms several baseline systems.¹

1 Introduction

Hyperbole is a figure of speech that deliberately exaggerates claim or statement to show emphasis or express emotions. If a referent has a feature X, a hyperbole exceeds the credible limits of fact in the given context and presents it as having more of that X than warranted by reality (Claridge 2010). Take the following example, “*I won’t wait for you: it took you centuries to get dressed.*” It over-blows the time for someone to get dressed with a single word “*centuries*” and thus creates a heightened effect. Although hyperbole is considered as the second most frequent rhetoric device (Kreuz and Roberts 1993), it has received less empirical attention in the NLP community. While hyperbole detection has already been investigated by Troiano et al. (2018) and Kong et al. (2020), there has been no study on automatic hyperbole generation and we aim to fill this research gap. From a syntactic point of view, Claridge (2010) classifies hyperbole into word-level, phrase-level and clause-level types, and conclude that the former two types are more common in English. As a result, we mainly focus on word-level and phrase-level hyperbole in this paper, which can be unified as span-level (n-gram) hyperbole.

¹Our code and data are available at <https://github.com/yunx-z/MOVER>

Literal Input	Generated Hyperbole
The minister is going to <i>harm the country</i> with his budget cuts.	The minister is going to <i>explode</i> with his budget cuts.
Reading dog food labels is <i>hard</i> to understand.	Reading dog food labels is <i>sheer torture</i> to understand.

Table 1: Examples of two generated hyperbolic sentences by our system MOVER from their literal inputs. Changed text spans are in italic.

To tackle the hyperbole generation problem we need to address three main challenges:

- The lack of training data that either consists of large-scale hyperbolic sentences or literal-hyperbole pairs, which are necessary to train an unsupervised or supervised model.
- The tendency of generative language models to generate literal text rather than hyperbolic one.
- Trade-off between content preservation and hyperbolic effect of the generated sentences.

In order to address the above challenges, we propose **MOVER** (Mask, **OVER**-generate and Rank), an unsupervised approach to generating hyperbolic paraphrase from literal input. Our approach does not require parallel data for training, thus alleviating the issue of scarce data. Still, we need a non-parallel corpus containing as much hyperbolic sentences as possible. To this end, we first build a large-scale hyperbole corpus in a semi-supervised way. We will release the corpus and the high-quality annotated data for training hyperbole detection model to the community.

Based on the intuition that the hyperbolic effect of a sentence is realized by a single word or phrase within it, we introduce a sub-task of hyperbolic span extraction. We identify several possible n-grams of a hyperbolic sentence that can cause the hyperbolic bent with syntactic and semantic features. We apply this masking approach to sentences in the previously built hyperbole corpus and teach a pretrained seq2seq transformer, BART (Lewis et al. 2020), to infill the words in missing hyperbolic spans. This increases the probability of generating hyperbolic text from pretrained model.

During inference, given a single literal sentence, our system generates multiple masked versions for inputs to BART and their corresponding outputs, which are various potential hyperbolic sentences. To select the best one for output, we leverage a BERT-based ranker to achieve a satisfying trade-off between hyperbolicity and paraphrase quality.

The contributions of our work are summarized as follows:

- We construct the first large-scale hyperbole corpus in a non-trivial way. The corpus will be released and contribute to the Figurative Language Processing (FLP) and NLP community by facilitating the development of computational study of hyperbole.
- We propose an unsupervised approach for hyperbole generation with the “overgenerate-and-rank” paradigm (Heilman and Smith 2009).
- We benchmark our system against several baselines and we compare their performances by pair-wise manual evaluations to demonstrate the effectiveness of our approach.

2 HYPO-XL: Hyperbole Corpus Collection

The availability of large-scale corpora can facilitate the development of figurative language generation with pretrained models, as is shown by Chakrabarty, Muresan, and Peng (2020) on simile generation and Chakrabarty et al. (2021) on metaphor generation. However, datasets for hyperbole are scarce. To the best of our knowledge, Troiano et al. (2018) built HYPO, the first and only hyperbole corpus in English, containing 709 hyperbolic sentences with their paraphrases and lexically overlapping non-hyperbolic sentences. The size of this dataset is too small to train a deep learning model for hyperbole detection and generation. To tackle the lack of hyperbole data, we propose to enlarge the hyperbolic sentences of HYPO in a semi-supervised way and build a large-scale corpus of 17,862 hyperbolic sentences, namely HYPO-XL. We would like to point out that this is a *non-parallel* corpus containing only hyperbolic sentences without their paraphrase counterparts, because our hyperbole generation approach (Section 3) does not require parallel or pseudo-parallel data. The collection of literal paraphrases for hyperboles is beyond the scope of this paper.

The creation of HYPO-XL consists of two steps, which are detailed in Appendix A:

1. We first train a BERT-based binary classifier on HYPO and retrieve possible hyperbolic sentences from an online corpus (Appendix A.1).
2. We manually label a subset of the retrieved sentences, denoted HYPO-L, and retrain our hyperbole detection model to identify hyperbolic sentences from the same retrieval corpus with higher confidence (Appendix A.2).

Corpus Analysis Since HYPO-XL is built in a semi-supervised way with only a small number of human labeled data samples, we conduct a quality analysis to investigate how many sentences in the corpus are *actually* hyperbolic. We randomly sample 100 instances from HYPO-XL and manually label them as hyperbole or non-hyperbole. Only

Measurement	Value
# Non-hypo	6
# Avg hypo span tokens	2.23
Long hypo spans (> 1 token)	37%
# Distinct hypo spans	85
# Distinct POS-ngrams	39
# Measurable	44
# Possible	27
# Conventional	65

Table 2: Statistics of 100 random samples from HYPO-XL, of which 6 are actually non-hyperbole. The rest statistics are calculated for the 94 real hyperboles.

POS	#	Hyperbole
NN	19	His words confirmed <i>everything</i> .
RB	15	He descanted <i>endlessly</i> upon the wonders of his trip.
JJ	14	Youth means <i>limitless</i> possibilities.

Table 3: Three most common POS n-grams of hyperbolic spans and their examples. Hyperbolic spans are in italic.

six sentences are not hyperbole, which we consider as acceptable for our pilot study. This precision of 94% is also comparable to another figurative language dataset on simile (Zhang et al. 2021). Actually we can tolerate a bit noise here since the primary goal of HYPO-XL is to facilitate hyperbole *generation* instead of *detection*, and a small proportion of non-hyperbole sentences as input will not harm our proposed method². We plan to manually filter out non-hyperboles in future.

We also annotate the hyperbolic spans (Section 3.1) for the rest 94 real hyperboles and show some examples of the most common POS n-grams of hyperbolic spans in Table 3. We further follow Troiano et al. (2018) to annotate the type of exaggeration along three independent dimensions, namely “measurable” (objective and quantifiable), “possible” (conceivable), and “conventional” (uncreative). Examples of annotations can be found in Appendix B. Each hyperbole is either YES or NO for each dimension and the reported numbers in Table 2 are for YES. Statistics show that we have created a diverse hyperbole corpus.

3 Hyperbole Generation

We propose an unsupervised approach to generate hyperbolic paraphrase from a literal sentence with BART (Lewis et al. 2020) such that we do not require parallel literal-hyperbole data. An overview of our hyperbole generation pipeline is shown in Figure 1. It consists of two steps during training.

1. **Mask.** Given a hyperbolic sentence from HYPO-XL, we identify multiple text spans that can possibly produce the

²We further explain the reason in Section 3.2

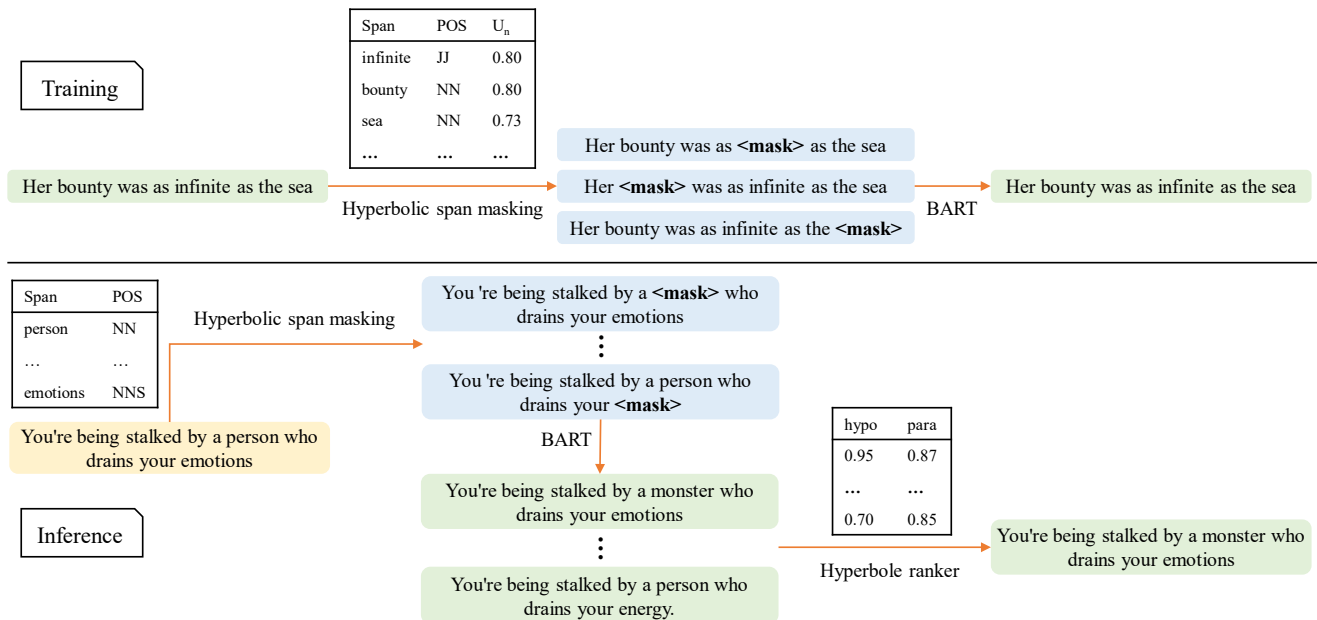


Figure 1: Overview of our approach to unsupervised hyperbole generation. Literal sentences are in yellow boxes, masked sentences are in blue boxes and hyperbolic sentences are in green boxes.

hyperbolic meaning of a sentence, based on two features (POS n-gram and unexpectedness score). For each identified text span, we replace it with the [MASK] token to remove hyperbolic attribute of the input. N text spans will result in N masked inputs, respectively.

2. **Infill.** We fine-tune BART to fill the masked spans of input sentences. The model learns to generate hyperbolic words or phrases that are pertinent to the context.

During inference, there are three steps.

1. **Mask.** Given a literal sentence, we apply POS-ngram-only masking to produce multiple input sentences.
2. **Over-generate.** BART generates one sentence from a masked input, resulting in multiple candidates.
3. **Rank.** Candidates are ranked by their hyperbolicity and relevance to the source literal sentence. The one with highest score is selected as the final output.

We dub our hyperbole generation system **MOVER** (**M**ask, **OVER**-generate and **R**ank). We apply masking technique to map both the hyperbolic (training input) and literal (test input) sentences into a same “space” where the masked sentence can be transformed into hyperbole by BART. It falls into the “overgenerate-and-rank” paradigm (Heilman and Smith 2009) since many candidates are available after the generation step. The remainder of this section details the three main modules: hyperbolic span masking (Section 3.1), BART-based span infilling (Section 3.2) and the hyperbole ranker (Section 3.3).

3.1 Mask: Hyperbolic Span Masking

We make a simple observation that the hyperbolic effect of a sentence is commonly localized to a single word or

a phrase within the sentence, which is also supported by a corpus-based linguistic study on hyperbole (Claridge 2010). For example, the word *marathon* in “*My evening jog with Bill turned into a marathon*” overstates the jogging distance and causes the sentence to be hyperbolic. This inspires us to leverage the “delete-and-generate” strategy (Li et al. 2018) for hyperbole generation. On the one hand, we can replace the hyperbolic span to transfer a hyperbolic sentence to its literal counterpart, as is demonstrated by the creation process of paraphrase sentences in the HYPO corpus (Troiano et al. 2018). For the example above, we can replace “*marathon*” with “*a long run*” to reduce the hyperbolic effect while preserving its content and polarity. On the other hand, a literal sentence can be reversely paraphrased into its hyperbolic counterpart via text span extraction and replacement as well. Therefore, hyperbolic span extraction is an important sub-module of our system.

How can we know which span in a hyperbolic sentence may cause the hyperbole? We propose to extract hyperbolic spans based on POS n-gram (syntactic) and unexpectedness (semantic) features.

POS N-gram POS n-gram has been successfully used as a feature in irony detection (Reyes and Rosso 2012) and sarcasm detection (Liu et al. 2014). We extract POS n-gram patterns of hyperbole from the training set of HYPO dataset³ and obtain 262 distinct POS n-grams. As a motivating example, the following three hyperbolic spans, “*faster than*

³The hyperbolic spans are not explicitly provided in HYPO dataset, so we take the maximum overlap between the sentences in HYPO Corpus and Minimal Unit Corpus as the hyperbolic spans.

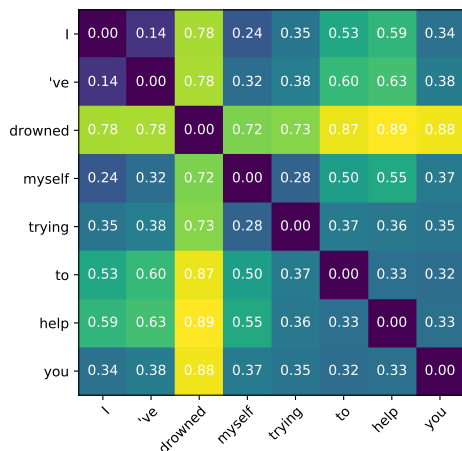


Figure 2: A visualization of the cosine distance matrix of the hyperbolic sentence “I’ve drowned myself trying to help you”.

light”, “sweeter than honey”, “whiter than snow”, share the same POS n-gram of “JJR+IN+NN”.

Unexpectedness Hyperbolic spans are less coherent with the literal contexts and thus their vector representations are distant from the context vectors. As defined by Troiano et al. (2018), the unexpectedness score U_s of a sentence s with the token sequence $\{x_0, x_1, \dots, x_N\}$ is calculated as the average cosine distance among all of its word pairs:

$$U_s = \text{average}_{i,j \in [0,N], i \neq j} (\text{cosine_distance}(v_i, v_j)) \quad (1)$$

where v_i denotes the word embedding vector of token x_i . It is adopted as a feature for their hyperbole detection model. Similarly, we define the unexpectedness score U_n of an n-gram $\{x_k, x_{k+1}, \dots, x_{k+n-1}\}$ in a sentence s as the average cosine distance among word pairs consisting of a word inside the n-gram and another outside:

$$U_n = \text{average}_{\substack{i \in [k, k+n-1] \\ j \in [0, k-1] \cup [k+n, N]}} (\text{cosine_distance}(v_i, v_j)) \quad (2)$$

Figure 2 illustrates the cosine distance of word pairs in the sentence “I’ve drowned myself trying to help you”. The words in the span “drowned myself” are distant from other words in terms of word embedding similarity. Text spans with higher unexpectedness scores tend to be hyperbolic.

For the masking step during training, we extract all the text spans in the original input hyperbolic sentences that match one of the hyperbolic POS n-grams. Then we rank them by their unexpectedness scores and choose top-3 items as the masked spans⁴. For the masking step during inference, we simply mask all the spans that match hyperbolic

⁴This means that at least 2/3 of the identified spans should not be hyperbolic, but this will not harm the hyperbole generation, which is explained in Section 3.2

POS n-grams, since the span unexpectedness score is not applicable to a literal input. We evaluate the accuracy of our hyperbolic span masking approach on the development set of HYPO dataset. The proportion of exact match (EM) (Rajpurkar et al. 2016) between our top-3 masked spans with the human-labeled spans is 86%, which shows that our simple method based on hand-crafted features above is effective for the task of hyperbolic span extraction.

3.2 Over-generate: Hyperbolic Text Infilling with BART

In order to generate hyperbolic and coherent text from the masked span, we leverage the text span infilling ability of BART (Lewis et al. 2020), a pretrained sequence2sequence model with a denoising autoencoder and an autoregressive autodecoder. During its pretraining, it learns to reconstruct the corrupted noised text. One of the noising transformations is random span masking, which teaches BART to predict the multiple tokens missing from a span. During training, we fine-tune BART by treating the masked hyperbolic sentence as encoder source and the original counterpart as decoder target. This can change the probability distribution when decoding tokens and increase the chance of generating hyperbolic, rather than literal, text span conditioned on the context. During inference, BART fills the masked span of a literal sentence with possible hyperbole.

Note that if the masked span of an input sentence is actually not hyperbolic, then fine-tuning on this example is just enhancing the reconstruction ability of BART, which does not exert negative effect on hyperbole generation. This can give rise to our tolerance for non-hyperbole input (Section 2) and non-hyperbolic masked span (Section 3.1).

3.3 Rank: Hyperbole Ranker

Recall that for each literal input during inference, we apply POS-ngram-based masking, produce different masked versions of the sentence and generate multiple output candidates. Obviously not all masking spans are suitable for infilling hyperbolic words due to the noise of masking. To filter out the best candidate for final output, we introduce a hyperbole ranker which can sort different candidate sentences according to their degrees of hyperbolicity and relevance to the source inputs. For evaluation of hyperbolicity, we leverage the BERT-based hyperbole detection model fine-tuned on HYPO and HYPO-L (Appendix A) to assign a hyperbole score (i.e. prediction probability) for every candidate. For evaluation of content preservation, we train a pairwise model to predict whether the hyperbolic sentence A is a paraphrase of a literal sentence B. To this end, we use distilled RoBERTa-base model checkpoint⁵ trained on large scale paraphrase data provided by Sentence-Transformer (Reimers and Gurevych 2019). It calculates the cosine similarity between literal input and candidate as the paraphrase score. We further fine-tune the checkpoint on the training set of HYPO dataset, where we treat pairs of hyperbolic sentences and their counterparts from Paraphrase Corpus

⁵<https://huggingface.co/sentence-transformers/paraphrase-distilroberta-base-v1>

as positive examples, while the counterparts from Minimal Unit Corpus as negative examples. The accuracy on test set is 93.48%.

Now that we obtain the hyperbole score $hypo(c)$ and the paraphrase score $para(c)$ for candidate c , we propose an intuitive scoring function $score(\cdot)$ as below:

$$score(s) = \begin{cases} hypo(s) & para(s) \in (\gamma, 1 - \epsilon) \\ 0 & \text{else} \end{cases} \quad (3)$$

where we filter out a candidate if its paraphrase score is lower than a specific threshold γ or it is almost the same as the original input (i.e. the paraphrase score is extremely close to 1). For diversity purpose we hope that our system will not copy the literal input as its output. We then rank the remaining candidates according to their hyperbole score and select the best one as final output.⁶

4 Experiments

There are no existing models applied on the task of hyperbole generation. To compare the quality of the generated hyperboles, we benchmark our MOVER system against three baseline systems adapted from related tasks.

4.1 Baseline Systems

Retrieve (R1) Following Nikolov et al. (2020), we implement a simple information retrieval baseline, which retrieves the closest hyperbolic sentence as output (i.e. highest cosine similarity) from HYPO-XL, using the hyperbole paraphrase detection model in Section 3.3. This can give us an upper bound for hyperbolicity, while maintaining some degree of lexical and semantic overlap with the input text.

Retrieve, Replace and Rank (R3) We first retrieve the top-5 most similar sentences from HYPO-XL like the **R1** baseline. Then we apply hyperbolic span extraction in Section 3.1 to find 3 text spans for each retrieved sentence. We replace the text spans in a literal input sentence with retrieved hyperbolic spans if two spans share the same POS n-gram. Since this replacement method may result in multiple modified sentences, we select the best one with the hyperbole ranker in Section 3.3. If there are no matched text spans, we fall back to **R1** baseline and return the most similar retrieved sentence verbatim. In fact, this baseline substitutes the BART generation model in MOVER system with a simpler retrieval approach, which can demonstrate the hyperbole generation ability of BART.

BART Inspired by Chakrabarty, Muresan, and Peng (2020), we provide results generated from the non-fintuned BART⁷. Since BART has already been pretrained to predict

⁶If all candidates are filtered out by their paraphrase scores (i.e. they all have the zero final scores), we still rank them according to their hyperbole score.

⁷We also tried to fine-tune BART on the 567 literal-hyperbole pairs from the training set of HYPO dataset in an end-to-end supervised fashion, but the model just copy the input for all instances (same as COPY in Table 4) and is unable to generate meaningful output due to small amount of training data. Therefore we do not consider it hereafter.

System	BLEU	BERTScore
R1	2.02	0.229
R3	33.25	0.520
BART	33.57	0.596
MOVER	39.43	0.624
w/o para score	39.22	0.604
w/o hypo ranker	34.83	0.610
COPY	<u>51.69</u>	<u>0.711</u>

Table 4: Automatic evaluation results on the test set of HYPO dataset.

tokens from a masked span, it can still be used for hyperbolic text infilling in Section 3.2.

4.2 Implementation Details

We use 16,075 (90%) samples in HYPO-XL for training our MOVER system and the rest 1,787 sentences for validation. For POS Tagging in Section 3.1 we use Stanford CoreNLP (Manning et al. 2014). For the word embedding we use 840B 300-dimension version of GloVe vectors (Pennington, Socher, and Manning 2014). For BART in Section 3.2 we use the BART-base checkpoint due to limited computing resources and use the implementation by Huggingface (Wolf et al. 2020). We fine-tune pretrained BART for 16 epochs for MOVER. For parameters of the hyperbole ranker in Section 3.3, we set $\gamma = 0.8$ and $\epsilon = 0.001$ by manual inspection of the ranking results on the development set of HYPO dataset.

4.3 Evaluation Criteria

Automatic Evaluation BLEU (Papineni et al. 2002) reflects the lexical overlap between the generated and the ground-truth text. BERTScore (Zhang et al. 2019) computes the similarity using contextual embeddings. These are common metrics for text generation. We use the 71 literal sentences in the test set of HYPO dataset as test inputs and the hyperbolic sentences as gold references. We report the BLEU scores and BERTScore for generated sentences compared with human written hyperboles.

Human Evaluation Automated metrics are not reliable on their own for evaluating methods to generate figurative language (Novikova et al. 2017) so we also conduct pair-wise comparisons manually (Shao et al. 2019). We evaluate the generation results from the 71 testing literal sentences. Each pair of texts (ours vs. a baseline / human reference) is given preference (win, lose or tie) by five people with proficiency in English. Following Chakrabarty et al. (2021), we use a set of 4 criteria to evaluate the generated output: 1) **Fluency**: Which sentence is more fluent and grammatical? 2) **Hyperbolicity**: Which sentence is more hyperbolic? 3) **Creativity**: Which sentence is more creative? 4) **Relevance**: Which sentence is more relevant to the input literal sentence?

MOVER vs.	Fluency		Hyperbolicity		Creativity		Relevance	
	W%	L%	W%	L%	W%	L%	W%	L%
R1	79.7	1.7	52.4	47.6	33.9	66.1	94.2	4.3
R3	35.8	11.3	52.5	36.1	50.0	38.5	52.6	29.8
BART	26.2	19.7	67.7	11.3	61.0	10.2	49.2	31.7
HUMAN	22.0	18.6	16.7	81.8	14.3	84.3	46.8	37.1

Table 5: Pairwise comparison between MOVER and other baseline systems. Win[W]% (Lose[L]%) is the percentage of MOVER considered better (worse) than a baseline system. The rest are ties.

System	Sentence	Flu	Hypo	Crea	Rel
LITERAL	Being out of fashion is very bad.	-	-	-	-
MOVER	Being out of fashion is <i>sheer hell</i> .	-	-	-	-
R1	<i>Their music will never</i> out of fashion.	T	W	L	W
R3	Being out of fashion is <i>richly</i> bad.	T	W	W	T
BART	Being out of fashion is very <i>difficult</i> .	T	W	W	T
HUMAN	<i>Better be out of the world than</i> out of the fashion.	W	W	L	W

Table 6: Pairwise evaluation results (Win[W], Lose[L], Tie[T]) between MOVER and generated outputs of baseline systems. Changed text spans are in italic.

4.4 Results

Automatic Evaluation Table 4 shows the automatic evaluation results of our system compared to different baselines. MOVER outperforms all three baselines on these two metrics. However, BLEU and BERTScore are far not comprehensive evaluation measures for our hyperbole generation task, since there are only a few modifications from literal to hyperbole and thus the overlap between generated sentence and source sentence is huge in nature. Even a naive system (COPY in Table 4) that simply returns the literal input verbatim as output (Krishna, Wieting, and Iyyer 2020) can achieve the highest performance. As a result, automatic metrics are not suitable for evaluating models that tend to copy input as output.

Human Evaluation The inter-annotator agreement of raw human evaluation results in terms of Fleiss’ kappa (Fleiss 1971) is 0.212, which indicates fair agreement (Landis and Koch 1977). We take a conservative approach and only consider items with an absolute majority label, i.e., at least 3 of 5 labelers choose the same preference (win/lose/tie). There are 61 (86%) items on average left for each baseline-criteria pair that satisfy this requirement. On this subset of items, Fleiss’ Kappa increases to 0.278 (fair agreement). This degree of agreement is acceptable compared with other sentence revision tasks (e.g., 0.322 by Tan and Lee (2014) and 0.263 by Afrin and Litman (2018)) since it is hard to discern the subtle changing effect caused by local revision.

The annotation results in Table 5 are the absolute majority vote (majority ≥ 3) from the 5 annotators for each item. Results show that our model mostly outperforms (Win% > Lose%) other baselines in the four metrics, except for creativity on R1. Because R1 directly retrieves human written hyperboles from HYPO-XL and is not strict about the relevance, it has the advantage of being more creative naturally.

An example of this is shown in Table 6. Our model achieves a balance between generating hyperbolic output while preserving the content, which indicates the effectiveness of the “overgenerate-and-rank” mechanism. It is also worth noting that in terms of hyperbolicity, MOVER can even perform better than human for 16.7% of the test cases. Table 6 shows a case where MOVER is rated higher than human.

Case Study Table 6 shows a group of generated examples from different systems. MOVER changes the phrase “very bad” in the original input to an extreme expression “sheer hell”, which captures the sentiment polarity of the original sentence while providing a hyperbolic effect. R1 retrieves a hyperbolic but irrelevant sentences. R3 replaces the word “very” with “richly”, which is not coherent to the context, though the word “richly” may introduce some hyperbolic effects. BART just generates a literal sentences, which seems more like a simple paraphrase. Although human reference provides a valid hyperbolic paraphrase, the annotators prefer our version in terms of fluency, hyperbolicity and relevance. Since our system makes fewer edits to the input than human reference, we are more likely to win in fluency and relevance. Also, the generated hyperbolic span “sheer hell” seems to be more extreme than “out of the world”, which helps in hyperbolicity. More examples of generated outputs are shown in Appendix C.

Table 7 shows the over-generation results for a literal input, with their hyperbole and paraphrase scores. On the one hand, our system can generate different hyperbolic versions, like the generated words “cannot”, “unyielding”, and “alive”. This is reasonable since there may be multiple hyperbolic paraphrase for a single sentence. It is only for comparison to other baselines that we have to use the ranker to keep only one output, which inevitably undermines the strength of our approach. On the other hand, our ranker fil-

GenHyperbole <i>s</i>	<i>hypo(s)</i>	<i>para(s)</i>	<i>score(s)</i>
You have ravished me away by a power I <i>cannot</i> resist.	0.962	0.954	0.962
You have ravished me away by a power I find <i>unyielding</i> to resist.	0.960	0.959	0.960
You have ravished me <i>alive</i> by a power I find difficult to resist.	0.954	0.931	0.954
You have <i>driven</i> me away by a power I find difficult to resist.	0.858	0.914	0.858
You have ravished me away <i>with a beauty</i> I find difficult to resist.	0.958	0.778	0.000

Table 7: An Example of intermediate generation results for the literal sentence “*You have ravished me away by a power I find difficult to resist*” after the over-generation steps (Section 3.2). Their ranking scores (Section 3.3) are displayed in the second to the fourth columns. Generated hyperbolic text spans are in italic.

ters out the sentence if the infilling text violates the original meaning, which can be seen from the last row of Table 7. In this way, we gain explicit control over hyperbolicity and relevance through a scoring function, and endow MOVER with more explainability.

Ablation Study We investigate the impact of removing partial or all information during the ranking stage. Results are shown in Table 4. Specifically, if we rank multiple generated outputs by only hyperbole score (w/o para score), or randomly select one as output (w/o hypo ranker), the performances worsen. Note that we do not report the ablation result for ranking only by paraphrase score (w/o hypo score), because it has the same problem with COPY: a generated sentence that directly copies input will result in the highest paraphrase score and thus be selected as final output.

From another perspective of view, experiments on R3 and BART can also serve as ablation studies for the generation model in Section 3.2 as they substitute the fine-tuned BART with a retrieve-and-replace method and a non-fine-tuned BART, respectively.

5 Related Work

Hyperbole Corpus Troiano et al. (2018) built the HYPO dataset consisting of 709 hyperbolic sentences with human-written paraphrases and lexically overlapping non-hyperbolic counterparts. Kong et al. (2020) also built a Chinese hyperbole dataset with 2680 hyperboles. Our HYPO-L and HYPO-XL are substantially larger than HYPO and we hope they can facilitate computational research on hyperbole detection and generation.

Figurative Language Generation As a figure of speech, hyperbole generation is related to general figurative language generation. Previous studies have tackled the generation of metaphor (Yu and Wan 2019; Stowe, Ribeiro, and Gurevych 2020; Chakrabarty et al. 2021; Stowe et al. 2021), simile (Chakrabarty, Muresan, and Peng 2020; Zhang et al. 2021), idiom (Zhou et al. 2021), pun (Yu, Tan, and Wan 2018; Luo et al. 2019b; He, Peng, and Liang 2019; Yu, Zang, and Wan 2020), sarcasm (Chakrabarty et al. 2020b), and irony (Zhu, Yu, and Wan 2019). Several figurative language datasets are proposed alongside these works. We are a pilot study for large-scale collection and unsupervised generation of hyperbole, which is a common yet under-researched figure of speech.

Unsupervised Text Style Transfer Recent advances on unsupervised text style transfer (Hu et al. 2017; Subramanian et al. 2018; Luo et al. 2019a; Zeng, Shoeybi, and Liu 2020), focus on transferring from one text attribute to another without parallel data. Jin et al. (2020) classify existing methods into three main branches: *disentanglement*, *prototype editing*, and *pseudo-parallel corpus construction*. Although we have constructed a non-parallel corpus on hyperbole, its generation, as a kind of figurative language generation task, is still different from text style transfer. First, it is unclear whether “literal” and “hyperbolic” can be treated as “styles”, especially the former one. Because “literal” sentences do not have any specific characteristics at all, there are no attribute markers (Li et al. 2018) in the input sentences, and thus many text style transfer methods based on *prototype editing* cannot work. Second, hyperbole generation is also different in that style transfer may need to change the complete input sentences (Zhou et al. 2021), while generated hyperboles usually have a large proportion of overlap with inputs (Section 4.4). In other words, hyperbole generation requires text span editing instead of sentence rephrasing. Third, hyperbolic span can be lexically separable from, yet strongly dependent on, the context (Section 3.1). On the contrary, *disentanglement-based* approaches for text style transfer aim to separate content and style via latent representation learning. Last but not the least, we would like to point out that MOVER can also be used for *constructing pseudo-parallel corpus* of literal-hyperbole pairs, which is beyond the scope of this work.

6 Conclusion and Future Work

We introduce a new task for figurative language generation: hyperbole generation from literal sentence. We build the first large-scale hyperbole corpus and propose an unsupervised approach for generating hyperbole. Human evaluation results show that our model is successful at generating hyperbole. The proposed generation pipeline has better interpretability and flexibility compared to potential end-to-end methods.

Future working directions include: 1) exploring semi-automatic generation mode (Zhang et al. 2021) of MOVER, where a user can decide single or multiple masking spans and our system directly starts the hyperbole generation with contextual coherence; 2) applying our mask-overgenerate-rank approach to the generation of other figurative languages such as metaphor and irony.

References

- Afrin, T.; and Litman, D. 2018. Annotation and Classification of Sentence-level Revision Improvement. In *Proceedings of the Thirteenth Workshop on Innovative Use of NLP for Building Educational Applications*, 240–246. New Orleans, Louisiana: Association for Computational Linguistics.
- Chakrabarty, T.; Ghosh, D.; Muresan, S.; and Peng, N. 2020a. R³: Reverse, Retrieve, and Rank for Sarcasm Generation with Commonsense Knowledge. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 7976–7986. Online: Association for Computational Linguistics.
- Chakrabarty, T.; Ghosh, D.; Muresan, S.; and Peng, N. 2020b. R³: Reverse, Retrieve, and Rank for Sarcasm Generation with Commonsense Knowledge. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 7976–7986.
- Chakrabarty, T.; Muresan, S.; and Peng, N. 2020. Generating similes effortlessly like a Pro: A Style Transfer Approach for Simile Generation. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 6455–6469. Online: Association for Computational Linguistics.
- Chakrabarty, T.; Zhang, X.; Muresan, S.; and Peng, N. 2021. MERMAID: Metaphor Generation with Symbolism and Discriminative Decoding. arXiv:2103.06779.
- Claridge, C. 2010. *Hyperbole in English: A corpus-based study of exaggeration*. Cambridge University Press.
- Devlin, J.; Chang, M.-W.; Lee, K.; and Toutanova, K. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, 4171–4186. Minneapolis, Minnesota: Association for Computational Linguistics.
- Fleiss, J. L. 1971. Measuring nominal scale agreement among many raters. *Psychological bulletin*, 76(5): 378.
- He, H.; Peng, N.; and Liang, P. 2019. Pun Generation with Surprise. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, 1734–1744.
- Heilman, M.; and Smith, N. A. 2009. Question generation via overgenerating transformations and ranking. Technical report, Carnegie-Mellon Univ Pittsburgh pa language technologies inst.
- Hornby, A. S.; and Cowie, A. P. 1995. *Oxford advanced learner's dictionary*, volume 1430. Oxford university press Oxford.
- Hu, Z.; Yang, Z.; Liang, X.; Salakhutdinov, R.; and Xing, E. P. 2017. Toward controlled generation of text. In *International Conference on Machine Learning*, 1587–1596. PMLR.
- Jin, D.; Jin, Z.; Hu, Z.; Vechtomova, O.; and Mihalcea, R. 2020. Deep learning for text style transfer: A survey. *arXiv preprint arXiv:2011.00416*.
- Kong, L.; Li, C.; Ge, J.; Luo, B.; and Ng, V. 2020. Identifying Exaggerated Language. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 7024–7034. Online: Association for Computational Linguistics.
- Kreuz, R. J.; and Roberts, R. M. 1993. The empirical study of figurative language in literature. *Poetics*, 22(1): 151–169.
- Krishna, K.; Wieting, J.; and Iyyer, M. 2020. Reformulating Unsupervised Style Transfer as Paraphrase Generation. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 737–762. Online: Association for Computational Linguistics.
- Landis, J. R.; and Koch, G. G. 1977. The measurement of observer agreement for categorical data. *biometrics*, 159–174.
- Lewis, M.; Liu, Y.; Goyal, N.; Ghazvininejad, M.; Mohamed, A.; Levy, O.; Stoyanov, V.; and Zettlemoyer, L. 2020. BART: Denoising Sequence-to-Sequence Pre-training for Natural Language Generation, Translation, and Comprehension. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 7871–7880. Online: Association for Computational Linguistics.
- Li, J.; Jia, R.; He, H.; and Liang, P. 2018. Delete, Retrieve, Generate: a Simple Approach to Sentiment and Style Transfer. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, 1865–1874. New Orleans, Louisiana: Association for Computational Linguistics.
- Liu, P.; Chen, W.; Ou, G.; Wang, T.; Yang, D.; and Lei, K. 2014. Sarcasm detection in social media based on imbalanced classification. In *International Conference on Web-Age Information Management*, 459–471. Springer.
- Luo, F.; Li, P.; Zhou, J.; Yang, P.; Chang, B.; Sui, Z.; and Sun, X. 2019a. A dual reinforcement learning framework for unsupervised text style transfer. *arXiv preprint arXiv:1905.10060*.
- Luo, F.; Li, S.; Yang, P.; Li, L.; Chang, B.; Sui, Z.; and Sun, X. 2019b. Pun-GAN: Generative Adversarial Network for Pun Generation. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, 3388–3393.
- Manning, C.; Surdeanu, M.; Bauer, J.; Finkel, J.; Bethard, S.; and McClosky, D. 2014. The Stanford CoreNLP Natural Language Processing Toolkit. In *Proceedings of 52nd Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, 55–60. Baltimore, Maryland: Association for Computational Linguistics.
- Nikolov, N. I.; Malmi, E.; Northcutt, C.; and Parisi, L. 2020. Rapformer: Conditional Rap Lyrics Generation with Denoising Autoencoders. In *Proceedings of the 13th International Conference on Natural Language Generation*, 360–373.

- Novikova, J.; Dušek, O.; Cercas Curry, A.; and Rieser, V. 2017. Why We Need New Evaluation Metrics for NLG. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, 2241–2252. Copenhagen, Denmark: Association for Computational Linguistics.
- Papineni, K.; Roukos, S.; Ward, T.; and Zhu, W.-J. 2002. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the 40th annual meeting of the Association for Computational Linguistics*, 311–318.
- Pennington, J.; Socher, R.; and Manning, C. 2014. GloVe: Global Vectors for Word Representation. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 1532–1543. Doha, Qatar: Association for Computational Linguistics.
- Rajpurkar, P.; Zhang, J.; Lopyrev, K.; and Liang, P. 2016. SQuAD: 100,000+ Questions for Machine Comprehension of Text. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, 2383–2392. Austin, Texas: Association for Computational Linguistics.
- Reimers, N.; and Gurevych, I. 2019. Sentence-BERT: Sentence Embeddings using Siamese BERT-Networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics.
- Reyes, A.; and Rosso, P. 2012. Making objective decisions from subjective data: Detecting irony in customer reviews. *Decision support systems*, 53(4): 754–760.
- Shao, Z.; Huang, M.; Wen, J.; Xu, W.; and Zhu, X. 2019. Long and Diverse Text Generation with Planning-based Hierarchical Variational Model. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, 3257–3268. Hong Kong, China: Association for Computational Linguistics.
- Stowe, K.; Chakrabarty, T.; Peng, N.; Muresan, S.; and Gurevych, I. 2021. Metaphor Generation with Conceptual Mappings. *arXiv preprint arXiv:2106.01228*.
- Stowe, K.; Ribeiro, L.; and Gurevych, I. 2020. Metaphoric paraphrase generation. *arXiv preprint arXiv:2002.12854*.
- Subramanian, S.; Lample, G.; Smith, E. M.; Denoyer, L.; Ranzato, M.; and Boureau, Y.-L. 2018. Multiple-attribute text style transfer. *arXiv preprint arXiv:1811.00552*.
- Tan, C.; and Lee, L. 2014. A Corpus of Sentence-level Revisions in Academic Writing: A Step towards Understanding Statement Strength in Communication. In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, 403–408. Baltimore, Maryland: Association for Computational Linguistics.
- Troiano, E.; Strapparava, C.; Özbal, G.; and Tekiroğlu, S. S. 2018. A Computational Exploration of Exaggeration. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, 3296–3304. Brussels, Belgium: Association for Computational Linguistics.
- Wolf, T.; Debut, L.; Sanh, V.; Chaumond, J.; Delangue, C.; Moi, A.; Cistac, P.; Rault, T.; Louf, R.; Funtowicz, M.; Davison, J.; Shleifer, S.; von Platen, P.; Ma, C.; Jernite, Y.; Plu, J.; Xu, C.; Le Scao, T.; Gugger, S.; Drame, M.; Lhoest, Q.; and Rush, A. 2020. Transformers: State-of-the-Art Natural Language Processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, 38–45. Online: Association for Computational Linguistics.
- Yu, Z.; Tan, J.; and Wan, X. 2018. A neural approach to pun generation. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 1650–1660.
- Yu, Z.; and Wan, X. 2019. How to Avoid Sentences Spelling Boring? Towards a Neural Approach to Unsupervised Metaphor Generation. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, 861–871. Minneapolis, Minnesota: Association for Computational Linguistics.
- Yu, Z.; Zang, H.; and Wan, X. 2020. Homophonic pun generation with lexically constrained rewriting. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2870–2876.
- Zeng, K.-H.; Shoeybi, M.; and Liu, M.-Y. 2020. Style example-guided text generation using generative adversarial transformers. *arXiv preprint arXiv:2003.00674*.
- Zhang, J.; Cui, Z.; Xia, X.; Guo, Y.; Li, Y.; Wei, C.; and Cui, J. 2021. Writing Polishment with Simile: Task, Dataset and A Neural Approach. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, 14383–14392.
- Zhang, T.; Kishore, V.; Wu, F.; Weinberger, K. Q.; and Artzi, Y. 2019. Bertscore: Evaluating text generation with bert. *arXiv preprint arXiv:1904.09675*.
- Zhou, J.; Gong, H.; Nanniyur, S.; and Bhat, S. 2021. From Solving a Problem Boldly to Cutting the Gordian Knot: Idiomatic Text Generation. *arXiv preprint arXiv:2104.06541*.
- Zhu, M.; Yu, Z.; and Wan, X. 2019. A Neural Approach to Irony Generation. *arXiv preprint arXiv:1909.06200*.

Appendix A Hyperbole Corpus Collection

Below we describe the two steps for the creation of HYPO-XL. The first step is to train a hyperbole detection model to retrieve possible hyperbolic sentences from a corpus (Appendix A.1). Then we further train that model on a manually labeled subset of the retrieved sentences (HYPO-L), to identify hyperboles more precisely (Appendix A.2).

A.1 Automatic Hyperbole Detection

Hyperbole detection is a supervised binary classification problem where we predict whether a sentence is hyperbolic or not (Kong et al. 2020). We fine-tune BERT (Devlin et al. 2019) on the hyperbole detection dataset HYPO (Troiano et al. 2018). It is necessary that we give a quick recap of this dataset here. Each hyperbolic sentence (from the Hyperbole Corpus) has two non-figurative counterparts. The first one (Paraphrase Corpus) is a human-written paraphrase sentence, which introduces the smallest possible change in the syntax and the semantics of the corresponding hyperbole. The second one (from the Minimal Unit Corpus) is a sentence from Wikipedia that includes the minimal hyperbolic span, but with a literal connotation.

Kong et al. (2020) have demonstrated empirically on a Chinese hyperbole detection dataset HYPO-cn that deep learners can offer better performance than traditional algorithms with hand-crafted features. As a result, we fine-tune BERT-base model on HYPO. In experiment, we randomly split the data into 567 (80%) hyperbolic sentences, with their non-figurative counterparts as negative samples, in training set and 71 (10%) in development set and 71 (10%) in test set. Our model achieves an accuracy of 80% on the test set, which is much better than the highest reported accuracy (72%) of traditional algorithms in Troiano et al. (2018).

Once we obtain this BERT-based hyperbole detection model, the next step is to retrieve hyperbolic sentences from a corpus. Following Chakrabarty et al. (2020a), we use Sencedict.com⁸, an online sentence dictionary as the retrieval corpus, where high-quality, context-independent sentences are abundant, including famous quotes, idioms and example sentences from dictionaries such as *Oxford Advanced Learner’s Dictionary* (Hornby and Cowie 1995) in English. We remove duplicate and incomplete (i.e. without initial capital) sentences in the corpus, resulting in a collection of 767,531 sentences. Then we identify 93,297 (12.2%) sentences predicted positive by our model as pseudo-hyperbolic.

A.2 HYPO-L: Human Annotation of Pseudo-labeled Data

Due to the small size of training set, pseudo-labeled data tend to have lower confidence score. To improve the precision of our model⁹, we further fine-tune it with our human-annotated data, namely HYPO-L. We randomly sample

⁸<https://sencedict.com/>

⁹Given the massive hyperboles in the “wild” (i.e., the retrieval corpus), we do not pursue recalling more hyperboles at the risk of hurting precision (Zhang et al. 2021).

Dataset	# Hypo	# Non-hypo	# Para	# Total
HYPO	709	698	709	2,116
HYPO-L	1,007	2,219	-	3,226
HYPO-XL	17,862	-	-	17,862

Table 8: Comparison of different hyperbole datasets (corpora) in terms of hyperbolic (Hypo), non-hyperbolic (Non-hypo) and paraphrase (Para) sentences.

5,000 examples from the 93,297 positive predictions and invite students with proficiency in English to label them as hyperbolic or not. For each sentence, two annotators provide their judgements. We only keep items with unanimous judgments (i.e. both of the two annotators mark the sentence as hyperbolic or non-hyperbolic) to ensure the reliability of annotated data. In this way, 3,226 (64.5%) out of 5,000 annotations are left in HYPO-L. This percentage of unanimous judgments (i.e., raw agreement, RA) is comparable to the same task of recognizing hyperboles in the creation of HYPO (Troiano et al. 2018). To be specific, HYPO-L consists of 1,007 (31.2%) positive examples and 2,219 (68.8%) negative ones.

We train the previously fine-tuned BERT on HYPO-L and the test accuracy is 80%¹⁰, which we consider as an acceptable metric for hyperbole detection. Finally we apply the BERT-based detection model to the retrieval corpus again and retain sentences whose prediction probabilities for positive class exceed a certain threshold¹¹. This results in HYPO-XL, a large-scale corpus of 17,862 (2.3%) hyperbolic sentences. We provide a brief comparison of HYPO, HYPO-L and HYPO-XL in Table 8 to clarify the data collection process.

Appendix B Hyperbole Annotation Examples

In Table 9, we provide some examples of annotations of the three dimensions of hyperbole mentioned in Section 2. According to Troiano et al. (2018), a hyperbole is measurable if it exaggerates something which is objective and quantifiable (e.g., “forever”, “in half”). A hyperbole is rated as “Possible”, if it denotes an extreme but conceivable, rather than an absurd or paradoxical situation. A hyperbole is judged as conventional if it does not express an idea in a creative way. However, we note that there are no absolute answers for these three questions and the annotation results may be subjective.

Appendix C More Generated Examples

Table 10 shows more examples of generated outputs from different systems and human references.

¹⁰We separate 10% data of HYPO-L for development and another 10% for testing.

¹¹Based on manual inspection of predicted results, we set the threshold as 0.8 to trade-off between high precision and large quantity of retrieved hyperboles.

Hyperbole	Measurable	Possible	Conventional
She would <i>die</i> rather than roll her eyes and wriggle and blush.	✗	✓	✓
She is <i>forever</i> picking at the child.	✓	✗	✓
At any moment, I feared, the boys could <i>snap my body in half</i> with just one concerted shove.	✓	✗	✗
Seeing her so upset really <i>tore him apart</i> .	✗	✗	✗
The words caused a shiver to <i>run a fine sharp line</i> through her.	✗	✓	✗

Table 9: Examples of annotations regarding three dimensions of hyperbole. Hyperbolic text spans are in italic.

System	Sentence	Flu	Hypo	Crea	Rel
LITERAL	At that point, the presidency was hard to recover.	-	-	-	-
MOVER	At that point the presidency was <i>virtually impossible</i> to recover.	-	-	-	-
R1	<i>The destruction of a President with its collapse of executive authority was too staggering to contemplate.</i>	W	W	T	W
R3	At that point the presidency was <i>staggering</i> to recover.	W	W	L	W
BART	At that point the presidency was <i>too fragile</i> to recover	T	W	T	T
HUMAN	At that point, the presidency was <i>fatally wounded</i> .	T	W	W	W
LITERAL	His piano playing is very bad.	-	-	-	-
MOVER	His piano playing is <i>beyond</i> bad.	-	-	-	-
R1	Her piano playing is <i>absolute magic</i> .	T	T	L	W
R3	His piano <i>guitar</i> is very bad.	T	T	L	L
BART	His piano playing is very <i>good</i> .	T	W	W	W
HUMAN	His piano playing is <i>enough to make Beethoven turn in his grave</i> .	T	L	L	W
LITERAL	The professor humiliated me in front of the class.	-	-	-	-
MOVER	The professor humiliated me in <i>every conceivable way</i> .	-	-	-	-
R1	<i>She infected the whole class with her enthusiasm.</i>	W	W	W	W
R3	<i>That lecture</i> humiliated me in front of the class.	T	W	T	T
BART	The professor humiliated me <i>and the rest</i> of the class.	W	W	W	W
HUMAN	The professor <i>destroyed</i> me in front of the class.	T	L	W	W
LITERAL	It annoys me when you only drink half of the soda.	-	-	-	-
MOVER	It <i>kills</i> me when you only drink half of the soda.	-	-	-	-
R1	<i>That was the best ice-cream soda I ever tasted.</i>	T	W	W	W
R3	It annoys me when you only drink <i>boredom</i> of the soda.	T	W	W	T
BART	It annoys me when you only drink half of <i>it</i> .	W	W	W	W
HUMAN	It <i>drives me crazy</i> when you only drink half of the soda.	T	W	T	T

Table 10: Pairwise evaluation results (Win[W], Lose[L], Tie[T]) between MOVER and generated outputs of baseline systems. Changed text spans are in italic.