
LANGUAGE MODELLING VIA LEARNING TO RANK

A PREPRINT

Arvid Frydenlund*

University of Toronto
Vector Institute for Artificial Intelligence
arvie@cs.toronto.edu

Gagandeep Singh

Nuance Communications Inc.
gagandeep.singh1@nuance.com

Frank Rudzicz

University of Toronto
Vector Institute for Artificial Intelligence
Unity Health Toronto
frank@cs.toronto.edu

Abstract

We consider language modelling (LM) as a multi-label structured prediction task by re-framing training from solely predicting a single ground-truth word to ranking a set of words which could continue a given context. To avoid annotating top- k ranks, we generate them using pre-trained LMs: GPT-2, BERT, and Born-Again models. This leads to a rank-based form of knowledge distillation (KD). We also develop a method using N -grams to create a non-probabilistic teacher which generates the ranks without the need of a pre-trained LM. We confirm the hypotheses that we can treat LMing as a ranking task and that we can do so without the use of a pre-trained LM. We show that rank-based KD generally improves perplexity (PPL) — often with statistical significance — when compared to Kullback–Leibler-based KD. Surprisingly, given the simplicity of the method, the N -grams act as competitive teachers and achieve similar performance as using either BERT or a Born-Again model as teachers. GPT-2 always acts as the best teacher, though, and using it and a Transformer-XL student on Wiki-02, rank-based KD reduces a cross-entropy baseline from 65.27 to 55.94 and against a KL-based KD of 56.70.

1 Introduction and motivation

More often than not, there are many ways to say the same thing. For example, ‘*the cat sat on the mat*’ is semantically equivalent to ‘*the cat sat on the rug*’, in most contexts. This basic fact about language is ignored when training language models, where we try to maximize the probability of predicting a single ground-truth word for a given context and penalize all other words regardless of any potential semantic equivalence. In particular, a word-level language model (LM) defines a distribution over T discrete tokens, $x_1, \dots, x_T$, as

$$p(x_1, \dots, x_T | x_0) = \prod_{t=1}^T p(x_t | x_{<t}) = \prod_{t=1}^T \frac{e^{w_t^{g_t}}}{\sum_{j=1}^{|V|} e^{w_t^j}} = \prod_{t=1}^T \frac{e^{w_t^{g_t}}}{Z_t}, \quad (1)$$

where we use the softmax function to model a multinomial distribution over a set vocabulary V , $w_t \in \mathbb{R}^{|V|}$ are the logits produced by the model at step t , j indexes the score for the j^{th} word-type, and g_t is the ground-truth (GT) index at time t . Such models are trained by minimizing the per-word cross-entropy (CE

*Contact author. Work accepted to AAAI 2022.

or $H(y, p)$ against the ground-truth text, $y = y_1, \dots, y_T \in \{0, 1\}^{|V|}$ which are one-hot representations of $x_1, \dots, x_T$,

$$\text{CE} = -\frac{1}{T} \sum_{t=1}^T \sum_{i=1}^{|V|} y_t^i \log \frac{e^{w_t^i}}{Z_t} = \frac{1}{T} \sum_{t=1}^T \sum_{i=1}^{|V|} y_t^i (\log Z_t - w_t^i). \quad (2)$$

During training, we assume that y is a one-hot distribution since we do not have access to the true data distribution. This assumption is obviously incorrect, considering that humans are able to form a valid continuation of most contexts with multiple potential words. Call these potential words the *branching set* of a given context. Instead, we may want to give partial credit for predicting words in the branching set, like ‘*rug*’ in instances when the GT is ‘*mat*’ (and vice versa) based on the semantic similarity between the words and contexts. One method for achieving this is via *label smoothing*.

1.1 Label smoothing and knowledge distillation

Label smoothing (LS) is a method which modifies each y_t to be soft-targets, instead of one-hot, by redistributing probability from the GT label to other labels (Szegedy et al., 2016). It is commonly implemented using a hand-crafted function, such as setting the GT probability to 0.9 and spreading the remaining 0.1 uniformly across the other labels (Pereyra et al., 2017). LS is a simple method which has different motivations depending on the problem it is meant to solve. One problem is noisy labels (Lukasik et al., 2020a). Here one views the GTs as truly one-hot but possibly incorrect due to errors in annotation. A second problem is to regularize over-confident models in situations where we desire that model’s probabilities should not spike to a single prediction (Pereyra et al., 2017; Müller et al., 2019). Here, one again views the GTs as truly one-hot but they do not want the model to make predictions too close to the one-hot distribution due to how the model is to be used. However, in our case, we use label smoothing to make the single-target GTs multi-target, under the view that the true GTs are actually multi-target but that we lack access to this information.

Given that the multiple-targets should change given the context, we desire the smoothing values to depend on the context. One can have a data-dependent or semantically-aware LS by using an auxiliary pre-trained model to form label scores, such as using cosine scores from FastText (Elbayad et al., 2018; Li et al., 2019). This can be seen as a form of knowledge distillation (KD), which is when a pre-trained teacher model is used to train a student model by minimizing the cross entropy, $H(p_{\text{KD}}, p)$, between the teacher’s distribution, p_{KD} and the student’s, p (Hinton et al., 2015; Wang and Yoon, 2021). Here, the smoothing scores are derived from the teacher’s distribution and thus can be viewed as parametric form of semantic LS (Yuan et al., 2020; Tang et al., 2020).

One can perform KD either from a weaker language representation model such as FastText or a strong language model such as GPT-2. However, this raises the question – *who teaches the teacher?* That is, in order to train our LM we need to assume the existence of an already established model, which seems to defeat the purpose. Instead, we set our own desideratum that we do not want to use a pre-trained neural LM as a teacher.

We hypothesize that N -gram statistics are a rich source of semantic information which can be exploited to train neural LMs, i.e., introducing global N -gram statistics to our otherwise local training procedure (Neubig and Dyer, 2016; Zhao et al., 2017; Yang et al., 2019a). The naïve approach would be to pre-train an N -gram LM to use as our teacher; however, this will not work because the N -gram model will be a weak teacher. N -gram LMs perform worse than neural language models (Mikolov, 2012; Jozefowicz et al., 2016). Because of this, if we just try to match the teacher’s distribution, as is done in KD, we will end up with a higher perplexity model than had we forgone the KD from the N -gram model. To overcome this issue, we need to examine how label smoothing and N -gram LMs work.

1.2 Ranking in lieu of label smoothing

We can break semantic label smoothing into two problems: a) how to choose which words should get partial credit in a given context, and b) how much partial credit they should receive. To solve the first problem, we could use the common ‘distributional hypothesis’ from linguistics to give partial credit to words which share similar contexts (Harris, 1954; Mikolov et al., 2013). That is, words which have some shared context should get some partial credit. The distributional hypothesis underlies N -gram language models as well, which employ smoothing algorithms and back-off methods to weigh higher-order N -grams more than lower order ones (Goodman, 2001). To solve the problem of quantifying credit assignment, it seems we need a

probabilistic (even if un-normalized) model to specify the smoothing values. However, as reasoned above, if we naïvely use N -gram LMs for this, we will wind up trying to match the distribution of a weaker teacher model. One solution to this would be to modify the N -gram LM teacher itself.

N -gram LM algorithms were developed with the goal of the model being a valid LM for use in applications. One criterion of such a model is that it produces a non-zero probability². This is achieved by including the unigram distribution. Another criterion is that the N -gram LM generalizes well to unseen contexts. This is achieved by well-developed smoothing algorithms. If we only intend to use the N -gram model as a teacher, we may ease or remove these criteria. For example, we might posit the converse of the distributional hypothesis and say that we will restrict credit from words which do not share contexts. To achieve this, we could forego backing-off to the unigram distribution and smoothing into unseen contexts. One of the main motivations of neural LMs over N -grams is their ability to generalize due their distributed representations (Bengio et al., 2003). This implies that we could forego applying any kind of smoothing algorithm to the N -gram teacher and let the neural student learn to generalize to unseen contexts. If we follow this approach, then we would need to make modifications to existing N -gram LM algorithms to determine how to combine the various N -gram probabilities into a (sparse) probabilistic model. Instead, we propose a more radical approach in order to avoid this.

If we decompose the problem of specifying label weights, we are specifying not only how to weight each cost term but also, implicitly, an ordering of the weighted terms. Thus, given label weights, we can convert the problem of LS to a ranking problem by specifying that the most probable label is the most relevant rank and the second most probable is the second most relevant rank, etc. **The main contribution of this paper is therefore the idea that we may not need to specify specific label weights, so long as we can specify an *order* to the labels.** In particular, we hypothesize that the ordering of labels contains sufficient semantic information to be used for our desired partial credit. To specify the ordering, we again employ the distributional hypothesis and consider that increasing the shared context between a word and the ground-truth word increases the relevance of that word in the ordering. Note that the original GT word will always retain the most relevant rank, as it will always share the most context with itself. Since ordinal information is less strict than interval information, we may overcome the issue of having a weak teacher since we are no longer trying to directly match a weaker distribution.

This approach obviates the need for a modified probabilistic N -gram LM since we just need to consider the size of a shared N -gram context to determine how much credit to give to a set of words which can follow. We describe how to construct artificial ranking GTs from N -gram statistics in Section 2.1 and how to use these in training the neural LM in Section 2.2.

Adams	River	is	a	tributary	to	the	Thompson	and	Fraser
Moro	passes	Lumber	the		,	Jim		sub	Sam
Shebelle	Lake	<unk>	located		of	Harry			<unk>
Colorado		to	thought		the				Kansas
Missouri		run	north		in				Platte
Payette		flows	298		valleys				Missouri
<unk>		begins			took				Yellowstone
Back		(			by				Mickey
Red		valley			paymen-				Mississippi
Yellowst-		Provincial			is				Cheyenne
Grand		sockeye							Columbia
Mississ-		area							Ohio
		,							Osage
		and							Kissimmee

Figure 1: Branching sets created for the ground-truth ‘*Adams River is a tributary to the Thompson and Fraser Rivers ...*’ using the ground-truths (O_{gt}) and four orders (O_5 , O_4 , O_3 , O_2) from the Wiki02 training partition. The branching sets for ‘*tributary*’ and ‘*Thompson*’ are only the ground-truths since all other orders have been pruned.

²Though this may not be true for current applications of LMs.

2 Methods

2.1 N -gram branching set construction

Let a *branching set* (BS), b_t , be a set of words which can continue a given context $c_t = (x_1, \dots, x_{t-1})$ at step t . Let $c_t(n)$ be a slice of the context which only includes the previous $n - 1$ words (assuming $t \geq n$). Intuitively, the construction of the BS is simple. We are going to consider a series of past N -gram contexts, starting with the largest context until the smallest, and any word that we find in the training set that continues those contexts will be in the BS. Then, in order to derive artificial rank GTs from the BS, we can give a *weak ordering*³ to the words in the BS by specifying that words in the BS with a larger context should have a higher rank relevance than those with a smaller context. If, for example, we consider bigrams and trigrams then any word that continues the trigram context will also continue the bigram context but words which only continue the bigram context (but not the trigram context) will be less relevant. Unigrams are excluded since they use no context.

More formally, we construct a tuple of sets referred to as *orders*, $O = (O_{gt}, O_M, \dots, O_2)$ which will be merged to form the BS. $O_{gt} = \{x_t\}$, only contains the original GT. The other orders are made up of all words which continue a specific context length, such that we construct each of the orders as $O_m = \{x | x \in V \setminus O_{>m}, C(c_t(m), x) \geq 1\}$, where $m \in \{M, \dots, 2\}$ and $C(c_t(m), x)$ is the count for how many times x appears in the context $c_t(m)$. Note, we exclude words already included in previous orders. We also use a cut-off, q , so that we only consider sufficiently small orderings $|O_m| < q$, since large BSs will not be informative; e.g., all words which follow ‘*the*’ or ‘*is a*’. The BS is constructed as an ordered tuple where $b_t = (x | x \in O_i, O_i \in O)$. The artificial GT ranks are then specified as the weak rank ordering of the BS, which is weak since each O_m may contain multiple unordered words.

We can further resolve the rank within each order by using future context in addition to past context. This assumes that, had we access to longer past contexts, the ranks would have resolved the same way as using future information. Note that we can introduce future information here because the teacher model does not need to form a valid probability distribution since it only defines targets for the student model. Let $c_t(n_p, n_f)$ be the context defined by using $n_p - 1$ words in the past and $n_f - 1$ words in the future. We prioritize past context over future context, since that is what the student model will be able to observe as input. This is done by specifying the orders by a reverse orthographical sorting of past and future context lengths, i.e., $c_t(3, 4) \succ c_t(3, 3) \succ c_t(2, 4)$. This does not completely resolve the weak ordering, though, since two words may share both the same past and future contexts. Figure 1 shows an example BS and Figure 2 shows how it was constructed using future information. We present a memory-efficient algorithm for creating the rank GTs in Appendix B.

Adams	River	is	a	tributary	to	the	Thompson	and	Fraser	Rivers
			a	tributary	,	the	Thompson	and	Sam	
			a	tributary	of	the		and	<unk>	Rivers
				tributary	the			and	Kansas	Rivers
				tributary	in			and	Platte	Rivers
				tributary	valleys			and	Missouri	Rivers
				tributary	took			and	Yellowstone	Rivers

Figure 2: BS construction for the example in Figure 1 using four orders, **2p-1f**, **2p**, **1p-1f**, **1p** and the GTs. Where ‘**2p-1f**’ indicates an order which matches two past words and one future word. We show the branching sets for ‘to’ and ‘Fraser’, centred in dash lines, and the context that selected those words in solid lines. The table has been truncated.

2.2 Plackett-Luce rank loss

Let us assume that the BS, b_t , is strongly ordered by some preferred (partial) rank over $k \leq |V|$ words in V for step t and that the GT word has the first rank. Let y_t be the set of words in V and say that $b_t(m)$

³For terminology, we use ‘full ordering’ to indicate known ranks for all $|V|$ words and ‘partial ordering’ to indicate known top- k ranks. A ‘strong ordering’ indicates there are no ties and a ‘weak ordering’ indicates that there are either ties or an unknown preference across contiguous ranks. This is also known as a ‘partitioned preference’.

indexes the element of rank m according to b_t , i.e. b_t defines a rank permutation. If we assume that y_t and w_t are sorted by rank, we can drop the indexing in the following section.

Given strongly ordered top- k ground-truths, we train our LM by learning to rank with the top- k Plackett-Luce (PL) rank loss (Plackett, 1975; Cao et al., 2007; Xia et al., 2009). The PL loss models the data as a Plackett-Luce distribution, where for any time step t ,

$$p_t(y_t^1 \succ \dots \succ y_t^k) = \prod_{i=1}^k p_t(y_t^i | y_t^1, \dots, y_t^{i-1}) = \prod_{i=1}^k \frac{e^{w_t^i}}{\sum_{j=i}^{|V|} e^{w_t^j}}. \quad (3)$$

The PL distribution represents a generative process of sampling from a softmax distribution without replacement, where we re-normalize the distribution by excluding previous samples at every ranking step. The loss is then defined as the negative log-likelihood of equation 3,

$$-\log p_t(y_t^1 \succ \dots \succ y_t^k) = \sum_{i=1}^k \log \sum_{j=i}^{|V|} e^{w_t^j} - w_t^i = \sum_{i=1}^k \log \left(Z_t - \sum_{j < i} e^{w_t^j} \right) - w_t^i. \quad (4)$$

While there are many surrogate ranking losses, we choose PL since, in the case when $k = 1$, the PL distribution collapses to the softmax distribution and the loss to the corresponding CE loss. That is, we revert back to traditional language modelling. This is a beneficial property since a) we might encounter contexts during training without available ranking data, i.e., only the original GT word is in the branching set, b) we only consider the probability of the original GT during evaluation, and c) we do not wish to radically change the distribution being modelled so that PPL is comparable to previous work. The PL loss can also be efficiently implemented for GPUs and does not add significant computation over a regular softmax (see Appendix C).

When combined with a method for constructing artificial ranking ground-truths, we can view the PL loss as a form of self-supervision where the first ranking term is our original loss and all higher ranking terms are auxiliary losses. However, unlike most auxiliary losses used in self-supervised learning, the extra PL loss terms are a natural extension or generalization of the original loss.

The PL loss can fail to capture the inductive bias that it is more important to get the more-preferred ranks correct over the lesser-preferred ranks (Lan et al., 2014). This is relevant since the original GT is the first rank and we will have less confidence as we descend the ranks, since the amount of semantic information in a bigram is generally less than in a trigram, and so on. Lan et al. (2014) introduced discount weights on the PL terms which decreased exponentially, but, since their exact method did not work for our task, we use a *stepped* function where a static $\eta < 1$ weight is given to the top rank and the remaining $1 - \eta$ is partitioned such that there is an equal difference between the weights for consecutive ranks. In practice, η acts similar to the temperature smoothing hyper-parameter used in KD.

The PL loss does not allow for weak orderings. This is a problem since the words within each individual order, O_i , have no ordering; i.e., if $O_i = \{o_1, \dots, o_S\}$, then the S items are of an unknown ordering. This creates a partitioned preference where all the partitions define a ranking, $O_i \succ O_{i+1}$, but the ranking within each ordering is unknown. One way of handling this would be to consider the marginal distribution across all permutations for each ordering. However, the likelihood would require calculating a factorial number of terms (Ma et al., 2021). Instead, we consider a lack of known preference as an inductive bias that words in the weak orders are equally preferred. We enforce this by modifying the PL loss such that we revert back to regular softmax-cross entropy within the weak order for rankings $i, \dots, i + S$ as $\sum_{s=i}^{i+S} \log Z_{t,i} - w_t^s$, where $Z_{t,i} = Z_t - \sum_{j < i} e^{w_t^j}$, which will optimize to a uniform distribution within the ordering. This is a novel modification to our knowledge.

3 Related work

Previous work combined N -gram information with neural LMs. Neubig and Dyer (2016); Bakhtin et al. (2018) used dynamic mixtures of N -grams and neural LMs. Neubig and Dyer (2016) found that their models performed worse than regularly trained neural LMs except on low-frequency words. Noraset et al. (2018) used soft constraints for text generation with an LSTM LM. They tried two sets of constraints: those to reduce

repeated words during generation and those to match Kneser-Ney bigram probabilities during generation. Their method estimates the marginal probability of the LSTM LM given some conditioning constraint and regularizes it using a KL-divergence against the constraint distribution. These marginal probabilities are based on a pool of generated text that is periodically updated during training. This can be seen as a form of LS against the actual generative distribution instead of the GT distribution. They showed they could better match the distribution of repeated tokens and bigram statistics against a baseline on PTB. Yang et al. (2019a) built on this by making computation of the marginals more tractable. They regularized the LM’s whole vocabulary against trigram statistics, which makes their methods very similar to KD against a trigram N -gram model. They also proposed a method for selecting useful N -grams based on an information criterion. This is important, as they need to do a single forward pass for every N -gram context they regularize. So selecting which contexts they use significantly decreases the computational cost. They trained an LSTM LM and a trigram N -gram LM. On Wiki02, their method achieved 69 PPL given a baseline of 76.

Various works implemented semantic label smoothing using pre-trained probabilistic models (Elbayad et al., 2018; Hahn and Choi, 2019; Li et al., 2019; Ghoshal et al., 2020; Liu et al., 2021; Lukasik et al., 2020b). These can use various pre-trained models such as embedding models like Fasttext (Joulin et al., 2017), language representation models like BERT (Devlin et al., 2019) or language models like GPT2 (Radford et al., 2019). Lukasik et al. (2020b) smoothed over related sequences which were found using a pre-trained model and then refined using BLEU as a selection criterion. Wang et al. (2020) introduced graduated label smoothing which uses a set of binned label-smoothing values and the confidence of a pre-trained model to determine the bin to which each token belongs, improving BLEU and calibration for NMT.

Li et al. (2019) used an auxiliary KL-divergence based loss on a semantically-aware or data-dependent Gaussian prior which is parameterized using cosine similarity from Fasttext embeddings. They applied this over a range of conditional language modelling tasks including NMT, text summarization, and story telling. For story telling, their method lowered test PPL by ≈ 2 -3 points. In general, LS can be framed as an entropy regularizer and many prior distributions can be used (Pereyra et al., 2017; Meister et al., 2020).

Ghoshal et al. (2020) proposed a method which jointly trains a model with a set of learned smoothing parameters. Given C classes, one could implement semantic LS by learning a similarity $C \times C$ matrix where each row provides smoothing scores for a given target class. Instead, the authors approximated this with a $C \times k$ matrix with $k \lll C$. While this is a form of semantic label smoothing, it is limited in that it is based only on the target class and not the full context. They applied it to semantic parsing and question answering.

Welleck et al. (2019) introduced an unlikelihood loss which penalizes words which should have low probability. We make use of the concept of a branching set which is the words that can follow a given context. The complementary set of the branching set could be used to select negative samples for the unlikelihood loss.

Born-again distillation or self-distillation is where the student and teacher have the same specification (Furlanello et al., 2018; Hahn and Choi, 2019; Yuan et al., 2020). Furlanello et al. (2018) applied born-again KD to LMs and showed that a student LSTM LM on PTB could outperform the same teacher model. Yang et al. (2019b) used a top- k auxiliary loss and trained image classification models with a series of self-distillations. Tang et al. (2020) developed a top- k KD using the teacher’s probability for the top- k ranks and distributing the remaining probability uniformly.

Reddi et al. (2021) recently introduced the use of top- k rank loss functions for rank-based KD using PL and pairwise hinge losses, outperforming traditional KD on a variety of traditional ranking tasks. Other forms of structured KD can also be applied to other NLP sequence tasks as well as computer vision (Wang et al., 2021; Liu et al., 2019). Cole et al. (2021) considered multi-label image classification when only having access to singular-class GTs and thus has a similar motivation to our work.

4 Experiments

We use the word-level Penn Treebank (PTB) and WikiText-02 (Wiki02) datasets and use ADW-LSTM (LSTM) and Transformer-XL (T-XL) students (Taylor et al., 2003; Merity et al., 2017, 2018; Dai et al., 2019). Our LSTM uses 24.2M parameters on PTB and 33.5M on Wiki02, and our Transformer-XL uses 35.8M on Wiki02.

We propose two hypotheses: that we can re-frame the problem of label-smoothing as a form of rank-based knowledge distillation from a teacher which *only* provides rank ground-truths and that we can derive the ranks directly from a non-probabilistic N -gram teacher. In order to decouple these two hypotheses, we first

Data	Model	(P-)PPL	$A \subseteq 1$	$A \subseteq 2$	$A \subseteq 3$	$A \subseteq 5$	$A \subseteq 10$
PTB	BERT 24-layer	*1.205	0.975	0.986	0.989	0.991	0.993
	GTP-2 774M	22.810	0.437	0.525	0.573	0.630	0.701
	BA-LSTM	60.724	0.302	0.394	0.446	0.511	0.593
Wiki02	BERT 24-layer	*1.423	0.930	0.979	0.983	0.985	0.987
	GTP-2 774M	25.277	0.419	0.521	0.575	0.635	0.706
	BA-LSTM	68.437	0.296	0.394	0.448	0.512	0.592
	BA-T-XL	67.468	0.301	0.398	0.452	0.517	0.598

Table 1: Perplexity (PPL) and accuracy in the top- k ($A \subseteq k$) for word-level fined-tuned probabilistic teacher models BERT, GPT-2, Born-Again (BA) on the PTB and Wiki02 validation sets. *We report a *pseudo*-perplexity (P-PPL) for BERT as it does not form a valid distribution over sequences.

use three different types of pre-trained LMs to evaluate the PL loss when used for KD then, provided that works, we apply the PL loss with an N -gram teacher model.

We choose GPT-2, BERT, and Born Again (BA) models as teachers for different reasons. GPT-2 and BERT were chosen under the assumption that these large LMs will produce better ranks than the N -grams. We tried both since the former is an auto-regressive LM which only conditions on past context and thus matches our student models, while the latter is an auto-encoding language representation model using both past and future contexts, allowing us to test if we can distil future information. BA models are also considered as they will not present data-leakage problems, unlike BERT and GPT-2 which were pre-trained on a large amount of auxiliary data. The BA models are selected as the highest performing CE baseline models.

GPT-2 and BERT use sub-word vocabularies instead of the standard word-level ones for PTB and Wiki02. We convert them by summing the sub-word hidden states to get whole-words and then fine-tuning them using CE.

Table 1 shows the validation performance of the teacher models. The performance of these models is better than the baseline CE models, which warrants their use as teacher models. BERT out-performs GPT-2 due to using surrounding context when predicting a word where GPT-2 is limited to only past context⁴. We provide two other sanity checks; first, we provide examples of the top- k predictions for BERT, GPT-2 and the N -grams in Appendix E and, second, we plot top- k frequency statistics for BERT and GPT-2 in Appendix D.

The N -grams used a set of contexts from 5 to 1 past tokens concurrently with 4 to 0 future tokens and a pruning cut-off of 10, i.e. 5p-4f, 5p-3f, ..., 1p-1f, 1p.

We compare a CE baseline to four other losses. The first is a top- k KL-based KD. This has been modified in three ways from traditional KD. First, we only use the top- k ranks, as did Tang et al. (2020), although we forgo placing a uniform distribution over all words not in the top- k . They reported a test PPL of 60.85 using top- k KD on PTB with AWD-LSTM using a smaller student with 9.1M parameters. Second, we post-process the predicted ranks by floating the original GTs to the top rank while keeping the top- k probabilities the same order i.e. make the GTs the most probable. Initial experimentation did not show a significant change for KL-based KD and we believed this was an important modification for rank-based KD. Third, we cycle the interpolation value between the CE and KD terms, similar to Clark et al. (2019); Jafari et al. (2021). For PL, we can forego discounting (PL), use the teacher’s probabilities (PL-t), or use the stepped function (PL-s). Note that the KL also uses the teacher’s probabilities. See Appendix A for further experimental details.

5 Discussion

The results in Table 2 show we can treat language modelling as a structured prediction task using a rank-based KD and that this can be done without the need of a probabilistic teacher. We discuss four main results.

First, given the proper form of discounting, either form of KD improves PPL over the CE baseline.

⁴Technically, these PPL results are not directly comparable since BERT does not form a valid distribution over sequences, hence using P-PPL for BERT. Also, they use different auxiliary training data.

		PTB				Wiki02							
		LSTM Student				LSTM Student				T-XL Student			
		Validation		Test		Validation		Test		Validation		Test	
T	Loss	PPL	SEM	PPL	SEM	PPL	SEM	PPL	SEM	PPL	SEM	PPL	SEM
	CE	61.44	0.014	59.11	0.015	69.59	0.018	66.43	0.015	68.66	0.021	65.27	0.020
GPT-2	KL	<u>57.43</u>	0.012	<u>55.46</u>	0.010	<u>65.41</u>	0.008	<u>62.79</u>	0.007	<u>59.43</u>	0.009	<u>56.70</u>	0.008
	PL-t	<u>57.28</u>	0.014	<u>55.17</u>	0.013	<u>65.47</u>	0.015	<u>62.69</u>	0.014	<u>59.32</u>	0.007	<u>56.58</u>	0.007
	PL	<u>58.16</u>	0.012	<u>56.25</u>	0.012	<u>65.45</u>	0.011	<u>62.74</u>	0.011	58.61	0.007	55.94	0.007
	PL-s	<u>57.63</u>	0.008	<u>55.67</u>	0.007	<u>65.34</u>	0.008	62.59	0.008	<u>59.48</u>	0.008	<u>56.76</u>	0.007
BERT	KL	59.86	0.018	57.73	0.017	68.63	0.010	65.51	0.009	67.79	0.010	64.16	0.009
	PL-t	59.38	0.009	57.20	0.009	68.04	0.010	64.99	0.009	67.66	0.012	64.18	0.012
	PL	62.23	0.011	60.32	0.011	71.98	0.009	68.68	0.008	67.78	0.009	64.28	0.010
	PL-s	61.13	0.010	59.11	0.010	68.55	0.007	65.53	0.008	67.72	0.008	64.26	0.008
BA	KL	60.14	0.011	57.63	0.010	68.90	0.014	65.75	0.012	67.46	0.014	64.19	0.012
	PL-t	60.80	0.014	58.15	0.014	69.14	0.009	65.74	0.009	66.96	0.012	63.46	0.011
	PL	63.36	0.017	60.54	0.013	69.63	0.007	66.16	0.008	66.93	0.017	63.58	0.014
	PL-s	60.91	0.010	58.22	0.012	67.96	0.007	64.76	0.006	67.10	0.012	63.64	0.011
N-gram	PL-s	59.87	0.022	57.33	0.021	67.58	0.008	64.82	0.007	66.86	0.017	63.87	0.016
	wPL-s	59.66	0.008	57.16	0.009	67.25	0.006	64.44	0.006	66.59	0.015	63.54	0.013
	wPL									66.38	0.013	63.49	0.012

Table 2: Average PPL ($\downarrow$) with standard error (SEM) ($n = 30$) using an LSTM and T-XL student models and GPT-2, BERT, Born again and N-gram teachers (T). wPL is our version of Plackett-Luce modified to account for weak orderings. Bolded PL experiments exceed the in-group KL baseline with $p < .001$ using a two-tailed t-test. Bolded KL experiments exceed the best in-group PL experiment with significance. Underlined experiments are those which perform better than the N-gram model with significance. We skipped two of the wPL experiments since only the T-XL student seems to benefit from no discounting.

Second, some form of rank-based KD often significantly outperforms KL-based KD. This is true of 6/9 test-set groups, with only a single experiment showing the reverse (this is a slight conceit, since we are making post-hoc comparisons against a set of PL experiments instead of selecting the best form of discounting during the validation phase). Since, KL-based KD contains both the label order and weight information, it acts as a strong baseline. We believe that the reason the rank-based KD often does better is because matching the teacher’s ranks is a less strict criterion than matching its probabilities. It may also be a better criterion when evaluating PPL, since PL may allow for the top ranks to all increase their probability together, so as long as the GT is in the top ranks, then PPL will decrease. **Importantly, these results also indicate that performance of the N-grams will be due to their inherent value as a teacher and will not be hindered by the loss function.** The results of the PL and PL-s experiments support the claim that the ordering of the labels provides sufficient semantic information to perform KD and that we can forego label weights (with a caveat addressed later).

Third, the N-grams act as a competitive teacher, with only GPT-2 consistently outperforming them. It seems plausible that the N-grams would surpass the BA models, since both types of KD will restrict how much the BA students can deviate from the baseline CE teacher. With BA and BERT, and LSTM students, the raw PL loss often does worse than the CE baseline. This is indicative of the PL loss failing when it is easier to optimize the lesser-preference ranks over the GT. Our modified PL loss leads to a modest PPL decrease.

That the N-grams outperform BERT speaks more to BERT failing to act as a good teacher rather than the quality of the N-gram models. For BERT, it was important to use the teacher probabilities (see the KL and PL-t vs PL and PL-s experiments). We believe that reliance on the teacher’s probabilities is indicative of poor ranks where the teacher’s sharp probability discounts the lower ranks. A qualitative analysis of the produced ranks shows that the future information can produce ranks that do not generalize well to a student evaluated on a past-context-only task. For example, BERT can see when a sentence ends and so produces ranks which do not try to continue the sentence where GPT-2 and the N-grams will. Thus, the major caveat mentioned above is that label ordering is sufficient, provided those ranks are informative for the student’s task. The N-grams are inherently sparse, since they only derive ranks when supported by the context. In

the future, we would like to consider ways of dynamically selecting the top- k which may fix this discounting issue. This also continues the desire to model the branching set, which are differently sized for each context.

The fourth result is how well GPT-2 does when paired with the T-XL student, where we see a reduction of almost 10 PPL points. Compare this with the LSTM student which only sees a reduction of 4 points. Tang et al. (2020) suggested that certain failure cases in KD could be explained by a *capacity gap*, where the teacher’s distribution is too complex to properly be distilled to the student model. We believe that the GPT-2 results are the inverse of this phenomenon, where the student falls into a good regime to match the teacher instead of out of the regime. This makes sense since, outside of the BA models, which may have limited value as teachers, GPT-2 and T-XL are the closest student-teacher pair in terms of specification. However, since the T-XL model only has 7% more parameters than the LSTM model, we believe this should be considered as a *capability gap* where the change in performance between the LSTM and T-XL is more likely due to actual model differences instead of raw capacity. Additionally, the T-XL model using PL and no discounting was competitive to the discounted forms for BERT and BA and was the best performing model for GPT-2. This is in contrast to the non-discounted PL using the LSTM student which often did worse than the CE baseline. This again speaks to a difference in capability between the two types of student models. We wish to explore this in the future.

Our results are limited to English datasets⁵ and there may be generalization issues for aspects of our presented methods for different languages. In particular, we believe that the idea of training a language model via learning to rank is language agnostic; however, the N-gram algorithm for creating the ranks may not be. For example, an agglutinative language like Turkish, might induce sparsity issues. Another example is that our N-gram algorithm assumes strong word-order information which will not be true for all languages.

Rank-based KD is a general idea which allows one to integrate rule-based systems into a student model. We could improve or generalize the N -grams by incorporating syntactic/morphological rules or enforcing co-references when generating the ranks. This can be done without modifying the model’s specification (such as needing to jointly learn the syntax). Another example of possible uses would be to use rank-based KD to integrate an LM into a NMT system by generating target-side ranks, again, without modifying the NMT model. It may be useful for black-box KD, where one only has access to the teacher’s hard predictions (Wang, 2021), to augment small-data environments with rules, or to enumerate instructions and answers for instruction fine-tuning (Wei et al., 2021).

In this work, we offer a novel perspective on language modelling by considering it as a multi-label task and develop the methods necessary to train such a model. We connect the idea of LS to ranking via KD by showing that we can incorporate semantic similarity information from an ordered set of words into a LM without requiring associated probabilities. In our desire to forego using a pre-trained LM, we re-examined how N -gram statistics should be incorporated into a neural LM. We find that this can be done using a simple method which just considers N -gram contexts, and that this surpasses the CE baseline and is comparable to using BA and BERT as teachers. We also find that, for language modelling, a rank-based KD is often a superior method for KD.

6 Acknowledgements

We thank our reviewers for their insightful feedback.

Resources used in preparing this research were provided, in part, by the Province of Ontario, the Government of Canada through CIFAR, and companies sponsoring the Vector Institute.

We acknowledge the support of the Natural Sciences and Engineering Research Council of Canada (NSERC).

Nous remercions le Conseil de recherches en sciences naturelles et en génie du Canada (CRSNG) de son soutien.

References

Christian Szegedy, Vincent Vanhoucke, Sergey Ioffe, Jon Shlens, and Zbigniew Wojna. Rethinking the inception architecture for computer vision. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2818–2826, 2016.

⁵We explicitly state this limitation to comply with the Bender Rule (Bowman, 2021; Bender and Koller, 2020).

- Gabriel Pereyra, George Tucker, Jan Chorowski, Lukasz Kaiser, and Geoffrey E. Hinton. Regularizing neural networks by penalizing confident output distributions. In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Workshop Track Proceedings*. OpenReview.net, 2017. URL <https://openreview.net/forum?id=HyhbYrGYe>.
- Michal Lukasik, Srinadh Bhojanapalli, Aditya Menon, and Sanjiv Kumar. Does label smoothing mitigate label noise? In Hal Daumé III and Aarti Singh, editors, *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pages 6448–6458. PMLR, 13–18 Jul 2020a. URL <http://proceedings.mlr.press/v119/lukasik20a.html>.
- Rafael Müller, Simon Kornblith, and Geoffrey E Hinton. When does label smoothing help? In *Advances in Neural Information Processing Systems*, pages 4694–4703, 2019.
- Maha Elbayad, Laurent Besacier, and Jakob Verbeek. Token-level and sequence-level loss smoothing for rnn language models. In *ACL-56th Annual Meeting of the Association for Computational Linguistics*, pages 2094–2103. ACL, 2018.
- Zuchao Li, Rui Wang, Kehai Chen, Masso Utiyama, Eiichiro Sumita, Zhuosheng Zhang, and Hai Zhao. Data-dependent gaussian prior objective for language generation. In *International Conference on Learning Representations*, 2019.
- Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the knowledge in a neural network. *stat*, 1050:9, 2015.
- Lin Wang and Kuk-Jin Yoon. Knowledge distillation and student-teacher learning for visual intelligence: A review and new outlooks. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2021.
- Li Yuan, Francis EH Tay, Guilin Li, Tao Wang, and Jiashi Feng. Revisiting knowledge distillation via label smoothing regularization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3903–3911, 2020.
- Jiaxi Tang, Rakesh Shivanna, Zhe Zhao, Dong Lin, Anima Singh, Ed H Chi, and Sagar Jain. Understanding and improving knowledge distillation. *arXiv preprint arXiv:2002.03532*, 2020.
- Graham Neubig and Chris Dyer. Generalizing and hybridizing count-based and neural language models. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 1163–1172, 2016.
- Zhe Zhao, Tao Liu, Shen Li, Bofang Li, and Xiaoyong Du. Ngram2vec: Learning improved word representations from ngram co-occurrence statistics. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 244–253, Copenhagen, Denmark, September 2017. Association for Computational Linguistics. doi:10.18653/v1/D17-1023. URL <https://www.aclweb.org/anthology/D17-1023>.
- Yiben Yang, Ji-Ping Wang, and Doug Downey. Using large corpus n-gram statistics to improve recurrent neural language models. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 3268–3273, 2019a.
- Tomáš Mikolov. *Statistical language models based on neural networks*. Ph.d. thesis, Brno University of Technology, Faculty of Information Technology, 2012. URL <https://www.fit.vut.cz/study/phd-thesis/283/>.
- Rafal Jozefowicz, Oriol Vinyals, Mike Schuster, Noam Shazeer, and Yonghui Wu. Exploring the limits of language modeling. *arXiv preprint arXiv:1602.02410*, 2016.
- Zellig S Harris. Distributional structure. *Word*, 10(2-3):146–162, 1954.
- Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. Distributed representations of words and phrases and their compositionality. *Advances in neural information processing systems*, 26: 3111–3119, 2013.
- Joshua T Goodman. A bit of progress in language modeling. *Computer Speech & Language*, 15(4):403–434, 2001.
- Yoshua Bengio, Réjean Ducharme, Pascal Vincent, and Christian Jauvin. A neural probabilistic language model. *Journal of machine learning research*, 3(Feb):1137–1155, 2003.
- Robin L Plackett. The analysis of permutations. *Journal of the Royal Statistical Society: Series C (Applied Statistics)*, 24(2):193–202, 1975.

- Zhe Cao, Tao Qin, Tie-Yan Liu, Ming-Feng Tsai, and Hang Li. Learning to rank: from pairwise approach to listwise approach. In *Proceedings of the 24th international conference on Machine learning*, pages 129–136, 2007.
- Fen Xia, Tie-Yan Liu, and Hang Li. Statistical consistency of top-k ranking. *Advances in Neural Information Processing Systems*, 22:2098–2106, 2009.
- Yanyan Lan, Yadong Zhu, Jiafeng Guo, Shuzi Niu, and Xueqi Cheng. Position-aware listmle: A sequential learning process for ranking. In *UAI*, pages 449–458, 2014.
- Jiaqi Ma, Xinyang Yi, Weijing Tang, Zhe Zhao, Lichan Hong, Ed Chi, and Qiaozhu Mei. Learning-to-rank with partitioned preference: Fast estimation for the plackett-luce model. In Arindam Banerjee and Kenji Fukumizu, editors, *The 24th International Conference on Artificial Intelligence and Statistics, AISTATS 2021, April 13-15, 2021, Virtual Event*, volume 130 of *Proceedings of Machine Learning Research*, pages 928–936. PMLR, 2021. URL <http://proceedings.mlr.press/v130/ma21a.html>.
- Anton Bakhtin, Arthur Szlam, Marc’Aurelio Ranzato, and Edouard Grave. Lightweight adaptive mixture of neural and n-gram language models. *arXiv preprint arXiv:1804.07705*, 2018.
- Thanapon Noraset, David Demeter, and Doug Downey. Controlling global statistics in recurrent neural network text generation. In *AAAI*, pages 5333–5341, 2018.
- Sangchul Hahn and Heeyoul Choi. Self-knowledge distillation in natural language processing. In *Proceedings of the International Conference on Recent Advances in Natural Language Processing (RANLP 2019)*, pages 423–430, Varna, Bulgaria, September 2019. INCOMA Ltd. doi:10.26615/978-954-452-056-4.050. URL <https://www.aclweb.org/anthology/R19-1050>.
- Asish Ghoshal, Xilun Chen, Sonal Gupta, Luke Zettlemoyer, and Yashar Mehdad. Learning better structured representations using low-rank adaptive label smoothing. In *International Conference on Learning Representations*, 2020.
- Yang Liu, Sheng Shen, and Mirella Lapata. Noisy self-knowledge distillation for text summarization. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 692–703, Online, June 2021. Association for Computational Linguistics. doi:10.18653/v1/2021.naacl-main.56. URL <https://aclanthology.org/2021.naacl-main.56>.
- Michal Lukasik, Himanshu Jain, Aditya Menon, Seungyeon Kim, Srinadh Bhojanapalli, Felix Yu, and Sanjiv Kumar. Semantic label smoothing for sequence to sequence problems. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4992–4998, Online, November 2020b. Association for Computational Linguistics. doi:10.18653/v1/2020.emnlp-main.405. URL <https://www.aclweb.org/anthology/2020.emnlp-main.405>.
- Armand Joulin, Édouard Grave, Piotr Bojanowski, and Tomáš Mikolov. Bag of tricks for efficient text classification. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 2, Short Papers*, pages 427–431, 2017.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, 2019.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. *OpenAI blog 1.8*, 9, 2019.
- Shuo Wang, Zhaopeng Tu, Shuming Shi, and Yang Liu. On the inference calibration of neural machine translation. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 3070–3079, Online, July 2020. Association for Computational Linguistics. doi:10.18653/v1/2020.acl-main.278. URL <https://www.aclweb.org/anthology/2020.acl-main.278>.
- Clara Meister, Elizabeth Salesky, and Ryan Cotterell. Generalized entropy regularization or: There’s nothing special about label smoothing. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 6870–6886, Online, July 2020. Association for Computational Linguistics. doi:10.18653/v1/2020.acl-main.615. URL <https://www.aclweb.org/anthology/2020.acl-main.615>.
- Sean Welleck, Ilia Kulikov, Stephen Roller, Emily Dinan, Kyunghyun Cho, and Jason Weston. Neural text generation with unlikelihood training. In *International Conference on Learning Representations*, 2019.
- Tommaso Furlanello, Zachary Lipton, Michael Tschannen, Laurent Itti, and Anima Anandkumar. Born again neural networks. In *International Conference on Machine Learning*, pages 1607–1616, 2018.

- Chenglin Yang, Lingxi Xie, Siyuan Qiao, and Alan L Yuille. Training deep neural networks in generations: A more tolerant teacher educates better students. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 5628–5635, 2019b.
- Sashank Reddi, Rama Kumar Pasumarthi, Aditya Menon, Ankit Singh Rawat, Felix Yu, Seungyeon Kim, Andreas Veit, and Sanjiv Kumar. Rankdistil: Knowledge distillation for ranking. In Arindam Banerjee and Kenji Fukumizu, editors, *Proceedings of The 24th International Conference on Artificial Intelligence and Statistics*, volume 130 of *Proceedings of Machine Learning Research*, pages 2368–2376. PMLR, 13–15 Apr 2021. URL <https://proceedings.mlr.press/v130/reddi21a.html>.
- Xinyu Wang, Yong Jiang, Zhaohui Yan, Zixia Jia, Nguyen Bach, Tao Wang, Zhongqiang Huang, Fei Huang, and Kewei Tu. Structural knowledge distillation: Tractably distilling information for structured predictor. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 550–564, Online, August 2021. Association for Computational Linguistics. doi:10.18653/v1/2021.acl-long.46. URL <https://aclanthology.org/2021.acl-long.46>.
- Yifan Liu, Ke Chen, Chris Liu, Zengchang Qin, Zhenbo Luo, and Jingdong Wang. Structured knowledge distillation for semantic segmentation. In *IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2019, Long Beach, CA, USA, June 16-20, 2019*, pages 2604–2613. Computer Vision Foundation / IEEE, 2019. doi:10.1109/CVPR.2019.00271. URL http://openaccess.thecvf.com/content_CVPR_2019/html/Liu_Structured_Knowledge_Distillation_for_Semanti
- Elijah Cole, Oisín Mac Aodha, Titouan Llorient, Pietro Perona, Dan Morris, and Nebojsa Jojic. Multi-label learning from single positive labels. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 933–942, 2021.
- Ann Taylor, Mitchell Marcus, and Beatrice Santorini. The penn treebank: An overview. In *Treebanks*, pages 5–22. Springer, 2003.
- Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. Pointer sentinel mixture models. In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net, 2017. URL <https://openreview.net/forum?id=Byj72udxe>.
- Stephen Merity, Nitish Shirish Keskar, and Richard Socher. An analysis of neural language modeling at multiple scales. *CoRR*, abs/1803.08240, 2018. URL <http://arxiv.org/abs/1803.08240>.
- Zihang Dai, Zhilin Yang, Yiming Yang, Jaime Carbonell, Quoc Le, and Ruslan Salakhutdinov. Transformer-XL: Attentive language models beyond a fixed-length context. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2978–2988, Florence, Italy, July 2019. Association for Computational Linguistics. doi:10.18653/v1/P19-1285. URL <https://aclanthology.org/P19-1285>.
- Kevin Clark, Minh-Thang Luong, Urvashi Khandelwal, Christopher D. Manning, and Quoc V. Le. BAM! born-again multi-task networks for natural language understanding. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 5931–5937, Florence, Italy, July 2019. Association for Computational Linguistics. doi:10.18653/v1/P19-1595. URL <https://aclanthology.org/P19-1595>.
- Aref Jafari, Mehdi Rezagholizadeh, Pranav Sharma, and Ali Ghodsi. Annealing knowledge distillation. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 2493–2504, Online, April 2021. Association for Computational Linguistics. URL <https://aclanthology.org/2021.eacl-main.212>.
- Samuel R. Bowman. When combating hype, proceed with caution. *CoRR*, abs/2110.08300, 2021. URL <https://arxiv.org/abs/2110.08300>.
- Emily M. Bender and Alexander Koller. Climbing towards NLU: On meaning, form, and understanding in the age of data. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5185–5198, Online, July 2020. Association for Computational Linguistics. doi:10.18653/v1/2020.acl-main.463. URL <https://aclanthology.org/2020.acl-main.463>.
- Zi Wang. Zero-shot knowledge distillation from a decision-based black-box model. In Marina Meila and Tong Zhang, editors, *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, pages 10675–10685. PMLR, 18–24 Jul 2021. URL <https://proceedings.mlr.press/v139/wang21a.html>.

Jason Wei, Maarten Bosma, Vincent Y. Zhao, Kelvin Adams Guu, Wei Yu, Brian Lester, Nan Du, Andrew M. Dai, and Quoc V. Le. Finetuned language models are zero-shot learners. *arXiv preprint arXiv:2109.01652*, 2021.

A Implementation details and extra experiments

A.1 Teacher models

We use Hugging Face’s implementation of BERT and GPT-2 (Wolf et al., 2020). In order to convert the models to a word-level vocabulary, we average the hidden states for each sub-word. For GPT-2, we respected its auto-regressive nature by off-setting the hidden states by one time-step to the past. We freeze all but the final layer and introduced a word-level embedding table of size $|V| \times h$, where h is the final hidden state size. These fine-tuned models can be viewed as a sub-word-aware LMs where the input is sub-words and the output is whole words (Ling et al., 2015; Kim et al., 2016). The ranks are generated by treating the training set as one contiguous text with a conditioning overlap of 50 tokens. The training set for the BERT models with Wiki02 does not perfectly match the standard training set. This is because the BERT tokenizer would sometimes fail to map between sub-words and whole-words for words containing a very small set of non-Latin characters.

Instead of including the teacher models directly into training the students, we saved the top- k predictions along with their logits (Tan et al., 2019). This was necessary, as the Hugging Face models and the student models required different versions of PyTorch (we were unable to replicate the LSTM results in a version of PyTorch ≥ 1.0). This also saved computation since we did not need to query the teacher model every batch.

A.2 Student models

We use the hyper-parameters from the official implementation for our LSTM models, with the exception that we increased the number of training epochs and when the optimizer switches to exponential averaging. We did this for the KD experiments in order to account for cycling the KD term. We do not believe that the CE baseline would have significantly changed with extra epochs.

For our T-XL model, we use 14 layers, 10 heads, a hidden state size of 400, and a feed-forward size of 1000. We train and evaluate with a target length of 150 tokens and a memory length of 150. We use Ranger for the optimizer (Wright, 2019). We use various forms of variational dropout, which the original authors used when applying T-XL to PTB, but did not use weight averaging (Dai et al., 2019). We referenced Tim Dettmers’s implementation for the necessary changes required to get T-XL to work with Wiki02.

For the top- k KL-based KD, it is important not to apply temperature smoothing, τ , to the student but to do so for the teacher as in

$$L = \alpha \text{CE} + (1 - \alpha) \text{KL}(\sigma(w_{\text{kd}}/\tau), \sigma(w_s)), \quad (5)$$

where the overall loss L is linearly interpolated between the CE and KL (KD) losses using α . The KL loss tries to match the student logit, w_s , against the teacher’s logit, w_{kd} . σ is the softmax function.

This is in contrast to traditional KD which applies the same temperature to both the student and the teacher. However, in our case, since the teacher is smoothed over only the top- k word-types while the student would be smoothed over the full vocabulary, this would make the two distributions very different post-normalization. We do not multiply the gradients by τ^2 . We also interpolate the PL loss with CE for the PL experiments, though this could also have been achieved by just re-weighting the first term relative to the others to avoid the extra computation cost. This was done because our initial implementation of PL was numerically unstable, causing NaNs. In these cases, we could back-off to just CE, however, the stability issue was later fixed but the interpolation with CE was not removed.

Each experiment was hyper-parameter tuned using different ranges of values depending on the given combination of dataset, student, teacher, and loss. The general ranges of hyper parameters was the value of $k \in \{10, 15, 20\}$, the temperature, $\tau \in [2 - 16]$ for KL and PL-t experiments and the stepped value $\eta \in [0.2 - 0.6]$ for the PL-s experiments. Cycling was controlled by two hyper-parameters which specified how many epochs constituted a cycle and the minimum value of α . Interpolating with CE re-weights the original GT relative to the $2, \dots, k$ terms. However, both τ and η also have this effect, and this also depends on the value of k . This creates a situation where these hyper-parameters are closely coupled and sensitive

to each other. We believe that using annealing instead of cycling may reduce this sensitivity (Jafari et al., 2021).

A.3 Random teacher

We found that it was important to cycle the α value to trade off between the KD and CE terms. In order to determine if the decrease in PPL was due to the intrinsic value of the teacher model, and not just an affect of the cycling, we replaced the top-2 though k ranks (keeping the original GTs as $k = 1$) with random words. Using an LSTM student with the random teacher resulted in a PPL of 63.19 for PTB, and 70.40 for Wiki02 on the test sets. Since these were both worse than the CE baselines, this indicates that cycling requires a good teacher and is not an independent phenomenon.

A.4 Pairwise hinge loss

There are other surrogate rank losses that could be used instead of Plackett-Luce. We experimented with a pair-wise hinge loss (PWH). This was selected because PWH can naturally express weak orderings while we needed to modify PL in order to consider them. We made use of negative samples in addition to pairs derived from the teacher’s top- k . To derive n negative samples, we used the student models own top- $n + k$ predictions cut down to n , so as not to include any of the teacher’s top- k predictions (Reddi et al., 2021). Initial experimentation did not show any benefit to using PWH over PL. Using GPT-2 as a teacher with an LSTM student on PTB and the teacher’s probabilities for discounting resulted in an average PPL of 55.95 on the test set. Combining PWH with PL did see a small reduction in PPL over either individually, with an average PPL of 55.28, however, this increased training time and complicated hyper-parameter tuning since there are now three loss functions to be interpolated. Using the N-gram teacher with stepped discounting on PTB, achieved an average PPL of 58.27.

B Memory efficient algorithm for branching set construction

N -grams require a lot of memory since they need to store all possible contexts. In Algorithm 1, we present a memory-efficient algorithm for creating the ranks using multiple passes through the training data.

We can build up the ranks using multiple passes through the dataset, D , of T tokens. Let a context schema be any context of size p past words and f future words (where, in contrast, an order is a specific context of p past words and f future words). If there are M context schemas, S , we use $2 \times M + 1$ passes through the data. In the first phase, we do M passes; one for each schema to collect all the orders of that schema’s size. These are each individually saved to disk so that the memory usage does not grow significantly larger than the dataset size. In the second phase, we do a pass to set the ground-truths and then a pass for each of the collected orders to create a $T \times k$ rank matrix, R (with lengths L). This can be efficiently parallelized in two ways. In the first phase, each of the first M passes can be processed separately, so that it does not scale poorly with M , given sufficient CPUs. Then, in the second phase, R can be partitioned and each partition created in parallel. In practice, there are some tricks necessary to make this efficient, such as using ordered sets for efficient ‘*matrix*’ look ups (line 23) and pruning the orders.

C Vectorized algorithm for Plackett-Luce loss

We present an efficient vectorized algorithm for PL in Algorithm 2. This algorithm is batched for a batch size b and sequence length q . w are the logits of shape $[b \times q, |V|]$. y are the targets of shape $[b \times q, k_m]$ for a max rank of k_m . The targets are padded such that they all have k_m ranks and the padded values will be masked out. k are the target lengths of shape $[b \times q]$, which will define the mask. When using the weak ordering modification, we need to know which targets are in the same order. o are the *order* values of shape $[b \times q, k_m]$. The order values will be indices in the range $[0, k_m - 1]$, which index the first element of an order. f are the values derived from a rank discounting function, i.e. either the teacher’s top- k probabilities for PL-t or the stepped values for PL-s.

In algorithm 2, the gather on line 4 accounts for most of the extra computational cost compared to softmax-CE.

Algorithm 1 Multi-Pass Branching Set Construction

```

1: function PROCESS TEXT( $D, S, k$ )
2:   for  $s \in S$  do                                     ▷ Schemas are an ordered set
3:      $C_s \leftarrow \text{dict}()$                              ▷ Context to branching set
4:     for  $t \leftarrow 0, \dots T$  do
5:        $c, w_t \leftarrow \text{getContextAndWord}(D[t])$ 
6:        $B \leftarrow C_s[c]$                                ▷ Empty set if does not exist
7:       if  $w_t \notin B$  and  $|B| < q - 1$  then
8:          $B.\text{add}(w_t)$                                    ▷ Add  $w_t$  to branching set
9:       end if
10:    end for
11:     $\text{save}(C_s)$ 
12:  end for
13:   $R, L \leftarrow \text{zeros}(T, k), \text{ones}(T)$                ▷ Second phase
14:  for  $t \leftarrow 0, \dots T$  do
15:     $R[t, 0] \leftarrow D[t]$                              ▷ Set GT
16:  end for
17:  for  $C_s \in \{C_1, \dots C_M\}$  do
18:     $\text{load}(C_s)$ 
19:    for  $t \leftarrow 0, \dots T$  do
20:       $c \leftarrow \text{getcontext}(D[t])$ 
21:       $B \leftarrow C_s[c]$ 
22:      for  $w \in B$  do                                     ▷ For each word in BS
23:        if  $w \notin R[t, : L[t]]$  then
24:           $R[t, L[t]] \leftarrow w$                          ▷ Set word
25:           $L[t] \leftarrow L[t] + 1$ 
26:        end if
27:      end for
28:    end for
29:  end for
30:  return  $R, L$ 
31: end function

```

Algorithm 2 vectorized Plackett-Luce

```

1: function PL( $w, y, k, o, f$ )
2:    $m \leftarrow \max(w)$                                      ▷ For log-sum-exp trick
3:    $s \leftarrow e^{w-m}$                                      ▷ Scores
4:    $w \leftarrow \text{gather}(w, y)$                              ▷ Reorders and cuts to  $k_m$ 
5:    $g \leftarrow e^{w-m}$                                      ▷ Shift by column of zeros since first term is fully normalized

6:    $g \leftarrow \text{cat}(\text{zeros}([b \times q, 1]), g[:, : -1])$ 
7:    $Z \leftarrow \text{sum}(s, \text{dim} = -1, \text{keepdim})$ 
8:    $Z_i \leftarrow \text{cumsum}(g, \text{dim} = -1)$ 
9:   if  $o$  then                                             ▷ When ranks are weakly ordered
10:     $Z_i \leftarrow \text{gather}(Z_i, o)$                         ▷ Undoes cumulated sum by duplicating head  $Z_i$  value across each order
11:  end if
12:   $Z \leftarrow \log(Z - Z_i + 0.00001) + m$                  ▷ NaNs
13:   $l \leftarrow Z - w$                                        ▷ Loss
14:  if  $f$  then                                             ▷ When using discounting
15:     $l \leftarrow l \odot f$ 
16:  end if
17:   $l \leftarrow l \odot \text{seqmask}(k)$ 
18:  return  $l$ 
19: end function

```

D Frequency distributions

An initial concern was that BERT or GPT-2 might fail to be a good teacher if the distribution of the top- k ranks was significantly different from ground-truth distribution; this could occur if the high-frequency words became amplified while the low-frequency words diminished. In order to investigate this, we plot the log frequency-rank distribution of the original ground-truths (forming a semi-linear downward line) in Figures 3 and 4. We then plot the $\frac{1}{10}$ of the frequency of the top-10 for individual word-types (forming dots above and below the ground-truth line) and binned averages. This shows that, while individual word-types might be amplified or diminished in relative frequency, the overall binned averages do not stray far from the original distribution. The figures have been down sampled by a rate of 4.

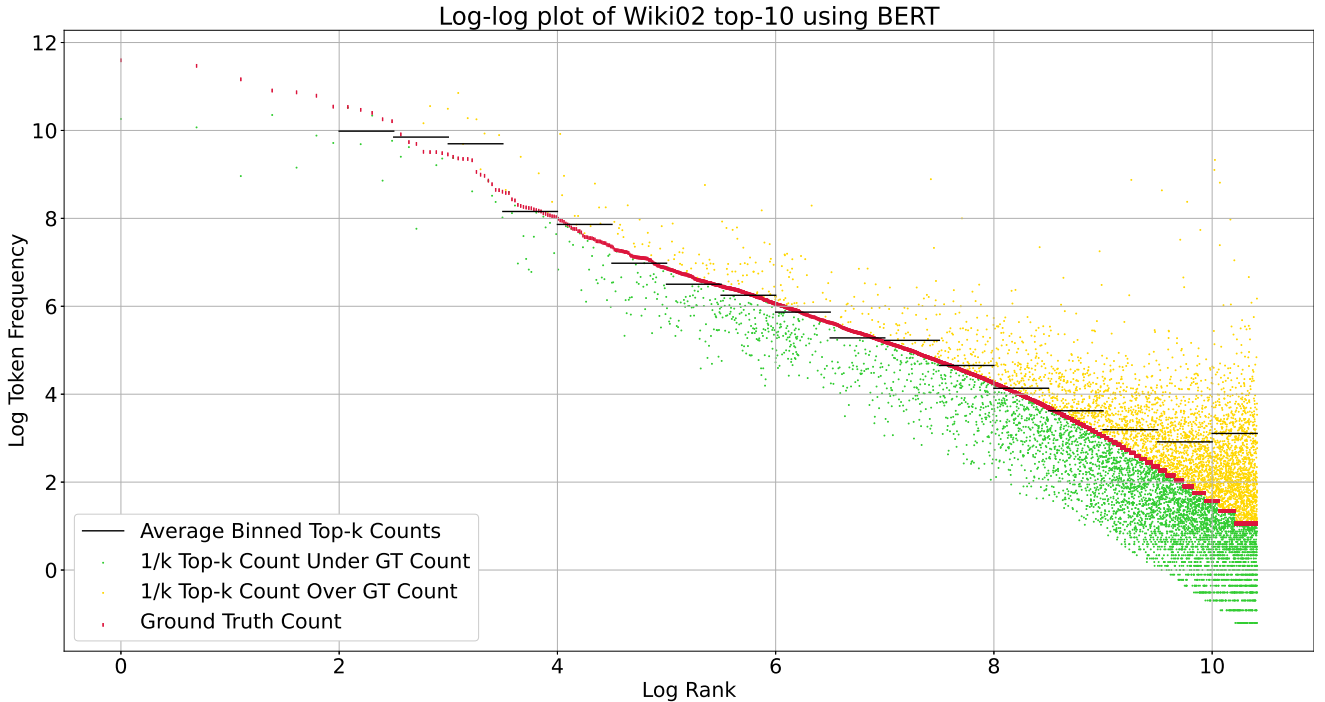


Figure 3: Top-10 frequency distribution relative to the original ground-truth distribution for Wiki02 using 24-layer BERT with whole-word-masking.

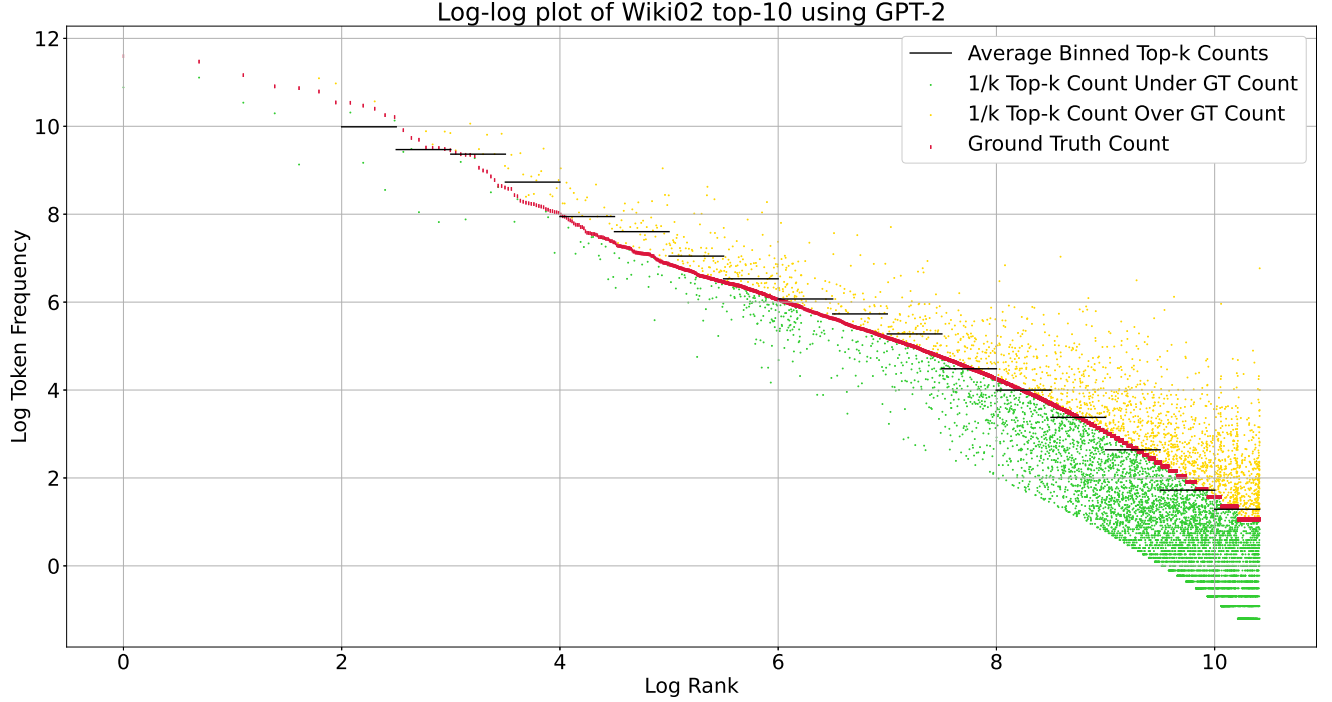


Figure 4: Top-10 frequency distribution relative to the original ground-truth distribution for Wiki02 using large GPT-2.

E Top- k samples

We generate top- k samples using BERT, GPT-2, and the N -grams from the Wiki02 training partition at random positions. The weak orders are grouped for the N -grams, where BERT and GPT-2 always produce a strong ordering. Note that the samples are filtered such that only a limited number of N -gram orders are used (so that they can be coloured using a colour-blind friendly scheme) and so that examples only contain Latin characters.

Rank	BERT	GPT-2	N-grams	BERT	GPT-2	N-grams
1	<i>debuted</i>			<i>and</i>		
2	debut	peaked	peaked	to	at	at
3	debuting	reached	was	which	atop	on
4	charted	is		as	with	in
5	peaked	appeared		for	as	to
6	premiered	entered		at	on	
7	topped	ranked		And	in	
8	cursed	became		by	from	
9	rookie	was		from	to	
10	Deacon	has		who	,	
1	<i>peaked</i>			<i>at</i>		
2	charted	stayed	finally	At	atop	on
3	peaking	remained		as	in	atop
4	reached	reached		to	within	within
5	Peaking	spent		from	with	
6	peak	entered		for	as	
7	singled	debuted		on	on	
8	filed	appeared		by	from	
9	grossed	moved		reached	between	
10	topped	became		with	number	
1	<i>number</i>			<i>89</i>		
2	Number	numbers	No.	9	39	nine
3	top	#		1989	33	15
4	figure	the		nine	26	32
5	least	its		1789	12	11
6	nine	no		9th	23	31
7	Top	position		09	5	25
8	Figure	39		1889	20	eight
9	member	chart		179	twelve	18
10	chart	a		90	76	84
1	<i>in</i>			<i>the</i>		
2	In	on	on	The	its	)
3	Iny	,		THE	July	every
4	IN	.		(	October	this
5	on	and		which	September	an
6	by	with		an	June	
7	for	(		their	April	
8	from	;		its	November	
9	On	for		was	August	
10	his	at		of	December	

Table 3: Example top-k from bert-wwm-24, gpt2-774, and N-grams using the Wiki02 training partition at block 465 with ground-truth text ‘debuted and peaked at number 89 in the’.

Rank	BERT	GPT2	Ngrams	BERT	GPT2	Ngrams
1	<i>organisers</i>			<i>to</i>		
2	organiser	government	ships	To	and	have
3	mourners	authorities		who	for	.
4	rescuers	company		by	of	adapted
5	Templers	police		from	,	
6	chasers	Government		,	with	
7	anglers	and		could	about	
8	chroniclers	propaganda		an	in	
9	taker	Parliament		as	who	
10	admirers	media		would	.	
1	<i>suggest</i>			<i>ending</i>		
2	suggestion	raise	the	Ending	that	that
3	ask	produce		end	a	to
4	consider	remake		ended	the	meanings
5	question	be		ends	an	a
6	recommend	have		leaving	they	she
7	propose	extend		holding	to	amendments
8	suggested	play		closing	further	original
9	recommendation	replace		eliminating	it	Meyerbeer
10	offer	provide		finishing	extending	
1	<i>the</i>			<i>ceremony</i>		
2	The	their		event	event	song
3	to	this		ceremonies	war	knuckleball
4	of	it		festival	service	criminal
5	THE	all		ceremonial	practice	track
6	from	these		process	annual	dead
7	an	its		site	anniversary	island
8	by	a		speech	tradition	
9	for	an		display	battle	
10	their	of		held	operation	
1	<i>,</i>			<i>believing</i>		
2	)	in	.	Believing	and	the
3	to	.	officially	believed	so	one
4	who	at	;	fearing	but	Obama
5	as	and	that	expecting	as	Roosevelt
6	for	on	starting	believe	because	and
7	by	to	continues	believes	stating	commemorating
8	at	with	time	belief	which	survived
9	and	there		Holding	to	
10	that	so		seeing	however	

Table 4: Example top-k from bert-wwm-24, gpt2-774, and N-grams using the Wiki02 training partition at block 558 with ground-truth text ‘organisers to suggest ending the ceremony , believing’.

Rank	BERT	GPT2	Ngrams	BERT	GPT2	Ngrams
1	<i>became</i>			<i>an</i>		
2	become	is	was	An	a	
3	gained	,	up	a	apparent	
4	followed	was		A	more	
5	becomes	and		one	very	
6	saw	in		as	the	
7	remained	of		that	so	
8	becoming	has		something	necessary	
9	made	to		another	significant	
10	ended	from		to	one	
1	<i>issue</i>			<i>in</i>		
2	idea	important	agnostic	In	when	that
3	problem	integral	Academy	for	for	,
4	issues	entity		with	,	of
5	area	apparent		from	because	still
6	amount	obvious		on	of	about
7	important	idea		by	.	for
8	obstacle	essential		IN	with	with
9	event	indicator		that	due	due
10	example	influence		and	to	
1	<i>later</i>			<i>games</i>		
2	Later	the	the	game	episodes	decades
3	late	a	May	Games	releases	performances
4	rest	some	Jifna	players	editions	years
5	future	an	2008	Game	stages	series
6	Late	its	Haiti	played	works	life
7	many	Japanese	an	areas	versions	times
8	other	terms		laws	series	
9	second	that		ships	years	
10	said	Japan		shows	parts	
1	<i>,</i>			<i>where</i>		
2	for	.		Where	and	a
3	)	in		there	so	marketed
4	that	and		and	as	causing
5	(	as		who	because	in
6	who	when		There	when	but
7	:	because		with	however	still
8	"	:		as	due	was
9	as	,		both	particularly	including
10	from	of		showing	but	with

Table 5: Example top-k from bert-wwm-24, gpt2-774, and N-grams using the Wiki02 training partition at block 559 with ground-truth text ‘became an issue in later games , where’.

Rank	BERT	GPT2	Ngrams	BERT	GPT2	Ngrams
1	<i>is</i>			<i>shown</i>		
2	was	can		showed	able	unemployed
3	does	has		seen	capable	famed
4	has	does		showing	aware	junk
5	Is	appears		played	a	late
6	as	may		given	also	helpless
7	are	makes		used	said	summoned
8	goes	uses		found	physically	able
9	also	also		thought	not	unable
10	uses	will		tried	still	
1	<i>to</i>			<i>be</i>		
2	To	in	surrounded	Be	have	the
3	as	as		are	speak	have
4	that	capable		remain	possess	
5	a	being		keep	enjoy	
6	can	using		ask	do	
7	by	with		know	experience	
8	who	attempting		have	know	
9	could	having		continue	also	
10	an	producing		believe	take	
1	<i>curious</i>			<i>about</i>		
2	wondering	capable	junk	About	and	collection
3	questions	a	precise	asking	,	decision
4	wondered	able	mad	into	of	.
5	curiosity	aware	serious	using	in	fact
6	Curious	physically	born	questions	when	to
7	amazed	an	less	for	.	features
8	suspicious	very	honest	under	to	arts
9	interesting	intelligent		"	as	by
10	jealous	sensitive		over	at	
1	<i>the</i>			<i>world</i>		
2	The	them		life	evil	
3	's	her		World	emotions	
4	)	a		worlds	supernatural	
5	a	human		Life	life	
6	(	and		job	human	
7	"	their		Book	nature	
8	THE	humans		way	truth	
9	,	what		man	paranormal	
10	their	how		lives	lives	

Table 6: Example top-k from bert-wwm-24, gpt2-774, and N-grams using the Wiki02 training partition at block 436 with ground-truth text ‘is shown to be curious about the world’.

Rank	BERT	GPT2	Ngrams	BERT	GPT2	Ngrams
1	<i>and</i>			<i>the</i>		
2	And	leaving	the	The	it	about
3	who	so	was	been	a	their
4	but	taking	reaching	its	by	was
5	as	leading		a	only	its
6	which	with		was	then	her
7	for	which		their	when	his
8	with	allowing		were	there	at
9	by	when		an	in	
10	where	thereby		for	were	
1	<i>first</i>			<i>service</i>		
2	First	restaurant	civil	Service	restaurant	flight
3	main	new	silver	load	food	ship
4	major	dining	military	services	dining	advisory
5	only	food	junk	serve	of	
6	new	opening	main	news	visitors	
7	many	kitchen	protection	military	chef	
8	final	final		served	day	
9	one	original		pair	night	
10	beginning	work		head	pair	
1	<i>was</i>			<i>run</i>		
2	were	of		ran	only	held
3	been	on		Run	carried	estimated
4	had	resumed		shown	held	
5	be	had		worn	stopped	
6	could	to		used	not	
7	being	in		seen	just	
8	saw	started		read	a	
9	would	did		runs	initiated	
10	only	at		broadcast	completed	
1	<i>at</i>			<i>7</i>		
2	At	in	.	seven	12	the
3	from	just	under	7th	1	reduced
4	for	by	over	seventh	5	a
5	by	on	with	07	10	37
6	on	from	by	Seven	4	up
7	with	only		700	2	9
8	as	a		8	14	11
9	to	for		17	around	
10	in	almost		27	the	

Table 7: Example top-k from bert-wwm-24, gpt2-774, and N-grams using the Wiki02 training partition at block 130 with ground-truth text ‘and the first service was run at 7’.

Rank	BERT	GPT2	Ngrams	BERT	GPT2	Ngrams
1	<i>Museum</i>			.		
2	museum	Channel	Commonwealth citizens battlecruisers protectorate	jeos ₂	,	
3	Louvre	Library		I.	in	
4	Smithsonian	Short		X.	and	
5	Gallery	International		Z.	on	
6	Zoo	Film		U.	(	
7	Park	Independent		E.	of	
8	museums	Academy		Q.	at	
9	park	Kids		C.	for	
10	Empire	Television		=	with	
1	<i>The</i>			<i>DVD</i>		
2	the	It	On junk ₂ Mathews jeos ₂ His He	Disc	film	rendering
3	a	In		DVDs	anime	column
4	THE	A		overseas	episode	Department
5	its	As		CD	series	railway
6	A	"		box	BBC	Strand
7	an	Other		video	first	National
8	(	This	TV " A	Steiner	original	Dodgers
9	Its	For		Hal	English	WWF
10	of	Some		PAS	movie	band
1	<i>released</i>			<i>ranked</i>		
2	release	of	received contained included called was has version	charted	in	
3	Released	and		featured	by	
4	releases	version		rose	on	
5	releasing	release		appeared	for	
6	stated	edition		reached	with	
7	version	was		remained	to	
8	published	is		finished	as	
9	election	has		Ranked	a	
10	elected	includes		marked	the	
1	<i>No.</i>			<i>1</i>		
2	top	#		1st	5	26
3	no	39		one	39	2
4	than	10		One	7	5
5	up	23		first	12	4
6	to	seventh		top	8	6
7	at	76		up	26	8
8	best	5		single	4	15
9	for	sixth		well	10	
10	as	fourth		leader	76	

Table 8: Example top-k from bert-wwm-24, gpt2-774, and N-grams using the Wiki02 training partition at block 554 with ground-truth text ‘Museum . The DVD released ranked No. 1’.

Rank	BERT	GPT2	Ngrams	BERT	GPT2	Ngrams
1	<i>Bear</i>			<i>River</i>		
2	Cache	highway	Cass	river	Creek	junk
3	bear	state	junk	Rivers	Mountain	Creek
4	Cub	city	Huron	Pit	Eagle	Lake
5	Salmon	town	River	revue	Village	Creeks
6	book	northern	road	Creek	Road	Valley
7	Park	US	Trent	Launcher	Canyon	)
8	Snake	county	Mulberry	rivers	Run	Bryant
9	Russia	southern		Valley	Island	
10	Bears	East		water	National	
1	<i>and</i>			<i>continues</i>		
2	as	,	was	Continuing	follows	Ireland
3	who	from	in	continuing	the	the
4	from	at	Avenue	continued	proceeds	stretches
5	And	just		continue	passes	then
6	for	in		remains	then	Oghratina
7	to	to		further	is	later
8	at	on		still	parallels	further
9	by	between		Farther	becomes	
10	in	into		keeps	runs	
1	<i>east</i>			<i>through</i>		
2	East	through	southeasterly	Through	along	onto
3	eastern	north	on	into	eastwards	to
4	Eastern	to		for	on	past
5	eastward	along		across	toward	of
6	E	on		throughout	to	
7	article	south		in	,	
8	arch	over		down	into	
9	all	west		from	westward	
10	red	toward		though	for	
1	<i>rural</i>			<i>Cache</i>		
2	Rural	the	Europe	Benton	areas	farmland
3	white	downtown	the	Bear	and	farm
4	countryside	a	Des	Emmett	farm	
5	quiet	residential	a	Boulder	Kent	
6	touring	an		Salmon	southern	
7	central	southern		Cascade	residential	
8	retreating	suburban		Cornish	,	
9	Midwest	farmland		Salford	forests	
10	outdoor	town		Milk	County	

Table 9: Example top-k from bert-wwm-24, gpt2-774, and N-grams using the Wiki02 training partition at block 75 with ground-truth text ‘Bear River and continues east through rural Cache’.

Rank	BERT	GPT2	Ngrams	BERT	GPT2	Ngrams
1	<i>at</i>			<i>the</i>		
2	At	into	and	The	it	
3	against	from	,	THE	him	
4	towards	and	.	by	his	
5	as	in	also	with	Lady	
6	from	on		when	its	
7	to	over		playwright	a	
8	,	,		a	Jack	
9	on	onto		his	them	
10	for	.		their	Henry	
1	<i>playwright</i>			<i>when</i>		
2	duo	cast		When	.	Julia
3	troupe	convict		as	,	Jacques
4	theologian	audience		time	and	Arthur
5	libretto	stage		about	;	George
6	inventor	couple		that	at	
7	Shakespeare	finale		at	in	
8	intruder	theatre		who	as	
9	author	principal		during	on	
10	theatre	production		other	but	
1	<i>he</i>			<i>took</i>		
2	He	it	she	taken	arrived	
3	him	the	Tech	taking	heard	
4	his	his	McCall	take	came	
5	they	Lady		made	was	
6	who	she		finished	left	
7	the	they		won	met	
8	His	"		started	appeared	
9	was	asked		takes	reached	
10	she	a		went	had	
1	<i>his</i>			<i>bow</i>		
2	him	the	custody	Bow	place	anger
3	the	to		vow	last	adopted
4	His	part		record	final	chair
5	their	a		Drop	wife	retirement
6	a	an		drop	leave	hat
7	to	over		booth	post	wife
8	in	off		memorial	passport	
9	its	place		chance	part	
10	her	it		snaps	first	

Table 10: Example top-k from bert-wwm-24, gpt2-774, and N-grams using the Wiki02 training partition at block 102 with ground-truth text ‘at the playwright when he took his bow’.

Rank	BERT	GPT2	Ngrams	BERT	GPT2	Ngrams
1	<i>the</i>			<i>offensive</i>		
2	The	these	an	offense	opposing	Ancients
3	THE	this		Offensive	shooter	30
4	their	his		attacking	shot	top
5	an	those		advancing	restricted	oldest
6	a	a		Defensive	defending	
7	they	them		attack	three	
8	by	their		advance	players	
9	to	any		rushing	defender	
10	his	three		opposing	lane	
1	<i>players</i>			<i>violate</i>		
2	Players	shooter	,	violating	are	of
3	members	defender		violation	in	are
4	player	team		abide	on	
5	men	or		violated	enter	
6	games	teams		comply	is	
7	musicians	offensive		obey	pass	
8	plays	possession		violations	drives	
9	Members	and		enforce	attempt	
10	soldiers	opponents		adherence	attempts	
1	<i>the</i>			<i>rule</i>		
2	The	this	natural	rules	violation	law
3	THE	these	universal	law	restricted	constitution
4	it	any	his	Rules	NBA	restoration
5	a	such	not	Rule	lane	Nile
6	an	that		plan	shooter	Azores
7	by	violation		decision	prohibited	end
8	was	their		partner	law	universe
9	this	an		leader	order	season
10	its	NBA		road	opposing	island
1	<i>,</i>			<i>no</i>		
2	by	and	then	No	the	experience
3	to	that	of	not	they	
4	of	by		all	a	
5	who	in		only	it	
6	for	of		little	an	
7	(	(		still	he	
8	that	or		just	or	
9	are	on		lot	such	
10	and	against		rest	their	

Table 11: Example top-k from bert-wwm-24, gpt2-774, and N-grams using the Wiki02 training partition at block 582 with ground-truth text ‘the offensive players violate the rule , no’.

Rank	BERT	GPT2	Ngrams	BERT	GPT2	Ngrams
1	<i>tracked</i>			<i>through</i>		
2	Tracking	Island	in	Through	the	near
3	track	had		across	into	
4	accelerating	was		faced	to	
5	ran	and		throughout	in	
6	overtook	is		Across	a	
7	tracking	County		hit	over	
8	trailed	,		though	slowly	
9	neared	has		crossed	on	
10	Track	Channel		visited	from	
1	<i>Atlantic</i>			<i>Canada</i>		
2	Northeastern	the	the	Scotia	waters	
3	Nova	a		North	hurricane	
4	East	several		Canadian	Ocean	
5	New	an		Newfoundland	City	
6	Scotia	coastal		Maine	,	
7	eastern	some		States	and	
8	Southeast	to		Carolina	Cape	
9	Maine	,		China	Island	
10	to	this		Quebec	Islands	
1	,			<i>no</i>		
2	did	and	.	No	the	another
3	to	on	and	little	she	which
4	as	in		there	it	damage
5	had	to		any	Fran	a
6	with	with		nothing	and	attaining
7	also	the		not	however	peaking
8	that	at		only	a	the
9	was	for		none	this	revealing
10	would	over		minimal	Ellen	its
1	<i>impact</i>			<i>was</i>		
2	affected	damage	dialog	is	on	whatsoever
3	affect	significant	structure	wasn	from	.
4	effect	major	damage	been	to	on
5	impacts	flooding		were	or	
6	initial	other		to	of	
7	significant	storm		did	in	
8	impacted	direct		a	there	
9	initially	storms		would	upon	
10	aspect	damages		by	were	

Table 12: Example top-k from bert-wwm-24, gpt2-774, and N-grams using the Wiki02 training partition at block 564 with ground-truth text ‘tracked through Atlantic Canada , no impact was’.

References

Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame,

- Quentin Lhoest, and Alexander M. Rush. Transformers: State-of-the-art natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online, October 2020. Association for Computational Linguistics. URL <https://www.aclweb.org/anthology/2020.emnlp-demos.6>.
- Wang Ling, Chris Dyer, Alan W Black, Isabel Trancoso, Ramón Fernandez, Silvio Amir, Luis Marujo, and Tiago Luís. Finding function in form: Compositional character models for open vocabulary word representation. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 1520–1530, 2015.
- Yoon Kim, Yacine Jernite, David Sontag, and Alexander Rush. Character-aware neural language models. In *Proceedings of the AAAI conference on artificial intelligence*, volume 30, 2016.
- Xu Tan, Yi Ren, Di He, Tao Qin, Zhou Zhao, and Tie-Yan Liu. Multilingual neural machine translation with knowledge distillation. In *International Conference on Learning Representations*, 2019.
- Less Wright. Ranger - a synergistic optimizer. <https://github.com/lessw2020/Ranger-Deep-Learning-Optimizer>, 2019.
- Zihang Dai, Zhilin Yang, Yiming Yang, Jaime Carbonell, Quoc Le, and Ruslan Salakhutdinov. Transformer-XL: Attentive language models beyond a fixed-length context. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2978–2988, Florence, Italy, July 2019. Association for Computational Linguistics. doi:10.18653/v1/P19-1285. URL <https://aclanthology.org/P19-1285>.
- Aref Jafari, Mehdi Rezagholizadeh, Pranav Sharma, and Ali Ghodsi. Annealing knowledge distillation. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 2493–2504, Online, April 2021. Association for Computational Linguistics. URL <https://aclanthology.org/2021.eacl-main.212>.
- Sashank Reddi, Rama Kumar Pasumarthi, Aditya Menon, Ankit Singh Rawat, Felix Yu, Seungyeon Kim, Andreas Veit, and Sanjiv Kumar. Rankdistil: Knowledge distillation for ranking. In Arindam Banerjee and Kenji Fukumizu, editors, *Proceedings of The 24th International Conference on Artificial Intelligence and Statistics*, volume 130 of *Proceedings of Machine Learning Research*, pages 2368–2376. PMLR, 13–15 Apr 2021. URL <https://proceedings.mlr.press/v130/reddi21a.html>.