

Query and Extract: Refining Event Extraction as Type-oriented Binary Decoding

Abstract

Event extraction is typically modeled as a multi-class classification problem where both event types and argument roles are treated as atomic symbols. These approaches are usually limited to a set of pre-defined types. We propose a novel event extraction framework that takes both event types and argument roles as natural language queries to extract candidate triggers and arguments from the input text. With the rich semantics in the queries, our framework benefits from the attention mechanisms to better capture the semantic correlation between the event types or argument roles and the input text. Furthermore, the query-and-extract formulation allows our approach to leverage all available event annotations from various ontologies as a unified model. Experiments on two public benchmark datasets, ACE and ERE, demonstrate that our approach achieves the state-of-the-art performance on each dataset and significantly outperforms existing methods on zero-shot event extraction. We will make all the programs publicly available once the paper is accepted.

1 Introduction

Event extraction (Grishman, 1997; Chinchor and Marsh, 1998; Ahn, 2006) is a task to identify and type event structures from natural language text automatically. It consists of two sub-tasks: extracting event triggers (**Trigger Detection**) and participants for each event mention (**Argument Extraction**). Figure 1 shows an example, where *married* and *left* are triggers of two event mentions of the *Marry* and *Transport* event types respectively. Two arguments are involved in the *left* event mention: *she* is an *Artifact*, and *Iraq* is the *Destination*.

Traditional studies usually model event extraction as a multi-class classification problem following a top-down manner (McClosky et al., 2011; Li et al., 2013; Chen et al., 2015; Yang and Mitchell, 2016; Nguyen et al., 2016; Lin et al., 2020), where

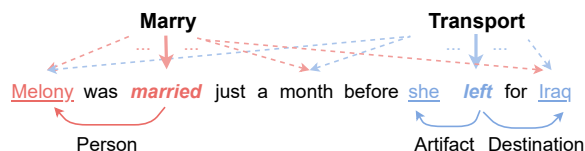


Figure 1: An example of event annotation.

a set of event types are firstly defined and then supervised machine learning approaches will detect and classify each candidate event mention or argument into one of the target types. However, in these approaches, each event type or argument role is treated as an atomic symbol, ignoring their rich semantics. Several studies explore the semantics of event types by leveraging the event type structures (Huang et al., 2018), seed event mentions (Bronstein et al., 2015; Lai and Nguyen, 2019), or question answering (QA) (Du and Cardie, 2020; Liu et al., 2020). However, these approaches are still designed for, thus limited to a single target event ontology, such as ACE¹ or ERE (Song et al., 2015).

With the existence of multiple ontologies and the challenge of handling new emerging event types, it is necessary to study event extraction approaches that are generalizable and can use all available training data from distinct event ontologies.² To this end, we propose a new event extraction framework following a query-and-extract paradigm. Our framework represents both event types and argument roles as natural language queries with rich semantics. The queries are then used to extract the corresponding event triggers and arguments by leveraging our proposed attention mechanism to capture their interactions with input texts. Specifically, (1) for trigger detection, we formulate each

¹<https://www ldc.upenn.edu/collaborations/past-projects/ace>.

²For argument extraction, the QA-based approaches have certain potential to generalize to new ontologies, but require high-quality template questions. As shown in our experiments, their generalizability is limited compared to ours.

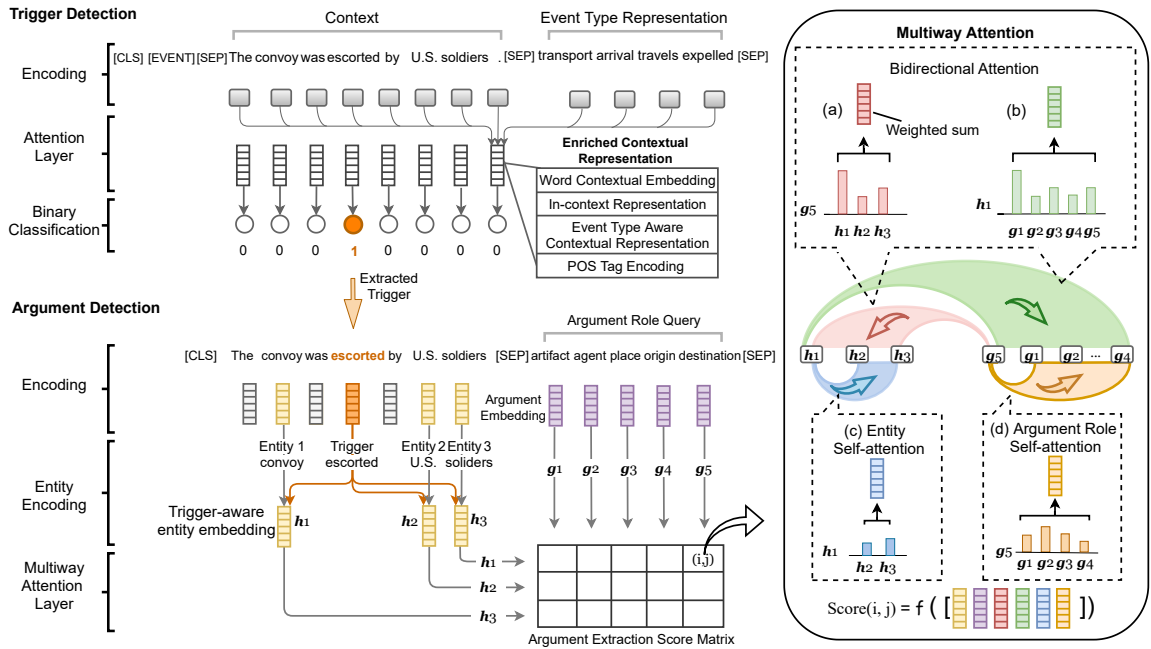


Figure 2: Architecture overview. Each cell in Argument Role Score Matrix indicates the probabilities of an entity being labeled with an argument role. The arrows in Multiway Attention module show four attention mechanisms: (a) entity to argument roles, (b) argument role to entities, (c) entity to entities, (d) argument role to argument roles.

event type as a query based on its type name and a shortlist of prototype triggers, and make **binary decoding** of each token based on its query-aware embedding; (2) for argument extraction, we put together all argument roles defined under each event type as a query, followed by a multiway attention mechanism to extract all arguments of each event mention with **one-time encoding**, with each argument predicted as **binary decoding**.

Our proposed approach can naturally handle various ontologies as a unified model – compared to previous studies (Chen et al., 2015; Nguyen and Grishman, 2016; Wadden et al., 2019; Lin et al., 2020), our binary decoding mechanism directly works with any event type or argument role represented as natural language queries, thus effectively leveraging cross-ontology event annotations and making zero-shot predictions. Moreover, compared with the QA-based methods (Du and Cardie, 2020; Liu et al., 2020; Li et al., 2020) that can also conduct zero-shot argument extraction, our approach does not require creating high-quality questions for argument roles or multi-time encoding for different argument roles separately, thus is more accurate and efficient.

We evaluate our approach on two public benchmarks, ACE and ERE. We demonstrate state-of-the-art performance in both the standard supervised event extraction and the challenging transfer learn-

ing settings that generalize to new event types and new ontologies. Specifically, equipped with the cross-ontology transferability, we can make use of both datasets and achieve 1.1% and 3.7% F-score gain on trigger detection compared with the previous state of the arts on ACE and ERE, respectively. On zero-shot transfer to new event types, our approach outperforms a strong baseline by 16% on trigger detection and 26% on argument detection. In summary, this paper makes the following contributions:

- We refine event extraction as a query-and-extract paradigm, which is more generalizable and efficient than previous top-down approaches.
- We design a new event extraction model that leverages rich semantics of event types and argument roles, leading to both improved accuracy and generalizability.
- We establish new state-of-the-art performance on ACE and ERE benchmarks and demonstrate our framework as an effective unified model for cross ontology transfer.

2 Our Approach

As Figure 2 shows, given an input sentence, we first identify the candidate event triggers for each

event type by taking it as a query to the sentence. Each event type, such as *Attack*, is represented with a natural language text, including its type name and a short list of prototype triggers, such as *invaded*, *airstrikes*, *overthrew*, and *ambushed*, which are selected from the training examples. Then, we concatenate the input sentence with the event type query, encode them with a pre-trained BERT encoder (Devlin et al., 2019), compute the attention distribution over the sequential representation of the event type query for each input token, and finally classify the token into a binary label, indicating it as a trigger candidate of the specific event type or not.

To extract the arguments for each candidate trigger, we follow a similar strategy and take the set of pre-defined argument roles for its corresponding event type as a query to the input sentence. We use another BERT encoder to learn the contextual representations for the input sentence as well as the query of the argument roles. Then, we take each entity of the input sentence as a candidate argument and compute the semantic correlation between entities and argument roles with multiway attention, and finally classify each entity into a binary label in terms of each argument role.

2.1 Trigger Detection

Event Type Representation A simple and intuitive way of representing each event type is to use the type name. However, the type name itself cannot accurately represent the semantics of the event type due to the ambiguity of the type name as well as the variety of the event mentions of each type. For example, *Meet* can refer to *an organized event* or an action of *getting together* or *matching*, and more than 60 unique strings are annotated as *Meet* event triggers in ACE05 dataset. Inspired by previous studies (Bronstein et al., 2015; Lai and Nguyen, 2019), we use a short list of prototype triggers to enrich the semantics of each event type.

Specifically, for each event type t , we collect a set of annotated triggers from the training examples. For each unique trigger word, we compute its frequency from the whole training dataset as f_o and its frequency of being tagged as an event trigger of type t as f_t , and then obtain a probability f_t/f_o , which will be used to sort all the annotated triggers for event type t . We select the top- K^3 ranked words as prototype triggers $\{\tau_1, \tau_2, \dots, \tau_K\}$.

³In our experiments, we set $K = 4$.

Finally, each event type will be represented with a natural language sequence of words, consisting of its type name and the list of prototype triggers $T = \{t, \tau_1^t, \tau_2^t, \dots, \tau_K^t\}$. Taking the event type *Attack* as an example, we finally represent it as *Attack invaded airstrikes overthrew ambushed*.

Context Encoding Given an input sentence $W = \{w_1, w_2, \dots, w_N\}$, we take each event type $T = \{t, \tau_1^t, \tau_2^t, \dots, \tau_K^t\}$ as a query to extract the corresponding event triggers. Specifically, we first concatenate them into a sequence as follows:

[CLS][EVENT][SEP] $w_1 \dots w_N$ [SEP] $t \tau_1^t \dots \tau_K^t$ [SEP]

where [SEP] is a separator from the BERT encoder (Devlin et al., 2019). Following (Liu et al., 2020), we use [EVENT] as part of event type queries. [EVENT] is a special symbol to emphasize the trigger detection task.

Then we use a pre-trained BERT encoder to encode the whole sequence and get contextual representations for the input sentence $\mathbf{W} = \{\mathbf{w}_0, \mathbf{w}_2, \dots, \mathbf{w}_N\}$ as well as the event type $\mathbf{T} = \{t, \tau_0^t, \tau_1^t, \dots, \tau_K^t\}$.⁴

Enriched Contextual Representation Given a query of each event type, we aim to extract corresponding event triggers from the input sentence automatically. To achieve this goal, we need to capture the semantic correlation of each input token to the event type. Thus we apply attention mechanism to learn a weight distribution over the sequence of contextual representations of the event type query and get an event type aware contextual representation for each token:

$$\mathbf{A}_i^T = \sum_{j=1}^{|\mathbf{T}|} \alpha_{ij} \cdot \mathbf{T}_j, \text{ where } \alpha_{ij} = \cos(\mathbf{w}_i, \mathbf{T}_j),$$

where \mathbf{T}_j is the contextual representation of the j -th token in the sequence $T = \{t, \tau_1^t, \tau_2^t, \dots, \tau_K^t\}$. $\cos(\cdot)$ is the cosine similarity function between two vectors. \mathbf{A}_i^T denotes the event type t aware contextual representation of token w_i .

In addition, the prediction of event triggers also depends on the occurrence of a certain context. For example, according to ACE event annotation guidelines (Linguistic Data Consortium, 2005), to qualify as a *Meet* event, the meeting must be known to be “*face-to-face and physically located somewhere*”. To capture such context information, we

⁴We use bold symbols to denote vectors.

further apply in-context attention to capture the meaningful contextual words for each input token:

$$\mathbf{A}_i^W = \sum_{j=1}^N \tilde{\alpha}_{ij} \cdot \mathbf{w}_j, \text{ where } \tilde{\alpha}_{ij} = \rho(\mathbf{w}_i, \mathbf{w}_j),$$

where $\rho(\cdot)$ is the attention function and is computed as the average of the self-attention weights from the last m layers of BERT.⁵

Event Trigger Detection With the aforementioned event type oriented attention and in-context attention mechanisms, each token w_i from the input sentence will obtain two enriched contextual representations \mathbf{A}_i^W and \mathbf{A}_i^T . We concatenate them with the original contextual representation \mathbf{w}_i from the BERT encoder, and classify it into a binary label, indicating it as a candidate trigger of event type t or not:

$$\tilde{\mathbf{y}}_i^t = \mathbf{U}_o \cdot ([\mathbf{w}_i; \mathbf{A}_i^W; \mathbf{A}_i^T; \mathbf{P}_i]),$$

where $[\cdot]$ denotes concatenation operation, \mathbf{U}_o is a learnable parameter matrix for event trigger detection, and \mathbf{P}_i is the one-hot part-of-speech (POS) encoding of word w_i . We optimize the following objective for event trigger detection

$$\mathcal{L}_1 = -\frac{1}{|\mathcal{T}||\mathcal{N}|} \sum_{t \in \mathcal{T}} \sum_{i=1}^{|\mathcal{N}|} \mathbf{y}_i^t \cdot \log \tilde{\mathbf{y}}_i^t,$$

where \mathcal{T} is the set of target event types and \mathcal{N} is the set of tokens from the training dataset. \mathbf{y}_i^t denotes the groundtruth label vector.

2.2 Event Argument Extraction

After detecting event triggers for each event type, we further extract their arguments based on the pre-defined argument roles of each event type.

Context Encoding Given a candidate trigger r from the sentence $W = \{w_1, w_2, \dots, w_N\}$ and its event type t , we first obtain the set of pre-defined argument roles for event type t as $G^t = \{g_1^t, g_2^t, \dots, g_D^t\}$. To extract the corresponding arguments for r , similar as event trigger detection, we take all argument roles G^t as a query by concatenating them with the original input sentence

$$[\text{CLS}] w_1 w_2 \dots w_N [\text{SEP}] g_1^t g_2^t \dots g_D^t [\text{SEP}]$$

where we use the last [SEP] separator to denote *Other* category, indicating whether the entity is an argument or not. Then, we encode the

⁵We set m as 3 as it achieved the best performance.

whole sequence with another pre-trained BERT encoder (Devlin et al., 2019) to get the contextual representations of the sentence $\tilde{W} = \{\tilde{\mathbf{w}}_0, \tilde{\mathbf{w}}_2, \dots, \tilde{\mathbf{w}}_N\}$, and the argument roles $G^t = \{g_0^t, g_1^t, \dots, g_D^t, g_{[\text{Other}]}^t\}$.

As the candidate trigger r may span multiple tokens within the sentence, we obtain its contextual representation \mathbf{r} as the average of the contextual representations of all tokens within r . In addition, as the arguments are usually detected from the entities of sentence W , we apply a BERT-CRF model, which is optimized on the same training set as event extraction to identify the entities $E = \{e_1, e_2, \dots, e_M\}$. As each entity may also span multiple tokens, following the same strategy, we average the contextual representations of all tokens within each entity and obtain the entity contextual representations as $\mathbf{E} = \{e_1, e_2, \dots, e_M\}$.

Multiway Attention Given a candidate trigger r of type t and an entity e_i , for each argument role g_j^t , we need to determine whether the underlying relation between r and e_i corresponds to g_j^t or not, namely, whether e_i plays the argument role of g_j^t in event mention r . To do this, for each e_i , we first obtain a trigger-aware entity representation as

$$\mathbf{h}_i = \mathbf{U}_h \cdot ([e_i; \mathbf{r}; e_i \circ \mathbf{r}]),$$

where \circ denotes element-wise multiplication operation. \mathbf{U}_h is a learnable parameter matrix.

In order to determine the semantic correlation between each argument role and each entity, we first compute a similarity matrix \mathbf{S} between the trigger-aware entity representations $\{\mathbf{h}_1, \mathbf{h}_2, \dots, \mathbf{h}_M\}$ and the argument role representations $\{g_0^t, g_1^t, \dots, g_D^t\}$

$$S_{ij} = \frac{1}{\sqrt{d}} \sigma(\mathbf{h}_i, g_j^t),$$

where σ denotes dot product operator, d denotes embedding dimension of g^t , and S_{ij} indicates the semantic correlation of entity e_i to a particular argument role g_j^t given the candidate trigger r .

Based on the correlation matrix \mathbf{S} , we further apply a bidirectional attention mechanism to get an argument role aware contextual representation for each entity and an entity-aware contextual representation for each argument role as follows:

$$\mathbf{A}_i^{e2g} = \sum_{j=1}^D S_{ij} \cdot g_j^t, \quad \mathbf{A}_j^{g2e} = \sum_{i=1}^M S_{ij} \cdot \mathbf{h}_i,$$

In addition, previous studies (Hong et al., 2011; Li et al., 2013; Lin et al., 2020) have revealed that

the underlying relations among entities or argument roles are also important to extract the arguments. For example, if entity e_1 is predicted as *Attacker* of an *Attack* event and e_1 is *located in* another entity e_2 , it’s very likely that e_2 plays an argument role of *Place* for the *Attack* event. To capture the underlying relations among the entities, we further compute the self-attention among them

$$\mu_{ij} = \rho(\mathbf{h}_i, \mathbf{h}_j), \quad \tilde{\mu}_i = \text{Softmax}(\boldsymbol{\mu}_i),$$

$$\mathbf{A}_i^{e2e} = \sum_{j=1}^M \tilde{\mu}_{ij} \cdot \mathbf{h}_j,$$

where ρ denotes the averaged self-attention weights obtained from the last m layers of BERT encoder.

Similarly, to capture the underlying relations among argument roles, we also compute the self-attention among them

$$v_{jk} = \frac{1}{\sqrt{d}} \sigma(\mathbf{g}_j^t, \mathbf{g}_k^t), \quad \tilde{v}_j = \text{Softmax}(\mathbf{v}_j),$$

$$\mathbf{A}_j^{g2g} = \sum_{k=1}^D \tilde{v}_{jk} \cdot \mathbf{g}_k^t,$$

where σ denotes the dot product operator, and d denotes embedding dimension of \mathbf{g}^t .

Event Argument Predication Finally, for each candidate event trigger r , we determine whether an entity e_i plays an argument role of g_j^t in the event mention by classifying it into a binary class:

$$\tilde{z}_{ij}^t = \mathbf{U}_a \cdot ([\mathbf{h}_i; \mathbf{g}_j^t; \mathbf{A}_i^{e2g}; \mathbf{A}_j^{g2e}; \mathbf{A}_i^{e2e}; \mathbf{A}_j^{g2g}]),$$

where \mathbf{U}_a is a learnable parameter matrix for argument extraction. The training objective is to minimize the following loss function:

$$\mathcal{L}_2 = -\frac{1}{|\mathcal{A}||\mathcal{E}|} \sum_{j=1}^{|\mathcal{A}|} \sum_{i=1}^{|\mathcal{E}|} z_{ij} \log \tilde{z}_{ij},$$

where \mathcal{A} denotes the collection of possible argument roles, and \mathcal{E} is the set of entities we need to consider for argument extraction. z_{ij} denotes the ground truth label vector. During test, an entity will be labeled as a non-argument if the prediction for *Other* category is 1. Otherwise, it can be labeled with multiple argument roles.

3 Experiments

3.1 Experimental Setup

We perform experiments on two public benchmarks, Automatic Content Extraction 2005

(ACE05)⁶ and Entity Relation Event (ERE) (Song et al., 2015)⁷. ACE defines 33 event types while ERE includes 38 types, among which there are 31 overlapped event types. Following previous studies (Wadden et al., 2019; Du and Cardie, 2020; Lin et al., 2020), we only consider the arguments from the 7 entity types, including *Facility*, *Geo-Political Entity*, *Location*, *Organization*, *Person*, *Vehicle*, *Weapon*, and ignore *Time* and *Value* related arguments. Appendix B shows detailed statistics of the two datasets, and Appendix C provides implementation details. We evaluate our approach with following settings:

Supervised Event Extraction We conduct experiments for supervised event extraction on ACE and ERE datasets separately. For ACE05, we use the same split as (Li et al., 2013; Wadden et al., 2019; Lin et al., 2020; Du and Cardie, 2020), including 529 documents for training, 30 documents for the development set, and 40 for the test. For ERE, we use the same data split as (Lin et al., 2020; Nguyen et al., 2021), including 396 documents for training, 31 for the development set, and 31 for the test.

Zero-Shot Event Extraction To evaluate the transfer capability of our approach, we use the top-10 most popular event types in ACE05 as seen types for training⁸, and treat the remaining 23 event types as unseen for testing, following Huang et al. (2018). We use the same data split as supervised event extraction but only keep the event annotations of the 10 seen types for training and development sets and sample 150 sentences with 120 annotated event mentions for the 23 unseen types from the test set for evaluation.

Cross-ontology Transfer We further design two more challenging and practical settings to evaluate how well the approach could leverage resources from different ontologies: (1) *cross-ontology direct transfer*, where we only use the annotations from ACE or ERE for training and directly test the model on another event ontology. This corresponds to the *domain adaptation setting* in transfer learning lit-

⁶<https://catalog.ldc.upenn.edu/LDC2006T06>

⁷Following Lin et al. (2020), we merge three ERE datasets, including LDC2015E29, LDC2015E68, and LDC2015E78 and use the same train/dev/test split.

⁸Including *Attack*, *Transport*, *Die*, *Meet*, *Sentence*, *Arrest-Jail*, *Transfer-Money*, *Elect*, *Transfer-Ownership*, *End-Position*.

Model	ACE05		ERE	
	Trigger Ext.	Argument Ext.	Trigger Ext.	Argument Ext.
DYGIE (Wadden et al., 2019)	68.9	51.4	-	-
OneIE (Lin et al., 2020)	72.8	54.8	57.0	46.5
BERT_QA_Arg (Du and Cardie, 2020)	72.4	53.1	57.0	39.2
Text2Event (Lu et al., 2021)	71.8	54.4	59.4	48.3
FourIE (Nguyen et al., 2021)	73.3	57.5	57.9	48.6
Our Approach w/o (Multiway) Attention	72.2	54.0	55.6	42.2
Our Approach	73.7	55.1	60.4	50.2

Table 1: Event extraction results on ACE05 dataset and ERE dataset (F-score, %).

erature; (2) *joint-ontology enhancement*, where we take the annotations from both ACE and ERE as training set, and test the approaches on ACE or ERE ontology separately. This corresponds to the *multi-domain learning setting* in transfer learning literature. Intuitively, an approach with good transferability should benefit more from the enhanced training data from other ontologies. We follow the same train/dev/test splits of ACE and ERE as supervised event extraction.

3.2 Supervised Event Extraction

Table 1 shows the supervised event extraction results of various approaches on ACE and ERE datasets. Though many other event extraction studies (Li et al., 2013; Yang and Mitchell, 2016; Liu et al., 2020, 2018; Sha et al., 2018; Lai et al., 2020; Veyseh et al., 2020; Zhang and Ji, 2021) have been conducted on the ACE dataset, they follow different settings⁹, especially regarding whether the Time and Value arguments are considered and whether all Time-related argument roles are viewed as a single role. Following several recent state-of-the-art studies (Wadden et al., 2019; Lin et al., 2020; Du and Cardie, 2020), we do not consider Time and Value arguments. Our approach significantly outperforms most of the previous comparable baseline methods on trigger detection and argument extraction, especially on the ERE dataset. The comparison between our approach and the ablated variant without attention mechanisms demonstrates the effectiveness of the attention mechanisms in capturing the correlation between input tokens and event type or argument role queries. Next we take BERT_QA_Arg, a QA_based method as the main baseline as it shares similar ideas to our approach, to compare their performance.

Specifically, for trigger detection, all the baseline

⁹Many studies did not describe their argument extraction setting in detail.

methods treat the event types as symbols and classify each input token into one of the target types or *Other*. So they heavily rely on human annotations and do not perform well on the types of which the annotations are not enough. For example, there are only 31 annotated event mentions for *End_Org* in the ACE05 training dataset, so BERT_QA_Arg only achieves 35.3% F-score. In comparison, our approach leverages the semantic interaction between the input tokens and the event types. Therefore it still performs well when the annotations are limited, e.g., it achieves 66.7% F-score for *End_Org*. In addition, by leveraging the rich semantics of event types, our approach also detects event triggers that are rarely seen in the training dataset. For example, our approach successfully detects *ousting* and *purge* as candidate triggers of *End-Position* while BERT_QA_Arg misses all these triggers.

For argument extraction, our approach shows more consistent results than baseline methods. For example, in the sentence “*Shalom was to fly on to London for talks with British Prime Minister Tony Blair and Foreign Secretary Jack Straw*”, the BERT_QA_Arg method correctly predicts *Tony Blair* and *Jack Straw* as *Entity* arguments of the *Meet* event triggered by *talks*, but misses *Shalom*. However, by employing multiway attention, especially the self-attention among all the entities, our approach can capture their underlying semantic relations, e.g., *Shalom* and *Tony Blair* are two persons to talk, so that it successfully predicts all the three *Entity* arguments for the *Meet* event.

3.3 Zero-Shot Event Extraction

As there are no fully comparable baseline methods for zero-shot event extraction, we adapt one of the most recent states of the arts, BERT_QA_Arg (Du and Cardie, 2020), which is expected to have specific transferability due to its QA formulation.

Model	Trigger Ext.	Arg Ext. (GT)
BERT_QA_Arg [†]	31.6	17.0
Our Approach	47.8	43.0

Table 2: Zero-shot F-scores on 23 unseen event types. †: adapted implementation from (Du and Cardie, 2020).

However, the original BERT_QA_Arg utilizes a generic query, e.g., “trigger” or “verb”, to classify each input token into one of the target event types or *Other*, thus is not capable of detecting event mentions for any new event types during the test. We adapt the BERT_QA_Arg framework by taking each event type instead of the generic words as a query for event detection. Note that our approach utilizes the event types as queries without any prototype triggers for zero-shot event extraction.

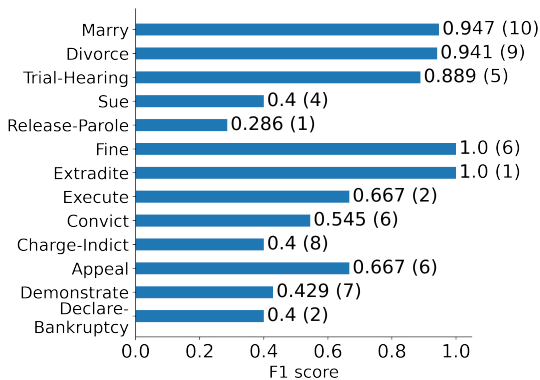


Figure 3: Zero-shot event extraction on each unseen event type. The number in parenthesis indicates # gold event mentions of each unseen type in the test set.

As Table 2 shows, our approach significantly outperforms BERT_QA_Arg under zero-shot event extraction, with over 16% F-score gain on trigger detection and 26% F-score gain on argument extraction. Comparing with BERT_QA_Arg, which only relies on the self-attention from the BERT encoder to learn the correlation between the input tokens and the event types or argument roles, our approach further applies multiple carefully designed attention mechanisms over BERT contextual representations to better capture the semantic interaction between event types or argument roles and input tokens, yielding much better accuracy and generalizability.

We pick 13 unseen event types and further analyze our approach’s zero-shot event extraction performance on each of them. As shown in Fig-

ure 3, our approach performs exceptionally well on *Marry*, *Divorce*, *Trial-Hearing*, and *Fine*, but worse on *Sue*, *Release-Parole*, *Charge-Indict*, *Demonstrate*, and *Declare-Bankruptcy*. There are two possible reasons: first, the semantic meaning of the event types, such as *Marry*, *Divorce*, is more straightforward and explicit than other types, such as *Charge-Indict*, *Declare-Bankruptcy*. Thus our approach can better capture the rich semantics of these types. Second, the diversity of the event triggers for some types, e.g., *Divorce*, is much lower than the other event types, e.g., *Demonstrate*. For example, among the 9 *Divorce* event triggers, there are only 2 unique strings, i.e., *divorce* and *break-downs*, while there are 6 unique strings among the 7 event mentions of *Demonstrate*.

3.4 Cross Ontology Transfer

For cross-ontology transfer, we develop two variations of BERT_QA_Arg as baseline methods: (1) BERT_QA_Arg_{multi}, which is the same as the original implementation but trained with only the annotations of overlapped event types from ACE and ERE and evaluated on the whole test set. (2) BERT_QA_Arg_{binary}, for which we apply the same query adaptation for event detection as Section 3.3, so it can leverage the whole training dataset from the source ontology. To train our approach and BERT_QA_Arg_{binary} for *joint-ontology enhancement*, we combine the training datasets of ACE and ERE and optimize the models from scratch.¹⁰

Table 3 shows the cross-ontology transfer results in both *direct transfer* and *enhancement* settings. Our approach significantly outperforms the baseline methods under all the settings. Notably, for *direct transfer*, e.g., from ERE to ACE, by comparing the F-scores on the whole test set with the performance on the ACE and ERE shared event types (F-scores shown in parenthesis), our approach not only achieves better performance on the shared event types but also extracts event triggers and arguments for the new event types in ACE. In contrast, the baseline methods hardly extract any events or arguments for the new event types. Moreover, by combining the training datasets of ACE and ERE for *joint-ontology enhancement*, our approach’s performance can be further boosted compared with using the annotations of the target event ontology

¹⁰Another intuitive training strategy is to first pre-train a model on the source ontology, then fine-tune it on the target ontology. Our pilot study shows that this strategy performs slightly worse.

Source	Target	BERT_QA_Arg ^{multi}		BERT_QA_Arg ^{binary} †		Our Approach	
		Trigger Ext.	Argument Ext.	Trigger Ext.	Argument Ext.	Trigger Ext.	Argument Ext.
ERE	ACE	48.9 (48.9)	18.5 (18.5)	50.8 (50.8)	20.9 (20.9)	53.9 (52.6)	30.2 (29.6)
ACE	ACE	72.4*	53.1*	72.2	50.4	73.7	55.1
ACE+ERE	ACE	70.1	47.0	71.3	49.8	74.4	56.2
ACE	ERE	47.2 (47.2)	18.0 (18.0)	47.2 (45.0)	17.9 (17.1)	55.9 (46.3)	31.9 (26.0)
ERE	ERE	57.0	39.2	56.7	42.9	60.4	50.2
ACE+ERE	ERE	57.0	38.6	54.6	37.1	63.1	52.3

Table 3: Cross ontology transfer between ACE and ERE datasets (F-score %). The scores in parenthesis indicate the performance on the ACE and ERE shared event types. * indicates scores reported in (Du and Cardie, 2020)

only, demonstrating the superior transfer capability across different ontologies. For example, ACE includes a *Transport* event type while ERE defines two more fine-grained types *Transport-Person* and *Transport-Artifact*. By adding the annotations of *Transport-Person* and *Transport-Artifact* from ERE into ACE, our approach can capture the underlying semantic interaction between *Transport*-related event type queries and the corresponding input tokens and thus yield 1.5% F-score gain on the *Transport* event type in the ACE test dataset. In contrast, both baseline methods fail to be enhanced with additional annotations from a slightly different event ontology without explicitly capturing semantic interaction between the event types and the input tokens.

3.5 Computational and Time Cost

Despite the performance improvement via extending from multi-class classification to multiple binary classifications, these approaches usually increase the time cost. We thus design two strategies to mitigate this issue: (1) more than 69% of the sentences in the training dataset do not contain any event triggers, so we randomly sample 20% of these sentences for training, and (2) our one-time argument encoding and decoding strategies extract all arguments of each event trigger at once. It is more efficient than the previous QA-based approaches, which can only extract arguments for one argument role at once. With these two strategies, for trigger detection, our approach takes 80% more time for training and 19% less for inference comparing with BERT_QA_Arg (Du and Cardie, 2020) which relies on multi-class classification for trigger extraction, while for argument extraction, our approach takes 36% less time for both training and inference than BERT_QA_Arg.

3.6 Remaining Challenges

We sample 200 supervised trigger detection and argument extraction errors from the ACE05 test dataset and identify the remaining challenges.

Lack of Background Knowledge Background knowledge, as well as human commonsense knowledge, sometimes is essential to event extraction. For example, from the sentence “*since the intifada exploded in September 2000, the source said*”, without knowing that *intifada* refers to a resistance movement, our approach failed to detect it as an *Attack* event mention.

Pronoun Resolution Extracting arguments by resolving coreference between entities and pronouns is still challenging. For example, in the following sentence “*Attempts by Laleh and Ladan to have their operation elsewhere in the world were rejected, with doctors in Germany saying one or both of them could die*”, without pronoun resolution, our approach mistakenly extracted *one*, *both* and *them* as *Victims* of the *Die* event triggered by *die*, while the actual *Victims* are *Ladan* and *Laleh*.

Ambiguous Context The ACE annotation guidelines (Linguistic Data Consortium, 2005) provide detailed rules and constraints for annotating events of all event types. For example, a *Meet* event must be specified by the context as *face-to-face and physically located somewhere*. Though we carefully designed several attention mechanisms, it is difficult for the machines to capture such context features accurately. For example, from the sentence “*The admission came during three-day talks in Beijing which concluded Friday, the first meeting between US and North Korean officials since the nuclear crisis erupted six months ago.*”, our approach failed to capture the context features that *the talks is not an explicit face-to-face meet event*, and thus mistakenly identified it as a *Meet* event mention.

4 Related Work

Traditional event extraction studies (Ji and Grishman, 2008; Liao and Grishman, 2010; McClosky et al., 2011; Li et al., 2013; Chen et al., 2015; Cao et al., 2015; Feng et al., 2016; Yang and Mitchell, 2016; Nguyen et al., 2016; Wadden et al., 2019; Lin et al., 2020; Wang et al., 2021) usually detect event triggers and arguments with multi-class classifiers. Unlike all these methods that treat event types and argument roles as symbols, our approach considers them queries with rich semantics and leverages the semantic interaction between input tokens and each event type or argument role.

Several studies have explored the semantics of event types based on seed event triggers (Bronstein et al., 2015; Lai and Nguyen, 2019) or event type structures (Huang et al., 2018). However, they can hardly be generalized to argument extraction. Recent studies that model event extraction as question answering (Du and Cardie, 2020; Liu et al., 2020; Li et al., 2020) can take advantage of the semantics of event types and the large-scale question answering datasets. Compared with these methods, there are two different vital designs, making our approach perform and be generalized better than these QA-based approaches: (1) our approach directly takes event types and argument roles as queries. In contrast, previous QA-based approaches rely on templates or generative modules to create natural language questions. (2) QA-based approaches can only detect arguments for one argument role at once, while our approach extracts all arguments of an event trigger with one-time encoding and decoding, which is more efficient and leverages the implicit relations among the candidate arguments or argument roles.

5 Conclusion

We refine event extraction with a query-and-extract paradigm and design a new framework that leverages rich semantics of event types and argument roles and captures their interactions with input texts using attention mechanisms to extract event triggers and arguments. Experimental results demonstrate that our approach achieves state-of-the-art performance on supervised event extraction and shows prominent accuracy and generalizability to new event types and across ontologies. In the future, we will combine prompt tuning techniques with our approach to further improve the event extraction task.

References

- David Ahn. 2006. The stages of event extraction. In *Proceedings of the Workshop on Annotating and Reasoning about Time and Events*, pages 1–8.
- Ofer Bronstein, Ido Dagan, Qi Li, Heng Ji, and Anette Frank. 2015. Seed-based event trigger labeling: How far can event descriptions get us? In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 2: Short Papers)*, pages 372–376.
- Kai Cao, Xiang Li, Miao Fan, and Ralph Grishman. 2015. [Improving event detection with active learning](#). In *Proceedings of the International Conference Recent Advances in Natural Language Processing*, pages 72–77, Hissar, Bulgaria. INCOMA Ltd. Shoumen, BULGARIA.
- Yubo Chen, Liheng Xu, Kang Liu, Daojian Zeng, and Jun Zhao. 2015. Event extraction via dynamic multi-pooling convolutional neural networks. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 167–176.
- Nancy Chinchor and Elaine Marsh. 1998. Muc-7 information extraction task definition. In *Proceeding of the seventh message understanding conference (MUC-7), Appendices*, pages 359–367.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Xinya Du and Claire Cardie. 2020. [Event extraction by answering \(almost\) natural questions](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 671–683, Online. Association for Computational Linguistics.
- Xiaocheng Feng, Lifu Huang, Duyu Tang, Heng Ji, Bing Qin, and Ting Liu. 2016. [A language-independent neural network for event detection](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 66–71, Berlin, Germany. Association for Computational Linguistics.
- Ralph Grishman. 1997. Information extraction: Techniques and challenges. In *International summer school on information extraction*, pages 10–27. Springer.
- Yu Hong, Jianfeng Zhang, Bin Ma, Jianmin Yao, Guodong Zhou, and Qiaoming Zhu. 2011. Using

- cross-entity inference to improve event extraction. In *Proceedings of the 49th annual meeting of the association for computational linguistics: human language technologies*, pages 1127–1136.
- Lifu Huang, Heng Ji, Kyunghyun Cho, Ido Dagan, Sebastian Riedel, and Clare Voss. 2018. [Zero-shot transfer learning for event extraction](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2160–2170, Melbourne, Australia. Association for Computational Linguistics.
- Heng Ji and Ralph Grishman. 2008. Refining event extraction through cross-document inference. In *Proceedings of ACL-08: Hlt*, pages 254–262.
- Viet Dac Lai and Thien Huu Nguyen. 2019. Extending event detection to new types with learning from keywords. *arXiv preprint arXiv:1910.11368*.
- Viet Dac Lai, Tuan Ngo Nguyen, and Thien Huu Nguyen. 2020. [Event detection: Gate diversity and syntactic importance scores for graph convolution neural networks](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5405–5411, Online. Association for Computational Linguistics.
- Fayuan Li, Weihua Peng, Yuguang Chen, Quan Wang, Lu Pan, Yajuan Lyu, and Yong Zhu. 2020. [Event extraction as multi-turn question answering](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 829–838, Online. Association for Computational Linguistics.
- Qi Li, Heng Ji, and Liang Huang. 2013. [Joint event extraction via structured prediction with global features](#). In *Proceedings of the 51st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 73–82, Sofia, Bulgaria. Association for Computational Linguistics.
- Shasha Liao and Ralph Grishman. 2010. Using document level cross-event inference to improve event extraction. In *Proceedings of the 48th Annual Meeting of the Association for Computational Linguistics*, pages 789–797.
- Ying Lin, Heng Ji, Fei Huang, and Lingfei Wu. 2020. [A joint neural model for information extraction with global features](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7999–8009, Online. Association for Computational Linguistics.
- Linguistic Data Consortium. 2005. English annotation guidelines for events. <https://www.ldc.upenn.edu/sites/www.ldc.upenn.edu/files/english-events-guidelines-v5.4.3.pdf>.
- Jian Liu, Yubo Chen, Kang Liu, Wei Bi, and Xiaojiang Liu. 2020. [Event extraction as machine reading comprehension](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1641–1651, Online. Association for Computational Linguistics.
- Xiao Liu, Zhunchen Luo, and Heyan Huang. 2018. [Jointly multiple events extraction via attention-based graph information aggregation](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 1247–1256, Brussels, Belgium. Association for Computational Linguistics.
- Yaojie Lu, Hongyu Lin, Jin Xu, Xianpei Han, Jialong Tang, Annan Li, Le Sun, Meng Liao, and Shaoyi Chen. 2021. [Text2Event: Controllable sequence-to-structure generation for end-to-end event extraction](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 2795–2806, Online. Association for Computational Linguistics.
- David McClosky, Mihai Surdeanu, and Christopher D Manning. 2011. Event extraction as dependency parsing. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, pages 1626–1635.
- Minh Van Nguyen, Viet Dac Lai, and Thien Huu Nguyen. 2021. [Cross-task instance representation interactions and label dependencies for joint information extraction with graph convolutional networks](#).
- Thien Huu Nguyen, Kyunghyun Cho, and Ralph Grishman. 2016. [Joint event extraction via recurrent neural networks](#). In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 300–309, San Diego, California. Association for Computational Linguistics.
- Thien Huu Nguyen and Ralph Grishman. 2016. [Modeling skip-grams for event detection with convolutional neural networks](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 886–891, Austin, Texas. Association for Computational Linguistics.
- Lei Sha, Feng Qian, Baobao Chang, and Zhifang Sui. 2018. Jointly extracting event triggers and arguments by dependency-bridge rnn and tensor-based argument interaction. In *AAAI*.
- Zhiyi Song, Ann Bies, Stephanie Strassel, Tom Riese, Justin Mott, Joe Ellis, Jonathan Wright, Seth Kulick, Neville Ryant, and Xiaoyi Ma. 2015. From light to rich ere: annotation of entities, relations, and events. In *Proceedings of the the 3rd Workshop on EVENTS: Definition, Detection, Coreference, and Representation*, pages 89–98.

Amir Pouran Ben Veysseh, Tuan Ngo Nguyen, and Thien Huu Nguyen. 2020. [Graph transformer networks with syntactic and semantic structures for event argument extraction](#). *CoRR*, abs/2010.13391.

David Wadden, Ulme Wennberg, Yi Luan, and Hananeh Hajishirzi. 2019. [Entity, relation, and event extraction with contextualized span representations](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 5784–5789, Hong Kong, China. Association for Computational Linguistics.

Ziqi Wang, Xiaozhi Wang, Xu Han, Yankai Lin, Lei Hou, Zhiyuan Liu, Peng Li, Juanzi Li, and Jie Zhou. 2021. [CLEVE: Contrastive Pre-training for Event Extraction](#). In *Proceedings of ACL-IJCNLP*, pages 6283–6297, Online. Association for Computational Linguistics.

Bishan Yang and Tom M. Mitchell. 2016. [Joint extraction of events and entities within a document context](#). In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 289–299, San Diego, California. Association for Computational Linguistics.

Zixuan Zhang and Heng Ji. 2021. [Abstract Meaning Representation guided graph encoding and decoding for joint information extraction](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 39–49, Online. Association for Computational Linguistics.

A Appendix

B Data Statistics

Table 4 shows the detailed data statistics of the training, development and test sets of the ACE05 and ERE datasets.

Dataset	Split	# Events	# Arguments
ACE	Training	4419	7932
	Development	468	892
	Test	424	898
ERE	Training	7232	12832
	Development	619	1100
	Test	652	1228

Table 4: Data statistics for ACE2005 and ERE datasets.

C Implementation Details

Implementation Details For fair comparison with previous baseline approaches, we use the same pre-trained bert-large-uncased model for

fine-tuning and optimize our model with BertAdam. We optimize the parameters with grid search: training epoch 10, learning rate $\in [3e-6, 5e-5]$, training batch size $\in \{8, 16, 32\}$, dropout rate $\in \{0.4, 0.5, 0.6\}$. Our experiments run on one Quadro RTX 8000. For trigger detection, the average runtime is 10 hours. For argument detection, the average runtime is 1.3 hours.

Evaluation Criteria For evaluation, we use the same criteria as (Li et al., 2013; Chen et al., 2015; Nguyen et al., 2016; Lin et al., 2020) as follows:

- **Trigger:** A trigger mention is correct if its span and event type matches a reference trigger. Each candidate may act as triggers for multiple event occurrences.
- **Argument:** An argument prediction is correct only if the event trigger is correctly detected. Meanwhile, its span and argument role need to match a reference argument. An argument candidate can be involved in multiple events as different roles. Furthermore, within a single event extent, an argument candidate may play multiple roles.