

Multimodal-Boost: Multimodal Medical Image Super-Resolution using Multi-Attention Network with Wavelet Transform

Fayaz Ali Dharejo, *Member, IEEE*, Muhammad Zawish, Farah Deebe, Yuanchun Zhou, Kapal Dev *Member, IEEE*, Sunder Ali Khawaja, and Nawab Muhammad Faseeh Qureshi, *Senior Member, IEEE*

Abstract—Multimodal medical images are widely used by clinicians and physicians to analyze and retrieve complementary information from high-resolution images in a non-invasive manner. Loss of corresponding image resolution adversely affects the overall performance of medical image interpretation. Deep learning based single image super resolution (SISR) algorithms has revolutionized the overall diagnosis framework by continually improving the architectural components and training strategies associated with convolutional neural networks (CNN) on low-resolution images. However, existing work lacks in two ways: i) the SR output produced exhibits poor texture details, and often produce blurred edges, ii) most of the models have been developed for a single modality, hence, require modification to adapt to a new one. This work addresses (i) by proposing generative adversarial network (GAN) with deep multi-attention modules to learn high-frequency information from low-frequency data. Existing approaches based on the GAN have yielded good SR results; however, the texture details of their SR output have been experimentally confirmed to be deficient for medical images particularly. The integration of wavelet transform (WT) and GANs in our proposed SR model addresses the aforementioned limitation concerning textures. While the WT divides the LR image into multiple frequency bands, the transferred GAN uses multi-attention and upsample blocks to predict high-frequency components. Additionally, we present a learning method for training domain-specific classifiers as perceptual loss functions. Using a combination of multi-attention GAN loss and a perceptual loss function results in an efficient and reliable performance. Applying the same model for medical images from diverse modalities is challenging, our work addresses (ii) by training and performing on several modalities via transfer learning. Using two medical datasets, we validate our proposed SR network against existing state-of-the-art approaches and achieve promising results in terms of SSIM and PSNR.

Index Terms—Super-resolution, attention modules, Multimodality data, Transfer learning, Wavelet transform, Generative adversarial network

1 INTRODUCTION

MEDICAL images of high quality are critical in early, fast and accurate diagnosis in the current clinical processes. Typically, spatial resolution of medical images is degraded by factors such as imaging modalities and acquisition time. To recover the distorted resolution, super-resolution (SR) methods are widely adopted on digital images as post-processors eluding the additional scanning costs [1]. Image super-resolution is one of the prominent low-level vision problems in the computer vision domain. The aim of image SR is to reconstruct a high resolution (HR) image from a corresponding low resolution (LR) image. SR

techniques are applied on both single and multiple images simultaneously subject to the input and output criteria. In this work, we study the Single-Image-Super-Resolution (SISR) for the application of medical images. In contrast to classical SISR applications, medical imaging SISR is captious as it is often followed by precise tasks of segmentation, classification or diagnosis [2] [3]. Thus, it becomes imperative to produce methods which could not only preserve sensitive information but also magnify the structures of interest efficiently.

Traditional SR based techniques such as interpolation [4] or reconstruction [5] based could not suffice for medical image SISR tasks. Interpolation methods such as linear, bicubic [4] and lanczos [6] often fail to reconstruct the high-frequency information which eventually results in blurred and smooth edges. In contrast, reconstruction based algorithms efficiently utilize prior local [7], global [8], and sparse [9] knowledge to efficiently reconstruct the HR image. However, these methods can not efficiently simulate the non-linear transformation from LR space to HR space in dynamic scenes, hence the output SR image is distorted. Deep learning techniques have recently shown notable performance on various vision tasks such as image dehazing, object detection, activity recognition etc [10]. Convolutional Neural Networks (CNNs) and particularly Generative Adversarial Networks (GANs) have shown re-

- F.A Dharejo, F. Deebe, Y. Zhou. Authors are with the Computer Net-work Information Center, Chinese Academy of Sciences, University of Chinese Academy of Sciences, Beijing, 100190, China. E-mail: fayazdharejo@cnic.cn, deebe@cnic.cn.
- M. Zawish is with Walton Institute for Information and Communication Systems Science, Waterford Institute of Technology, Ireland. E-mail: muhammad.zawish@waltoninstitute.ie
- K. Dev is with Department of institute of intelligent systems, University of Johannesburg, South Africa. E-mail: kapal.dev@ieee.org
- S.A. Khawaja is with Faculty of Engineering and Technology, University of Sindh, Jamshoro, Pakistan. E-mail: sandar.ali@usindh.edu.pk
- N.M.F. Qureshi is associated with the Department of Computer Education, Sungkyunkwan University, Seoul, Korea. E-mail: faseeh@skku.edu (Correspond: Y. Zhou E-mail: zyc @cnic.cn and N.M.F Qureshi E-mail: faseeh@skku.edu)

Manuscript received.

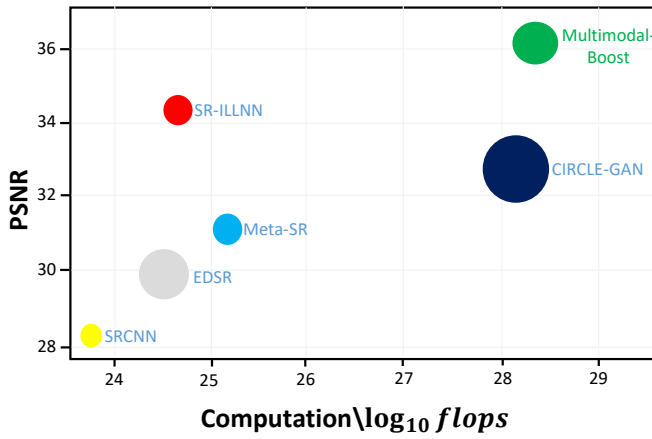


Fig. 1. A quantitative comparison of the super resolution capabilities of several state-of-art methods. In terms of PSNR, our proposed technique, Multimodal-Boost, exceeds the competition. The horizontal axis, which is measured in logarithmic FLOPs for easier observation and PSNR is represented on the vertical axis. The amount of parameters is represented by the circular area. A green circle in the top centered is regarded to be a superior SR network.

markable performance on various SR applications such as remote sensing and medical imaging. Deep Convolutional Neural Network for Super-Resolution (SRCNN) [11] laid the foundation of deep learning (DL) based SR methods, followed by a number of techniques involving powerful capabilities of CNNs. Due to phenomenal performance of residual blocks and dense blocks, several works such as, Enhanced Deep Residual Networks for Single Image Super-Resolution (EDSR) [12] Very Deep Convolutional Networks (VDSR) [13], Fast Super-Resolution with Cascading Residual Network (RFSR) [14] and Deep Back-Projection Networks for Super-Resolution (DBPN) [15] were proposed for the SR problem. These end to end models are deeper and complex thus requiring a large number of LR and corresponding HR pairs to get trained [16]. Moreover, these deep networks could not provide photo realistic results despite the high performance of Structural Similarity Measure (SSIM) and Peak Signal-to-Noise Ratio (PSNR) [2]. Thus, GAN based networks accompanied by attention mechanisms [17] were introduced to produce perceptually realistic outputs closer to the ground truth HR image. However, aforementioned deep learning based SR techniques have shown sub-optimal performance on medical images particularly for different types of modalities. Several medical imaging analysis tasks such as tumor segmentation [18] and lesion detection [19] are essentially hindered by the substandard HR output with blurred edges. Using a Multi-Temporal Ultra-Dense Memory Network, Peng Ye et al. [20] proposed a new method based on video super-resolution. Previous video SR methods mostly use a single memory module and a single channel structure, which does not fully capture the correlations between frames specific to video. To achieve video super-resolution, this paper presents a multi-temporal ultra-dense. Yiqun Mei et al. [21] developed an efficient SR method based on Cross-Scale Non-Local Attention Module (CS-NL) incorporating recurrent neural networks to handle an inherent property of images: cross-

scale correlation of features. Afterward, Kui Jiang et al. [22] developed a hierarchical dense recursive network with super-resolution. Feature representations were made richer thanks to dense hierarchical connections. Additionally, it facilitates the lightweight SR model by providing Reasonable design and parameter sharing.

In this work, we aim to overcome aforementioned problems in multimodal medical imaging SISR by proposing a combination of multi-attention GAN with wavelet subbands. Wavelet transform (WT) [23] has a unique ability of extracting useful multi-scale features with the help of sparse subbands. Since WT accompanied with GAN has been widely adopted for several applications including remote sensing for spatio-temporal SR [24] and dehazing [25], it would be interesting to utilize its potential for the medical imaging SR. In the first step, we derive the WT based four subbands of the given LR image using a 2D discrete wavelet transform (DWT) from Haar family of wavelet which eventually replaces LR input with low dimensional input space preserving the key information. These subbands are then fed into the proposed GAN involving multiple attention and upsample blocks which produces an improved HR wavelet component for each corresponding subband. Lastly, the HR image is reconstructed using 2 dimensional inverse discrete wavelet transform (2D-IDWT). Inspired from this [26], we use a perceptual loss network along with GAN to further boost the performance of our proposed method in term of qualitative and qualitative. Moreover, a challenging and time-consuming task in medical imaging SR is to modify the models designed for one modality to fit a new modality. We overcome this by introducing the transfer learning technique which efficiently adapts to unseen data with the help of pre-learned knowledge. In result, it becomes feasible to adapt on datasets of different modalities along with the reliable results. In summary, the following are the contributions of our methodology:

- We proposed a novel wavelet-based multimodal and multi-attention GAN framework for medical imaging SR called Multimodal-Boost. The Multimodal-Boost can learn end-to-end residual mapping between low and high resolution wavelet subbands. The key advantage of utilizing wavelet transform is that it helps restoring rich content from images by accurately extracting missing details. WT give high-frequency information in a variety of directions that are most likely to result from (horizontal, vertical, and diagonal edges).
- We trained the perceptual network on VGG-16 to improve the SR results, as shown in the Figure 7. Using perceptual loss, we boost network and improve super-resolution performance. We use a transfer-learning technique to deal with inadequate training for super-resolution medical applications. Our algorithm is trained on DIV2K [27] dataset prior to getting evaluated on multimodal medical datasets.
- Unlike many previous Deep Neural networks (DNN) medical image SR approaches [28] [29] [30] [31], our method employs multimodality data into a single

model, which reduces the cost of adding new SR objectives such as detection and classification tasks. The results reveal that the proposed method outperforms existing methods in objective and subjective evaluation as shown in Figure. 1.

The rest of the paper is drawn as follows. Section II provides an overview of the related works. The proposed The multimodal-Boost approach is detailed in Section III. Section IV contains the results and discussion. Finally, in Section V, the conclusion is given.

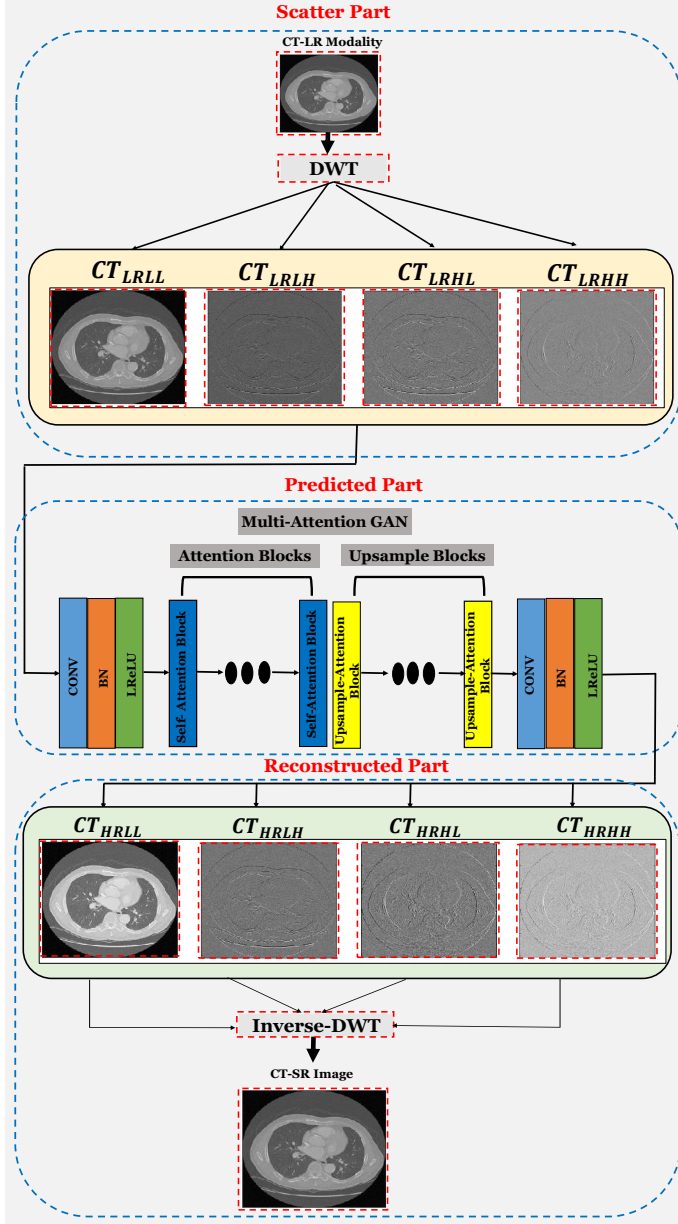


Fig. 2. Multimodal-Boost presents a three-part methodology flow chart: scatter, predicted, and reconstruct portions. The interpolated version of the LR image is broken down into four LR wavelet components in the dispersed section. In the predicting section, a developed Multi-Attention GAN SR network is used to estimate the HR wavelet component from the LR counterpart. The third portion is the reconstructed component, which uses 2DIWT to generate super-resolution images. The two forms of attention blocks are multi-attention and upsample-attention.

2 LITERATURE WORK

SR is undoubtedly a classical low-level vision problem which has been highly studied with emerging deep learning based solutions for a variety of applications. The problem of SR can be categorised into either single image SR or multiple image SR, our focus in this paper is on single image SR. Thus, in this section we review the state-of-the-art SR methods for both general and medical imaging application.

In the domain of DL based SR, SRCNN by Dong et al [11] was the very first technique incorporating deep CNNs for the SR task. Following that several works were proposed with a typical pipeline of feature extraction, non-linear mapping and HR image reconstruction. However, such deeper level and complex architectures failed to extract the important multi-level features of a given LR image. Liang et al [32] identified the importance of edge based features for enhancing the SR task using sobel edge priors of LR input for training a deep SR model. Later, VDSR [13], EDSR [12], and RFASR [14] were proposed with the use of very deep networks involving residual skip connections and residual feature aggregation techniques to enhance the SR output. However, these methods did not yield admissible SSIM and PSNR due to deterioration of visual perception which resulted in over-smoothed SR output. Ledig et al [33] improved the visual perception in SR problem by proposing a GAN based network namely SRGAN by combining adversarial and content loss of generated HR output. Moreover, Meta-SR [34] and DBPN [15] achieved improved results where the former proposed a solution for high magnification and arbitrary magnification SR and the later used a deep back-projection network to generate clear HR output.

While all these methods work well on natural datasets, their performance is not admissible for medical imaging tasks. The methods on pixel space optimization [11], [12], [14] generate a smooth output which lacks the important information, while the methods on feature space optimization [33] could not generate realistic enough outputs. For this reason, these methods are not well suited for a critical problem like medical imaging SR. Although there exist several studies to tackle medical imaging SR with the techniques such as cycle GAN [35], U-Nets [36], 3D convolutions [37] and attention based networks [38], none of them achieved acceptable clinical ability. Moreover, most of these works are suitable only for single modality and their performance degrades when doing inference on new modality dataset. Therefore, in this paper we aim to address the shortcomings of above works by utilizing the inherent capabilities of discrete wavelet analysis on embedding the LR input image which is then provided to multi-attention and upsample blocks of proposed GAN network to produce the corresponding HR output. It can be seen from results that our model efficiently utilizes the transfer learning technique to produce clear HR output on multiple medical imaging modalities.

3 METHODOLOGY

3.1 SR Based on the DWT

For low-level vision tasks like image denoising and super-resolution, choosing the proper wavelet can be difficult.

Medical diagnostics, in particular, demands HR images with improved contextual features to provide better patient care. The WT stores detailed information about an image in many orientations to make the most of it. At each level of decomposition, the 2D-DWT produces four subbands that correspond to distinct frequency components and are referred to as approximate subbands, horizontal, vertical, and diagonal, containing complete edges information. Each subband contains image data with distinct characteristics that are important enough to offer precise image features.

In practice, DWT is being used to send the input signal via the low-pass $L(e)$ and high-pass filters $H(e)$. The input signal's approximation and accuracy are then reduced by 2. $L(e)$ and $H(e)$, are the Haar wavelets' definitions:

$$L(e) = \begin{cases} 1, & e = 0, 1 \\ 0, & \text{otherwise} \end{cases} \quad H(e) = \begin{cases} 1, & e = 0 \\ -1, & e = 1 \\ 0, & \text{otherwise} \end{cases} \quad (1)$$

Generally, an image $I(x,y)$, where x th and y th pixel values are in columns. The average components of the 2D-DWT are represented by four subbands: approximation, vertical, horizontal, diagonal, **LL, LH, HL, HH**.

When we use 1-level 2D-DWT to an LL input image to predict the HL, LH, and HH subbands, we get the missing information features of the LL image, as shown in the figure. To obtain SR results, we employ 2D-IDWT to acquire the image missing features information. The coefficients of 2D-IDWT can be computed as below from the Haar wavelet.

$$\begin{cases} A = a + b + c + d \\ B = a - b + c - d \\ C = a + b - c - d \\ D = a - b - c + d \end{cases} \quad (2)$$

where A, B, C, D , and a, b, c, d are the subbands pixel values. Interpolation-based SR approaches are limited in their capacity to reconstruct information appropriately. The result is not accurate because high-frequency domain information cannot be adequately recovered during SR. To improve super-resolved image performance, edges must be retained. The DWT was employed to keep the image edges features and texture details in high-frequency; the 2-DWT decomposed the I_L image into the **LL, LH, HL, HH** subbands. Conventional DWT-based SR approaches combine DWT with Non-DL SR methods [24]. Let I_G denote the image of the ground-truth HR in $m \times n$ by, and I_L symbolize LR in size $m \times n$ by, and I_L by the same scale factor (s). Authorize I_{LR} to represent I_L up-scale ability, with $m \times n$ size, and to display the **HR** image reconstructed, with $m \times n$ size, via bicubic interpolation.

- 1) The four different subbands are achieved from LR input image, as shown in Figure. 2., i.e., **CT_{LL}, CT_{LH}, CT_{HL}, CT_{HH} CT_{LR}**
- 2) Finally using a discrete inverse WT, the HR image of **CT_{HR}** is reconstructed (IDWT).

3.2 Multimodal Multi-Attention GAN

A generator and a discriminator are the two fundamental components of a GAN. Samples z from a preceding noise

distribution $\mathbf{p}_{noise}$ are sent into the generator G . The generator is performed with any model distribution $\mathbf{p}_{model}$ in the data space $\hat{x} = G(z)$. The discriminator is a binary classifier whose function is to distinguish between real and fake data on generated samples $x \sim P_{data}, D(\hat{x}) = 1$ and $x \sim P_{data}, D(\hat{x}) = 0$. Convolutional layers are featured in almost all GAN-based image restoration models [39] [40]. GANs evaluate information in a local neighborhood while deploying convolutional layers is computationally expensive for long-range modeling relationships in images. Our proposed approach uses DWT to generate wavelet subbands to improve spatial resolution (super-resolution). Self-attention is introduced in to the GAN framework, allowing the generator and the discriminator to efficiently describe interactions between widely separated spatial regions, as shown in Figure. 4.

To calculate the attention blocks, the image features from previously hidden layers $x \in \mathbf{R}^{C \times N}$ are transferred to feature spaces $\mathbf{f}; \mathbf{g}$, where $\mathbf{f}(x) = W_f x; \mathbf{g}(x) = W_g x$

$$\beta_{i,j} = \frac{\exp(S_{i,j})}{\sum_{i=1}^N \exp(S_{i,j})} = f(x_i)^T g(x_i) \quad (3)$$

When constructing the j th area, $\beta_{i,j}$ shows how much attention the model pays to the i th place. Where C is Considering N is the number of locations of features from the previously hidden layer, the output of the attention layer can be expressed as, $o = (o_1, o_2, \dots, o_j, \dots, o_N) \in \mathbf{R}^{C \times N}$ where,

$$O_j = \mathcal{V}(\sum_{i=1}^N \beta_{i,j} h(x_i)), h(x_i) = W_h X_i, \mathcal{V} = W_v X_i \quad (4)$$

The learned weight matrices $\mathbf{W}_g \in \mathbf{R}^{L \times C}$, $\mathbf{W}_f \in \mathbf{R}^{L \times C}$, $\mathbf{W}_h \in \mathbf{R}^{L \times C}$, and $\mathbf{W}_v \in \mathbf{R}^{L \times C}$ are implemented as 1×1 convolutions. We used varied channel numbers of $L=C/K$, in all of our experiments, where $k=1,2,4,8$ thus after a few ImageNet training epochs, we chose $k = 8$ (i.e., $L = \frac{C}{8}$) and found no significant performance loss. We also add back the input feature map after multiplying the output of the attention layer by a scale parameter. As a result, the final outcome is as follows:

$$Y_i = \alpha o_i + x_i \quad (5)$$

Where α is a scalar parameter initially set to 0, allowing the network to depend on local inputs first and then progressively learn to give non-local data to more weights. The attention block used in our method is shown in Figure 5(a). Upsampling attention blocks, which tend to improve the resolution for CT images on wavelet subbands input features, are another attention block employed in our predicted part. The spatial resolution of the feature map was further improved by performing local neighborhood interpolation on the wavelet subband input features. These are fed to the leaky convolution ReLU, and the final feature map ($f_{Upsample} \in \mathbf{R}^{L \times C}$) Upsample attention block can be expressed as;

$$F_{map} = \text{Sigmoid}(\text{Conv}(1 \times 1)) \times f_{upsample} \quad (6)$$

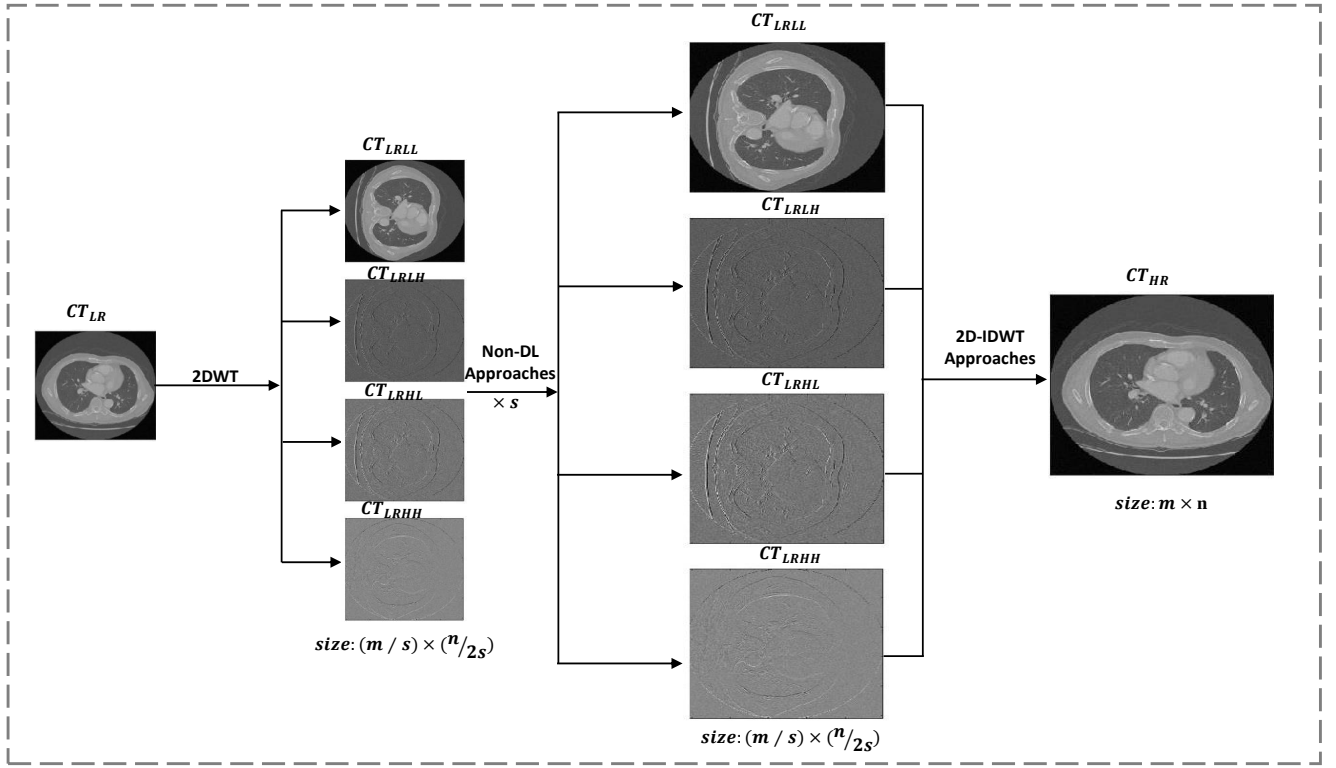


Fig. 3. level-1 decomposition of CT image. 2DWT extracts four subbands (CT_{LL} , CT_{LH} , CT_{HL} , and CT_{HH}) from the input CT modality image, which are subsequently fed to the Predicted Network for training.

F_{map} is referred to output of pixel attention module and (**Conv(1×1)**) represent the convolution operation with kernel size 1×1 so we can say the $F_{map} \in \mathbf{R}^{W \times L \times 1}$. The values of the feature map fall between 0 and 1. The feature map can be correctly changed at the component level to achieve superior SR results. The Upsample attention block is given in Figure 5(b).

3.3 The Reconstruction Part

To reconstruct the HR super-resolved image CT_{HR} , we use a 2D-IDWT inverse wavelet onto four components CT_{LL} , CT_{LH} , CT_{HL} , and CT_{HH} .

3.4 VGG based Perceptual Loss

Perceptual loss is one of the best metrics for measuring image similarity when CNN algorithms are applied to the input image. It is utilized in various applications such as image denoising, image dehazing, image translation, and image super-resolution. Compared to Mean Squared Error (MSE) loss [26], the perceptual loss is more robust to several problems such as over-flattening and distortion [41] [42]; hence for image SR, the perceptual loss is more powerful to search spatial resolution similarities between two images. Many CNN networks employ VGG-loss to measure perceptual loss; however, VGG-11, VGG-16, and VGG-19 are pre-trained networks that achieved amazing results using natural image datasets [43]. VGG-loss is a term that can be stated as follows:

$$L_{VGG} = \mathbb{E}_{(I_{LR}, I_{HR})} \left[\frac{\|VGG(g(I_{LR})) - VGG(I_{HR})\|_F^2}{DHW} \right] \quad (7)$$

where D; H; W denotes the computed tomography (CT) image depth, height, and width. VGG was trained for image classification using natural images; therefore, it generates features not relevant to CT image super-resolution. This is one of the possible pitfalls with VGG-loss [44]. Due to the scarcity of labeled CT images, VGG for CT datasets is a challenging task. We proposed a trained perceptual network to handle this challenge to extract a compressed encoding from CT data input and reconstruct an image comparable to the original image. In our case we used VGG-16 in the described perceptual loss network as shown in Figure 4. The perceptual network comprises six convolution layers, each with 32, 32, 64, 64, 128, 128 filters. There is also a max pooling layer with a kernel size of 2 and a stride of 2. The perceptual loss convolution layers were utilized, followed by the ReLU activation function. In this design, we used a 33 filter size and a stride of 1. To extract the features, we trained the perceptual network to determine the perceptual loss. Figure 7 shows the perceptual loss based on VGG-16.

$$L_{prec} = \mathbb{E}_{(I_{LR}, I_{HR})} \left[\frac{\|\gamma(g(I_{LR})) - \gamma(I_{HR})\|_F^2}{DHW} \right] \quad (8)$$

Where γ is the pre-trained encoder network.

3.5 Model Optimization

The proposed multimodal multi-attention model loss is equal to the sum of the perceptual and generator-

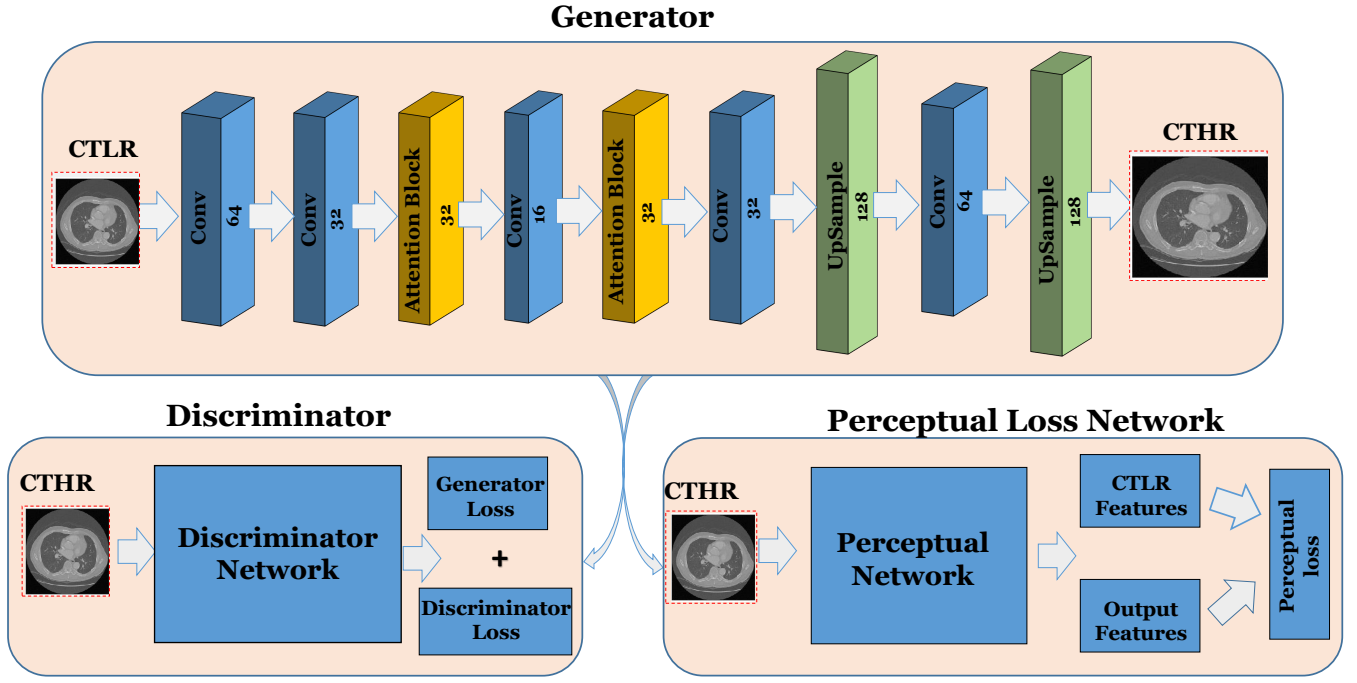


Fig. 4. Proposed GAN network with multiple attention and upsample blocks.

discriminator losses, as shown below:

$$\min_g \max_d L_{WGAN}(g, d) + \beta L_{perc}(g) \quad (9)$$

$L_{WGAN}(g, d)$ is a Wasserstein GAN [45] [46] optimizer, the weighted parameters are represented by the β , which claims to stand for substitution between WGAN-Loss and perceptual loss, and the letters g and d , which stand for generator and discriminator, respectively. $L_{perc}(g)$ is the perceptual loss. $L_{WGAN}(g, d)$ is in addition to the usual Wasserstein distance and the regularization gradient penalty, which is represented as,

$$\min_g \max_d L_{WGAN}(g, d) = (-\mathbb{E}_{I_{HR}}[d(I_{HR})] + \mathbb{E}_{I_{LR}}[d(g(I_{LR}))] + \lambda \mathbb{E}[(\|\nabla_{\hat{I}} d(\hat{I})\|_2 - 1)^2])$$

Where $\mathbb{E}_a[b]$ is the expression of b as a function of a , λ represents the weighted parameter, $\hat{I}$ denotes the generated and real images in uniform sampling from a range of $[0, 1]$, and ∇ is the gradient.

4 RESULTS AND DISCUSSIONS

We introduced above a Multimodal-Boost framework for super-resolution tasks in medical images. It comprises a new neural network for SR medical image reconstruction, pairwise attention blocks, and a novel GAN-based loss function. The proposed model is efficient with texture details and realistic for viewing reconstructed images to a large extent. Since super-resolution is an inverse problem with unpredictable solution [12], the output of the SR image contains substantially more information than the matching LR image.

Each LR feature from wavelet subbands was regarded as a training sample during Multimodal-Boost model training and fed to the training phase. Loss functions are employed to ensure generated SR images as close to HR. Since working with LR images for diagnosis is too challenging, SR images are highly rated for medical applications, and they include enough information for radiologists to make precise conclusions. The information was stored in hidden layers by SR DNN models, which resulted in high frequency or HR images with superior texture and edge details. Medical images are too complicated to handle compared to natural images, making machine learning models relatively challenging. The higher magnification area in Figure 6, Figure 9, and Figure 10 shows the differences between each approach. At the same time, Meta-SR achieves excellent performance than other techniques; it still struggles to generate pretty small textures, whereas our proposed method takes advantage of wavelet transform and obtains more excellent texture details. We also perform visual comparisons on other images using our Multimodal-Boost and other SR techniques, as seen in Figure "teeth-image" Figure 6. All previous SR algorithms produce blurry outputs and fail to recover detailed information in the magnified image, while Meta-SR and our new approach Multimodal-Boost can only reconstruct a clean image with sharp lines. We evaluate the SR results of the image MRI Modality to support the multimodality and discover that SRCNN, EDSR, and Meta-SR all fail to recover the clear edges. It is indeed worth remembering that the texturing details they acquired are incorrect. CIRCLE-GAN and SR-ILLNN, on the other hand, can rebuild more compelling results that are consistent with ground truth, but they fail to provide more precise edge information. On the other hand, our technique does better

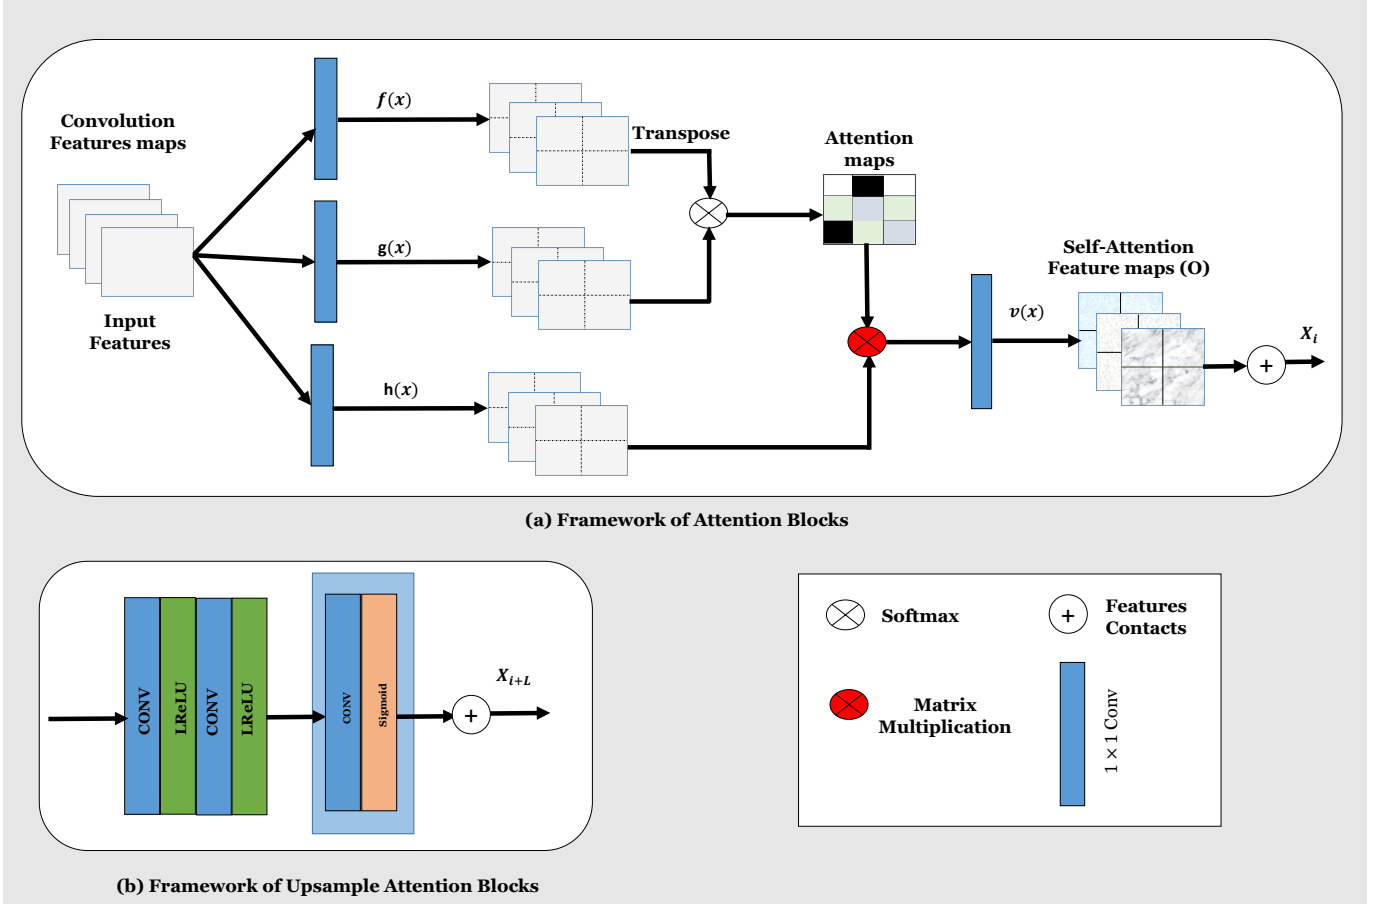


Fig. 5. Mechanism of attention blocks, whose goal is to boost network performance by improving super-resolution, where (a) displays the mechanism of Self-attention blocks and (b) illustrates the structure of Upsample blocks.

when it comes to restoring edges and texture details.

4.1 Training Details

When training SR models with pairs of LR and HR images, downsampling is typically utilized. On the other hand, medical datasets have fixed in-plane resolutions of roughly 1mm and lack ultra-high spatial resolutions. As a result, transfer learning is one of the methods for effectively training models using external datasets, which has proven to be very useful in remote sensing and medical applications. We used massive datasets DIV2K [27] with 2000×1400 pixels of good quality to train our proposed technique to use transfer learning. We randomly cropped 56×56 sub-pictures from DIV2K training images for training. Preliminary, we obtain the trained and optimized network by pre-training the proposed model in a, particularly defined manner. The pre-trained network is fine-tuned by selecting the Shenzhen Hospital datasets [47], containing 662 X-ray images used for training and testing. All images were scaled to 512×512 pixels, and three modalities, including Montgomery County X-ray, Teeth,, and knee images, were chosen to test our model. MRI brain scans from the Calgary Campinas repository were another dataset we used to evaluate our proposed approach. This modality is produced using a 12-channel head-neck coil on an MR scanner (Discovery MR750; General Electric Healthcare, Waukesha, WI). All experiments

have been carried out on a Windows-based machine with an Intel(R) Core(TM) i5-7300HQ CPU running at 3.40GHz and an NVIDIA GeForce GTX 1080-Ti graphics card. The setup also makes use of MATLAB 2019 with CUDA Toolkit and Anaconda.

4.2 Transfer Learning

Transfer learning is a technique that improves the performance of deep neural networks by utilizing knowledge learned from natural image data sets as initial training data. Due to the different distributions of two types of images, directly applying a trained model using natural datasets to medical images will not work, so transfer learning is a feasible solution. Transfer learning has various advantages such as:

- The ability to borrow high-frequency information from natural image datasets, which boosts the proposed method's performance to reconstruct the HR image from LR image.
- It helps in faster model convergence.
- It improves the model accuracy.

To achieve high image resolution for diagnostic, our suggested Multimodal-Boost model leveraged transfer learning to integrate shared and supplementary information from diverse modalities. In order to assess each modality and the

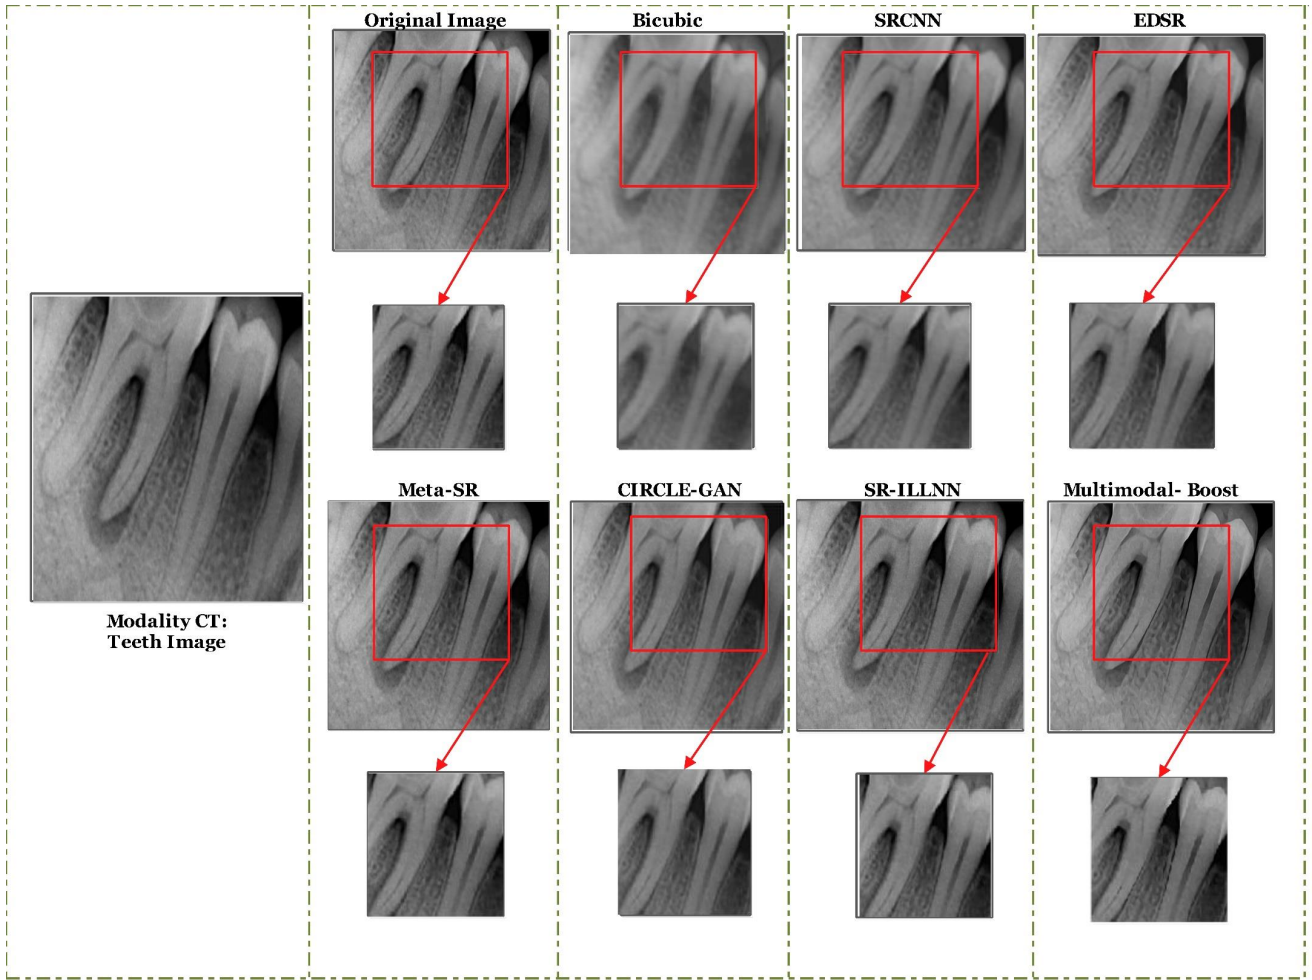


Fig. 6. Visual results of our proposed method (Multimodal-Boost) compared to our State-of-art methods. We enlarge the particular region to notice the differences between the outcomes more clearly on CT teeth.

TABLE 1
DETAILS OF ALL TRAINED MODELS AND DIFFERENT LOSS MEASURES

Experiments	Generator Network	Loss Function	WGAN
CNN-VGG	CNN	L_{VGG}	no
WGAN	CNN	L_{WGAN}	yes
Perceptual	Multi-attention	L_{perc}	no
WAGN-VGG	CNN	$L_{WGAN} + L_{VGG}$	yes
WAGN-MA-P	Multi-attention CNN	$L_{WGAN} + L_{perc}$	yes

detailed information inside the image patches, we used 16 to 128 batch sizes for the HR patches in model training. When the epochs in both modalities, CT-Images from Shenzhen Hospital dataset [47] and MRI brain scans from CalgaryCampinas, reach 180, the training process is finished. We train our model with ADAM optimizer [51] by setting $\beta_1 = 0.9$, $\beta_2 = 0.999$, and $\epsilon = 10^{-8}$. Our primary goal is to improve multimodal medical image quality. We trained the model with DIV2K before fine-tuning it with CT-image dataset, which contains 662 X-ray images. We also tested our model using MRI brain imaging so that the previous modality information can be used to reconstruct the next modality image. According to the proposed results, transfer learning knowledge considerably improved performance as shown in Figure 12 and Figure 13. The DIV2K dataset [27] is being

used for training since it is a recently proposed high-quality 2k resolutions image dataset for image enhancement. There are 800 training images, 100 validation image.

4.3 Comparison with State-of-art Methods

We analyzed and compared the proposed method with deep learning models including SRCNN [48], EDSR [12], Meta-SR [34], CIRCLE-GAN [49], SR-ILLNN [50] and bicubic interpolation. These methods were designed for natural images DIV2K [27], which have much bigger dimensions than the medical images we used. We employed transfer learning and retrained the models with smaller chunks of medical image datasets to make them work more robustly. We used the same hardware and experiment conditions to make a fair comparison. We employed the MSE loss;

TABLE 2
NETWORK COMPLEXITY AND INFERENCE SPEED ON SHENZHEN HOSPITAL DATASETS. MULTIMODAL-BOOST, IN COMPARISON TO SRDESNET AND ESRGAN, TAKES MORE TRAINING TIME WHILE TAKING LESS TIME THAN EDSR AND CIRCLE-GAN WITH TRANSFER LEARNING. FURTHERMORE, UNLIKE EDSR AND META-SR, WHICH ONLY WORK WITH A SINGLE MODALITY, IT USES MULTI-MODALITY DATA IN A SINGLE MODEL, LOWERING THE COST OF ADDING NEW SR TASKS

Methods	Number of parameters (M)	Memory size (MB)	Inference time(s)	Number of $\log_{10}$ flops
SRCNN [48]	0.059	13.68	0.0113	17.4
EDSR [12]	32.55	266.78	2.178	24.2
Meta-SR [34]	4.075	32.64	1.0156	25.1
GAN-CIRCLE [49]	55.88	457.88	3.0172	24.8
SR-ILLNN [50]	0.441	16.44	0.0123	28.1
Multimodal-Boost	21.68	105.68	2.0189	28.3

TABLE 3
OUR PROPOSED METHOD OUTPERFORMS SRCNN, EDSR, META-SR, CIRCLE-GAN, SR-ILLNN AND BICUBIC INTERPOLATION ON MULTI-MODAL IMAGES SUCH AS TEETH, KNEE, CT SCAN IMAGES, AND CARDIAC MR BRAIN SCANS IMAGE IN TERMS OF BOTH QUALITATIVE AND QUANTITATIVE OUTCOMES. A GREATER PSNR INDICATES BETTER SR IMAGE RECONSTRUCTION QUALITY, WHILE A HIGHER SSIM INDICATES BETTER PERCEPTUAL QUALITY. BOLD REPRESENTS THE BEST PERFORMANCE.

State-of-art Methods	CT: Modality (Teeth-Image)		CT: Modality (Knee-Image)		MRI: Modality (Brain-Image)	
	PSNR	SSIM	PSNR	SSIM	PSNR	SSIM
Bcubic	26.30	0.825	25.10	0.815	25.22	0.842
SRCNN [48]	27.45	0.845	26.69	0.853	26.99	0.862
EDSR [12]	29.54	0.873	28.52	0.868	28.72	0.890
Meta-SR [34]	31.55	0.919	32.22	0.913	33.52	0.912
CIRCLE-GAN [49]	32.44	0.902	33.33	0.921	33.93	0.929
SR-ILLNN [50]	34.57	0.921	35.76	0.925	35.41	0.931
Multimodal-Boost	36.32	0.937	36.97	0.931	37.46	0.941

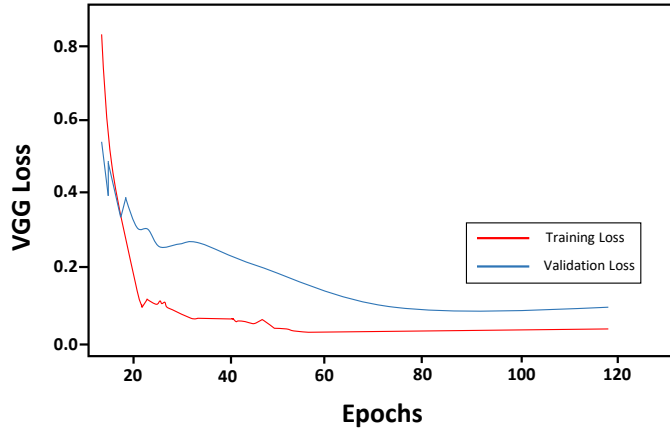


Fig. 7. VGG-16 Loss curves obtained on natural images.

however, it was not very reliable due to distortion and over-flattening. As a result, we proposed perceptual loss $L_{perc}(g)$ using VGG-16 training, and then we improved our network with total loss $L_{WGAN}(g, d) + \beta L_{perc}(g)$, which is the sum of perceptual loss and generative discriminator loss function. The proposed model (Multimodal-Boost) is compared against state-of-the-art approaches in Tables 2, and the visualization results are shown in Figure 6, Figure 9, and 10.

For comparison, we conduct experiments on numerous networks with varying configurations, presented in Table I and Figure 12. We witnessed that WGAN-based losses converge faster than non-WGAN-based losses. Finally, combining WGAN and perceptual loss results in a shorter distance and greater convergence, which we apply to all losses in model optimization, as shows in Figure 13.

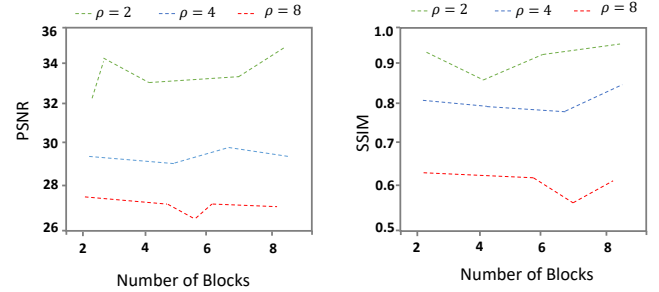


Fig. 8. Performance evaluation of our model with different numbers of multi-attention blocks.

4.4 Convergence

The convergence curve of VGG-loss in WGAN-MA-P has the fastest convergence across all types of approaches, as shown in Figure 12. WGAN-MA-P loss is quite similar to WGAN- VGG, although the latter achieves lower. However, a reduced VGG loss does not always imply improved performance. According to our findings, the VGG-loss network's spatial resolution diminishes its benefits while still causing some loss. Finally, we show how the WGAN-MA-P loss converges very quickly with shorter Wasserstein distances, resulting in state-of-the-art performance compared to other WGAN-based alternatives. The network complexity of methodologies is measured in terms of the number of parameters, memory, inference time, and number of flops as shown in Table 2. Compared to SRCNN [48], Meta-SR [34], SR-ILLNN [50], Multimodal-Boost has many parameters; however, it has fewer parameters than EDSR [12] and CIRCLE-GAN [49]. Furthermore, on the same hardware, the proposed method takes 18% longer to train than Meta-SR.

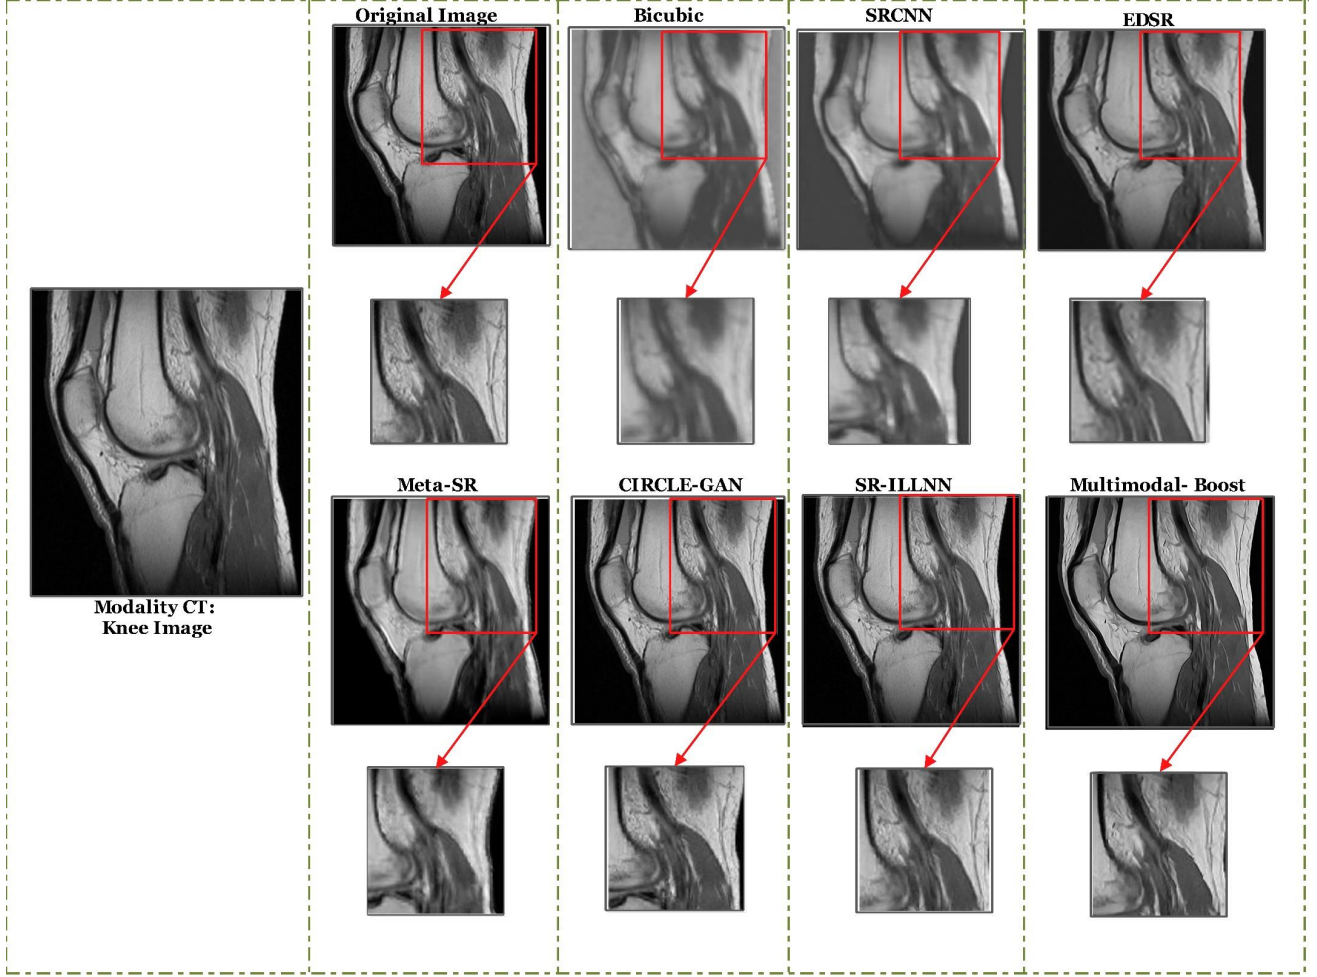


Fig. 9. Visual results of our proposed method (Multimodal-Boost) compared to our State-of-art methods. We enlarge the particular region to notice the differences between the outcomes more clearly on CT knee image.

As a result, further work on the architecture, such as model compression, should be done in the future.

4.5 Quantitative Analysis

We evaluated our approach on several attention blocks ($\rho = 2, 4, 8$) to investigate how well it performed. In terms of PSNR and SSIM, we found that the proposed Multimodal-Boost technique outperforms all others. When ρ is increased, the proposed method performance degrades significantly, as illustrated in Figure 8. Table 3 shows that the proposed strategy produces the maximum PSNR. For three images, SRCNN [48] has the lowest PSNR, although it is better than Bilinear interpolation. The proposed method achieves 1.54–4.89 greater PSNR index when compared with recent methods EDSR [12], Meta-SR [34], CIRCLE-GAN [49], and SR-ILLNN [50]. The quantitative performance metric is the peak signal-to-noise ratio (PSNR). The PSNR is defined as follows: Given a ground-truth image S and its reconstructed image $\hat{S}$, with $M \times N$ pixels size,

$$PSNR(S, \hat{S}) = 10 \log_{10} \frac{225^2}{MSE(S, \hat{S})} \quad (10)$$

The Structural Similarity Index Measure (SSIM) is a popular tool for assessing the quality of high-resolution reconstructions. The SSIM index can be expressed mathematically as,

$$SSIM = \frac{(2\mu_x\mu_y + C_1)(2\sigma_{xy} + C_2)}{(\mu_x^2 + \mu_y^2 + C_1)(\sigma_x^2 + \sigma_y^2 + C_2)} \quad (11)$$

where μ_x, μ_y are the average of x and y respectively, σ_x^2, σ_y^2 are the variance of x and y respectively, σ_{xy} is the covariance of x and y , C_1, C_2 are the constants.

SISR is a low-level image processing task that can be used in a number of contexts. In real-world circumstances, SISR's time constraints are extremely stringent. We conduct tests to see how long each state-of-the-art method takes to run and then compare the results on Shenzhen Hospital datasets. This is depicted in Figure 13.

ACKNOWLEDGMENTS

This work was supported by Natural Science Foundation of China, Grant/Award Number: 61836013; Beijing Natural Science Foundation, Grant/Award Number: 4212030; Beijing Technology, Grant/Award Num-

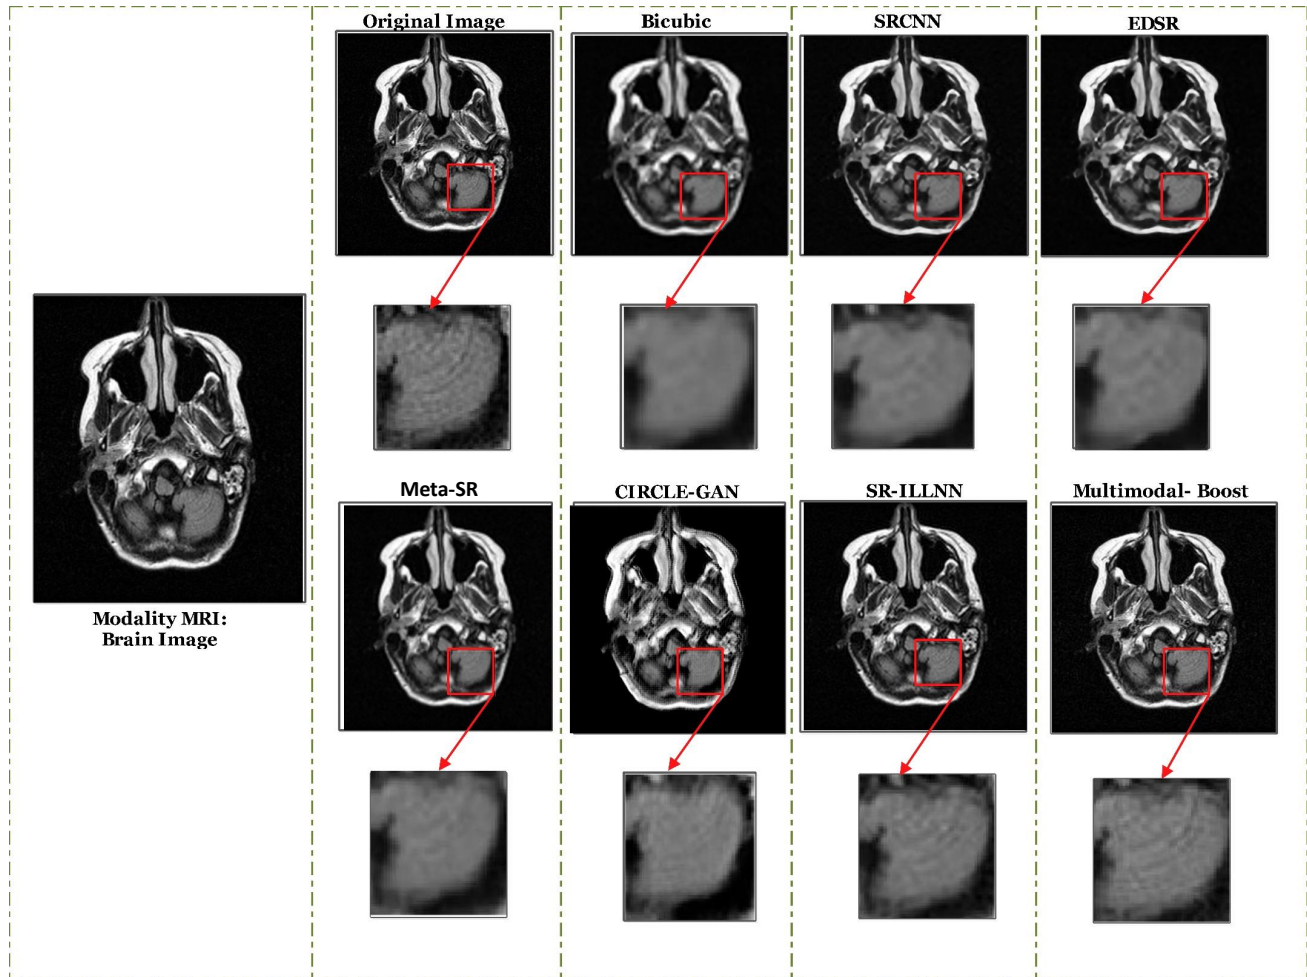


Fig. 10. Visual results of our proposed method (Multimodal-Boost) compared to our State-of-art methods. We enlarge the particular region to notice the differences between the outcomes more clearly on MRI-Brain image.

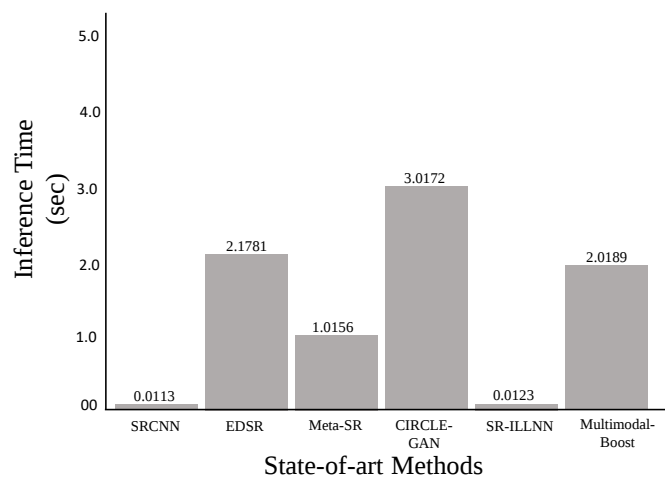


Fig. 11. Inference speed on Shenzhen Hospital dataset.

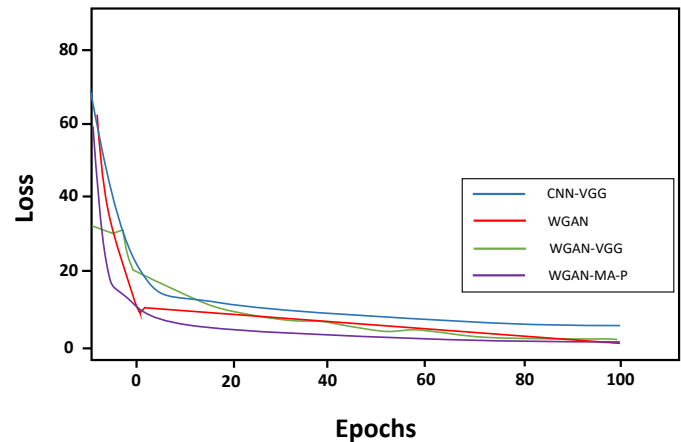


Fig. 12. Model loss over different experimental networks.

DATA AVAILABILITY

ber:Z191100001119090; Key Research Program of Frontier Sciences, CAS, Grant/Award Number:ZDBS-LY-DQC016.

We used the two popular datasets CT-images from Shenzhen Hospital datasets [47] and Public MRI dataset (<https://sites.google.com/view/calgary-campinas->

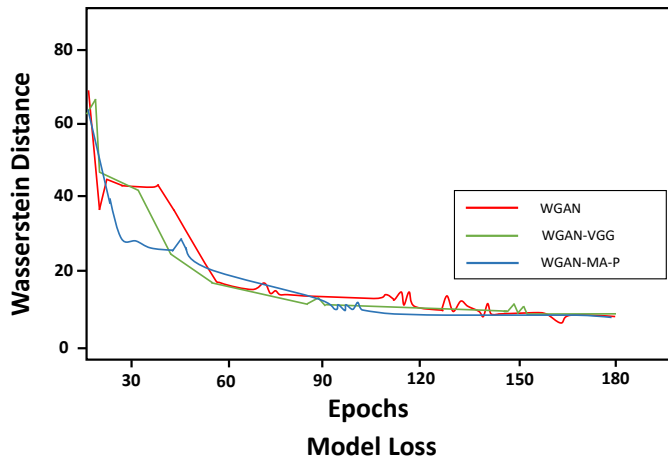


Fig. 13. Network convergence over different loss functions on Wasserstein Estimation.

dataset/home).

5 CONCLUSION

In this study, we designed a multi-attention GAN framework with wavelet transform and transfer learning for multimodal SISr on medical images. This is the first time a multi-attention GAN has been employed in conjunction with a wavelet transform methodology for medical image super-resolution. We also used transfer learning, which works with multimodality data that decrease the cost of adding new SR challenging targets like disease classification. We trained our network on the high-resolution DIV2K dataset, then applied transfer learning to train and test medical images on the Shenzhen Hospital datasets of various modalities. Furthermore, we used GANs to train a perceptual loss function that can better super-resolve LR features, resulting in improved perceptual quality of the generated images. Due to the 2D-DWT properties, the reconstructed images are more accurate and have more texture information. The utility of transfer learning is that the pre-trained model is fine-tuned using medical images such as cardiac MR scans and CT scans. In particular, we evaluated our outcomes in terms of visual, quantitative, adversarial, and perceptual loss. The PSNR and SSIM measurements are the preliminary step in evaluating the SR approach, however they are insufficient for real-time applications. In the future, we will study how the proposed approach affects target tasks such as disease detection and classification, as well as minimizing the amount of parameters and flops, which will effectively reduce training and inference time.

REFERENCES

- [1] Z. Wang, J. Chen, and S. C. Hoi, "Deep learning for image super-resolution: A survey," *IEEE transactions on pattern analysis and machine intelligence*, 2020.
- [2] Y. Li, B. Sixou, and F. Peyrin, "A review of the deep learning methods for medical images super resolution problems," *IRBM*, vol. 42, no. 2, pp. 120–133, 2021.
- [3] F. Deeba, S. Kun, F. A. Dharejo, and Y. Zhou, "Sparse representation based computed tomography images reconstruction by coupled dictionary learning algorithm," *IET image Processing*, vol. 14, no. 11, pp. 2365–2375, 2020.
- [4] R. Keys, "Cubic convolution interpolation for digital image processing," *IEEE transactions on acoustics, speech, and signal processing*, vol. 29, no. 6, pp. 1153–1160, 1981.
- [5] H. Ji and C. Fermüller, "Wavelet-based super-resolution reconstruction: theory and algorithm," in *European Conference on Computer Vision*. Springer, 2006, pp. 295–307.
- [6] C. E. Duchon, "Lanczos filtering in one and two dimensions," *Journal of Applied Meteorology and Climatology*, vol. 18, no. 8, pp. 1016–1022, 1979.
- [7] Y.-W. Tai, S. Liu, M. S. Brown, and S. Lin, "Super resolution using edge prior and single image detail synthesis," in *2010 IEEE computer society conference on computer vision and pattern recognition*. IEEE, 2010, pp. 2400–2407.
- [8] C.-Y. Yang, J.-B. Huang, and M.-H. Yang, "Exploiting self-similarities for single frame super-resolution," in *Asian conference on computer vision*. Springer, 2010, pp. 497–510.
- [9] W. Dong, F. Fu, G. Shi, X. Cao, J. Wu, G. Li, and X. Li, "Hyperspectral image super-resolution via non-negative structured sparse representation," *IEEE Transactions on Image Processing*, vol. 25, no. 5, pp. 2337–2352, 2016.
- [10] F. Deeba, F. A. Dharejo, M. Zawish, F. H. Memon, K. Dev, R. A. Naqvi, Y. Zhou, and Y. Du, "A novel image dehazing framework for robust vision-based intelligent systems," *International Journal of Intelligent Systems*.
- [11] C. Dong, C. C. Loy, K. He, and X. Tang, "Learning a deep convolutional network for image super-resolution," in *European conference on computer vision*. Springer, 2014, pp. 184–199.
- [12] B. Lim, S. Son, H. Kim, S. Nah, and K. Mu Lee, "Enhanced deep residual networks for single image super-resolution," in *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*, 2017, pp. 136–144.
- [13] J. Kim, J. K. Lee, and K. M. Lee, "Accurate image super-resolution using very deep convolutional networks," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2016, pp. 1646–1654.
- [14] N. Ahn, B. Kang, and K.-A. Sohn, "Fast, accurate, and lightweight super-resolution with cascading residual network," in *Proceedings of the European Conference on Computer Vision (ECCV)*, 2018, pp. 252–268.
- [15] M. Haris, G. Shakhnarovich, and N. Ukita, "Deep back-projection networks for super-resolution," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2018, pp. 1664–1673.
- [16] Z. Wang, J. Chen, and S. C. Hoi, "Deep learning for image super-resolution: A survey," *IEEE transactions on pattern analysis and machine intelligence*, 2020.
- [17] M. Xu, Z. Wang, J. Zhu, X. Jia, and S. Jia, "Multi-attention generative adversarial network for remote sensing image super-resolution," *arXiv preprint arXiv:2107.06536*, 2021.
- [18] M. Zawish, A. A. Siyal, K. Ahmed, A. Khalil, and S. Memon, "Brain tumor segmentation in mri images using chan-vede technique in matlab," in *2018 International Conference on Computing, Electronic and Electrical Engineering (ICE Cube)*. IEEE, 2018, pp. 1–6.
- [19] J. Zhu, G. Yang, and P. Lio, "Lesion focused super-resolution," in *Medical Imaging 2019: Image Processing*, vol. 10949. International Society for Optics and Photonics, 2019, p. 109491L.
- [20] P. Yi, Z. Wang, K. Jiang, Z. Shao, and J. Ma, "Multi-temporal ultra dense memory network for video super-resolution," *IEEE Transactions on Circuits and Systems for Video Technology*, vol. 30, no. 8, pp. 2503–2516, 2019.
- [21] Y. Mei, Y. Fan, Y. Zhou, L. Huang, T. S. Huang, and H. Shi, "Image super-resolution with cross-scale non-local attention and exhaustive self-exemplars mining," in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2020, pp. 5690–5699.
- [22] K. Jiang, Z. Wang, P. Yi, and J. Jiang, "Hierarchical dense recursive network for image super-resolution," *Pattern Recognition*, vol. 107, p. 107475, 2020.
- [23] A. Abbate, J. Frankel, and P. Das, "Wavelet transform signal processing for dispersion analysis of ultrasonic signals," in *1995 IEEE Ultrasonics Symposium. Proceedings. An International Symposium*, vol. 1. IEEE, 1995, pp. 751–755.
- [24] F. A. Dharejo, F. Deeba, Y. Zhou, B. Das, M. A. Jatoti, M. Zawish, Y. Du, and X. Wang, "Twist-gan: Towards wavelet transform and transferred gan for spatio-temporal single image super resolution," *arXiv preprint arXiv:2104.10268*, 2021.

- [25] M. Fu, H. Liu, Y. Yu, J. Chen, and K. Wang, "Dw-gan: A discrete wavelet transform gan for nonhomogeneous dehazing," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021, pp. 203–212.
- [26] J. Johnson, A. Alahi, and L. Fei-Fei, "Perceptual losses for real-time style transfer and super-resolution," in *European conference on computer vision*. Springer, 2016, pp. 694–711.
- [27] R. Timofte, E. Agustsson, L. Van Gool, M.-H. Yang, and L. Zhang, "Ntire 2017 challenge on single image super-resolution: Methods and results," in *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*, 2017, pp. 114–125.
- [28] Y. Zhang and M. An, "Deep learning-and transfer learning-based super resolution reconstruction from single medical image," *Journal of healthcare engineering*, vol. 2017, 2017.
- [29] Z. Chen, X. Guo, P. Y. Woo, and Y. Yuan, "Super-resolution enhanced medical image diagnosis with sample affinity interaction," *IEEE Transactions on Medical Imaging*, vol. 40, no. 5, pp. 1377–1389, 2021.
- [30] F. Deeba, S. Kun, F. A. Dharejo, and Y. Zhou, "Wavelet-based enhanced medical image super resolution," *IEEE Access*, vol. 8, pp. 37 035–37 044, 2020.
- [31] Y. Romano, J. Isidoro, and P. Milanfar, "Raisr: rapid and accurate image super resolution," *IEEE Transactions on Computational Imaging*, vol. 3, no. 1, pp. 110–125, 2016.
- [32] Y. Liang, J. Wang, S. Zhou, Y. Gong, and N. Zheng, "Incorporating image priors with deep convolutional neural networks for image super-resolution," *Neurocomputing*, vol. 194, pp. 340–347, 2016.
- [33] C. Ledig, L. Theis, F. Huszár, J. Caballero, A. Cunningham, A. Acosta, A. Aitken, A. Tejani, J. Totz, Z. Wang et al., "Photo-realistic single image super-resolution using a generative adversarial network," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2017, pp. 4681–4690.
- [34] X. Hu, H. Mu, X. Zhang, Z. Wang, T. Tan, and J. Sun, "Meta-sr: A magnification-arbitrary network for super-resolution," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2019, pp. 1575–1584.
- [35] H. Liu, J. Liu, S. Hou, T. Tao, and J. Han, "Perception consistency ultrasound image super-resolution via self-supervised cyclegan," *Neural Computing and Applications*, pp. 1–11, 2021.
- [36] J. Park, D. Hwang, K. Y. Kim, S. K. Kang, Y. K. Kim, and J. S. Lee, "Computed tomography super-resolution using deep convolutional neural network," *Physics in Medicine & Biology*, vol. 63, no. 14, p. 145011, 2018.
- [37] Y. Chen, F. Shi, A. G. Christodoulou, Y. Xie, Z. Zhou, and D. Li, "Efficient and accurate mri super-resolution using a generative adversarial network and 3d multi-level densely connected network," in *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 2018, pp. 91–99.
- [38] X. He, Y. Lei, Y. Fu, H. Mao, W. J. Curran, T. Liu, and X. Yang, "Super-resolution magnetic resonance imaging reconstruction using deep attention networks," in *Medical Imaging 2020: Image Processing*, vol. 11313. International Society for Optics and Photonics, 2020, p. 113132J.
- [39] T. Salimans, I. Goodfellow, W. Zaremba, V. Cheung, A. Radford, and X. Chen, "Improved techniques for training gans," *Advances in neural information processing systems*, vol. 29, pp. 2234–2242, 2016.
- [40] A. Creswell, T. White, V. Dumoulin, K. Arulkumaran, B. Sengupta, and A. A. Bharath, "Generative adversarial networks: An overview," *IEEE Signal Processing Magazine*, vol. 35, no. 1, pp. 53–65, 2018.
- [41] H. Shan, Y. Zhang, Q. Yang, U. Kruger, M. K. Kalra, L. Sun, W. Cong, and G. Wang, "3-d convolutional encoder-decoder network for low-dose ct via transfer learning from a 2-d trained network," *IEEE transactions on medical imaging*, vol. 37, no. 6, pp. 1522–1534, 2018.
- [42] Z. Chen and Y. Tong, "Face super-resolution through wasserstein gans," *arXiv preprint arXiv:1705.02438*, 2017.
- [43] Y. He, J. Lin, Z. Liu, H. Wang, L.-J. Li, and S. Han, "Amc: Autotml for model compression and acceleration on mobile devices," in *Proceedings of the European conference on computer vision (ECCV)*, 2018, pp. 784–800.
- [44] Y. Jo, S. Yang, and S. J. Kim, "Investigating loss functions for extreme super-resolution," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops*, 2020, pp. 424–425.
- [45] M. Arjovsky, S. Chintala, and L. Bottou, "Wasserstein generative adversarial networks," in *International conference on machine learning*. PMLR, 2017, pp. 214–223.
- [46] P. Isola, J.-Y. Zhu, T. Zhou, and A. A. Efros, "Image-to-image translation with conditional adversarial networks," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2017, pp. 1125–1134.
- [47] S. Jaeger, S. Candemir, S. Antani, Y.-X. J. Wang, P.-X. Lu, and G. Thoma, "Two public chest x-ray datasets for computer-aided screening of pulmonary diseases," *Quantitative imaging in medicine and surgery*, vol. 4, no. 6, p. 475, 2014.
- [48] C. Dong, C. C. Loy, K. He, and X. Tang, "Image super-resolution using deep convolutional networks," *IEEE transactions on pattern analysis and machine intelligence*, vol. 38, no. 2, pp. 295–307, 2015.
- [49] C. You, G. Li, Y. Zhang, X. Zhang, H. Shan, M. Li, S. Ju, Z. Zhao, Z. Zhang, W. Cong et al., "Ct super-resolution gan constrained by the identical, residual, and cycle learning ensemble (gan-circle)," *IEEE transactions on medical imaging*, vol. 39, no. 1, pp. 188–203, 2019.
- [50] S. Kim, D. Jun, B.-G. Kim, H. Lee, and E. Rhee, "Single image super-resolution method using cnn-based lightweight neural networks," *Applied Sciences*, vol. 11, no. 3, p. 1092, 2021.
- [51] D. P. Kingma and J. Ba, "Adam: A method for stochastic optimization," *arXiv preprint arXiv:1412.6980*, 2014.



Fayaz Ali Dharejo <https://orcid.org/0000-0001-7685-391> (ORCID ID). He received B.E. degree in Electronic Engineering from Quaid-e-Awam University of Engineering Science and Technology (QUEST) Pakistan and M.S. degrees in School of Information and Software Engineering from University of Electronic Science and Technology of China (UESTC) in 2016 and 2018, respectively. Since September 2018, he is Pursuing PhD in the Institute of Computer Network Information Center Chinese Academy of Sciences, University of Chinese Academy of Sciences.. He has published more than 30 articles within few time in reputed ISI impact factor journals and in IEEE conferences, among them the top journals ACM Transactions on Intelligent Systems and Technology, International Journal of Intelligent Systems, IEEE GRSL and etc. He is a member of professional bodies such as Pakistan Engineering Council (PEC), ACM, IEEE (USA), IEEE Societies, such as IEEE Geoscience and Remote Sensing Society, IEEE Computer Society and IEEE Signal Processing Society. He is a member of the Technical Program Committee and Reviewer of several Scopus, Springer and ISI (Thomson Reuters) indexed conferences. His research interests are image processing, deep learning, remote sensing and machine learning.



Muhammad Zawish has done BE in computer systems from Mehran University of Engineering and Technology, Pakistan. He has worked as Lab engineer in Department of Software Engineering at PAFKIET, Pakistan. Currently, he is pursuing his PhD in computer science at Walton Institute, Waterford Institute of Technology, Ireland. His research interests are deep learning for IoT.



Yuanchun Zhou Yuanchun Zhou is a Professor in the Computer Network Information Center, Chinese Academy of Sciences. He received his PhD from the Institute of Computing Technology, Chinese Academy of Sciences, in 2006. His main research interests include data mining, data intelligence, massive data and data intensive computing. He has published more than 100 research publications.



Farah Deebea <https://orcid.org/0000-0002-1987-2402>. She received B.E. and M.E. degrees in Department of Software Engineering from Mehran University of Engineering and Technology Jamshoro Pakistan in 2010 and 2014, respectively. She has 3 years of experience in teaching at graduate and post-graduate level at Hamdard University Karachi Pakistan. Currently, she has completed her Ph.D. degree from the School of Information and Software Engineering, University of Electronic Science and Technology,

China in July 2020. Since September 2020 she is also doing Post-doc at Computer network information Center, Chinese Academy of Sciences Beijing, China. She has served as a reviewer for many ISI (Impact factor) and Scopus indexed journals, Such as IEEE Transactions on Pattern Analysis and Machine Intelligence, Electronics Letters, IET Image Processing, IEEE Access, etc. She is a member of professional bodies such as Pakistan Engineering Council (PEC), ACM, IEEE (USA), IEEE Societies, such as IEEE Geoscience and Remote Sensing Society, IEEE Computer Society and IEEE Signal Processing Society. Her research interest includes super-resolution, sparse representation and deep learning.



Kapil Dev ORCID ID: 0000-0003-1262-8594 He is Senior Research Associate at university of Johannesburg South Africa. Previously, he was a Postdoctoral Research Fellow with the CONNECT Centre, School of Computer Science and Statistics, Trinity College Dublin (TCD). He worked as 5G Junior Consultant and Engineer at Altran Italia S.p.A, Milan, Italy on 5G use cases. He worked as Lecturer at Indus university, Karachi back in 2014. He is also working for OCEANS Network as Head of Projects funded

by European Commission. He was awarded the PhD degree by Politecnico di Milano, Italy under the prestigious fellowship of Erasmus Mundus funded by European Commission. His research interests include Blockchain, 6G Networks and Artificial Intelligence. He is very active in leading (as Principle Investigator) Erasmus + International Credit Mobility (ICM), Capacity Building for Higher Education, and H2020 Co-Fund projects. He is also serving as Associate Editor in Springer Wireless Networks, IET Quantum Communication, IET Networks, Topic Editor in MDPI Network, and Review Editor in Frontiers in Communications and Networks. He is also serving as Guest Editor (GE) in several Q1 journals; IEEE TII, IEEE TNSE, IEEE TGCN, Elsevier COMCOM and COMNET. He served as Lead chair in one of IEEE CCNC 2021, IEEE Globecom 2021 and ACM MobiCom 2021 workshops, TPC member of IEEE BCA 2020 in conjunction with AICCSA 2020, ICBC 2021, SSCt 2021, DICG Co-located with Middleware 2020 and FTNCT 2020. He is expert evaluator of MSCA Co-Fund schemes, Elsevier Book proposals and top scientific journals and conferences including IEEE TII, IEEE TITS, IEEE TNSE, IEEE IoT, IEEE JBHI, and elsevier FGCS and COMNET.



Dr. Sunder Ali Khowaja ORCID ID: 0000-0002-4586-4131 He received the Ph.D. degree in Industrial and Information Systems Engineering from Hankuk University of Foreign Studies, South Korea. He is currently an Assistant Professor at Department of Telecommunication Engineering, Faculty of Engineering and Technology, University of Sindh, Pakistan. He had the experience of working with multi-national companies as Network and RF Engineer from 2008-2011. He is having teaching, research and administrative experience of more than 10 years. He has published over 30 research articles in national, international journals, and conference proceedings. He is also a regular reviewer of notable journals including IEEE Transactions on Industrial Informatics, IEEE Internet of Things Journal, IEEE Access, Electronic Letters, IET Image Processing, IET Signal Processing, Computer Communications, International Journal of Imaging Systems and Technology, Multimedia Systems, IET Networks, SN Applied Sciences, Artificial Intelligence Review, Computational and Mathematical in Medicine, Computers in Human Behavior, IET Wireless Sensor Systems, Journal of Information Processing Systems, and Mathematical Problems in Engineering. He has also served as a TPC member for workshops in A* conferences such as Globecom and Mobicom. His research interests include Data Analytics, Process Mining, and Deep Learning for Computer Vision applications and Emerging Communication Technologies.

administrative experience of more than 10 years. He has published over 30 research articles in national, international journals, and conference proceedings. He is also a regular reviewer of notable journals including IEEE Transactions on Industrial Informatics, IEEE Internet of Things Journal, IEEE Access, Electronic Letters, IET Image Processing, IET Signal Processing, Computer Communications, International Journal of Imaging Systems and Technology, Multimedia Systems, IET Networks, SN Applied Sciences, Artificial Intelligence Review, Computational and Mathematical in Medicine, Computers in Human Behavior, IET Wireless Sensor Systems, Journal of Information Processing Systems, and Mathematical Problems in Engineering. He has also served as a TPC member for workshops in A* conferences such as Globecom and Mobicom. His research interests include Data Analytics, Process Mining, and Deep Learning for Computer Vision applications and Emerging Communication Technologies.



Dr. Nawab Muhammad Faseeh Qureshi ORCID ID: 0000-0002-5035-2640 He is an Assistant Professor at Sungkyunkwan University, Seoul, South Korea. He received Ph. D. in Computer Engineering from Sungkyunkwan University, South Korea, through a SAMSUNG scholarship. He was awarded the 1st Superior Research Award from the College of Information and Communication Engineering based on his research contributions and performance during his studies. He has served as Guest Editor in more than

17 Journals. Also, he has served as General Chair Workshop in many conferences that includes IEEE Wireless Communications and Networking Conference (WCNC2020) and IEEE Globecom 2020. In addition to that, he has served as Proceedings Chair in Global Conference on Wireless and Optical Technologies consecutively for the third time. He is a reviewer of various prestigious IEEE and ACM Journals. He serves in many leading IEEE and ACM conferences as a reviewer every year. He has evaluated several theses as external Ph.D. thesis evaluators. Also, he has facilitated several institutes and conferences with keynotes and Webinars on Big data analysis and Modern Technology convergence. He is an active Senior Member of IEEE, ACM, KSII (Korean Society for Internet Information), and IEICE (Institute of Electronics, Information and Communication Engineers). His research interests include big data analytics, machine learning, deep learning, context-aware data processing of the Internet of Things, and cloud computing.