

Fast FPT-Approximation of Branchwidth

Fedor V. Fomin*

Tuukka Korhonen†

Abstract

Branchwidth determines how graphs, and more generally, arbitrary connectivity (basically symmetric and submodular) functions could be decomposed into a tree-like structure by specific cuts. We develop a general framework for designing fixed-parameter tractable (FPT) 2-approximation algorithms for branchwidth of connectivity functions. The first ingredient of our framework is combinatorial. We prove a structural theorem establishing that either a sequence of particular refinement operations could decrease the width of a branch decomposition or that the width of the decomposition is already within a factor of 2 from the optimum. The second ingredient is an efficient implementation of the refinement operations for branch decompositions that support efficient dynamic programming. We present two concrete applications of our general framework.

- An algorithm that for a given n -vertex graph G and integer k in time $2^{2^{\mathcal{O}(k)}} n^2$ either constructs a rank decomposition of G of width at most $2k$ or concludes that the rankwidth of G is more than k . It also yields a $(2^{2k+1} - 1)$ -approximation algorithm for cliquewidth within the same time complexity, which in turn, improves to $f(k)n^2$ the running times of various algorithms on graphs of cliquewidth k . Breaking the “cubic barrier” for rankwidth and cliquewidth was an open problem in the area.
- An algorithm that for a given n -vertex graph G and integer k in time $2^{\mathcal{O}(k)} n$ either constructs a branch decomposition of G of width at most $2k$ or concludes that the branchwidth of G is more than k . This improves over the 3-approximation that follows from the recent treewidth 2-approximation of Korhonen [FOCS 2021].

*University of Bergen, Norway. fomin@ii.uib.no

†University of Bergen, Norway. tuukka.korhonen@uib.no

1 Introduction

The branchwidth of a connectivity function f (that is, $f(\emptyset) = 0$, and f is symmetric and submodular) was introduced by Robertson and Seymour in [41]. Let V be a finite set and $f : 2^V \rightarrow \mathbb{Z}_{\geq 0}$ be a connectivity function on V . A *branch decomposition* of f is a pair (T, L) , where T is a cubic tree (the degree of each non-leaf node of T is 3) and L is a bijection mapping V to the leaves of T . (If $|V| \leq 1$, then f admits no branch decomposition.) For every edge e of T , the connected components of $T \setminus \{e\}$, the graph obtained from T by deleting e , induce a partition (X, Y) of the set of leaves of T . The *width* of e is $f(e) = f(L^{-1}(X)) = f(L^{-1}(Y))$. The *width* of (T, L) is the maximum width of all edges of T . The *branchwidth* $\text{bw}(f)$ of f is the minimum width of a branch decomposition of f . In this paper, we develop a framework for designing fixed-parameter tractable (FPT) 2-approximation algorithms for computing branch decompositions of connectivity functions. We provide a detailed overview of the framework in Section 2. Here we discuss some of its concrete algorithmic consequences.

Rankwidth. Rankwidth was introduced by Oum and Seymour [38]. The rank decomposition of a graph G is the branch decomposition of the following connectivity function f defined on the vertex set $V(G)$. For a graph G and a pair A, B of disjoint subsets of $V(G)$, let $G[A, B]$ be the bipartite graph induced by edges between A and B . Let $M_G[A, B]$ be the $|A| \times |B|$ 0-1 matrix representing $G[A, B]$. Then the value $f(A) = f(V(G) \setminus A) = \text{rk}(M_G[A, V(G) \setminus A])$ is the $\text{GF}(2)$ -rank of $M_G[A, V(G) \setminus A]$. By making use of our algorithmic framework for connectivity functions, we prove the following theorem about approximation of rankwidth.

Theorem 1. *For integer k and an n -vertex graph G , there is an algorithm that in time $2^{2^{\mathcal{O}(k)}} n^2$ either computes a rank decomposition of G of width at most $2k$, or correctly concludes that the rankwidth of G is more than k .*

Several algorithms computing rankwidth exactly or approximately are known in the literature. After a number of improvements, the best running times of algorithms computing rankwidth are of the form $\mathcal{O}(f(k) \cdot n^3)$ [27, 29, 34, 38, 36]. As Oum wrote in his survey [35], “*However, for rank-width, it seems quite non-trivial to reduce n^3 into n^c for some $c < 3$.*” Theorem 1 affirmatively answers the open question of Oum [35, Question 3], who asked whether there exists an algorithm with functions $f(k)$, $g(k)$ and a constant $c < 3$ that finds a rank decomposition of width at most $f(k)$ or confirms that the rankwidth of a graph is larger than k , in time $\mathcal{O}(g(k) \cdot n^c)$. Pipelined with the previous work on rankwidth and cliquewidth, Theorem 1 has several important consequences.

Cliquewidth. A common approach in graph algorithms is to decompose a graph by making use of small separations. Perhaps the most popular measure of graph decomposition is the treewidth of a graph [17, Chapter 7]. Many NP-hard optimization problems can be solved efficiently on graphs of bounded treewidth. The seminal result of Courcelle [10, 11] (see also [1, 6, 12]) combined with the algorithm of Bodlaender [2], states that every decision problem on graphs expressible in Monadic Second Order Logic (MSO_2) is solvable in linear time on graphs of bounded treewidth. However, the average vertex degree of a graph of treewidth k does not exceed k , limiting the algorithmic applicability of treewidth to “sparse” graph classes. Arguably, the most successful project of extending the meta-algorithmic results from graphs of bounded treewidth to “non-sparse” graphs is by making use of the cliquewidth of a graph defined by Courcelle, Engelfriet, and Rozenberg [13]. We give the formal definition due to its technicality in Appendix. Intuitively, a graph is of cliquewidth at most k if it can be built from single vertices following a k -expression, which identifies how to systematically join the already constructed parts of the graph. Moreover, in each constructed part, the vertices can be partitioned into at most k types such that vertices of the same type will be indistinguishable in later steps of

the construction. Cliquewidth generalizes treewidth in the following sense. Every graph G of treewidth at most k has cliquewidth at most $\mathcal{O}(2^k)$. On the other hand, there are graphs, like the n -vertex complete graph K_n whose treewidth is $n - 1$ and cliquewidth is a constant [28].

Oum and Seymour [38] proved that for any graph of rankwidth k , its cliquewidth is always between k and $2^{k+1} - 1$. Moreover, their proof gives an algorithm that in time $2^{\mathcal{O}(k)} n^2$ converts a rank decomposition of width k into a $(2^{k+1} - 1)$ -expression for the cliquewidth. By combining the construction of Oum and Seymour with Theorem 1, we derive the following corollary.

Corollary 1.1. *For integer k and n -vertex graph G , there is an algorithm that in time $2^{2^{\mathcal{O}(k)}} n^2$ either computes a $(2^{k+1} - 1)$ -expression of G or correctly concludes that the cliquewidth of G is more than k .*

The importance of cliquewidth is due to its algorithmic properties. Courcelle, Makowsky, and Rotics in [14] identified a variation of \mathbf{MSO}_2 , called \mathbf{MSO}_1 , and showed how to extend Courcelle's theorem for this variation of \mathbf{MSO}_2 to graphs of bounded cliquewidth. Informally, \mathbf{MSO}_1 is the class of \mathbf{MSO}_2 formulas that allow quantification over subsets of vertices, but not of edges. While being less expressive than \mathbf{MSO}_2 , \mathbf{MSO}_1 still captures a broad class of optimization problems on graphs, including vertex cover, dominating set, domatic number for fixed k , k -colorability for fixed k , partition into cliques for fixed k , clique, independent set, and induced path. The meta-theorem of Courcelle, Makowsky, and Rotics [14] states that every \mathbf{MSO}_1 -definable problem on graphs is solvable in time $\mathcal{O}(f(k) \cdot (n + m))$ when a k -expression is provided with the input. The theorem of Courcelle, Makowsky, and Rotics applies also to a more general class of problems, like optimization problems searching for sets of vertices that are optimal concerning some linear evaluation function (for example, a clique of the maximum weight) or counting [14, 15].

The applicability of the meta-theorem of Courcelle, Makowsky, and Rotics crucially depends on the efficiency of computing the cliquewidth of a graph and constructing the corresponding k -expression. The only known way of constructing (an approximate) k -expression for cliquewidth, as well as for related graph parameters like NLC-width [44] or Boolean width [8], is by making use of rankwidth. Combining Corollary 1.1 with the meta-theorem of Courcelle, Makowsky, and Rotics implies that every \mathbf{MSO}_1 -definable problem is solvable in quadratic $\mathcal{O}(f(k) \cdot n^2)$ running time on graphs of cliquewidth at most k . This is the first improvement on the time complexity of this meta-theorem since the $\mathcal{O}(f(k) \cdot n^3)$ algorithm given by Oum in 2005 [34, 37].

Exact rankwidth. Courcelle and Oum [16] proved that for every fixed k , there are only finitely many graphs, such that a graph G does not contain any of them as a vertex-minor if and only if the rankwidth of G at most k . They also proved that for every fixed graph H , the property that H is isomorphic to a vertex-minor of an input graph G is expressible in a variant of \mathbf{MSO}_1 that can be checked in time $\mathcal{O}(f(k) \cdot (n + m))$ if a k -expression is provided. Combined with Corollary 1.1, this implies the following.

Corollary 1.2. *For integer k , deciding whether the rankwidth of an n -vertex graph G is at most k can be done in time $f(k)n^2$.*

Function $f(k)$ in Corollary 1.2 is huge, it is the tower $2^{2^{\dots^k}}$, where the height of the tower is bounded by some function of k . Also this approach does not provide the rank decomposition.

Jeong, Kim, and Oum [29] developed an alternative framework for computing branch decompositions of finite-dimensional vector spaces over a fixed finite field. As one of the applications of their method, they gave an FPT algorithm that for an input graph G and integer k in time $2^{2^{\mathcal{O}(k^2)}} n^3$ either constructs a rank decomposition of width $\leq k$ or concludes that the rankwidth of G is more than k . The algorithm of Jeong, Kim, and Oum does not rely on vertex-minors and logic and can be seen as a (very nontrivial) adaptation to the space

branchwidth of the dynamic programming algorithm of Bodlaender and Kloks for treewidth [4]. Since the algorithm of Jeong, Kim, and Oum works for more general objects, first they do a preprocessing step. However for rankwidth computation this step is not required. Then the cubic running time of their algorithm is because due to the lack of a fast approximation algorithm, they have to use iterative compression. However, by combining with our approximation algorithm, the dynamic programming of Jeong, Kim, and Oum directly implies the following corollary.

Corollary 1.3. *For integer k and an n -vertex graph G , there is an algorithm that in time $2^{2^{O(k^2)}} n^2$ either constructs a rank decomposition of width at most k , or correctly concludes that the rankwidth of G is more than k .*

Branchwidth of a graph. As another application of the new algorithmic framework for connectivity functions, we obtain a 2-approximation algorithm for the branchwidth of a graph. In this case, the connectivity function f is defined on the edge set $E(G)$ of a graph G . For $A \subseteq E(G)$, $f(A)$ is the number of vertices that are incident to both A and $E(G) \setminus A$. The branchwidth of a graph is a “close relative” of the treewidth: For every graph of branchwidth k , its treewidth is between $k - 1$ and $3k/2 - 1$ [41]. Thus any c -approximation of treewidth is also a $3c/2$ -approximation for branchwidth and vice versa. It appears that in certain situations, branchwidth could be more convenient to work with than treewidth, for example, when it comes to some dynamic programming algorithms [9, 19, 20]. The previously best-known approximation of branchwidth of running time $2^{O(k)} n$ is a 3-approximation that follows from the treewidth 2-approximation algorithm of Korhonen [32]. We prove the following theorem.

Theorem 2. *For integer k and an n -vertex graph G , there is an algorithm that in time $2^{O(k)} n$ either computes a branch decomposition of G of width at most $2k$, or correctly concludes that the branchwidth of G is more than k .*

1.1 Previous work

Branchwidth of a connectivity function was introduced by Robertson and Seymour in Graph Minors X [41]. Oum and Seymour [34] gave an algorithm of running time $\mathcal{O}(|V|^{8k+12} \log |V|)$ deciding whether the branchwidth of a connectivity function is at most k . In [38], Oum & Seymour also gave a 3-approximation algorithm of running time $\mathcal{O}(|V|^6 \delta \log |V|)$, where δ is the time for each evaluation of an interpolation of f . (We refer [38] for more details.)

Rankwidth was introduced by Oum & Seymour in [38] as a tool for FPT-approximation of cliquewidth. As it was observed by Oum in [34], deciding whether the rankwidth of a graph is at most k is NP-complete. The first FPT-approximation algorithm for cliquewidth is due to Oum & Seymour [38]. Its running time is $\mathcal{O}(8^k n^9 \log n)$ and it outputs a rank decomposition of width at most $3k + 1$ or concludes that the rankwidth of the input graph is more than k . Since then a number of FPT exact and approximation algorithms were developed [16, 38, 27, 34, 36, 29], see Table 1 for an overview. The running times of all these algorithms is at least cubic in n . The existence of an FPT-approximation in subcubic time was widely open, see [35, Question 3]. Rankwidth 1 graphs are known as distance-hereditary graphs [33]. There is a (non-trivial) linear time $\mathcal{O}(n + m)$ recognition algorithm for distance-hereditary graphs [18]. To the best of our knowledge, already for rankwidth $k = 2$ no algorithm faster than $\mathcal{O}(n^3)$ was known. Algorithms for computing the branchwidth of certain matroids were studied by Hliněný in [25, 26].

Following the work of Courcelle, Makowsky, and Rotics in [14], there is a lot of literature on developing algorithms (FPT and XP) on graphs of bounded cliquewidth [23, 24, 30, 31, 39, 43]. The design of algorithms on rank decompositions [21, 22, 7] and related graph parameters “sandwiched” by the rankwidth like NLC-width [44] and Boolean width [8] is also an active research area in graph algorithms. For each of these width parameters, the only known way to

Reference	Approximation	TIME	Remarks
Oum & Seymour [38]	$3k + 1$	$8^k n^9 \log n$	Works for connectivity functions
Oum [34]	$3k + 1$	$8^k n^4$	
Oum [34]	$3k - 1$	$h(k)n^3$	
Courcelle and Oum [16]	exact	$h(k)n^3$	Does not provide decomposition
Hlinený & Oum [27]	exact	$h(k)n^3$	
Jeong, Kim, & Oum [29]	exact	$2^{2^{O(k^2)}} n^3$	Works for spaces over finite fields
This paper	$2k$	$2^{2^{O(k)}} n^2$	
This paper	exact	$2^{2^{O(k^2)}} n^2$	Our approximation + [29]

Table 1: Overview of rankwidth algorithms. Here k is the rankwidth and n is the number of vertices of an input graph G . Unless otherwise specified, each of the algorithms outputs in $\mathcal{O}(\text{TIME})$ a decomposition of width given in the Approximation column. The function $h(k)$ is a huge function whose bound depends on huge list of forbidden minors in matroids or vertex-minors in graphs and the length of the logic formula describing such minors.

compute the corresponding expression or decomposition is through rank decompositions. By Theorem 1, the running times of all FPT algorithms on graphs of k -cliquewidth, k -rankwidth, k -Boolean width or k -NLC width, improve from $f(k)n^3$ to $f(k)n^2$.

The branchwidth of a graph was introduced by Robertson and Seymour in Graph Minors X [41]. The branchwidth of a planar graph is computable in polynomial time but in general the problem is NP-hard [42]. Bodlaender and Thilikos in [5] developed an algorithm computing the branchwidth of a graph in time $2^{O(k^3)}n$.

As we already mentioned, branchwidth of a graph is an invariant similar to treewidth and within a constant factor of treewidth. By the seminal result of Bodlaender [2], deciding whether the treewidth of a graph is at most k can be done in time $2^{O(k^3)}n$. There are several linear time FPT algorithms with single-exponential dependence in k that reach a constant approximation ratio [3, 32]. In particular, Korhonen [32] obtained an algorithm that in time $2^{O(k)}n$ computes a tree decomposition of width at most $2k + 1$ or concludes that the treewidth of the graph is more than k . When it comes to branchwidth, the result of Korhonen [32] is incomparable with Theorem 2. Theorem 2 implies 3-approximation for treewidth, which is worse than Korhonen's algorithm, while Korhonen's algorithm yields a 3-approximation for branchwidth, which is worse than Theorem 2.

Organization of the paper. We overview our framework for designing FPT 2-approximation algorithms for computing branch decomposition in Section 2, outlining the main novel techniques. Section 3 contains definitions and simple facts about branch decompositions. In Section 4 we develop the combinatorial tools of our framework which will be used in the next sections. Section 5 is devoted to the algorithmic part of our framework. Section 6 implements our framework for rankwidth and Section 7 for branchwidth of a graph.

2 Overview of our framework

In this section, we overview our framework for designing FPT 2-approximation algorithms for computing branch decompositions. Our framework consists of two parts. The first part is combinatorial and the second part is algorithmic. We first overview the combinatorial part, then the algorithmic part, and then the specific applications for approximating rankwidth and branchwidth of graphs.

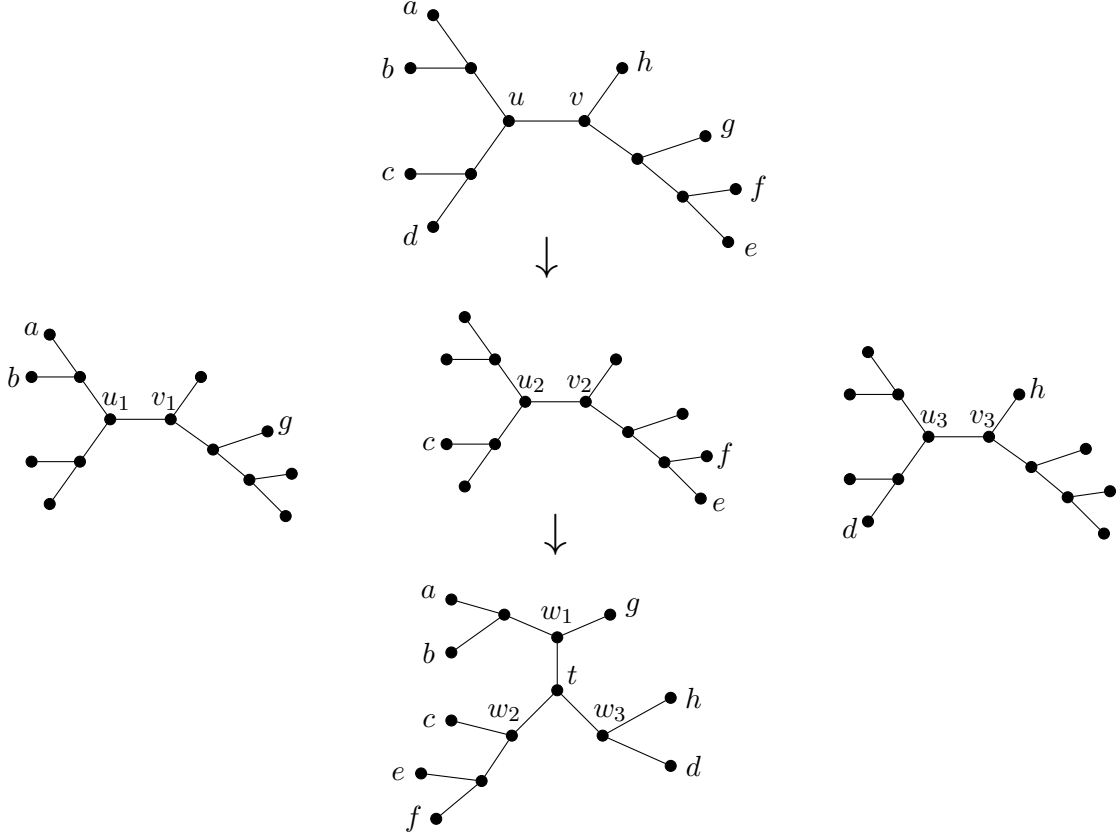


Figure 1: Example of the refinement operation. A branch decomposition (T, L) on a set $V = \{a, b, c, d, e, f, g, h\}$ (top). For a tripartition $(C_1 = \{a, b, g\}, C_2 = \{c, e, f\}, C_3 = \{d, h\})$, we have the partial branch decompositions $(T_1, L_1) = (T, L \upharpoonright_{\{a, b, g\}})$, $(T_2, L_2) = (T, L \upharpoonright_{\{c, e, f\}})$, and $(T_3, L_3) = (T, L \upharpoonright_{\{d, h\}})$ (middle), and the refinement of (T, L) with (uv, C_1, C_2, C_3) (bottom).

2.1 Combinatorial framework

Combinatorial arguments about how and when a branch decomposition can be improved form the core of our framework. For a branch decomposition (T, L) of a function f , we want to identify whether (T, L) could be refined into a “better” branch decomposition (T', L') . By better, we mean the following. Let k be the width of (T, L) and h be the number of heavy edges of T , that is, the edges e where $f(e)$ is the width of (T, L) . Then (T', L') is *better* than (T, L) if the width of (T', L') is at most k and the number of edges of width k in T' is less than h .

Our central combinatorial insight is that if the width of (T, L) is more than $2\text{bw}(f)$, then for any heavy edge e , there is a partition of V into three sets (C_1, C_2, C_3) with some particular properties, such that the quadruple (e, C_1, C_2, C_3) “enforces” a better refinement of T . We start first with explaining how edge e and tripartition (C_1, C_2, C_3) enforce a refinement.

Let (T, L) be a branch decomposition of a connectivity function $f : 2^V \rightarrow \mathbb{Z}_{\geq 0}$. Let uv be an edge of T and (C_1, C_2, C_3) be a tripartition of V . (One of the sets C_i could be empty). We denote by $(T, L \upharpoonright_{C_i})$ the partial branch decomposition that has the same tree T as (T, L) , but the mapping $L \upharpoonright_{C_i}$ is a restriction of mapping L to C_i . (We say that a partial branch decomposition is a branch decomposition where the labeling function L is only required to be an injection.)

The *refinement* (T', L') of (T, L) with (uv, C_1, C_2, C_3) is obtained by first taking the partial branch decompositions $(T_i, L_i) = (T, L \upharpoonright_{C_i})$ for each $i \in \{1, 2, 3\}$. Let $u_i v_i$ be the copy of the edge uv in T_i . The partial branch decompositions (T_1, L_1) , (T_2, L_2) , and (T_3, L_3) are combined

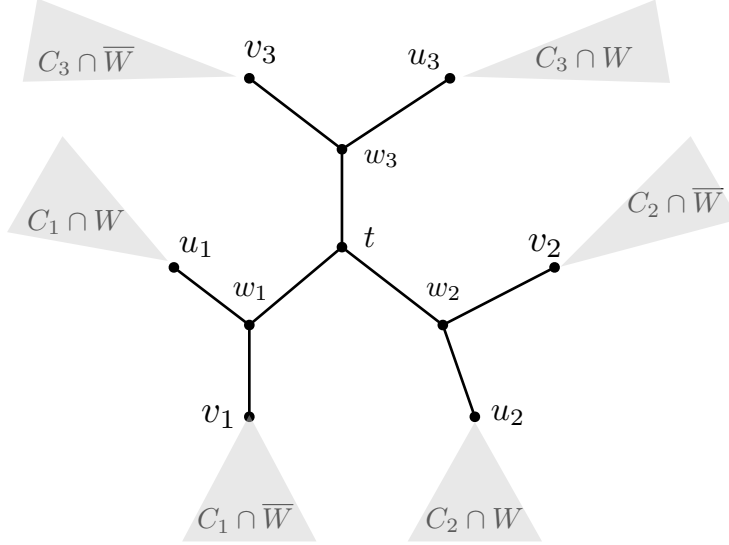


Figure 2: Changes of the width in a “neighborhood” of uv .

into a new partial branch decomposition by inserting a new node w_i on each edge $u_i v_i$, and then connecting the nodes w_1 , w_2 , and w_3 to a new center node t . Finally, the obtained partial branch decomposition is transformed into a branch decomposition by iteratively pruning leaves that are not labeled and suppressing degree-2 nodes. (See also Figure 1.)

How the widths of edges change after the refinement? First, note that if C_i is non-empty, then there will be an edge $tw_i \in E(T')$ corresponding to a bipartition $(C_i, \overline{C_i})$ in the refinement, see Figure 2. (For $X \subseteq V$, we use \overline{X} to denote $V \setminus X$.) Thus the width of tw_i will be at least $f(C_i)$. Let (W, \overline{W}) be the bipartition corresponding to the edge uv in T . Then in the refinement there will be edges $u_i w_i$ and $v_i w_i$ corresponding to bipartitions $(C_i \cap W, \overline{C_i} \cap \overline{W})$ and $(C_i \cap \overline{W}, \overline{C_i} \cap W)$ for each i , provided that they are non-empty. Therefore, the width of the refinement will be at least $\max(f(C_i \cap W), f(C_i \cap \overline{W}))$. Our first result is that if $f(uv) > 2\text{bw}(f)$, then there exists a refinement that locally improves the branch decomposition around the edge uv .

Theorem 3. *Let $f : 2^V \rightarrow \mathbb{Z}_{\geq 0}$ be a connectivity function. If $W \subseteq V$ is a set with $f(W) > 2\text{bw}(f)$, then there exists a tripartition (C_1, C_2, C_3) of V so that for each $i \in \{1, 2, 3\}$ it holds that $f(C_i) < f(W)/2$, $f(C_i \cap W) < f(W)$, and $f(C_i \cap \overline{W}) < f(W)$.*

We call such a tripartition (C_1, C_2, C_3) satisfying $f(C_i) < f(W)/2$, $f(C_i \cap W) < f(W)$, and $f(C_i \cap \overline{W}) < f(W)$, a W -improvement, signifying that the refinement operation enforced by this tripartition and the edge uv corresponding to (W, \overline{W}) improves the branch decomposition around the edge uv . However, we cannot guarantee that the new decomposition T' would be better than T . The reason is that W -improvement can increase the widths of edges in branches (T_i, L_i) . It is a non-trivial statement that the existence of a W -improvement on a heavy edge implies the existence of a refinement that is better than (T, L) . More formally,

Theorem 4. *Let $f : 2^V \rightarrow \mathbb{Z}_{\geq 0}$ be a connectivity function and (T, L) be a branch decomposition of f of width k , having $h \geq 1$ edges of width k . Let uv be an edge of (T, L) corresponding to a partition (W, \overline{W}) and having width $f(uv) = k$. If there exists a W -improvement, then there exists a W -improvement (C_1, C_2, C_3) such that the refinement of (T, L) with (uv, C_1, C_2, C_3) has width at most k and less than h edges of width k .*

The combination of Theorems 3 and 4 shows that when we consider a heavy edge uv , we either prove that $k = f(uv) \leq 2\text{bw}(f)$ (if there is no a W -improvement then $f(uv) \leq 2\text{bw}(f)$), or

that there exists a W -improvement which can be used to globally improve (T, L) by reducing the number of edges of width k . We refer to a W -improvement (C_1, C_2, C_3) whose existence is guaranteed by [Theorem 4](#) as a *global T -improvement*. The statement of [Theorem 4](#) is non-constructive—it does not provide a clue how to compute a global T -improvement. To make [Theorem 4](#) constructive, we show that a global T -improvement can be found by selecting a W -improvement that optimizes four explicit criteria over all W -improvements. More precisely, let (C_1, C_2, C_3) be a W -improvement. The first three conditions that (C_1, C_2, C_3) optimizes are

- (i) $\max\{f(C_1), f(C_2), f(C_3)\} \rightarrow \min$,
- (ii) subject to (i), the number of non-empty sets C_i in (C_1, C_2, C_3) is minimum, and
- (iii) subject to (i) and (ii), $f(C_1) + f(C_2) + f(C_3) \rightarrow \min$.

(In the proof we refer to a W -improvements satisfying (i)–(iii) as to the minimum W -improvement.)

To state the fourth property we need the following definition. Let $r = uv \in E(T)$ be the edge of T corresponding to the partition (W, \bar{W}) . By slightly abusing the notation, let us view r as the root of T . Then for every node w of T , we define $T_r[w]$ as the set of leaves of the subtree of T rooted in w . We say that a tripartition (C_1, C_2, C_3) *intersects* a node $w \in V(T)$ if $T_r[w]$ contains elements from at least two sets C_i , $i \in \{1, 2, 3\}$.

- (iv) subject to (i), (ii), and (iii), (C_1, C_2, C_3) intersects the minimum number of nodes of T .

The main result of [Section 4](#) is [Theorem 6](#). By this theorem, any W -improvement satisfying (i)–(iv) is a global T -improvement. The properties (i)–(iv) are very useful from the algorithmic perspective: For several important classes of function f , W -improvements with properties (i)–(iv) can be computed by making use of dynamic programming on the branch decomposition T .

The combinatorial characterization of improving refinements brings us to the following generic algorithm for 2-approximating branchwidth. The algorithm repeatedly takes a heavy edge uv corresponding to a partition (W, \bar{W}) . Then it checks if there exists a W -improvement, and if not, returns (T, L) . If a W -improvement exists, the algorithm refines (T, L) using a global T -improvement. In the next subsection we outline how to implement this generic algorithm efficiently for branch decompositions that support efficient dynamic programming for finding global T -improvements.

2.2 Algorithmic framework

In order to efficiently apply refinement operations to improve a branch decomposition, we need to find global T -improvements efficiently. For this, the main idea is that finding a global T -improvement corresponds to a partitioning problem minimizing (i)–(iv). Such type of problems can be solved efficiently on branch decompositions that support dynamic programming, like rank decompositions or branch decompositions of graphs. The application of sequence of at most n refinement operations guarantees that the width of the resulting decomposition would decrease by at least one. Thus starting with a branch decomposition of width k and repeatedly using dynamic programming to find a global T -improvement in $\mathcal{O}(f(k) \cdot n)$ time would result in a total time complexity of $\mathcal{O}(f(k) \cdot k \cdot n^2)$ to reduce the width down to $2\text{bw}(f)$. Of course, this is not sufficient to obtain our applications. Let us remind that we target a linear time algorithm for the branchwidth of a graph. For rankwidth, where we target for a quadratic running time, we also have to implement iterative compression, resulting in cubic running time.

The algorithmic ingredient of our general framework strongly uses the combinatorial properties of global T -improvements: It appears, that refinements with global T -improvements “interplay well” with dynamic programming. This allows us to implement a sequence of refinement operations that reduces the width from k to $k - 1$ in a total of $t(k)2^{\mathcal{O}(k)}n$ time, where $t(k)$

depends on the time complexity of dynamic programming on the branch decomposition. This part is inspired by the amortization techniques from [32].

We exploit the fact that when we refine a branch decomposition (T, L) on an edge uv , only some connected subtree of T around uv changes. We call the nodes in this connected subtree the edit set of the refinement operation. In particular, we show that a refinement operation can be implemented by removing its edit set R and inserting a connected subtree of $|R|$ new nodes in its place. Then we define a potential function ϕ of a branch decomposition so that $\phi(T, L)$ is initially bounded by $2^{\mathcal{O}(k)}n$, where k is the width of (T, L) . We show that when refining with a global T -improvement, a refinement operation with edit set R decreases $\phi(T, L)$ by at least $|R|$, and therefore the total sum of $|R|$ across a series of refinement operations is bounded by $2^{\mathcal{O}(k)}n$.

We exploit the bound on the sizes of edit sets by only re-computing the dynamic programming tables of the nodes in the edit set and re-using the rest. We formalize the notion of performing dynamic programming operations in time $t(k)$ with a definition of a “refinement data structure” in Section 5.2. This leads to the following theorem.

Theorem 5. *Let f be a connectivity function for which there exists a refinement data structure with time complexity $t(k)$. There is an algorithm that given a branch decomposition (T, L) of f of width k , in time $t(k)2^{\mathcal{O}(k)}n$ either outputs a branch decomposition of f of width at most $k - 1$, or correctly concludes that $k \leq 2\text{bw}(f)$.*

2.3 Applications

Rankwidth. We show that for rank decompositions, the refinement data structure from Theorem 5 can be implemented in $t(k) = 2^{2^{\mathcal{O}(k)}}$ time, yielding a $2^{2^{\mathcal{O}(k)}}n$ time implementation of the algorithm in Theorem 5 for rankwidth. To obtain Theorem 1, we then apply this algorithm with the technique of iterative compression of Reed, Smith, and Vetta [40], see also [17, Chapter 4]. In particular, by iteratively obtaining a rank decomposition of G of width $\leq 2\text{rw}(G) + 1$ from a rank decomposition of $G \setminus \{v\}$ of width $\leq 2\text{rw}(G \setminus \{v\})$, and then applying Theorem 5 to decrease the width or to prove that it is already within a factor of 2 from the optimum.

A crucial detail of this iterative compression and the implementation of Theorem 5 for rankwidth is that we always maintain an *augmented rank decomposition*, i.e., a rank decomposition that for each edge corresponding to a partition (A, B) of $V(G)$ stores representatives of the twin classes of the bipartite graph $G[A, B]$. In particular, the implementation of Theorem 5 for rank decompositions requires an augmented rank decomposition as an input and outputs an augmented rank decomposition. The augmentation is required for implementing dynamic programming on rank decompositions, and the reason for maintaining the augmentation throughout the iterative compression is that we are not aware of any $\mathcal{O}(f(k)n)$ time algorithms for making a given rank decomposition augmented. Instead, in every step of the iterative compression we use a $2^{\mathcal{O}(k)}n$ time algorithm for obtaining an augmented rank decomposition of G from an augmented rank decomposition of $G \setminus \{v\}$.

Branchwidth of a graph. We show that for branch decompositions of graphs, the refinement data structure from Theorem 5 can be implemented in $t(k) = 2^{\mathcal{O}(k)}$ time, thus yielding a $2^{\mathcal{O}(k)}n$ time implementation of the algorithm for branchwidth of a graph. By using a 2-approximation algorithm for treewidth with time complexity $2^{\mathcal{O}(k)}n$ [32], we can assume that we initially have a branch decomposition of width at most $3k$, where k is the branchwidth. We then obtain Theorem 2 by k applications of the algorithm of Theorem 5. We note that this algorithm can be made more self-contained, to only depend on the compression technique of Bodlaender [2] instead of treewidth algorithms, by applying the compression technique of Bodlaender in the same manner as it is applied in [3, 32].

3 Notation

Let G be a graph, its vertices are $V(G)$ and edges $E(G)$. For a vertex v , $N_G(v)$ denotes the neighborhood of v in G , and for a vertex set X , $N_G(X) = \bigcup_{v \in X} N_G(v) \setminus X$. We drop the subscript G when it is clear from the context. For a graph G and a set $X \subseteq V(G)$, we denote by $G[X]$ the subgraph induced by X . Let v be a degree-2 vertex in G , with neighbors $N(v) = \{u, w\}$. The suppression of v deletes the vertex v and edges incident to it and inserts the edge uw if it does not exist.

For a graph G and a pair A, B of disjoint subsets of $V(G)$, $G[A, B]$ is the bipartite graph induced by edges between A and B and labeled with the bipartition (A, B) . The notation $M_G[A, B]$ denotes the $|A| \times |B|$ 0-1 matrix representing $G[A, B]$. All matrices in this paper are 0-1 matrices, and the GF(2) rank of matrix M is denoted by $\text{rk}(M)$.

A bipartition of a set V is an ordered pair (X, Y) of disjoint sets so that $X \cup Y = V$. A tripartition of a set V is an ordered triple (X, Y, Z) of disjoint sets so that $X \cup Y \cup Z = V$. Note that in our definitions a partition can contain empty parts. We say that a tripartition (X, Y, Z) of V intersects a set $A \subseteq V$ if at least two of X, Y, Z have a non-empty intersection with A .

Let V be a finite set and $f : 2^V \rightarrow \mathbb{Z}_{\geq 0}$ be a function. Function f is *submodular* if

$$f(U \cup W) + f(U \cap W) \leq f(U) + f(W)$$

for all $U, W \subseteq V$. For a set $W \subseteq V$, we denote $\overline{W} = V \setminus W$. A function f is *symmetric* if for every $W \subseteq V$, $f(W) = f(\overline{W})$. Function f is a *connectivity function* if (i) $f(\emptyset) = 0$, (ii) f is symmetric, and (iii) f is submodular.

A cubic tree is a tree where each node has degree 1 or 3. A *branch decomposition* of a connectivity function $f : 2^V \rightarrow \mathbb{Z}_{\geq 0}$ is a pair (T, L) , where T is a cubic tree and L is a bijection mapping V to the leaves of T . If $|V| \leq 1$, then f admits no branch decomposition. Very often, by slightly abusing the notation, we will treat the leaves of the branch decomposition as elements of V . Thus usually we do not distinguish a set of leaves W of T and the subset $L^{-1}(W)$ of V , and we usually denote a branch decomposition by only the tree T instead of the pair (T, L) .

Let $e = uv \in E(T)$ be an edge of a branch decomposition T . We denote by $T[uv] \subseteq V$ the set of leaves of T that are closer to the node u than to the node v , and by $T[vu] \subseteq V$ the set of leaves that are closer to v than u . Hence $(T[uv], T[vu])$ is the bipartition of V induced by the connected components of the forest $T - e$ obtained from T by deleting e . The *width* of an edge $e = uv$ of T is $f(e) = f(T[uv]) = f(T[vu])$, and the *width of a branch decomposition* (T, L) , denoted by $\text{bw}(T, L)$, is a maximum width of an edge. Finally, the *branchwidth* of f , denoted by $\text{bw}(f)$, is the minimum width of a branch decomposition of f .

Let $r \in E(T)$ be an edge of a branch decomposition T . We introduce some notation with the intuition that T is rooted at the edge r . The r -subtree of a node $w \in V(T)$ is the subtree of T induced by nodes $x \in V(T)$ such that w is on the unique $x - r$ path (including w). For any node $w \in V(T)$, we denote by $T_r[w] \subseteq V$ the set of leaves in the r -subtree of w . Note that when $r = uv$, it holds that $T_r[u] = T[uv]$, $T_r[v] = T[vu]$, and for any $w \in V(T)$ it holds that either $T_r[w] \subseteq T_r[u]$ or $T_r[w] \subseteq T_r[v]$. The r -parent of a node $w \in V(T) \setminus \{u, v\}$ is the node next to w on the unique $w - r$ path. If p is the r -parent of w , then w is an r -child of p . Note that every non-leaf node has exactly two r -children, and every leaf node has no r -children. A set $X \subseteq V$ r -intersects a node $w \in V(T)$ if $X \cap T_r[w]$ is non-empty. Similarly, a tripartition (C_1, C_2, C_3) of V r -intersects a node $w \in V(T)$ if it intersects the set $T_r[w]$.

4 Combinatorial results

In this section we prove our combinatorial results. Throughout this section we use the convention that $f : 2^V \rightarrow \mathbb{Z}_{\geq 0}$ is a connectivity function.

4.1 Refinement operation

The central concept of our results is the refinement operation. Before defining it, we need the definition of a *partial branch decomposition*.

Definition 4.1 (Partial branch decomposition). *A partial branch decomposition on a set C is a pair (T, L) , where T is a cubic tree and L is an injection from C to the leaves of T .*

Let (T, L) be a branch decomposition of f and let $C_i \subseteq V$. We denote by $(T, L \upharpoonright_{C_i})$ the partial branch decomposition on the set C_i obtained by restricting the mapping L to only C_i . Now we can define the refinement operation (see also [Figure 1](#)).

Definition 4.2 (Refinement). *Let (T, L) be a branch decomposition of f , $uv \in E(T)$ an edge of T , and (C_1, C_2, C_3) a tripartition of V . We define the refinement of T with (uv, C_1, C_2, C_3) .*

For each $i \in \{1, 2, 3\}$, let $(T_i, L_i) = (T, L \upharpoonright_{C_i})$, and let $u_i v_i$ be the copy of the edge uv in T_i . Now, let (T', L') be a partial branch decomposition on V obtained by first inserting a node w_i on the edge $u_i v_i$ of each T_i (i.e. $V(T_i) \leftarrow V(T_i) \cup \{w_i\}$ and $E(T_i) \leftarrow E(T_i) \cup \{u_i w_i, w_i v_i\} \setminus \{u_i v_i\}$), then taking the disjoint union of (T_1, L_1) , (T_2, L_2) , (T_3, L_3) , and then inserting a node t adjacent to w_1, w_2, w_3 , connecting the disjoint union into a tree. Finally, the refinement is obtained by simplifying (T', L') by iteratively removing degree-1 nodes that are not labeled by L' , and suppressing degree-2 nodes.

We observe that if T' is a refinement of T with (r, C_1, C_2, C_3) , then every edge of T' either corresponds to a bipartition $(C_i, \overline{C_i})$ or to a bipartition $(T_r[w] \cap C_i, \overline{T_r[w] \cap C_i})$, where $w \in V(T)$. More formally as follows.

Observation 4.1. *Let T be a branch decomposition, $r \in E(T)$, and (C_1, C_2, C_3) a tripartition of V . Let T' be the refinement of T with (r, C_1, C_2, C_3) . It holds that*

$$\begin{aligned} & \{\{T'[u'v'], T[v'u']\} \mid u'v' \in E(T')\} = \\ & \bigcup_{i \in \{1, 2, 3\}} \left(\{\{C_i, \overline{C_i}\}\} \cup \{\{T_r[w] \cap C_i, \overline{T_r[w] \cap C_i}\} \mid w \in V(T)\} \right) \setminus \{\{\emptyset, V\}\}. \end{aligned}$$

Note that as a branch decomposition is a cubic tree, no two edges correspond to the same cut, i.e., the set $\{\{T[uv], T[vu]\} \mid uv \in E(T)\}$ has cardinality $|E(T)|$.

4.2 Improving refinement

Now we provide the formal definitions and results of our combinatorial framework, postponing the proofs to [Sections 4.3](#) to [4.5](#). First we define a W -improvement of a set $W \subseteq V$.

Definition 4.3 (W -improvement). *Let $W \subseteq V$. A tripartition (C_1, C_2, C_3) of V is a W -improvement if for every $i \in \{1, 2, 3\}$,*

- $f(C_i) < f(W)/2$,
- $f(C_i \cap W) < f(W)$, and
- $f(C_i \cap \overline{W}) < f(W)$.

The width of a W -improvement is $\max\{f(C_1), f(C_2), f(C_3)\}$, the sum-width of a W -improvement is $f(C_1) + f(C_2) + f(C_3)$, and the arity of a W -improvement is the number of non-empty parts in the partition.

Let us note that because of the condition $f(C_i \cap W) < f(W)$, we have that for every $i \in \{1, 2, 3\}$, $C_i \neq V$. Thus the arity of every W -improvement is always 2 or 3. Also, W -improvements are symmetric in the sense that the ordering of the sets C_1, C_2, C_3 as well as replacing W by \overline{W} , do not change any properties of a W -improvement.

The following lemma is a re-statement of [Theorem 3](#).

Lemma 4.1. *If $W \subseteq V$ such that $f(W) > 2\text{bw}(f)$, then there exists a W -improvement.*

We postpone the proof of [Lemma 4.1](#) to [Section 4.4](#).

If uv is an edge of a branch decomposition T with $(T[uv], T[vu]) = (W, \overline{W})$, then refining with (uv, C_1, C_2, C_3) where (C_1, C_2, C_3) is a W -improvement locally improves the branch decomposition around the edge uv . Towards proving that the existence of a W -improvement implies the existence of a W -improvement that globally improves the branch decomposition, we define minimum W -improvement.

Definition 4.4 (Minimum W -improvement). *For $W \subseteq V$, we say that a W -improvement (C_1, C_2, C_3) is minimum if*

- (1) (C_1, C_2, C_3) is of minimum width among all W -improvements,
- (2) subject to (1), (C_1, C_2, C_3) is of minimum arity, and
- (3) subject to (1) and (2), (C_1, C_2, C_3) is of minimum sum-width.

Let $uv = r$ be an edge of a branch decomposition T . Recall that for any node w of T it holds that either $T_r[w] \subseteq T[uv]$ or $T_r[w] \subseteq T[vu]$, and recall that by [Observation 4.1](#), when refining with (uv, C_1, C_2, C_3) , an edge corresponding to $T_r[w]$ will turn into edges corresponding to $T_r[w] \cap C_1$, $T_r[w] \cap C_2$, and $T_r[w] \cap C_3$. The following lemma shows that when refining with a minimum W -improvement, the width of a branch decomposition does not increase.

Lemma 4.2. *Let $W \subseteq V$ and let (C_1, C_2, C_3) be a minimum W -improvement. Then for each set W' such that $W' \subseteq W$ or $W' \subseteq \overline{W}$ and every $i \in \{1, 2, 3\}$, it holds that $f(W' \cap C_i) \leq f(W')$.*

We postpone the proof of [Lemma 4.2](#) to [Section 4.5](#).

Next we define a global T -improvement, which will be the type of refinement that we really use in our results.

Definition 4.5 (Global T -improvement). *Let T be a branch decomposition, and $r = uv \in E(T)$ an edge of T . A T -improvement on r is a tuple (r, C_1, C_2, C_3) , where $W = T[uv]$, and (C_1, C_2, C_3) is a minimum W -improvement. We say that a T -improvement on r intersects a node $w \in V(T)$ if (C_1, C_2, C_3) r -intersects it, i.e., the set $T_r[w]$ intersects at least two sets from $\{C_1, C_2, C_3\}$. A T -improvement (r, C_1, C_2, C_3) is a global T -improvement if it intersects the minimum number of nodes of T among all T -improvements on r .*

The following theorem is our main combinatorial result. In particular, [Theorem 4](#) will be a straightforward application of it.

Theorem 6. *Let T be a branch decomposition, $r \in E(T)$, and (r, C_1, C_2, C_3) a global T -improvement. Then for every $i \in \{1, 2, 3\}$ and every node $w \in V(T)$, it holds that $f(T_r[w] \cap C_i) \leq f(T_r[w])$. Moreover, if $T_r[w] \cap C_i \neq \emptyset$, then $f(T_r[w] \cap C_i) = f(T_r[w])$ if and only if $T_r[w] \subseteq C_i$.*

We postpone the proof of [Theorem 6](#) to [Section 4.5](#). Let us prove [Theorem 4](#) using [Theorem 6](#) and [Observation 4.1](#).

Theorem 4. Let $f : 2^V \rightarrow \mathbb{Z}_{\geq 0}$ be a connectivity function and (T, L) be a branch decomposition of f of width k , having $h \geq 1$ edges of width k . Let uv be an edge of (T, L) corresponding to a partition (W, \overline{W}) and having width $f(uv) = k$. If there exists a W -improvement, then there exists a W -improvement (C_1, C_2, C_3) such that the refinement of (T, L) with (uv, C_1, C_2, C_3) has width at most k and less than h edges of width k .

Proof. Denote $uv = r$. Take a global T -improvement (r, C_1, C_2, C_3) , which exists by the existence of a W -improvement. Let T' be the refinement of T with (r, C_1, C_2, C_3) . By [Observation 4.1](#), each edge of T' corresponds to a bipartition of form $(T_r[w] \cap C_i, \overline{T_r[w] \cap C_i})$, where $w \in V(T)$, or of form $(C_i, \overline{C_i})$. Because (C_1, C_2, C_3) is a W -improvement, all edges of form $(C_i, \overline{C_i})$ have width $< k/2$. By the first part of [Theorem 6](#), all edges of form $(T_r[w] \cap C_i, \overline{T_r[w] \cap C_i})$ have width $\leq f(T_r[w]) \leq k$, and therefore the width of T' is at most k .

By the second part of [Theorem 6](#), if T' contains an edge of form $(T_r[w] \cap C_i, \overline{T_r[w] \cap C_i})$ with width k , then $T_r[w] \cap C_i = T_r[w]$, and thus the exact same edge also exists in T . This gives an injective mapping from the edges of T' of width k to edges of T of width k . It remains to observe that by the definition of W -improvement, this mapping maps no edge of T' to the edge uv of T , and therefore T' contains strictly less edges of width k than T . \square

4.3 Observations on connectivity functions

We need the following two observations.

Observation 4.2. For any $A_1, \dots, A_n \subseteq V$, it holds that $f(A_1 \cap \dots \cap A_n) = f(\overline{A_1} \cup \dots \cup \overline{A_n})$.

Proof. Note that $\overline{A_1 \cap \dots \cap A_n} = \overline{A_1} \cup \dots \cup \overline{A_n}$. \square

Observation 4.3. For any $A, B \subseteq V$, it holds that $f(A) \leq f(A \cap B) + f(A \cap \overline{B}) \leq f(A) + 2f(B)$.

Proof. For the first inequality, we have

$$f(A) = f((A \cap B) \cup (A \cap \overline{B})) \leq f(A \cap B) + f(A \cap \overline{B}) - f(\emptyset). \quad (1)$$

For the second inequality, observe that

$$\begin{aligned} f(A \cap B) + f(A \cap \overline{B}) &\leq 2f(A) + 2f(B) - f(A \cup B) - f(A \cup \overline{B}) \\ &= 2f(A) + 2f(B) - f(\overline{A} \cap \overline{B}) - f(\overline{A} \cap B) \leq 2f(A) + 2f(B) - f(A), \end{aligned}$$

where the last inequality follows from (1). \square

4.4 Proof of [Lemma 4.1](#)

The idea of the proof of [Lemma 4.1](#) is that we take an optimal branch decomposition T of f , i.e., a branch decomposition T of width $\text{bw}(f)$, and argue that either some bipartition corresponding to an edge of T or some tripartition corresponding to a node of T gives the W -improvement.

We define an orientation of a set $C \subseteq V$ with respect to a set $W \subseteq V$. This will be used for orienting the edges of the optimal branch decomposition based on W .

Definition 4.6 (Orientation). Let $C, W \subseteq V$. We say that the set W directly orients C if $f(C \cap W) < f(\overline{C} \cap W)$ and $f(C \cap \overline{W}) < f(\overline{C} \cap \overline{W})$. The set W inversely orients C if it directly orients \overline{C} . The set W disorients C if it neither directly nor inversely orients C .

Note that the definition of orienting is symmetric with respect to complementing W , i.e., W (directly, inversely, dis)-orients C if and only if \overline{W} (directly, inversely, dis)-orients C . Next we show that if there is an edge of an optimal branch decomposition that cannot be oriented according to [Definition 4.6](#), then it corresponds to a W -improvement.

Lemma 4.3. *Let $C, W \subseteq V$. If W disorients C and $f(C) < f(W)/2$, then $(C, \overline{C}, \emptyset)$ is a W -improvement.*

Proof. By possibly interchanging C with \overline{C} , without loss of generality we can assume that $f(C \cap W) \leq f(\overline{C} \cap W)$ and $f(C \cap \overline{W}) \geq f(\overline{C} \cap \overline{W})$. Since $f(C) = f(\overline{C}) < f(W)/2$, to show that $(C, \overline{C}, \emptyset)$ is a W -improvement, it suffices to prove that $f(\overline{C} \cap W) < f(W)$ and $f(C \cap \overline{W}) < f(W)$. Assume, by way of contradiction, that $f(\overline{C} \cap W) \geq f(W)$. Then by the submodularity of f , $f(\overline{C} \cup W) \leq f(C)$, hence $f(C \cap \overline{W}) \leq f(C)$. Therefore, $f(C \cap \overline{W}) + f(\overline{C} \cap \overline{W}) \leq 2f(C) < f(W)$. But this contradicts [Observation 4.3](#). The proof of $f(C \cap \overline{W}) < f(W)$ is symmetric. \square

Now, to prove [Lemma 4.1](#), we take an optimal branch decomposition T of f and orient each edge uv with $(T[uv], T[vu]) = (C, \overline{C})$ towards v if W directly orients C and towards u if W inversely orients C . If no orientation can be found, then [Lemma 4.3](#) shows that $(C, \overline{C}, \emptyset)$ is a W -improvement and we are done.

Claim 4.1. *No edge of T is oriented towards a leaf.*

Proof. Suppose there is an edge of T oriented towards a leaf $v \in V$. This means that $V \setminus \{v\}$ directly orients W , implying that $f(W \setminus \{v\}) < f(W \cap \{v\})$ and $f(\overline{W} \setminus \{v\}) < f(\overline{W} \cap \{v\})$. However, one of the sets $W \cap \{v\}$ or $\overline{W} \cap \{v\}$ must be empty and therefore either $f(W \cap \{v\}) = 0$ or $f(\overline{W} \cap \{v\}) = 0$, but f cannot take values less than 0, so we get a contradiction. \square

Now, by walking in T according to the orientation, we end up finding an internal node to which all adjacent edges are oriented towards. The following lemma proves that this node indeed gives a W -improvement, and therefore completes the proof of [Lemma 4.1](#).

Lemma 4.4. *Let $W \subseteq V$, and (C_1, C_2, C_3) a tripartition of V such that for each $i \in \{1, 2, 3\}$, $f(C_i) < f(W)/2$ and W directly orients C_i . Then (C_1, C_2, C_3) is a W -improvement.*

Proof. Since W directly orients C_i , we have that $f(C_i \cap W) < f(\overline{C}_i \cap W)$. By [Observation 4.3](#), $f(C_i \cap W) + f(\overline{C}_i \cap W) \leq f(W) + 2f(C_i)$. Therefore, $f(C_i \cap W) \leq f(W)/2 + f(C_i) < f(W)$. The proof that $f(C_i \cap \overline{W}) < f(W)$ is similar. \square

4.5 Proofs of [Lemma 4.2](#) and [Theorem 6](#)

Let $W \subseteq V$ and let (C_1, C_2, C_3) be a minimum W -improvement. The main idea behind the proofs of [Lemma 4.2](#) and [Theorem 6](#) is that if $f(W' \cap C_1) \geq f(W')$ for some $W' \subseteq W$ or $W' \subseteq \overline{W}$, then we prove that $(C'_1, C'_2, C'_3) = (C_1 \cup W', C_2 \setminus W', C_3 \setminus W')$ is also a minimum W -improvement. (And symmetrically for C_2 and C_3 .) In particular, this will be used to contradict the minimality of (C_1, C_2, C_3) or the fact that (r, C_1, C_2, C_3) is a global T -improvement.

The proof is different for minimum W -improvements of arity 2 and of 3 and we have to consider different cases. The following lemma would be used in both cases.

Lemma 4.5. *For $W \subseteq V$, let (C_1, C_2, C_3) be a W -improvement. Suppose that for some $W' \subseteq W$, $f(C_1 \cap W') \geq f(W')$. Then for $C'_1 = C_1 \cup W'$, it holds that $f(C'_1 \cap W) < f(W)$.*

Proof.

$$\begin{aligned} f(C'_1 \cap W) &= f((C_1 \cup W') \cap W) = f(W' \cup (C_1 \cap W)) && (W' \subseteq W) \\ &\leq f(W') + f(C_1 \cap W) - f(W' \cap (C_1 \cap W)) && (\text{submodularity of } f) \\ &= f(W') + f(C_1 \cap W) - f(W' \cap C_1) \\ &\leq f(C_1 \cap W) < f(W). && (\text{def. of } W\text{-improvement}) \end{aligned}$$

\square

Note that by the symmetry of W -improvements, [Lemma 4.5](#) holds also for C_2 and C_3 , and for $W' \subseteq \overline{W}$.

4.5.1 W -improvements of arity 2

The following lemma completes the proof of [Lemma 4.2](#) for W -improvements of arity 2 (note symmetry). It also sets up the proof of [Theorem 6](#) for W -improvements of arity 2, which will be completed in [Section 4.5.3](#).

Lemma 4.6. *Let $W \subseteq V$ and $(C, \overline{C}, \emptyset)$ be a minimum W -improvement. Then $f(C \cap W') \leq f(W')$ for every $W' \subseteq W$. Moreover, if the equality $f(C \cap W') = f(W')$ holds, then $(C \cup W', \overline{C} \setminus W', \emptyset)$ is also a minimum W -improvement.*

Proof. Let $(C, \overline{C}, \emptyset)$ be a minimum W -improvement. Suppose that for some $W' \subseteq W$, $f(C \cap W') \geq f(W')$. To prove the lemma, we show that in this case $(C', \overline{C}', \emptyset) = (C \cup W', \overline{C} \setminus W', \emptyset)$ is also a W -improvement. Moreover, when $f(C \cap W') > f(W')$, the existence of W -improvement $(C', \overline{C}', \emptyset)$ would contradict the minimality of $(C, \overline{C}, \emptyset)$. When $f(C \cap W') = f(W')$, we show that $(C', \overline{C}', \emptyset)$ is a minimum W -improvement.

Let us check that $(C', \overline{C}', \emptyset)$ satisfies all the conditions of a W -improvement.

First, by $f(C \cap W') \geq f(W')$ and submodularity of f , we have that

$$f(\overline{C}') = f(C') = f(C \cup W') \leq f(C). \quad (2)$$

Thus $f(\overline{C}') = f(C') < f(W)/2$.

Then, we note that $f(C' \cap \overline{W}) = f(C \cap \overline{W}) < f(W)$ and $f(\overline{C}' \cap \overline{W}) = f(\overline{C} \cap \overline{W}) < f(W)$. By [Lemma 4.5](#), we have that $f(C' \cap W) < f(W)$. Finally,

$$\begin{aligned} f(\overline{C}' \cap W) &= f(C' \cup \overline{W}) = f((C \cup W') \cup (C \cup \overline{W})) && \text{(by Observation 4.2)} \\ &\leq f(C \cup W') + f(C \cup \overline{W}) - f((C \cup W') \cap (C \cup \overline{W})) && \text{(submodularity of } f) \\ &= f(C \cup W') + f(C \cup \overline{W}) - f(C) \\ &\leq f(C) + f(\overline{C} \cap W) - f(C) < f(W). && \text{(by Observation 4.2 and (2))} \end{aligned}$$

This completes the proof that $(C', \overline{C}', \emptyset)$ is a W -improvement.

Now, if $f(C \cap W') > f(W')$, then by the submodularity of f , $f(C') = f(C \cup W') < f(C)$. But this contradicts the minimality of $(C, \overline{C}, \emptyset)$. If $f(C \cap W') = f(W')$, then $f(C') \leq f(C)$. In this case, since $(C', \overline{C}', \emptyset)$ is a W -improvement and $(C, \overline{C}, \emptyset)$ is a minimum W -improvement, we conclude that $(C', \overline{C}', \emptyset)$ is also a minimum W -improvement. \square

Note again that due to symmetry of W -improvements, [Lemma 4.6](#) holds also for \overline{C} and for $W' \subseteq \overline{W}$.

4.5.2 W -improvements of arity 3

For W -improvements of arity 3, we will heavily exploit the minimality of arity, i.e., the condition on minimum W -improvements that there should be no W -improvement with smaller or equal width and with smaller arity. We proceed with a sequence of auxiliary lemmas establishing properties of a minimum W -improvement of arity 3.

Lemma 4.7. *Let (C_1, C_2, C_3) be a minimum W -improvement of arity 3. Then for every $i \in \{1, 2, 3\}$, W directly orients C_i .*

Proof. If W disorients C_i , then by [Lemma 4.3](#), $(C_i, \overline{C}_i, \emptyset)$ is a W -improvement contradicting the minimality of (C_1, C_2, C_3) . On the other hand, W cannot inversely orient C_i . Indeed, the assumption $f(W \cap C_i) > f(W \cap \overline{C}_i)$ and $f(\overline{W} \cap C_i) > f(\overline{W} \cap \overline{C}_i)$ yields that $f(W \cap \overline{C}_i) < f(W)$ and $f(\overline{W} \cap \overline{C}_i) < f(W)$ by the fact that (C_1, C_2, C_3) is a W -improvement. In this case, again, $(C_i, \overline{C}_i, \emptyset)$ is a W -improvement contradicting the minimality of (C_1, C_2, C_3) . \square

Lemma 4.8. *Let (C_1, C_2, C_3) be a minimum W -improvement of arity 3. Then for every $i \in \{1, 2, 3\}$, it holds that $f(W \cup C_i) > f(W)/2$ and $f(\overline{W} \cup C_i) > f(W)/2$.*

Proof. By Lemma 4.7, W directly orients C_i . Hence $f(\overline{W} \cap C_i) < f(\overline{W} \cap \overline{C}_i)$. By Observation 4.3, $f(W) = f(\overline{W}) \leq f(\overline{W} \cap C_i) + f(\overline{W} \cap \overline{C}_i)$. Therefore, $f(W \cup C_i) = f(\overline{W} \cap \overline{C}_i) > f(W)/2$. The proof of $f(\overline{W} \cup C_i) > f(W)/2$ is symmetric. \square

The following lemma shows that any set C_i in a minimum W -improvement is in some sense well-connected to any set $C_i \cup (W \cap C_j)$.

Lemma 4.9. *Let (C_1, C_2, C_3) be a minimum W -improvement of arity 3. Then for every set P and $i, j \in \{1, 2, 3\}$ such that $C_i \subseteq P \subseteq C_i \cup (W \cap C_j)$, it holds that $f(P) \geq f(C_i)$.*

Proof. For $i = j$ the lemma is trivial. For $i \neq j$, without loss of generality, we can assume that $i = 1$ and $j = 2$. Targeting towards a contradiction, let us assume that for some P with $C_1 \subseteq P \subseteq C_1 \cup (W \cap C_2)$, $f(P) < f(C_1)$. We claim that then $(C'_1, C'_2, C'_3) = (P, C_2 \setminus P, C_3)$ is a W -improvement contradicting the minimality of (C_1, C_2, C_3) .

First, by our assumption, $f(C'_1) = f(P) < f(C_1) < f(W)/2$. To verify that $f(C'_2) = f(C_2 \setminus P) = f(C_2 \cap \overline{P}) \leq f(C_2)$, we observe that $f(C_2 \cup \overline{P}) = f(C_2 \cup C_3) = f(C_1)$. Then by the submodularity of f ,

$$f(C_2 \cap \overline{P}) + f(C_1) = f(C_2 \cap \overline{P}) + f(C_2 \cup \overline{P}) \leq f(C_2) + f(P).$$

By our assumption, $f(P) < f(C_1)$. Thus $f(C'_2) = f(C_2 \cap \overline{P}) < f(C_2)$.

It remains to show that $f(C'_1 \cap W) < f(W)$ and $f(C'_1 \cap \overline{W}) < f(W)$. Because $P \subseteq C_1 \cup (W \cap C_2)$, we have that $C'_1 \cap \overline{W} = C_1 \cap \overline{W}$ and $C'_2 \cap \overline{W} = C_2 \cap \overline{W}$. Thus $f(C'_1 \cap \overline{W}) < f(W)$.

To prove that $f(P \cap W) < f(W)$, first observe that $P \cup W = C_1 \cup W$. Then by Lemma 4.8,

$$f(P \cup W) = f(C_1 \cup W) > \frac{f(W)}{2}.$$

By the submodularity of f ,

$$f(P \cap W) + f(P \cup W) \leq f(P) + f(W).$$

Since $f(P) < f(C_1) < f(W)/2$, we have that $f(C'_1 \cap W) = f(P \cap W) < f(W)$.

Similarly, to prove that $f(C'_2 \cap W) < f(W)$, we note that $C'_2 \cup W = C_2 \cup W$. Then by Lemma 4.8, $f(C'_2 \cup W) > f(W)/2$. We already have proved that $f(C'_2) < f(C_2)$. Then by making use of the submodularity of f , we have that

$$\frac{f(W)}{2} + f(C'_2 \cap W) < f(C'_2 \cap W) + f(C'_2 \cup W) \leq f(C'_2) + f(W) < \frac{f(W)}{2} + f(W).$$

This concludes the proof that (C'_1, C'_2, C'_3) is a W -improvement. Finally, the width of (C'_1, C'_2, C'_3) is at most the width of (C_1, C_2, C_3) , but its sum-width is strictly less. This contradicts the minimality of (C_1, C_2, C_3) . \square

The following lemma completes the proof of Lemma 4.2 together with Lemma 4.6 (note symmetry). It also sets up the proof of Theorem 6 for W -improvements of arity 3, which will be completed in Section 4.5.3.

Lemma 4.10. *Let (C_1, C_2, C_3) be a minimum W -improvement of arity 3. Then for every $W' \subseteq W$, $f(C_1 \cap W') \leq f(W')$. Moreover, if the equality holds, then $(C_1 \cup W', C_2 \setminus W', C_3 \setminus W')$ is also a minimum W -improvement.*

Proof. Let (C_1, C_2, C_3) be a minimum W -improvement of arity 3 and assume that for some $W' \subseteq W$, $f(C_1 \cap W') \geq f(W')$. We define $(C'_1, C'_2, C'_3) = (C_1 \cup W', C_2 \setminus W', C_3 \setminus W')$. First we will prove that (C'_1, C'_2, C'_3) is a W -improvement. Due to the minimality of (C_1, C_2, C_3) , this would imply that $f(C_1 \cap W') > f(W')$ cannot occur. Moreover, the condition $f(C_1 \cap W') = f(W')$ would yield that (C'_1, C'_2, C'_3) is a minimum W -improvement.

We start the proof that (C'_1, C'_2, C'_3) is W -improvement from showing that $f(C'_i) \leq f(C_i)$ for all i . The inequality

$$f(C'_1) = f(C_1 \cup W') \leq f(C_1) \quad (3)$$

follows directly from our assumption and the submodularity of f . Moreover, (3) turns into an equality only if $f(C_1 \cap W') = f(W')$.

To prove that

$$f(C'_2) \leq f(C_2), \quad (4)$$

we do the following

$$\begin{aligned} f(C'_2) &= f(C_2 \setminus W') = f(C_2 \cap \overline{W'}) = f(\overline{C_2} \cup W') = f(\overline{C_2} \cup (C_1 \cup W')) \\ &\leq f(C_2) + f(C_1 \cup W') - f(\overline{C_2} \cap (C_1 \cup W')) && \text{(submodularity of } f) \\ &\leq f(C_2) + f(C_1) - f(\overline{C_2} \cap (C_1 \cup W')) && \text{(by (3))} \\ &= f(C_2) + f(C_1) - f(C_1 \cup (C_3 \cap W')) \leq f(C_2). && \text{(by Lemma 4.9)} \end{aligned}$$

The proof of $f(C'_3) \leq f(C_3)$ is symmetric.

Next we prove that $f(C'_i \cap W) < f(W)$ and that $f(C'_i \cap \overline{W}) < f(W)$. First, note that for each $i \in \{1, 2, 3\}$, $C'_i \cap \overline{W} = C_i \cap \overline{W}$. So the cases with \overline{W} are trivial. The inequality $f(C'_1 \cap W) < f(W)$ is proved in Lemma 4.5.

The bound on $f(C'_2 \cap W)$ follows from the following chain of inequalities

$$\begin{aligned} f(C'_2 \cap W) &= f(C_2 \cap \overline{W'} \cap W) = f(\overline{C_2} \cup W' \cup \overline{W}) && \text{(by Observation 4.2)} \\ &\leq f(\overline{C_2} \cup W') + f(W) - f((\overline{C_2} \cup W') \cap \overline{W}) && \text{(submodularity of } f) \\ &= f(C_2 \cap \overline{W'}) + f(W) - f(\overline{C_2} \cap \overline{W}) \\ &= f(C_2 \cap \overline{W'}) + f(W) - f(C_2 \cup W) && \text{(by Observation 4.2)} \\ &< f(C_2 \setminus W') + f(W) - f(W)/2 = f(C'_2) + f(W)/2 && \text{(by Lemma 4.8)} \\ &< f(C_2) + f(W)/2 < f(W). && \text{(by (4))} \end{aligned}$$

The proof of $f(C'_3 \cap W) < f(W)$ is symmetric. This completes the proof that (C'_1, C'_2, C'_3) is a W -improvement with $f(C'_i) \leq f(C_i)$ for all i .

Now, if $f(C_1 \cap W') > f(W')$, then $f(C'_1) < f(C_1)$ and (C'_1, C'_2, C'_3) contradicts the minimality of (C_1, C_2, C_3) . If $f(C_1 \cap W') = f(W')$, then (C'_1, C'_2, C'_3) has the same width and the sum-width as (C_1, C_2, C_3) , which is a minimum W -improvement. Thus in the case of $f(C_1 \cap W') = f(W')$, (C'_1, C'_2, C'_3) is also a minimum W -improvement. \square

4.5.3 Completing the proof of Theorem 6

The following lemma is just Lemmas 4.6 and 4.10 put together.

Lemma 4.11. *Let (C_1, C_2, C_3) be a minimum W -improvement. Then for every $W' \subseteq W$, $f(C_1 \cap W') \leq f(W')$. Moreover, if the equality holds, then $(C_1 \cup W', C_2 \setminus W', C_3 \setminus W')$ is also a minimum W -improvement.*

As discussed above, the first part of [Lemma 4.11](#) directly gives [Lemma 4.2](#) by the symmetry of W -improvements. Next we prove [Theorem 6](#) by using also the second part of [Lemma 4.11](#).

Theorem 6. *Let T be a branch decomposition, $r \in E(T)$, and (r, C_1, C_2, C_3) a global T -improvement. Then for every $i \in \{1, 2, 3\}$ and every node $w \in V(T)$, it holds that $f(T_r[w] \cap C_i) \leq f(T_r[w])$. Moreover, if $T_r[w] \cap C_i \neq \emptyset$, then $f(T_r[w] \cap C_i) = f(T_r[w])$ if and only if $T_r[w] \subseteq C_i$.*

Proof. The first part follows from combining the fact that either $T_r[w] \subseteq T[uv]$ or $T_r[w] \subseteq T[vu]$ with [Lemma 4.2](#).

For the second part, suppose that for some node $w \in V(T)$ it holds that $T_r[w] \cap C_1 \neq \emptyset$, $T_r[w] \not\subseteq C_1$, and $f(T_r[w] \cap C_1) = f(T_r[w])$. Take a tripartition $(C'_1, C'_2, C'_3) = (C_1 \cup T_r[w], C_2 \setminus T_r[w], C_3 \setminus T_r[w])$. By [Lemma 4.11](#), this tripartition is a minimum W -improvement. We argue that this minimum W -improvement contradicts the fact that (r, C_1, C_2, C_3) is a global T -improvement by r -intersecting less nodes of T .

The W -improvement (C_1, C_2, C_3) r -intersects the node w but (C'_1, C'_2, C'_3) does not, so it suffices to prove the implication that if (C_1, C_2, C_3) does not r -intersect a node w' then (C'_1, C'_2, C'_3) does not r -intersect w' :

As both $T_r[w]$ and $T_r[w']$ represent leaves of r -subtrees of T , it follows that either $T_r[w'] \subseteq T_r[w]$, $T_r[w] \subseteq T_r[w']$, or that $T_r[w]$ and $T_r[w']$ are disjoint. If $T_r[w'] \subseteq T_r[w]$, then (C'_1, C'_2, C'_3) does not r -intersect w' . If $T_r[w] \subseteq T_r[w']$, then (C_1, C_2, C_3) r -intersects w' . If $T_r[w']$ and $T_r[w]$ are disjoint, then the intersections of (C'_1, C'_2, C'_3) with $T_r[w']$ are the same as the intersections of (C_1, C_2, C_3) with $T_r[w']$, so w' r -intersects (C'_1, C'_2, C'_3) if and only if it r -intersects (C_1, C_2, C_3) . \square

5 Algorithmic properties of refinement

In this section we present our algorithmic framework for designing fast FPT 2-approximation algorithms for computing branch decompositions. In particular, we show that a sequence of refinement operations decreasing the width of a branch decomposition from k to $k - 1$ or concluding $k \leq 2\text{bw}(f)$ can be implemented in time $t(k) \cdot 2^{\mathcal{O}(k)} \cdot n$ for connectivity functions f whose branch decompositions support dynamic programming with time complexity $t(k)$ per node. That is, we prove [Theorem 5](#). The concrete implementation of this framework for rankwidth, with $t(k) = 2^{2^{\mathcal{O}(k)}}$, is provided in [Section 6](#) and for graph branchwidth, with $t(k) = 2^{\mathcal{O}(k)}$, in [Section 7](#).

5.1 Amortized analysis of refinement

A naive implementation of the refinement operation, see [Definition 4.2](#), would use $\Omega(n)$ time on each refinement, which would result in the time complexity of $\Omega(n^2)$ over the course of n refinements. In this section we show that the refinement operations can be implemented so that over any sequence of refinement operations using global T -improvements on a branch decomposition of width at most k , the total work done in refining the branch decomposition amortizes to $2^{\mathcal{O}(k)}n$.

The efficient implementation of refinements is based on the notion of the edit set of a global T -improvement. Informally, the edit set corresponding to a global T -improvement (r, C_1, C_2, C_3) are the nodes of the subtree of T obtained after pruning all subtrees whose leaves are entirely from one of the sets C_i . Formally, as follows.

Definition 5.1 (Edit set). *Let T be a branch decomposition, $r \in E(T)$, and (r, C_1, C_2, C_3) a global T -improvement. The edit set of (r, C_1, C_2, C_3) is the set $R \subseteq V(T)$ of nodes that r -intersect (C_1, C_2, C_3) , i.e., $R = \{w \in V(T) \mid T_r[w] \text{ intersects at least two sets from } \{C_1, C_2, C_3\}\}$.*

Note that for a global T -improvement (uv, C_1, C_2, C_3) , both u and v are necessarily in the edit set. We formalize the intuition about edit sets in the following lemma. It will be implicitly used in many of our arguments.

Lemma 5.1. *Let T be a branch decomposition, $r = uv \in E(T)$, (r, C_1, C_2, C_3) a global T -improvement, R the edit set of (r, C_1, C_2, C_3) , and T' the refinement of T with (r, C_1, C_2, C_3) . It holds that*

- (1) *every node in R is of degree 3,*
- (2) *the nodes of R induce a connected subtree $T[R]$ of T , and*
- (3) *there exists an edge $r' \in E(T')$ so that for every $w \in V(T) \setminus R$ there is a node $w' \in V(T')$ with $T_r[w] = T_{r'}[w']$.*

Proof. For (1), the set $T_r[w]$ of a leaf w consists of one element. Thus it does not intersect (C_1, C_2, C_3) . For (2), first note that $\{u, v\} \subseteq R$. Then, consider a node $w \in R \setminus \{u, v\}$, and let p be the r -parent of w . It holds that $T_r[w] \subseteq T_r[p]$, so p must also be in R .

For (3), observe that by the definition of edit set for every node $w \in V(T) \setminus R$ it holds that $T_r[w] \subseteq C_i$ for some i . This implies that the r -subtree of w appears identically in T' , and therefore T' consists of the r -subtrees of all $w \in N_T(R)$ and a connected subtree inserted in the place of R and connected to $N_T(R)$. As $|R| \geq 2$, this inserted subtree contains at least one edge, which we can designate as the edge r' . \square

Next we define the *neighbor partition* of an edit set R .

Definition 5.2 (Neighbor partition). *Let (r, C_1, C_2, C_3) be a global T -improvement and R its edit set. The neighbor partition of R is the partition (N_1, N_2, N_3) of the neighbors $N_T(R)$ of R , where $N_i = \{w \in N_T(R) \mid T_r[w] \subseteq C_i\}$.*

Note that the neighbor partition is indeed a partition of $N_T(R)$ by the definition of edit set.

Next we give an algorithm for performing the refinement operation in $\mathcal{O}(|R|)$ time, given the edit set R and its neighbor partition.

Lemma 5.2. *Let T be a branch decomposition, $r = uv \in E(T)$, and (r, C_1, C_2, C_3) a global T -improvement. Given the edit set R of (r, C_1, C_2, C_3) and the neighbor partition (N_1, N_2, N_3) of R , T can be turned into the refinement of T with (r, C_1, C_2, C_3) in $\mathcal{O}(|R|)$ time. Moreover, all information stored in nodes $V(T) \setminus R$ is preserved and the other nodes are marked as new.*

Proof. We create three copies T_1, T_2, T_3 of the induced subtree $T[R]$. We denote the copy of a vertex $x \in R$ in T_i by x_i , and denote $R_i = \{x_i \mid x \in R\}$. To each T_i we also insert a new node w_i on the edge $u_i v_i$, i.e., let $V(T_i) \leftarrow V(T_i) \cup \{w_i\}$ and $E(T_i) \leftarrow E(T_i) \setminus \{u_i, v_i\} \cup \{u_i w_i, w_i v_i\}$. We then insert a new center node t and connect each w_i to it.

For each node $w \in N_i$, let $p \in R$ be the r -parent of w . We remove the edge wp and insert the edge wp_i . It remains to remove all nodes of R , and then iteratively remove degree-1 nodes and suppress degree-2 nodes in $R_1 \cup R_2 \cup R_3 \cup \{t\}$.

For the time complexity, these operations can be done in time linear in $|R| + |R_1| + |R_2| + |R_3| + |N_1| + |N_2| + |N_3| = \mathcal{O}(|R|)$ because T is represented as an adjacency list and the maximum degree of T is 3. \square

The outline of the refinement operation in our framework is that the dynamic programming outputs the edit set R and its neighbor partition in $\mathcal{O}(t(k)|R|)$ time, then the algorithm of [Lemma 5.2](#) computes the refinement in $\mathcal{O}(|R|)$ time, and then the dynamic programming tables of the $|R|$ new nodes are computed in $\mathcal{O}(t(k)|R|)$ time. To bound the sum of the sizes of the edit sets R over the course of the algorithm, we introduce the following potential function.

Definition 5.3 (k -potential). Let T be a branch decomposition of f . The k -potential of T is

$$\phi_k(T) = \sum_{\substack{e \in E(T) \\ f(e) < k}} f(e) \cdot 3^{f(e)} + \sum_{\substack{e \in E(T) \\ f(e) \geq k}} 3f(e) \cdot 3^{f(e)}.$$

When working with k -potentials, we will use the following notation. For $x \geq 0$, let

$$\phi_k(x) = \begin{cases} x3^x, & \text{if } x < k \\ 3x \cdot 3^x, & \text{otherwise,} \end{cases}$$

For $W \subseteq V$, we will use $\phi_k(W)$ to denote $\phi_k(f(W))$. With this notation, the k -potential of T is

$$\phi_k(T) = \sum_{uv \in E(T)} \phi_k(T[uv]).$$

Note that for any k , the k -potential of a branch decomposition T is at most $\mathcal{O}(3^{\mathbf{bw}(T)} \mathbf{bw}(T) |E(T)|)$, which is $2^{\mathcal{O}(k)} n$ when $\mathbf{bw}(T) = \mathcal{O}(k)$.

Next we show that performing a refinement operation with an edit set R decreases the k -potential by at least $|R|$.

Lemma 5.3. Let T be a branch decomposition with an edge $r = uv \in E(T)$ so that $f(uv) = \mathbf{bw}(T) = k$. Let (r, C_1, C_2, C_3) be a global T -improvement, R be the edit set of (r, C_1, C_2, C_3) , and T' be the refinement of T with (r, C_1, C_2, C_3) . Then it holds that $\phi_k(T') \leq \phi_k(T) - |R|$.

Proof. We use the notation that $W = T[uv]$. Note that

$$\phi_k(T) = \phi_k(k) + \sum_{w \in (V(T) \setminus \{u, v\})} \phi_k(T_r[w]) \quad (5)$$

and that by [Observation 4.1](#) and the fact that $\phi_k(\emptyset) = 0$,

$$\phi_k(T') = \sum_{i \in \{1, 2, 3\}} \left(\phi_k(C_i) + \sum_{w \in V(T)} \phi_k(C_i \cap T_r[w]) \right). \quad (6)$$

Then

$$\phi_k(T) - \phi_k(T') = \phi_k(T) - \sum_{i \in \{1, 2, 3\}} \left(\phi_k(C_i) + \sum_{w \in V(T)} \phi_k(C_i \cap T_r[w]) \right)$$

and by taking $C_i \cap T_r[u] = C_i \cap W$ and $C_i \cap T_r[v] = C_i \cap \overline{W}$ out of the sum we get

$$\geq \phi_k(T) - \sum_{i \in \{1, 2, 3\}} \left(\phi_k(C_i) + \phi_k(C_i \cap W) + \phi_k(C_i \cap \overline{W}) + \sum_{w \in (V(T) \setminus \{u, v\})} \phi_k(C_i \cap T_r[w]) \right)$$

and by using [\(5\)](#), $\phi_k(C_i) \leq \phi_k((k-1)/2)$, $\phi_k(C_i \cap W) \leq \phi_k(k-1)$ by the definition of W -improvement, and interleaving the sums [\(5\)](#) and [\(6\)](#) we get

$$\geq \phi_k(k) - 3\phi_k((k-1)/2) - 6\phi_k(k-1) + \sum_{w \in (V(T) \setminus \{u, v\})} \left(\phi_k(T_r[w]) - \sum_{i \in \{1, 2, 3\}} \phi_k(C_i \cap T_r[w]) \right)$$

and by simplifying $\phi_k(k) - 3\phi_k((k-1)/2) - 6\phi_k(k-1) \geq 3 \cdot 3^k$

$$\geq 3 \cdot 3^k + \sum_{w \in (V(T) \setminus \{u, v\})} \left(\phi_k(T_r[w]) - \sum_{i \in \{1, 2, 3\}} \phi_k(C_i \cap T_r[w]) \right).$$

The next inequality is by noticing that for $w \notin R$, $\phi_k(T_r[w]) = \sum_{i \in \{1, 2, 3\}} \phi_k(C_i \cap T_r[w])$ because $T_r[w]$ is a subset of some C_i and $\phi_k(\emptyset) = 0$. The final inequality is from [Theorem 6](#), which implies that for any node w in the edit set and every i it holds that $f(T_r[w] \cap C_i) < f(T_r[w])$.

$$\geq 2 + \sum_{w \in (R \setminus \{u, v\})} \left(\phi_k(T_r[w]) - \sum_{i \in \{1, 2, 3\}} \phi_k(C_i \cap T_r[w]) \right) \geq |R|.$$

□

In particular, when performing a sequence of refinement operations with global T -improvements on edges r of width $f(r) = \text{bw}(T) = k$, the sum of the sizes of edit sets is at most $\mathcal{O}(3^k \cdot k \cdot |E(T)|)$.

5.2 Refinement data structure

We define a *refinement data structure* to formally capture what is required from the underlying dynamic programming in our framework.

Definition 5.4 (Refinement data structure). *Let f be a connectivity function. A refinement data structure of f with time complexity $t(k)$ maintains a branch decomposition T of f with $\text{bw}(T) \leq k$ rooted on an edge $r = uv \in E(T)$ and supports the following operations:*

1. *Init(T, uv): Given a branch decomposition T of f with $\text{bw}(T) \leq k$ and an edge $uv \in E(T)$, initialize the data structure in $\mathcal{O}(t(k)|V(T)|)$ time.*
2. *Move(vw): Move the root edge $r = uv$ to an incident edge vw , i.e., set $r \leftarrow vw$. Works in $\mathcal{O}(t(k))$ time.*
3. *Width(): Return $f(uv)$ in $\mathcal{O}(t(k))$ time.*
4. *CanRefine(): Returns true if there exists a W -improvement where $W = T[uv]$ and false otherwise. Works in time $\mathcal{O}(t(k))$. Once CanRefine() has returned true, the following can be invoked:*
 - (a) *EditSet(): Let (r, C_1, C_2, C_3) be a global T -improvement, R the edit set of (r, C_1, C_2, C_3) , and (N_1, N_2, N_3) the neighbor partition of R . Returns R and (N_1, N_2, N_3) . Works in $\mathcal{O}(t(k)|R|)$ time.*
 - (b) *Refine($R, (N_1, N_2, N_3)$): Implements the refinement operation described in [Lemma 5.2](#), i.e., computes the refinement of T with (r, C_1, C_2, C_3) by removing the edit set R and inserting a connected subtree of $|R|$ nodes in its place. Sets r to an arbitrary edge between two newly inserted nodes (such an edge exists because $|R| \geq 2$). Works in $\mathcal{O}(t(k)|R|)$ time.*
5. *Output(): Outputs T in $\mathcal{O}(t(k)|V(T)|)$ time.*

We explain how our algorithm uses the refinement data structure in [Section 5.3](#). Let us here informally explain how the refinement data structure is typically implemented using dynamic programming. The formal descriptions for rankwidth and graph branchwidth constitute [Sections 6](#) and [7](#).

For each node w of T , the refinement data structure stores a dynamic programming table of size $\mathcal{O}(t(k))$ that represents information of the r -subtree of w in such a way that the dynamic programming tables of the nodes u and v combined together can be used to detect the existence of a W -improvement on $W = T[uv]$. Now, the $\text{Init}(T, uv)$ operation is to compute these dynamic programming tables in a bottom-up fashion for all nodes from the leaves towards the root uv , using $\mathcal{O}(t(k))$ time per node. The $\text{Move}(vw)$ operation changes the root edge uv to an incident edge vw . For implementing $\text{Move}(vw)$, we observe the following useful property.

Observation 5.1. *Let T be a branch decomposition, $r = uv \in E(T)$ an edge of T , and $r' = vw \in E(T)$ another edge of T . For all nodes $x \in V(T) \setminus \{v\}$, the r -subtree of x is the same as the r' -subtree of x .*

In particular, as the dynamic programming table of a node depends only on its r -subtree, it suffices to re-compute only the dynamic programming table of the node v in $\mathcal{O}(t(k))$ time when using $\text{Move}(vw)$. The $\text{Width}()$ operation is typically implemented without dynamic programming, using some other auxiliary data structure. The $\text{CanRefine}()$ operation is implemented by combining the information of the dynamic programming tables of u and v in an appropriate way. Then, the $\text{EditSet}()$ operation is implemented by tracing the dynamic programming backwards, working with a representation of the global T -improvement (r, C_1, C_2, C_3) that allows for efficiently determining whether C_i and $T_r[w]$ intersect. The $\text{Refine}(R, (N_1, N_2, N_3))$ operation is a direct application of [Lemma 5.2](#) followed by computing the dynamic programming tables of the $|R|$ new nodes inserted by [Lemma 5.2](#) in $\mathcal{O}(t(k)|R|)$ time, and possibly also updating other auxiliary data structures. The implementation of $\text{Output}()$ is typically straightforward, as it just amounts to outputting the branch decomposition that the data structure has been maintaining.

5.3 General algorithm

We present a general algorithm that uses the refinement data structure to in time $t(k)2^{\mathcal{O}(k)}n$ either improve the width of a given branch decomposition from k to $k - 1$ or to conclude that it is already a 2-approximation.

Our algorithm is described as a pseudocode [Algorithm 5.1](#). The algorithm is a depth-first-search on the given branch decomposition T , where whenever we return from a subtree via an edge uv of width $f(uv) = k$, we check if there exists a global T -improvement (uv, C_1, C_2, C_3) . If there does not exist such a global T -improvement, then we conclude that T is already a 2-approximation. If there exists such a global T -improvement, then we refine T using it. We need to be careful to proceed so that the refinement does not break invariants of depth-first-search, and the extra work caused by refining with an edit set R can be bounded by $\mathcal{O}(|R|)$.

Let us explain how [Algorithm 5.1](#) is implemented with the refinement data structure. We always maintain that the root edge uv in the refinement data structure corresponds to the edge uv in [Algorithm 5.1](#). We start by calling $\text{Init}(T, uv)$ after [line 7](#). In the cases of [line 9](#) and [line 16](#) the edge uv is changed to an adjacent edge vw , which is done by the $\text{Move}(vw)$ operation. The edge uv is changed also after the refinement operation. There we can move to the appropriate edge with $|R|$ $\text{Move}(vw)$ operations. Now that the edge uv of [Algorithm 5.1](#) corresponds to the edge uv of the refinement data structure, all non-elementary operations of [Algorithm 5.1](#) can be performed with the refinement data structure. In particular, checking $f(uv)$ on [line 13](#) is done by $\text{Width}()$, [line 21](#) corresponds to $\text{CanRefine}()$, and [line 22](#) corresponds to $\text{EditSet}()$ and $\text{Refine}()$. The returned edit set is also used to determine the node v on [line 23](#).

The rest of this section is devoted to proving the correctness and the time complexity of [Algorithm 5.1](#). The next lemma shows that adding the refinement operation does not significantly change the properties of depth-first-search and provides the key argument for proving the correctness.

<p>Input : A function $f : 2^V \rightarrow \mathbb{Z}_{\geq 0}$ and a branch decomposition T of f.</p> <p>Output : A branch decomposition of f of width at most $\text{bw}(T) - 1$ or the conclusion that $\text{bw}(T) \leq 2\text{bw}(f)$.</p> <pre> 1 Let $k \leftarrow \text{bw}(T)$ 2 Let state be an array initialized with the value unseen for all nodes of T, including new nodes that will be created by refinement. 3 Let s be an arbitrary leaf node of T 4 $v \leftarrow s$ 5 $u \leftarrow$ the neighbor of v 6 state[v] \leftarrow open 7 state[u] \leftarrow open 8 while state[u] = open do 9 if <i>Exists</i> $w \in N_T(u)$ with state[w] = unseen then 10 $v \leftarrow u$ 11 $u \leftarrow w$ 12 state[u] \leftarrow open 13 else if $f(uv) < k$ then 14 if $v = s$ then 15 return T 16 else 17 state[u] \leftarrow closed 18 $u \leftarrow v$ 19 $v \leftarrow$ the node $v \in N_T(u)$ with state[v] = open /* Such a node v is unique. */ 20 else 21 if <i>Exists</i> a global T-improvement (uv, C_1, C_2, C_3) then 22 $T \leftarrow \text{Refine}(T, (uv, C_1, C_2, C_3))$ /* Where the refinement operation works as in Lemma 5.2, i.e., by removing the edit set R and inserting a connected subtree of R nodes in its place. */ 23 $v \leftarrow$ the node $v \in N_T(R)$ with state[v] = open 24 $u \leftarrow$ the node $u \in N_T(v)$ that was inserted by the refinement /* Such nodes v and u are unique. */ 25 state[u] \leftarrow open 26 else 27 conclude $\text{bw}(T) \leq 2\text{bw}(f)$ 28 end </pre>

Algorithm 5.1: Iterative refinement.

Lemma 5.4. *Algorithm 5.1 maintains the invariant that the nodes with state **open** form a path w_1, \dots, w_l in T , where $l \geq 2$, $w_1 = s$, $w_{l-1} = v$, and $w_l = u$.*

Proof. This invariant is satisfied at the beginning of the algorithm. There are three cases in the if-else structure that do not terminate the algorithm and alter u , v , or the states, i.e., the cases of line 9, line 16, and line 21. The case of line 9 maintains the invariant by extending the path by one node. The case of line 16 maintains the invariant by removing the last node of the path. In the case of line 21, recall that both u and v are in the edit set R and the edit set is a connected subtree of T , so the refinement removes some suffix w_j, \dots, w_l of the path. Together with the fact that w_1 is a leaf and thus $w_1 \notin R$ (see Lemma 5.1), this implies that the node v

determined in [line 23](#) must be the node w_{j-1} of the path. Finally, the path is extended by one node in [lines 24](#) and [25](#). \square

The next lemma will be used to prove the correctness of [Algorithm 5.1](#) in the case when it returns an improved branch decomposition.

Lemma 5.5. *If [Algorithm 5.1](#) reaches [line 15](#), i.e., terminates by returning a branch decomposition, then all nodes except v and u have state `closed`.*

Proof. We show that [Algorithm 5.1](#) maintains the invariant that if a node w is closed, then all nodes w' in the s -subtree of w are also closed. This is trivially maintained by the case of [line 9](#). In other cases all of the neighbors of u except v are closed due to [Lemma 5.4](#). This implies that the case of [line 16](#) also maintains the invariant. The case of [line 21](#), i.e., refinement, maintains this because by [line 23](#), the union of the edit set R and the path w_1, \dots, w_l defined in [Lemma 5.4](#) is a connected subtree that contains u , v , and s .

This invariant implies the conclusion of the lemma because at [line 15](#) all neighbors of u except v are closed. \square

We are ready to prove the correctness and the time complexity of [Algorithm 5.1](#). In particular, next we complete the proof of the main theorem of this section.

Theorem 5. *Let f be a connectivity function for which there exists a refinement data structure with time complexity $t(k)$. There is an algorithm that given a branch decomposition (T, L) of f of width k , in time $t(k)2^{\mathcal{O}(k)}n$ either outputs a branch decomposition of f of width at most $k - 1$, or correctly concludes that $k \leq 2\mathbf{bw}(f)$.*

Proof. It suffices to prove that [Algorithm 5.1](#) is correct and works in time $t(k)2^{\mathcal{O}(k)}n$ provided a refinement data structure with time complexity $t(k)$.

For the correctness. The algorithm terminates with the conclusion $\mathbf{bw}(T) \leq 2\mathbf{bw}(f)$ if and only if there is no W -improvement of $W = T[uv]$, where $f(W) = \mathbf{bw}(T)$. Therefore, by [Lemma 4.1](#), $\mathbf{bw}(T) = f(W) \leq 2\mathbf{bw}(f)$. For the other case, let $w \neq s$ be a node of T and p be the s -parent of w . We note that the state of w can be closed only if $f(wp) < k$. Therefore, by [Lemma 5.5](#), when [Algorithm 5.1](#) reaches [line 15](#), we have that $f(wp) < k$ for all $w \in V(T) \setminus \{u, v\}$, and by [line 13](#) we also have $f(uv) < k$. Therefore we have that $f(e) < k$ for all edges e of T , implying that [Algorithm 5.1](#) is correct when it returns a branch decomposition.

For the running time. By the definition of W -improvement and [Theorem 6](#), the width of T never increases. By [Lemma 5.3](#), with every refinement, the potential function drops by at least $|R|$, the size of the edit set. While we cannot control the size of the edit set for each new refinement, the total sum of the sizes of the edit sets over all the sequence of refinements does not exceed $\phi_k(T) = 2^{\mathcal{O}(k)}n$. Thus the total time complexity of the refinement operations is $t(k)2^{\mathcal{O}(k)}n$ and the total number of new nodes created over the course of the algorithm in refinement operations is $2^{\mathcal{O}(k)}n$. All cases of the algorithm advance the state of some node either from unseen to open or from open to closed, and therefore the total number of operations is $2^{\mathcal{O}(k)}n$ and their total time $t(k)2^{\mathcal{O}(k)}n$. \square

6 Approximating rankwidth

In this section we prove [Theorem 1](#), that is, for integer k and an n -vertex graph G , there is an algorithm that in time $2^{2^{\mathcal{O}(k)}}n^2$ either computes a rank decomposition of width at most $2k$, or correctly concludes that the rankwidth of G is more than k . To prove that theorem, we define “augmented rank decompositions”, show how to implement the refinement data structure of [Theorem 5](#) for augmented rank decompositions with time complexity $t(k) = 2^{2^{\mathcal{O}(k)}}$, and then apply the algorithm of [Theorem 5](#) with iterative compression.

6.1 Preliminaries on rank decompositions

We start with preliminaries on rank decompositions and representatives.

Most of the material in this subsection is well-known and is commonly used in dynamic programming over rank decompositions [7, 21, 22]. For reader's convenience, we provide short proofs here.

Let us remind that a rank decomposition of a graph G is a branch decomposition of the function $\text{cutrk}_G : 2^{V(G)} \rightarrow \mathbb{Z}_{\geq 0}$ defined on vertex sets of a graph G . For a graph G and a subset A of the vertex set $V(G)$, we define $\text{cutrk}_G(A)$, as the rank of the $|A| \times |\bar{A}|$ 0 – 1 matrix $M_G[A, \bar{A}]$ over the binary field where the entry $m_{i,j}$ of $M_G[A, \bar{A}]$ on the i -th row and the j -th column is 1 if and only if the i -th vertex in A is adjacent to the j -th vertex in \bar{A} . That is, $\text{cutrk}_G(A) = \text{rk}(M_G[A, \bar{A}])$. Then the rankwidth of a graph G , $\text{rw}(G)$, is the minimum width of a rank decomposition.

Proposition 6.1 ([38]). *The function cutrk_G is a connectivity function.*

In the rest of this section we will always assume that we are computing the rankwidth of a graph G , and therefore we drop the subscript in cutrk_G . We also assume that a representation of G that allows for checking the existence of an edge in $\mathcal{O}(1)$ time (e.g. an adjacency matrix) is available.

Definition 6.1 (Representative). *Let $A \subseteq V(G)$. A set $R \subseteq A$ is a representative of A if for every vertex $v \in A$ there is a vertex $u \in R$ with $N(v) \setminus A = N(u) \setminus A$. The representative R is minimal if for each such $v \in A$ there exists exactly one such $u \in R$.*

Note that there always exists a minimal representative. The property of cutrk that we exploit in dynamic programming is that it bounds the size of any minimal representative.

Proposition 6.2 ([38]). *Let $A \subseteq V(G)$. If $\text{cutrk}(A) \leq k$, then any minimal representative of A has size at most 2^k .*

To do computations on minimal representatives, we usually need to work with representatives of cuts (A, \bar{A}) .

Definition 6.2 (Representative of (A, \bar{A})). *Let $A \subseteq V(G)$. A set (R, Q) with $R \subseteq A$ and $Q \subseteq \bar{A}$ is a (minimal) representative of (A, \bar{A}) if R is a (minimal) representative of A and Q is a (minimal) representative of \bar{A} .*

Given some representative of (A, \bar{A}) , a minimal representative can be found in polynomial time by the following lemma.

Lemma 6.1. *Let $A \subseteq V(G)$. Given a representative (R, Q) of (A, \bar{A}) , a minimal representative of (A, \bar{A}) can be computed in $(|R| + |Q|)^{\mathcal{O}(1)}$ time.*

Proof. One can use the partition refinement algorithm on the graph $G[R, Q]$. □

We will also need the following lemma to work with representatives.

Lemma 6.2. *Let R_A be a representative of A and R_B a representative of B . Then $R_A \cup R_B$ is a representative of $A \cup B$.*

Proof. If $N(v) \setminus A = N(u) \setminus A$, then $N(v) \setminus (A \cup B) = N(u) \setminus (A \cup B)$. □

Next define the A_R -representative of a vertex.

Definition 6.3 (A_R -representative of a vertex). *Let $A \subseteq V(G)$, R a minimal representative of A , and v a vertex $v \in A$. The A_R -representative of v , denoted by $\text{rep}_{A_R}(v)$, is the vertex $u \in R$ with $N(u) \setminus A = N(v) \setminus A$.*

By the definition of a minimal representative, there exists exactly one A_R -representative of a vertex, so the function $\text{rep}_{A_R}(v)$ is well-defined. Using a minimal representative of (A, \bar{A}) we can compute $\text{rep}_{A_R}(v)$ efficiently.

Lemma 6.3. *Let $A \subseteq V(G)$. Given a vertex $v \in A$ and a minimal representative (R, Q) of (A, \bar{A}) , $\text{rep}_{A_R}(v)$ can be computed in $(|R| + |Q|)^{\mathcal{O}(1)}$ time.*

Proof. Test for each $u \in R$ if $N(u) \cap Q = N(v) \cap Q$. □

We also define the A_R -representative of a set.

Definition 6.4 (A_R -representative of a set). *Let $A \subseteq V(G)$, R a minimal A -representative, and $X \subseteq A$. The A_R -representative of X , denoted by $\text{rep}_{A_R}(X)$ is $\text{rep}_{A_R}(X) = \bigcup_{v \in X} \text{rep}_{A_R}(v)$.*

Because $\text{rep}_{A_R}(v)$ is well-defined, $\text{rep}_{A_R}(X)$ is also well-defined. By repeatedly applying [Lemma 6.3](#), the A_R -representative of a set X can be computed in $|X|(|R| + |Q|)^{\mathcal{O}(1)}$ time. As any A_R -representative of a set is a subset of R , there are at most $2^{|R|}$ different A_R -representatives of sets. Therefore if $\text{cutrk}(A) \leq k$, there are at most 2^{2^k} different A_R -representatives of sets.

Many computations on A_R -representatives of sets rely on the following observation.

Observation 6.1. *Let $A \subseteq V(G)$, $X \subseteq A$, $Y \subseteq A$, and let R_A be a minimal representative of A , R_X be a minimal representative of X , and R_Y be a minimal representative of Y . Let also $X' \subseteq X$ and $Y' \subseteq Y$. Then it holds that $\text{rep}_{A_R}(X' \cup Y') = \text{rep}_{A_R}(\text{rep}_{R_X}(X') \cup \text{rep}_{R_Y}(Y'))$.*

6.2 Augmented rank decompositions

In order to do dynamic programming efficiently on a rank decomposition, we define the notion of an *augmented rank decomposition*.

Definition 6.5 (Augmented rank decomposition). *An augmented rank decomposition is a pair (T, \mathcal{R}) , where T is a rank decomposition, and for each edge $uv \in E(T)$, a minimal representative $(\mathcal{R}[uv], \mathcal{R}[vu])$ of $(T[uv], T[vu])$ corresponding to a cut $(T[uv], T[vu])$ is stored.*

We will also use a notation $\mathcal{R}_r[w]$ to denote the minimal representative of $T_r[w]$ stored in \mathcal{R} . Note that by [Proposition 6.2](#) an augmented rank decomposition can be represented in $\mathcal{O}(2^k n)$ space, where k is the width.

Next we show that we can maintain an augmented rank decomposition in our iterative compression.

Lemma 6.4. *Let $v \in V(G)$. Given an augmented rank decomposition (T, \mathcal{R}) of $G \setminus \{v\}$ of width k , an augmented rank decomposition of G of width at most $k + 1$ can be computed in $2^{\mathcal{O}(k)} n$ time.*

Proof. We obtain a rank decomposition T' of G by subdividing an arbitrary edge of T and inserting v as a leaf connected to the node created by subdividing. The width of T' is at most $k + 1$ because adding one vertex to A increases $\text{cutrk}(A)$ by at most one.

For the new edge incident with v a minimal representative is easy to compute in $\mathcal{O}(n)$ time: $\{v\}$ is a minimal representative of $\{v\}$ and a minimal representative of $V(G) \setminus \{v\}$ has one vertex from $N(v)$ and one from $V(G) \setminus (N(v) \cup \{v\})$.

All other edges of T' correspond to edges $uv \in E(T)$ in the sense that they correspond to some cut $(A', \bar{A}') = (T[uv] \cup \{v\}, T[vu])$. We start by setting for each such A' the representative

as $\mathcal{R}[uv] \cup \{v\}$. This is not necessarily a minimal representative of A' , but we turn it into minimal later. Now we have representatives of size at most $2^k + 1$ for the sides of cuts containing v .

For the sides of cuts not containing v , we compute minimal representatives by dynamic programming. We root the decomposition at v and proceed from leafs to roots. For leafs, the minimal representatives have exactly one vertex, the leaf. For non-leafs, the situation is that we want to compute a minimal representative of a set B with $v \notin B$ such that $B = B_1 \cup B_2$, where we have already computed minimal representatives R_1 and R_2 of B_1 and B_2 , and a representative R_A of \overline{B} of size $|R_A| \leq 2^k + 1$. By [Lemma 6.2](#), $R_1 \cup R_2$ is a representative of B , so $(R_1 \cup R_2, R_A)$ is a representative of (B, \overline{B}) of size $2^{\mathcal{O}(k)}$, so we use [Lemma 6.1](#) to compute a minimal representative of (B, \overline{B}) in time $2^{\mathcal{O}(k)}$. \square

6.3 The algorithm for rankwidth

This subsection is devoted to proving the following lemma.

Lemma 6.5. *There is a refinement data structure for rank decompositions with time complexity $t(k) = 2^{2^{\mathcal{O}(k)}}$, where the init operation requires an augmented rank decomposition and the output operation outputs an augmented rank decomposition.*

Combined with [Theorem 5](#) we get the following corollary.

Corollary 6.1. *There is an algorithm, that given an augmented rank decomposition of G of width k outputs an augmented rank decomposition of G of width at most $k - 1$ or correctly concludes that $k \leq 2\text{rw}(G)$ in time $2^{2^{\mathcal{O}(k)}} n$.*

And by applying iterative compression with [Corollary 6.1](#) and [Lemma 6.4](#) we get the main result of this section.

Theorem 1. *For integer k and an n -vertex graph G , there is an algorithm that in time $2^{2^{\mathcal{O}(k)}} n^2$ either computes a rank decomposition of G of width at most $2k$, or correctly concludes that the rankwidth of G is more than k .*

Our refinement data structure is based on characterizing global T -improvements by dynamic programming on the augmented rank decomposition (T, \mathcal{R}) directed towards the edge $r \in E(T)$. In [Sections 6.3.1](#) to [6.3.4](#) we introduce the objects manipulated in this dynamic programming and prove properties of them and in [Section 6.3.5](#) we apply this dynamic programming to provide the refinement data structure.

6.3.1 Embeddings

Bui-Xuan, Telle, and Vatshelle in [\[7\]](#) characterized the cut-rank of a cut (A, \overline{A}) by the existence of an embedding of $G[A, \overline{A}]$ into a certain graph R_k . Next we define this notion of embedding. In our definition the function describing the embedding is in some sense inversed. This inversion will make manipulating embeddings in dynamic programming easier.

Definition 6.6 (Embedding). *Let G be a bipartite graph with bipartition (A_G, B_G) of $V(G)$ and H be a bipartite graph with bipartition (A_H, B_H) of $V(H)$. A function $f : V(H) \rightarrow 2^{V(G)}$ is an embedding of G into H if*

- $f(u) \cap f(v) = \emptyset$ for $u \neq v$,
- $A_G = \bigcup_{v \in A_H} f(v)$, $B_G = \bigcup_{v \in B_H} f(v)$, and
- for every pair $(a_H, b_H) \in A_H \times B_H$ and every $(a, b) \in f(a_H) \times f(b_H)$, it holds that $ab \in E(G)$ if and only if $a_H b_H \in E(H)$.

When using the notation $G[X, Y]$ to construct a bipartite graph, we always assume that the bipartition of $G[X, Y]$ is (X, Y) . Note that the embedding completely defines the edges of $G[X, Y]$ in terms of the edges of H , and in particular gives a representative of (X, Y) of size $|V(H)|$, as we formalize as follows.

Observation 6.2. *Let G be a graph and (A, \bar{A}) be a bipartition of $V(G)$. Let H be a bipartite graph with bipartition (A_H, B_H) . Let $f : V(H) \rightarrow 2^{V(G)}$ be an embedding of $G[A, \bar{A}]$ into H . Let g be a function mapping each $v \in V(H)$ to a subset of $f(v)$ as follows:*

$$g(v) = \begin{cases} \{u\} \text{ where } u \in f(v) & \text{if } f(v) \text{ is non-empty,} \\ \emptyset & \text{otherwise.} \end{cases}$$

Then $(\bigcup_{v \in A_H} g(v), \bigcup_{v \in B_H} g(v))$ is a representative of (A, \bar{A}) of size $|V(H)|$.

Next we define the graph R_k that will be used to characterize cut-rank.

Definition 6.7 (Graph R_k [7]). *For each $k \geq 0$, we denote by R_k the bipartite graph with a bipartition (A, B) , having for each subset $X \subseteq \{1, \dots, k\}$ a vertex $a_X \in A$ and a vertex $b_X \in B$, (in particular, having $|A| = 2^k$ and $|B| = 2^k$), and having an edge between a_X and b_Y if and only if $|X \cap Y|$ is odd.*

Proposition 6.3 ([7]). *Let $A \subseteq V(G)$. It holds that $\text{cutrk}(A) \leq k$ if and only if there is an embedding of $G[A, \bar{A}]$ into R_k .*

We will find global T -improvements by computing embeddings into R_k by dynamic programming. In order to manipulate embeddings and objects related to embeddings we introduce some notation that naturally extends the definitions of intersections and unions of sets.

Definition 6.8 (Intersection $f \cap X$). *Let $f : V(H) \rightarrow 2^A$ be a function and $X \subseteq A$ be a set. We denote by $f \cap X$ the function $f \cap X : V(H) \rightarrow 2^X$ with $(f \cap X)(v) = f(v) \cap X$.*

We note that an intersection of an embedding and a set is again an embedding.

Observation 6.3. *Let A be a set, $C \subseteq A$, and $X \subseteq A$. If $f : V(H) \rightarrow 2^A$ is an embedding of $G[A \cap C, A \setminus C]$ into H , then $f \cap X$ is an embedding of $G[X \cap C, X \setminus C]$ into H .*

Finally, we define the union of functions.

Definition 6.9 (Union $f \cup g$). *Let $f : V(H) \rightarrow 2^X$ and $g : V(H) \rightarrow 2^Y$ be functions. We define function $f \cup g : V(H) \rightarrow 2^{X \cup Y}$ with $(f \cup g)(v) = f(v) \cup g(v)$.*

6.3.2 Representatives of embeddings

Next we define the A_R -representative of an embedding, extending the definition of the A_R -representative of a set.

Definition 6.10 (A_R -representative of an embedding). *Let G be a graph, $A \subseteq V(G)$, and R be a minimal representative of A . Let also $f : V(H) \rightarrow 2^A$ be an embedding. The A_R -representative of f is the function $g : V(H) \rightarrow 2^R$, where $g(v) = \text{rep}_{A_R}(f(v))$.*

The A_R -representative of an embedding is well-defined because the A_R -representative of a set is well-defined. If $\text{cutrk}(A) \leq k$, then the number of A_R -representatives of embeddings into H is at most $(2^{2^k})^{|V(H)|}$. In particular, the number of A_R -representatives of embeddings into R_k is at most $(2^{2^k})^{2 \cdot 2^k} = 2^{2^{\mathcal{O}(k)}}$.

We will define the compatibility and the composition of two representatives of embeddings. The intuition is that embeddings f_X and f_Y of disjoint subgraphs can be merged into an

embedding $f_X \cup f_Y$ if and only if their representatives are compatible. Moreover, the representative of $f_X \cup f_Y$ will be the composition of the representatives of f_X and f_Y .

Let X and Y be disjoint subsets of $V(G)$ and $A = X \cup Y$. Let also R be a minimal representative of A , R_X a minimal representative of X , and R_Y a minimal representative of Y . Let also H be a bipartite graph, $g_X : V(H) \rightarrow 2^{R_X}$ an X_{R_X} -representative an embedding, and $g_Y : V(H) \rightarrow 2^{R_Y}$ an Y_{R_Y} -representative of an embedding.

Definition 6.11 (Compatibility). *Let (A_H, B_H) be the bipartition of H . The representatives g_X and g_Y are compatible if for every pair $(a_H, b_H) \in A_H \times B_H$ it holds that*

1. *for every pair $(a, b) \in g_X(a_H) \times g_Y(b_H)$ it holds that $ab \in E(G) \Leftrightarrow a_H b_H \in E(H)$ and*
2. *for every pair $(a, b) \in g_Y(a_H) \times g_X(b_H)$ it holds that $ab \in E(G) \Leftrightarrow a_H b_H \in E(H)$.*

Note that compatibility can be tested in $(|V(H)| + |R_X| + |R_Y|)^{\mathcal{O}(1)}$ time. Next we show that two embeddings can be merged into an embedding only if their representatives are compatible.

Lemma 6.6. *Let $C \subseteq A$ be a set and let f_A be an embedding of $G[A \cap C, A \setminus C]$ into H . If g_X is the X_{R_X} -representative of $f_A \cap X$ and g_Y is the Y_{R_Y} -representative of $f_A \cap Y$, then g_X and g_Y are compatible.*

Proof. Let $f_X = f_A \cap X$, $f_Y = f_A \cap Y$, and let (A_H, B_H) be the bipartition of H . For the case (1) of compatibility it suffices to prove for every pair $(a_H, b_H) \in A_H \times B_H$ and every $(a, b) \in g_X(a_H) \times g_Y(b_H)$ that $ab \in E(G)$ if and only if $a_H b_H \in E(H)$.

As $g_X(a_H)$ is an X_{R_X} -representative of $f_X(a_H)$, there exists $a' \in f_X(a_H)$ with $N(a') \setminus X = N(a) \setminus X$. Similarly there exists $b' \in f_Y(b_H)$ with $N(b') \setminus Y = N(b) \setminus Y$. Therefore $ab \in E(G)$ if and only if $a'b' \in E(G)$. Since $f_X(a_H) = f_A(a_H) \cap X$ and $f_Y(b_H) = f_A(b_H) \cap Y$, we have that $a' \in f_A(a_H)$ and that $b' \in f_A(b_H)$. Because f_A is an embedding it holds that $a'b' \in E(G)$ if and only if $a_H b_H \in E(H)$. This concludes the proof that the case (1) of compatibility holds.

For the case (2) it suffices to prove the same but for every $(a, b) \in g_Y(a_H) \times g_X(b_H)$. This proof is symmetric. \square

The composition is defined as the representative of the union.

Definition 6.12 (Composition). *The composition of g_X and g_Y is the function $g_A : V(H) \rightarrow 2^A$ defined by $g_A(v) = \text{rep}_{A_R}(g_X(v) \cup g_Y(v))$ for all $v \in V(H)$.*

By using a minimal (A, \bar{A}) -representative (R, Q) the composition can be computed in time $(|V(H)| + |R| + |Q| + |R_X| + |R_Y|)^{\mathcal{O}(1)}$.

Next we prove that two embeddings can be merged into an embedding if their representatives are compatible, and in this case the composition gives the resulting representative.

Lemma 6.7. *Let $C \subseteq A$ be a set. Let g_X be the X_{R_X} -representative of an embedding f_X of $G[X \cap C, X \setminus C]$ into H and g_Y the Y_{R_Y} -representative of an embedding f_Y of $G[Y \cap C, Y \setminus C]$ into H . If g_X and g_Y are compatible, then $f_X \cup f_Y$ is an embedding of $G[A \cap C, A \setminus C]$ into H so that the composition of g_X and g_Y is the A_R -representative of $f_X \cup f_Y$.*

Proof. Let (A_H, B_H) be the bipartition of H . We let $f_A = f_X \cup f_Y$ and observe that f_A is a function $f_A : V(H) \rightarrow 2^A$ that satisfies $f_A(u) \cap f_A(v) = \emptyset$ for $u \neq v$, $(X \cap C) \cup (Y \cap C) = (A \cap C) = \bigcup_{v \in A_H} f_A(v)$, and $(X \setminus C) \cup (Y \setminus C) = (A \setminus C) = \bigcup_{v \in B_H} f_A(v)$. Therefore f_A is an embedding of $G[A \cap C, A \setminus C]$ into H if for every pair $(a_H, b_H) \in A_H \times B_H$ and every $(a, b) \in f_A(a_H) \times f_A(b_H)$ it holds that $ab \in E(G)$ if and only if $a_H b_H \in E(H)$. We say that f_A is *good* for a pair $(a, b) \in (A \cap C) \times (A \setminus C)$ if this holds for this pair. Now f_A is an embedding of $G[A \cap C, A \setminus C]$ into H if it is good for every pair $(a, b) \in (A \cap C) \times (A \setminus C)$.

Because f_X is an embedding of $G[X \cap C, X \setminus C]$ into H we have that f_X is good for all pairs in $(X \cap C) \times (X \setminus C)$ and therefore f_A is good for all pairs in $(X \cap C) \times (X \setminus C)$. Analogously because f_Y is an embedding of $G[Y \cap C, Y \setminus C]$ into H we have that f_A is good for all pairs in $(Y \cap C) \times (Y \setminus C)$. It remains to prove that f_A is good for all pairs in $(X \cap C) \times (Y \setminus C)$ and in $(Y \cap C) \times (X \setminus C)$.

Let $(a, b) \in (X \cap C) \times (Y \setminus C)$. The set $g_X(a_H)$ is a X_{R_X} -representative of $f_X(a_H) \supseteq \{a\}$, so there exists $a' \in g_X(a_H)$ so that $N(a') \setminus X = N(a) \setminus X$. Similarly there exists $b' \in g_Y(b_H)$ so that $N(b') \setminus Y = N(b) \setminus Y$. Therefore $ab \in E(G)$ if and only if $a'b' \in E(G)$. Now, by compatibility (1) it holds that $a'b' \in E(G)$ if and only if $a_H b_H \in E(G)$. Therefore f_A is good for (a, b) .

The proof for $(a, b) \in (Y \cap C) \times (X \setminus C)$ is symmetric, using compatibility (2) instead. Therefore f_A is an embedding of $G[A \cap C, A \setminus C]$ into H . Finally, by [Observation 6.1](#) we have that the composition of g_X and g_Y is the A_R -representative of f_A . \square

6.3.3 Improvement embeddings

In order to construct a minimum W -improvement (C_1, C_2, C_3) , we build six embeddings simultaneously in the dynamic programming, three to bound $\text{cutrk}(C_i)$ and three to bound $\text{cutrk}(C_i \cap W)$. We of course also need to bound $\text{cutrk}(C_i \cap \overline{W})$, but note that $G[(C_i \cap \overline{W}) \cap W, (C_i \cap \overline{W}) \cap W] = G[\emptyset, W]$, so dynamic programming is not required for building the side of W of the embedding $G[C_i \cap \overline{W}, C_i \cap \overline{W}]$.

Definition 6.13 (A -restricted improvement embedding). *Let $A \subseteq V(G)$. A 10-tuple*

$$E = (f_1^C, f_2^C, f_3^C, f_1^W, f_2^W, f_3^W, k_1, k_2, k_3, l)$$

is an A -restricted improvement embedding if there exists a tripartition (C_1, C_2, C_3) of A so that

1. *for each $i \in \{1, 2, 3\}$, f_i^C is an embedding of $G[A \cap C_i, A \cap \overline{C_i}]$ into R_{k_i} and*
2. *for each $i \in \{1, 2, 3\}$, f_i^W is an embedding of $G[A \cap C_i, A \cap \overline{C_i}]$ into R_l .*

Note that an A -restricted improvement embedding E uniquely defines such a tripartition (C_1, C_2, C_3) of A . We call such a tripartition *the tripartition of E* . We say that E *intersects a set* if its tripartition (C_1, C_2, C_3) intersects it. We call the quadruple (k_1, k_2, k_3, l) the *shape of E* . An A -restricted improvement embedding is k -bounded if $k_1, k_2, k_3, l \leq k$.

In the following lemma we introduce the notation $E \cap X$, where E is an A -restricted improvement embedding and $X \subseteq A$.

Lemma 6.8. *Let $A \subseteq V(G)$, $X \subseteq A$, and*

$$E = (f_1^C, f_2^C, f_3^C, f_1^W, f_2^W, f_3^W, k_1, k_2, k_3, l)$$

be an A -restricted improvement embedding with tripartition (C_1, C_2, C_3) . The tuple

$$E \cap X = (f_1^C \cap X, f_2^C \cap X, f_3^C \cap X, f_1^W \cap X, f_2^W \cap X, f_3^W \cap X, k_1, k_2, k_3, l)$$

is an X -restricted improvement embedding with tripartition $(C_1 \cap X, C_2 \cap X, C_3 \cap X)$.

Proof. By [Observation 6.3](#), for each i $f_i^C \cap X$ is an embedding of $G[X \cap C_i, X \cap \overline{C_i}]$ to R_{k_i} and f_i^W is an embedding of $G[X \cap C_i, X \cap \overline{C_i}]$ to R_l . \square

We also define the union of improvement embeddings, extending the definition of the union of embeddings.

Definition 6.14. Let X and Y be disjoint subsets,

$$E_1 = (f_1^C, f_2^C, f_3^C, f_1^W, f_2^W, f_3^W, k_1, k_2, k_3, l)$$

an X -restricted improvement embedding, and

$$E_2 = (g_1^C, g_2^C, g_3^C, g_1^W, g_2^W, g_3^W, k_1, k_2, k_3, l)$$

an Y -restricted improvement embedding with the same shape. We denote by $E_1 \cup E_2$ the 10-tuple

$$E_1 \cup E_2 = (f_1^C \cup g_1^C, f_2^C \cup g_2^C, f_3^C \cup g_3^C, f_1^W \cup g_1^W, f_2^W \cup g_2^W, f_3^W \cup g_3^W, k_1, k_2, k_3, l).$$

Note that if the tripartition of X is $(C_1 \cap X, C_2 \cap X, C_3 \cap X)$, the tripartition of Y is $(C_1 \cap Y, C_2 \cap Y, C_3 \cap Y)$, and $E_1 \cup E_2$ is indeed an $X \cup Y$ -restricted improvement embedding, then the tripartition of $E_1 \cup E_2$ is (C_1, C_2, C_3) .

We will use dynamic programming on the rank decomposition T to compute improvement embeddings, minimizing the number of nodes of T intersected.

6.3.4 Representatives of improvement embeddings

The definition of the A_R -representative of an improvement embedding extends the definition of the A_R -representative of an embedding.

Definition 6.15 (A_R -representative of an improvement embedding). Let $A \subseteq V(G)$, and R a minimal representative of A . Let also

$$E = (f_1^C, f_2^C, f_3^C, f_1^W, f_2^W, f_3^W, k_1, k_2, k_3, l)$$

be an A -restricted improvement embedding. The A_R -representative of E is the tuple

$$(g_1^C, g_2^C, g_3^C, g_1^W, g_2^W, g_3^W, k_1, k_2, k_3, l),$$

where each such g is the A_R -representative of the corresponding embedding f .

The shape of the A_R -representative of E is the same as the shape of E . When $\text{cutrk}(A) \leq k$, the number of A_R -representatives of k -bounded improvement embeddings is $(2^{2^{O(k)}})^6 k^4 = 2^{2^{O(k)}}$. We naturally extend the definitions of composition and compatibility to representatives of improvement embeddings.

Let G be a graph, X and Y disjoint subsets of $V(G)$, and $A = X \cup Y$. Let also R be a minimal representative of A , R_X a minimal representative of X , and R_Y a minimal representative of Y . Let $E_X = (f_1^C, f_2^C, f_3^C, f_1^W, f_2^W, f_3^W, k_1, k_2, k_3, l)$ be the X_{R_X} -representative of an X -restricted improvement embedding and $E_Y = (g_1^C, g_2^C, g_3^C, g_1^W, g_2^W, g_3^W, k'_1, k'_2, k'_3, l')$ the Y_{R_Y} -representative of an Y -restricted improvement embedding.

Definition 6.16 (C -Compatibility). E_X and E_Y are C -compatible if they have the same shape and for each $i \in \{1, 2, 3\}$, f_i^C and g_i^C are compatible.

Definition 6.17 (Compatibility). E_X and E_Y are compatible if they are C -compatible and for each $i \in \{1, 2, 3\}$, f_i^W and g_i^W are compatible.

We derive the following lemma directly from [Lemma 6.6](#).

Lemma 6.9. Let E be an A -restricted improvement embedding. If E_X is the X_{R_X} -representative of $E \cap X$ and E_Y is the Y_{R_Y} -representative of $E \cap Y$, then E_X and E_Y are compatible.

Proof. Apply [Lemma 6.6](#) to each embedding in E . □

Next we define the composition of two representatives of improvement embeddings, extending the definition of the composition of representatives of embeddings.

Definition 6.18 (Composition). *If E_X and E_Y are compatible, then the composition of E_X and E_Y is the pointwise composition of E_X and E_Y , i.e., the composition is the 10-tuple*

$$E_A = (h_1^C, h_2^C, h_3^C, h_1^W, h_2^W, h_3^W, k_1, k_2, k_3, l),$$

where for each $i \in \{1, 2, 3\}$ h_i^C is the composition of f_i^C and g_i^C , and h_i^W is the composition of f_i^W and g_i^W .

Next we prove the main lemma for computing improvement embeddings by dynamic programming, which is an extension of [Lemma 6.7](#).

Lemma 6.10. *Let X and Y be disjoint sets, $A = X \cup Y$, R a minimal representative of A , R_X a minimal representative of X , and R_Y a minimal representative of Y . Let E_1 be an X -restricted improvement embedding and E_2 a Y -restricted improvement embedding. Let E_X be the X_{R_X} -representative of E_1 and E_Y the Y_{R_Y} -representative of E_2 . If E_X and E_Y are compatible, then $E_1 \cup E_2$ is an A -restricted improvement embedding and the composition of E_X and E_Y is the A_R -representative of $E_1 \cup E_2$.*

Proof. Denote

$$E_1 = (f_1^C, f_2^C, f_3^C, f_1^W, f_2^W, f_3^W, k_1, k_2, k_3, l)$$

and

$$E_2 = (g_1^C, g_2^C, g_3^C, g_1^W, g_2^W, g_3^W, k_1, k_2, k_3, l).$$

Let (C_1^X, C_2^X, C_3^X) be the tripartition of E_1 and (C_1^Y, C_2^Y, C_3^Y) the tripartition of E_2 . By [Lemma 6.7](#) it holds for every i that $f_i^C \cup g_i^C$ is an embedding of $G[C_i^X \cup C_i^Y, A \setminus (C_i^X \cup C_i^Y)]$ to R_{k_i} and $f_i^W \cup g_i^W$ is an embedding of $G[C_i^X \cup C_i^Y, A \setminus (C_i^X \cup C_i^Y)]$ to R_l . Therefore

$$E = (f_1^C \cup g_1^C, f_2^C \cup g_2^C, f_3^C \cup g_3^C, f_1^W \cup g_1^W, f_2^W \cup g_2^W, f_3^W \cup g_3^W, k_1, k_2, k_3, l)$$

is an improvement embedding with tripartition $(C_1^X \cup C_1^Y, C_2^X \cup C_2^Y, C_3^X \cup C_3^Y)$. By [Lemma 6.7](#) the composition of E_X and E_Y is the A_R -representative of E . \square

Finding the W -improvement. In the dynamic programming we will determine if there exists a W -improvement based on the representatives of W -restricted improvement embeddings and the representatives of \overline{W} -restricted improvement embeddings. For this purpose we will define the root-compatibility of two representatives of improvement embeddings, characterizing whether they can be merged to yield a W -improvement.

Let $W \subseteq V(G)$, R_W a minimal representative of W , and $R_{\overline{W}}$ a minimal representative of \overline{W} . Let also $E_W = (f_1^C, f_2^C, f_3^C, f_1^W, f_2^W, f_3^W, k_1, k_2, k_3, l)$ be a W_{R_W} -representative of a W -restricted improvement embedding and $E_{\overline{W}} = (g_1^C, g_2^C, g_3^C, g_1^W, g_2^W, g_3^W, k_1, k_2, k_3, l)$ a $\overline{W}_{R_{\overline{W}}}$ -representative of an \overline{W} -restricted improvement embedding so that E_W and $E_{\overline{W}}$ have the same shape.

Definition 6.19 (Root-compatibility). *E_W and $E_{\overline{W}}$ are root-compatible if they are C -compatible and*

1. *for each i , there exists an embedding $f_i^{\overline{W}}$ of $G[\emptyset, \overline{W}]$ into R_l so that $f_i^{\overline{W}}$ is compatible with the $\overline{W}_{R_{\overline{W}}}$ -representative of $f_i^{\overline{W}}$ and*
2. *for each i , there exists an embedding g_i^W of $G[\emptyset, W]$ into R_l so that g_i^W is compatible with the W_{R_W} -representative of g_i^W .*

The definition does not directly provide an efficient algorithm for checking root-compatibility, but a couple of observations and brute force yields a $2^{2^{\mathcal{O}(k)}}$ time algorithm as follows.

Lemma 6.11. *Let $\text{cutrk}(W) \leq k$ and let the improvement embeddings be k -bounded. Given E_W , $E_{\overline{W}}$, R_W , and $R_{\overline{W}}$, the root-compatibility of E_W and $E_{\overline{W}}$ can be checked in time $2^{2^{\mathcal{O}(k)}}$.*

Proof. We prove the case (1), the other case is symmetric.

Suppose there exists such an embedding $f_i^{\overline{W}}$. Let (A_H, B_H) be the bipartition of R_l and let $u_H, v_H \in B_H$ be a pair of distinct vertices in B_H . Suppose that there exists $u, v \in \overline{W}$ such that $N(u) \cap W = N(v) \cap W$, $u \in f_i^{\overline{W}}(u_H)$, and $v \in f_i^{\overline{W}}(v_H)$. Note that now, if we remove u from $f_i^{\overline{W}}(u_H)$ and insert it into $f_i^{\overline{W}}(v_H)$, we obtain an embedding whose $\overline{W}_{R_{\overline{W}}}$ -representative is compatible with the same W_{R_W} -representatives as $f_i^{\overline{W}}$. Therefore, we can assume for any $u, v \in \overline{W}$ that if $N(u) \cap W = N(v) \cap W$, then there exists $v_H \in B_H$ so that $\{u, v\} \subseteq f_i^{\overline{W}}(v_H)$.

As for any $v \in \overline{W}$ there is a vertex $v_R \in R_{\overline{W}}$ with $N(v) \cap W = N(v_R) \cap W$, it is sufficient to enumerate all intersections $f_i^{\overline{W}} \cap R_{\overline{W}}$ and assign each v to the same vertex of B_H as v_R . Note that in this case, the $\overline{W}_{R_{\overline{W}}}$ -representative of $f_i^{\overline{W}}$ depends only on the intersection $f_i^{\overline{W}} \cap R_{\overline{W}}$. The number of the intersections is $\leq (2^{|R_{\overline{W}}|})^{|B_H|} \leq (2^{2^k})^{2^k} = 2^{2^{\mathcal{O}(k)}}$ and each can be checked in time $2^{\mathcal{O}(k)}$. \square

We also introduce the definition of C_i -emptiness to denote whether none of the vertices have been assigned to C_i in the tripartition.

Definition 6.20 (C_i -empty). *Let $E_R = (f_1^C, f_2^C, f_3^C, \dots)$ be the A_R -representative of an A -restricted improvement embedding. Let $i \in \{1, 2, 3\}$, and let (A_H, B_H) be the bipartition of R_{k_i} . E_R is C_i -empty if for every $v \in A_H$ it holds that $f_i^C(v) = \emptyset$.*

The definition of C_i -emptiness is for determining which of the parts of a corresponding tripartition intersect A .

Observation 6.4. *Let E_R be the A_R -representative of an A -restricted improvement embedding E and (C_1, C_2, C_3) the tripartition of E . It holds that $C_i = \emptyset$ if and only if E_R is C_i -empty.*

Finally, we describe how to find W -improvements based on representatives of improvement embeddings.

Lemma 6.12. *Let T be a rank decomposition, $uv = r \in E(T)$, and $W = T[uv]$. Denote $X = W = T_r[u]$, $Y = \overline{W} = T_r[v]$, and let R_X be a minimal representative of X and R_Y a minimal representative of Y . There exists a W -improvement (C_1, C_2, C_3) with arity α and $\text{cutrk}(C_i) \leq k_i$ for each $i \in \{1, 2, 3\}$ if and only if there exists E_u and E_v such that*

1. E_u is the X_{R_X} -representative of an X -restricted improvement embedding with shape (k_1, k_2, k_3, l) whose tripartition $(C_1 \cap X, C_2 \cap X, C_3 \cap X)$ is,
2. E_v is the Y_{R_Y} -representative of an Y -restricted improvement embedding with shape (k_1, k_2, k_3, l) whose tripartition $(C_1 \cap Y, C_2 \cap Y, C_3 \cap Y)$ is,
3. E_u and E_v are root-compatible,
4. $k_i < \text{cutrk}(W)/2$ for all $i, l < \text{cutrk}(W)$, and
5. $\alpha = 2$ if there exists i such that both E_u and E_v are C_i -empty and otherwise $\alpha = 3$.

Proof. If direction:

Let

$$E_X = (f_1^C, f_2^C, f_3^C, f_1^W, f_2^W, f_3^W, k_1, k_2, k_3, l)$$

be a X -restricted improvement embedding whose X_{R_X} -representative E_u is and whose tripartition $(C_1 \cap X, C_2 \cap X, C_3 \cap X)$ is. Let also

$$E_Y = (g_1^C, g_2^C, g_3^C, g_1^{\overline{W}}, g_2^{\overline{W}}, g_3^{\overline{W}}, k_1, k_2, k_3, l)$$

be a Y -restricted improvement embedding whose Y_{R_Y} -representative E_v is and whose tripartition $(C_1 \cap Y, C_2 \cap Y, C_3 \cap Y)$ is.

As E_u and E_v are C -compatible, [Lemma 6.7](#) implies that for each i $f_i^C \cup g_i^C$ is an embedding of $G[C_i, \overline{C_i}]$ to k_i . Therefore by [Proposition 6.3](#) it holds that $\text{cutrk}(C_i) \leq k_i$.

As E_u and E_v are root-compatible, by the definition of root-compatibility and [Lemma 6.7](#) for each i there exists an embedding $f_i^{\overline{W}}$ of $G[\emptyset, \overline{W}]$ to R_l so that $f_i^W \cup f_i^{\overline{W}}$ is an embedding of $G[C_i \cap W, (\overline{C_i} \cap W) \cup \overline{W}] = G[C_i \cap W, \overline{C_i} \cap \overline{W}]$ to R_l . Therefore by [Proposition 6.3](#) it holds that $\text{cutrk}(C_i \cap W) \leq l$.

Symmetrically by root-compatibility for each i there exists an embedding g_i^W of $G[\emptyset, W]$ to R_l so that $g_i^{\overline{W}} \cup g_i^W$ is an embedding of $G[C_i \cap \overline{W}, (\overline{C_i} \cap \overline{W}) \cup W] = G[C_i \cap \overline{W}, \overline{C_i} \cap \overline{W}]$ to R_l . Therefore by [Proposition 6.3](#) it holds that $\text{cutrk}(C_i \cap \overline{W}) \leq l$.

Finally note that $C_i = \emptyset$ if and only if both E_u and E_v are C_i -empty.

Only if direction:

Let (C_1, C_2, C_3) be a W -improvement of arity α where $\text{cutrk}(C_1) = k_1$, $\text{cutrk}(C_2) = k_2$, and $\text{cutrk}(C_3) = k_3$. Let also $l = \text{cutrk}(W) - 1$. By [Proposition 6.3](#), for each i there exists an embedding f_i^C of $G[C_i, \overline{C_i}]$ to R_{k_i} , an embedding f_i^W of $G[C_i \cap W, \overline{C_i} \cap \overline{W}]$ to R_l , and an embedding $f_i^{\overline{W}}$ of $G[C_i \cap \overline{W}, \overline{C_i} \cap \overline{W}]$ to R_l .

Let

$$E_X = (f_1^C \cap X, f_2^C \cap X, f_3^C \cap X, f_1^W \cap X, f_2^W \cap X, f_3^W \cap X, k_1, k_2, k_3, l)$$

and note that the tripartition of E_X is $(C_1 \cap X, C_2 \cap X, C_3 \cap X)$. Let also

$$E_Y = (f_1^C \cap Y, f_2^C \cap Y, f_3^C \cap Y, f_1^{\overline{W}} \cap Y, f_2^{\overline{W}} \cap Y, f_3^{\overline{W}} \cap Y, k_1, k_2, k_3, l)$$

and note that the tripartition of E_Y is $(C_1 \cap Y, C_2 \cap Y, C_3 \cap Y)$. Let E_u be the X_{R_X} -representative of E_X and E_v the Y_{R_Y} -representative of E_Y . Note that now, E_u and E_v satisfy (1) and (2).

By [Lemma 6.6](#), E_u and E_v are C -compatible. Note that also by [Lemma 6.6](#), for each i , $f_i^W \cap Y$ is an embedding of $G[\emptyset, \overline{W}]$ to R_l whose Y_{R_Y} -representative is compatible with the X_{R_X} -representative of $f_i^W \cap X$, and $f_i^{\overline{W}} \cap X$ is an embedding of $G[\emptyset, W]$ whose X_{R_X} -representative is compatible with the Y_{R_Y} -representative of $f_i^{\overline{W}} \cap Y$. Therefore E_u and E_v are root-compatible by the definition of root-compatibility.

If (C_1, C_2, C_3) has arity 2, then there is i such that $C_i = \emptyset$, which implies that both E_u and E_v are C_i -empty. Otherwise each C_i intersects with at least one of X or Y , and therefore for each i at least one of E_u or E_v is not C_i -empty. \square

6.3.5 Refinement data structure for augmented rank decompositions

In this subsection we provide the refinement data structure for augmented rank decompositions using dynamic programming building on the previous subsections. Throughout this subsection, we assume that we are maintaining an augmented rank decomposition (T, \mathcal{R}) of width $\text{rw}(T) \leq k$ and that therefore we are only interested in k -bounded improvement embeddings.

Concrete representatives. In order to maintain an augmented rank decomposition in the refinement operation, we need to construct a minimal representative of each set C_i of the W -improvement (C_1, C_2, C_3) . To do this, we maintain “concrete representatives” in the dynamic programming.

Definition 6.21 (Concrete representative). *Let H be a bipartite graph, $A \subseteq V(G)$, and $f : V(H) \rightarrow 2^A$ a function. A concrete representative of f is a function g defined in [Observation 6.2](#), i.e., a function g mapping each $v \in V(H)$ to a subset of $f(v)$ as follows:*

$$g(v) = \begin{cases} \{u\} \text{ where } u \in f(v) & \text{if } f(v) \text{ is non-empty} \\ \emptyset & \text{otherwise.} \end{cases}$$

Let $E = (f_1^C, f_2^C, f_3^C, \dots)$ be an A -restricted improvement embedding. A concrete representative of E is a triple (g_1^C, g_2^C, g_3^C) , where each g_i^C is a concrete representative of f_i^C .

Note that a concrete representative can be represented in $\mathcal{O}(|V(H)|)$ space. By [Observation 6.2](#), a concrete representative of an embedding of $G[C_i, \overline{C_i}]$ into H can be turned into a representative of $(C_i, \overline{C_i})$ of size $|V(H)|$. In particular, using a concrete representative of a $V(G)$ -restricted improvement embedding with tripartition (C_1, C_2, C_3) we can compute a minimal representatives of each C_i in time $2^{\mathcal{O}(k)}$.

We define the union of two concrete representatives naturally.

Definition 6.22 (Union of concrete representatives). *Let f_R be a concrete representative of a function $f : V(H) \rightarrow 2^X$ and g_R a concrete representative of a function $g : V(H) \rightarrow 2^Y$. We denote by $f_R \cup g_R$ the function mapping each $v \in V(H)$ to a subset of $f(v) \cup g(v)$ as follows:*

$$(f_R \cup g_R)(v) = \begin{cases} f_R(v), & \text{if } f_R(v) \neq \emptyset \\ g_R(v), & \text{otherwise.} \end{cases}$$

The union of concrete representatives of improvement embeddings is the pointwise union of such triples of concrete representatives.

Observe that such $f_R \cup g_R$ is a concrete representative of $f \cup g$.

Dynamic programming tables. In the refinement data structure we maintain a dynamic programming table for each node $w \in V(T)$. We call this table the r -table of the node w to signify that this table contains information about the r -subtree of w . Next we formally define an r -table.

Definition 6.23 (r -table). *Let (T, \mathcal{R}) be an augmented rank decomposition, $r \in E(T)$, $w \in V(T)$, $A = T_r[w]$, and $R = \mathcal{R}_r[w]$. An r -table of w is a triple $(\mathcal{E}, \mathcal{I}, \mathcal{C})$, where*

1. \mathcal{E} is the set of all A_R -representatives of k -bounded A -restricted improvement embeddings,
2. \mathcal{I} is a function mapping each $E_R \in \mathcal{E}$ to the least integer i such that there exists an A -restricted improvement embedding E whose A_R -representative E_R is and which r -intersects i nodes of the r -subtree of w , and
3. \mathcal{C} is a function mapping each $E_R \in \mathcal{E}$ to a concrete representative of an A -restricted improvement embedding E such that E_R is the A_R -representative of E and E r -intersects $\mathcal{I}(E_R)$ nodes of the r -subtree of w .

Note that an r -table can be represented by making use of $2^{2^{\mathcal{O}(k)}}$ space.

To correctly construct the refinement that matches the concrete representation obtained, we need to spell out some additional properties of r -tables, which will be naturally satisfied by the way the r -tables will be constructed.

Definition 6.24 (Local and global representation). Let (T, \mathcal{R}) be an augmented rank decomposition, $r \in E(T)$, $w \in V(T)$, $A = T_r[w]$, and $R = \mathcal{R}_r[w]$. An r -table $(\mathcal{E}, \mathcal{I}, \mathcal{C})$ of w locally represents an A -restricted improvement embedding E if there exists $E_R \in \mathcal{E}$ so that E_R is the A_R -representative of E , $\mathcal{I}(E_R)$ is the number of nodes in the r -subtree of w r -intersected by E , and $\mathcal{C}(E_R)$ is a concrete representative of E . The r -table of w globally represents E if the r -tables of all nodes w' in the r -subtree of w (including w itself) locally represent $E \cap T_r[w']$.

Definition 6.25 (Linked r -table). A linked r -table of w is a 4-tuple $(\mathcal{E}, \mathcal{I}, \mathcal{C}, \mathcal{L})$ so that $(\mathcal{E}, \mathcal{I}, \mathcal{C})$ is an r -table of w and for each $E_R \in \mathcal{E}$ there exists an A -restricted improvement embedding E so that

1. E_R is the A_R -representative of E ,
2. $(\mathcal{E}, \mathcal{I}, \mathcal{C})$ globally represents E , and
3. if w is non-leaf and has r -children w_1 and w_2 with r -tables $(\mathcal{E}_1, \mathcal{I}_1, \mathcal{C}_1)$ and $(\mathcal{E}_2, \mathcal{I}_2, \mathcal{C}_2)$, then \mathcal{L} is a function mapping E_R to a pair $\mathcal{L}(E_R) = (E_1, E_2)$ such that $E_1 \in \mathcal{E}_1$, $E_2 \in \mathcal{E}_2$, E_1 is the $T_r[w_1]_{\mathcal{R}_r[w_1]}$ -representative of $E \cap T_r[w_1]$, and E_2 is the $T_r[w_2]_{\mathcal{R}_r[w_2]}$ -representative of $E \cap T_r[w_2]$.

The existence of a linked r -table will be formally proved in [Lemma 6.14](#) when also its construction is given. Note that a linked r -table of a node w can be represented in $2^{2^{\mathcal{O}(k)}}$ space. We start implementing the dynamic programming from the leaves.

Lemma 6.13. Let (T, \mathcal{R}) be an augmented rank decomposition, $r \in E(T)$, and w a leaf node of T . A linked r -table of w can be constructed in time $2^{\mathcal{O}(k)}$.

Proof. Let $A = T_r[w]$. As $|A| = 1$, the number of A -restricted improvement embeddings is $2^{\mathcal{O}(k)}$ and we can iterate over all of them and construct the r -table directly by definition. Moreover, the r -table is by definition linked because A is the minimal representative of itself and so there is bijection between A -restricted improvement embeddings and their A_A -representatives. \square

The next lemma is the main dynamic programming lemma. It specifies the computation of linked r -tables for non-leaf nodes.

Lemma 6.14. Let (T, \mathcal{R}) be an augmented rank decomposition, $r \in E(T)$, w a non-leaf node of T , and w_1 and w_2 the r -children of w . Given linked r -tables of the nodes w_1 and w_2 , a linked r -table $(\mathcal{E}, \mathcal{I}, \mathcal{C}, \mathcal{L})$ of w can be constructed in time $2^{2^{\mathcal{O}(k)}}$.

Proof. Let $A = T_r[w]$, $X = T_r[w_1]$, $Y = T_r[w_2]$, $R = \mathcal{R}_r[w]$, $R_X = \mathcal{R}_r[w_1]$, and $R_Y = \mathcal{R}_r[w_2]$. Let $(\mathcal{E}_1, \mathcal{I}_1, \mathcal{C}_1)$ be the given r -table of w_1 and $(\mathcal{E}_2, \mathcal{I}_2, \mathcal{C}_2)$ the given r -table of w_2 .

Let E be a k -bounded A -restricted improvement embedding. Note that the number of nodes in the r -subtree of w that E r -intersects is $i_1 + i_2 + i_w$, where i_1 is the number of nodes in the r -subtree of w_1 that $E \cap X$ r -intersects, i_2 is the number of nodes in the r -subtree of w_2 that $E \cap Y$ r -intersects, and $i_w = 1$ if E r -intersects w and 0 otherwise. Moreover, the fact whether E r -intersects w can be determined only by considering the A_R -representative of E , in particular by whether it is C_i -empty for at most one i .

We enumerate all pairs $(E_1, E_2) \in \mathcal{E}_1 \times \mathcal{E}_2$. If E_1 is compatible with E_2 , then by [Lemma 6.10](#), for any E_X and E_Y such that E_1 is a X_{R_X} -representative of E_X and E_2 is a Y_{R_Y} -representative of E_Y it holds that $E = E_X \cup E_Y$ is an A -restricted improvement embedding such that $E \cap X = E_X$, $E \cap Y = E_Y$, and the composition E_R of E_1 and E_2 is the A_R -representative of E . Let us fix such E_X and E_Y so that they are globally represented by $(\mathcal{E}_1, \mathcal{I}_1, \mathcal{C}_1)$ and $(\mathcal{E}_2, \mathcal{I}_2, \mathcal{C}_2)$, respectively. If $E_R \notin \mathcal{E}$, or $E_R \in \mathcal{E}$ but $\mathcal{I}(E_R) > \mathcal{I}_1(E_1) + \mathcal{I}_2(E_2) + i_w$, we insert E_R to \mathcal{E} and set

$\mathcal{I}(E_R) \leftarrow \mathcal{I}_1(E_1) + \mathcal{I}_2(E_2) + i_w$, $\mathcal{C}(E_R) \leftarrow \mathcal{C}_1(E_1) \cup \mathcal{C}_2(E_2)$ and $\mathcal{L}(E_R) \leftarrow (E_1, E_2)$. Now $(\mathcal{E}, \mathcal{I}, \mathcal{C})$ globally represents E .

The fact that for all A -restricted improvement embeddings E we actually considered a pair $(E_1, E_2) \in \mathcal{E}_1 \times \mathcal{E}_2$ so that E_1 is a X_{R_X} -representative of $E \cap X$ and E_2 is a Y_{R_Y} -representative of $E \cap Y$ follows from the definition of r -state and Lemma 6.8, i.e., the fact that $E \cap X$ is an X -restricted improvement embedding and $E \cap Y$ is an Y -restricted improvement embedding. \square

Now the $\text{Init}(T, r)$ operation can be implemented in $|V(T)|2^{2^{\mathcal{O}(k)}}$ time by constructing a linked r -table of each node in the order from leafs to root with $|V(T)|$ applications of Lemma 6.14. For the $\text{Move}(vw)$ operation, observe that the linked r -table of a node $x \in V(T)$ depends only on the r -subtree of x , and therefore by Observation 5.1 it suffices to recompute only the linked r -table of v when using $\text{Move}(vw)$. Therefore $\text{Move}(vw)$ can be implemented in $2^{2^{\mathcal{O}(k)}}$ time by a single application of Lemma 6.14. The operation $\text{Width}()$ is implemented without r -tables. It amounts to finding an embedding of $G[\mathcal{R}[uv], \mathcal{R}[vu]]$ to R_k by brute-force in time $2^{2^{\mathcal{O}(k)}}$. The $\text{Output}()$ operation also is straightforward as we just output the augmented rank decomposition we are maintaining.

It remains to implement the operations $\text{CanRefine}()$, $\text{EditSet}()$, and $\text{Refine}(R, (N_1, N_2, N_3))$. The following is the main lemma for them, providing the implementations of $\text{CanRefine}()$ and $\text{EditSet}()$ and setting the stage for $\text{Refine}(R, (N_1, N_2, N_3))$.

Lemma 6.15. *Let (T, \mathcal{R}) be an augmented rank decomposition, $uv = r \in E(T)$, and $W = T[uv]$. For each node $w \in V(T)$, let $(\mathcal{E}_w, \mathcal{I}_w, \mathcal{R}_w, \mathcal{L}_w)$ be the linked r -table of w . There is an algorithm that returns \perp if there is no W -improvement, and otherwise returns a tuple $(R, N_1, N_2, N_3, C_1^R, C_2^R, C_3^R)$, where (r, C_1, C_2, C_3) is a global T -improvement, R is the edit set of (r, C_1, C_2, C_3) , (N_1, N_2, N_3) is the neighbor partition of R , and for each i C_i^R is a minimal representative of C_i . The algorithm works in time $2^{2^{\mathcal{O}(k)}}(|R| + 1)$.*

Proof. Denote $X = W = T_r[u]$, $Y = \overline{W} = T_r[v]$, let $R_X = \mathcal{R}_r[u]$ and $R_Y = \mathcal{R}_r[v]$.

We iterate over all pairs $(E_u, E_v) \in \mathcal{E}_u \times \mathcal{E}_v$ satisfying the conditions in Lemma 6.12 and determine the width, the arity, and the sum-width of a corresponding W -improvement as in Lemma 6.12. Also, the minimum number of nodes of T r -intersected by a W -improvement corresponding to (E_u, E_v) can be determined as $\mathcal{I}_u(E_u) + \mathcal{I}_v(E_v)$. If no such pair is found we return \perp . Otherwise we find a pair (E_u, E_v) so that E_u is the X_{R_X} -representative of an X -restricted improvement embedding E_X that is globally represented by $(\mathcal{E}_u, \mathcal{I}_u, \mathcal{C}_u)$ and whose tripartition $(C_1 \cap X, C_2 \cap X, C_3 \cap X)$ is, E_v is the Y_{R_Y} -representative of an Y -restricted improvement embedding E_Y that is globally represented by $(\mathcal{E}_v, \mathcal{I}_v, \mathcal{C}_v)$ and whose tripartition $(C_1 \cap Y, C_2 \cap Y, C_3 \cap Y)$ is, and (r, C_1, C_2, C_3) is a global T -improvement of T . As $|\mathcal{E}_u||\mathcal{E}_v| = 2^{2^{\mathcal{O}(k)}}$ and each pair can be checked in time $2^{2^{\mathcal{O}(k)}}$ (root-compatibility by Lemma 6.11), this phase has time complexity $2^{2^{\mathcal{O}(k)}}$.

Let $(f_1^C, f_2^C, f_3^C) = \mathcal{C}_u(E_u) \cup \mathcal{C}_v(E_v)$. Now f_i^C is a concrete representative of an embedding of $G[(X \cap C_i) \cup (Y \cap C_i), (X \setminus C_i) \cup (Y \setminus C_i)] = G[C_i, \overline{C_i}]$ to R_{k_i} , and therefore by Observation 6.2 we obtain a representative of $(C_i, \overline{C_i})$ of size at most $2 \cdot 2^{k_i}$ from f_i^C . We compute a minimal representative C_i^R of C_i in time $2^{\mathcal{O}(k)}$ by Lemma 6.1

We compute the edit set and the neighbor partition with a BFS-type algorithm that maintains a queue Q containing pairs (w, E_w) , where $w \in V(T)$, with the invariant that if w is in the r -subtree of u , then E_w is the $T_r[w]_{\mathcal{R}_r[w]}$ -representative of $E_X \cap T_r[w]$ and if w is in the r -subtree of v , then E_w is the $T_r[w]_{\mathcal{R}_r[w]}$ -representative of $E_Y \cap T_r[w]$. We start by inserting the pairs (u, E_u) and (v, E_v) to Q . Then, we iteratively pop a pair (w, E_w) from the queue. If there is i such that E_w is C_j -empty for all $j \neq i$, then it holds that $T_r[w] \subseteq C_i$, and therefore we insert w to N_i . Otherwise, we insert w to R , let w_1 and w_2 be the r -children of w , and let

$(E_1, E_2) = \mathcal{L}_w(E_w)$. We insert (E_1, w_1) and (E_2, w_2) into Q . This maintains the invariant by the definition of a linked r -table.

For each node $w \in R \cup N_1 \cup N_2 \cup N_3$ we just access tables indexed by E_w and determine C_i -emptiness, so the amount of work is bounded by $|R \cup N_1 \cup N_2 \cup N_3|2^{2^{\mathcal{O}(k)}} = |R|2^{2^{\mathcal{O}(k)}}$. \square

What is left is the $\text{Refine}(R, (N_1, N_2, N_3))$ operation. Computing the refinement T' of T itself is a direct application of [Lemma 5.2](#) and computing the linked r -tables of the new nodes is done by $|R|$ applications of [Lemma 6.14](#), but in order to compute the linked r -tables we must first make T' augmented, that is, for each new edge uv compute a minimal representative of $(T'[uv], T'[vu])$. We use the minimal representatives of C_1 , C_2 , and C_3 returned by the algorithm of [Lemma 6.15](#) for this.

Lemma 6.16. *Let T be a rank decomposition, $r \in E(T)$, and (r, C_1, C_2, C_3) a global T -improvement. Let w be a non-leaf node of T and let w_1 and w_2 be the r -children of w . Let i, j , and l be such that $\{i, j, l\} = \{1, 2, 3\}$. Given minimal representatives of $T_r[w_1] \cap C_i$, $T_r[w_2] \cap C_i$, $\overline{T_r[w]}$, C_j , and C_l , a minimal representative of $(T_r[w] \cap C_i, \overline{T_r[w]} \cap C_i)$ can be computed in $2^{\mathcal{O}(k)}$ time.*

Proof. As (r, C_1, C_2, C_3) is a global T -improvement of T , by [Theorem 6](#) and [Proposition 6.2](#) each of the given minimal representatives has size at most 2^k .

It holds that

$$T_r[w] \cap C_i = (T_r[w_1] \cap C_i) \cup (T_r[w_2] \cap C_i),$$

so by [Lemma 6.2](#) we obtain a representative of $T_r[w] \cap C_i$ as the union of the given minimal representatives of $T_r[w_1] \cap C_i$ and $T_r[w_2] \cap C_i$. It also holds that

$$\overline{T_r[w] \cap C_i} = \overline{T_r[w]} \cup \overline{C_i} = \overline{T_r[w]} \cup C_j \cup C_l,$$

so again by [Lemma 6.2](#) we obtain a representative of $\overline{T_r[w] \cap C_i}$ as the union of the given minimal representatives of $\overline{T_r[w]}$, C_j , and C_l . Now we have a representative of $(T_r[w] \cap C_i, \overline{T_r[w] \cap C_i})$ of size $2^{\mathcal{O}(k)}$, so we can use [Lemma 6.1](#) to compute a minimal representative in time $2^{\mathcal{O}(k)}$. \square

In particular, a minimal representative of $\overline{T_r[w]}$ is available in (T, \mathcal{R}) as $\mathcal{R}[pw]$, where p is the r -parent of w , and minimal representatives of $T_r[w_1] \cap C_i$ and $T_r[w_2] \cap C_i$ are available by doing the construction in an order towards the root r .

This completes the description of the refinement data structure for augmented rank decompositions and thus also the proof of [Lemma 6.5](#).

7 Approximating graph branchwidth

In this section we prove the following theorem.

Theorem 2. *For integer k and an n -vertex graph G , there is an algorithm that in time $2^{\mathcal{O}(k)}n$ either computes a branch decomposition of G of width at most $2k$, or correctly concludes that the branchwidth of G is more than k .*

We start with the definition of branch decomposition of a graph.

Definition 7.1 (Border). *Let G be a graph and $X \subseteq E(G)$. The border $\delta_G(X)$ of X is the set of vertices of G that are incident to an edge in X and to an edge in $E(G) \setminus X$.*

The following result is well-known.

Proposition 7.1. *The function $|\delta_G| : 2^{E(G)} \rightarrow \mathbb{Z}_{\geq 0}$ assigning for each $X \subseteq E(G)$ the cardinality $|\delta_G(X)|$ of the border of X , is a connectivity function.*

A branch decomposition of a graph G is a branch decomposition of function $|\delta_G|$, and the branchwidth of G , denoted by $\text{bw}(G)$ is the branchwidth of $|\delta_G|$. In the rest of this section we assume that we are computing the branchwidth of a graph G and drop the subscript.

For branchwidth we do not need iterative compression as we can use the algorithm of Korhonen [32] and the connection between branchwidth and treewidth [42] to obtain a branch decomposition of G of width at most $3k$ in $2^{\mathcal{O}(k)}n$ time.

The following is the key lemma, and the whole section is devoted to its proof.

Lemma 7.1. *There is a refinement data structure for branch decompositions of graphs with time complexity $t(k) = 2^{\mathcal{O}(k)}$.*

With Theorem 5 and the aforementioned connections to treewidth, this will prove Theorem 2.

The remaining part of this section is organized as follows. In Section 7.1 we define augmented branch decompositions, in Section 7.2 we introduce the objects manipulated in our dynamic programming and prove some properties of them. Then Section 7.3 we give the refinement data structure for branch decompositions using this dynamic programming.

7.1 Augmented branch decompositions

In our refinement data structure we maintain an augmented branch decomposition. An augmented branch decomposition stores the *border description* of each cut.

Definition 7.2 (Border description). *Let $X \subseteq E(G)$. The border description of X is the pair $(\delta(X), f)$, where $f : \delta(X) \rightarrow \mathbb{Z}_{\geq 0}$ is the function so that $f(v)$ is the number of edges in X incident to v .*

An augmented branch decomposition is a branch decomposition T where for each edge $uv \in E(T)$ the border descriptions of $T[uv]$ and $T[vu]$ are stored. Note that an augmented branch decomposition can be represented in $\mathcal{O}(|V(T)|\text{bw}(T))$ space.

The following lemma leads to an algorithm for computing the border descriptions.

Lemma 7.2. *Let X and Y be disjoint subsets of $E(G)$. Given the border descriptions of X and Y , the border description of $X \cup Y$ can be computed in $\mathcal{O}(|\delta(X)| + |\delta(Y)|)$ time.*

Proof. Let $(\delta(X), f)$ be the border description of X and $(\delta(Y), g)$ the border description of Y . It holds that $\delta(X \cup Y) \subseteq \delta(X) \cup \delta(Y)$, where $(\delta(X) \cup \delta(Y)) \setminus \delta(X \cup Y)$ can be identified as the vertices v for which $f(v) + g(v)$ is the degree of v . Now $(\delta(X \cup Y), f + g)$ is the border description of $X \cup Y$. \square

It follows that given a branch decomposition T , a corresponding augmented branch decomposition can be computed in $\mathcal{O}(|V(T)|\text{bw}(T))$ time by applying Lemma 7.2 $2|V(T)|$ times.

7.2 Borders of tripartitions

We define the partial solutions stored in dynamic programming tables.

Definition 7.3 (Border of a tripartition). *Let $A \subseteq E(G)$ and (C_1, C_2, C_3) a tripartition of A . The border of (C_1, C_2, C_3) is the 9-tuple $(R_1, R_2, R_3, r_1, r_2, r_3, k_1, k_2, k_3)$, where for each $i \in \{1, 2, 3\}$ it holds that $R_i = \delta(C_i) \cap \delta(A)$, $r_i = 0$ if $C_i = \emptyset$ and otherwise $r_i = 1$, and k_i is the number of vertices $v \in V(G) \setminus \delta(A)$ such that there exists an edge $e_1 \in C_i$ incident to v and an edge $e_2 \in A \setminus C_i$ incident to v , i.e., $k_i = |\delta(C_i) \cap \delta(A \setminus C_i) \setminus \delta(A)|$.*

We call a border of tripartition k -bounded if for each i it holds that $k_i \leq k$. Note that if $|\delta(A)| \leq k$, then the number of k -bounded borders of tripartitions of A is $\leq (2^k)^3 2^3 k^3 = 2^{\mathcal{O}(k)}$, and each of them can be represented in $\mathcal{O}(k)$ space.

We define the *composition* of borders of tripartitions to combine partial solutions.

Definition 7.4 (Composition). Let X and Y be disjoint subsets of $E(G)$ and $A = X \cup Y$. Let $R_X = (R_1^X, R_2^X, R_3^X, r_1^X, r_2^X, r_3^X, k_1^X, k_2^X, k_3^X)$ be the border of a tripartition of X and $R_Y = (R_1^Y, R_2^Y, R_3^Y, r_1^Y, r_2^Y, r_3^Y, k_1^Y, k_2^Y, k_3^Y)$ be the border of a tripartition of Y . Denote $F = (\delta(X) \cup \delta(Y)) \setminus \delta(A)$. The composition of R_X and R_Y is the 9-tuple $(R_1, R_2, R_3, r_1, r_2, r_3, k_1, k_2, k_3)$, where for each $i \in \{1, 2, 3\}$,

1. $R_i = \delta(A) \cap (R_i^X \cup R_i^Y)$,
2. $r_i = \max(r_i^X, r_i^Y)$, and
3. $k_i = k_i^X + k_i^Y + |F \cap (R_i^X \cup R_i^Y) \cap (R_j^X \cup R_l^X \cup R_j^Y \cup R_l^Y)|$, where $\{i, j, l\} = \{1, 2, 3\}$.

Note that when the sets $\delta(X)$, $\delta(Y)$, and $\delta(A)$ are given and have size $\leq k$, the composition can be computed in $\mathcal{O}(k)$ time.

Next we prove that the composition operation really combines partial solutions as expected.

Lemma 7.3. Let X and Y be disjoint subsets of $E(G)$ and $A = X \cup Y$. If R_X is the border of a tripartition (C_1^X, C_2^X, C_3^X) and R_Y is the border of a tripartition (C_1^Y, C_2^Y, C_3^Y) , then the composition of R_X and R_Y is the border of the tripartition $(C_1^X \cup C_1^Y, C_2^X \cup C_2^Y, C_3^X \cup C_3^Y)$.

Proof. Let V^X be the set of vertices incident to X and V^Y the set of vertices incident to Y . Let also $F = (\delta(X) \cup \delta(Y)) \setminus \delta(A)$. Let $i \in \{1, 2, 3\}$ and let j and l be such that $\{i, j, l\} = \{1, 2, 3\}$. It holds that

$$\delta(C_i^X \cup C_i^Y) = (\delta(C_i^X) \cup \delta(C_i^Y)) \cap (\delta(C_j^X) \cup \delta(C_l^X) \cup \delta(C_j^Y) \cup \delta(C_l^Y) \cup \delta(\bar{A})).$$

Therefore by observing that $\delta(\bar{A}) = \delta(A)$, $\delta(A) \cap V^X \subseteq \delta(X)$, and $\delta(A) \cap V^Y \subseteq \delta(Y)$ we get

$$\delta(C_i^X \cup C_i^Y) \cap \delta(A) = (\delta(C_i^X) \cup \delta(C_i^Y)) \cap \delta(A) = (R_i^X \cup R_i^Y) \cap \delta(A),$$

so the sets R_1 , R_2 , and R_3 in the composition are correct.

By observing that $V^X \cap F \subseteq \delta(X)$ and $V^Y \cap F \subseteq \delta(Y)$, we have that

$$\begin{aligned} \delta(C_i^X \cup C_i^Y) \cap F &= F \cap (\delta(C_i^X) \cup \delta(C_i^Y)) \cap (\delta(C_j^X) \cup \delta(C_l^X) \cup \delta(C_j^Y) \cup \delta(C_l^Y)) \\ &= F \cap (R_i^X \cup R_i^Y) \cap (R_j^X \cup R_l^X \cup R_j^Y \cup R_l^Y). \end{aligned}$$

Since $V^X \setminus (F \cup \delta(A)) = V^X \setminus \delta(X)$ and $V^Y \setminus (F \cup \delta(A)) = V^Y \setminus \delta(Y)$ are disjoint, we get that

$$\begin{aligned} &|\delta(C_i^X \cup C_i^Y) \setminus (F \cup \delta(A))| \\ &= |(\delta(C_i^X) \cap (\delta(C_j^X) \cup \delta(C_l^X)) \setminus \delta(X)) + |(\delta(C_i^Y) \cap (\delta(C_j^Y) \cup \delta(C_l^Y)) \setminus \delta(Y))| \\ &= |\delta(C_i^X) \cap \delta(X \setminus C_i^X) \setminus \delta(X)| + |\delta(C_i^Y) \cap \delta(Y \setminus C_i^Y) \setminus \delta(Y)|. \end{aligned}$$

Hence the numbers k_1 , k_2 , and k_3 in the composition are correct. The numbers r_1 , r_2 , and r_3 are correct by observing that $C_i^X \cup C_i^Y$ is empty if and only if both C_i^X and C_i^Y are empty. \square

The next lemma gives the method for determining if there exists a W -improvement based on borders of tripartitions.

Lemma 7.4. Let T be a rank decomposition, $uv = r \in E(T)$, and $W = T[uv]$. Denote $X = W$ and $Y = \bar{W}$. There exists a W -improvement (C_1, C_2, C_3) with arity α and $|\delta(C_i)| = k_i$ for each $i \in \{1, 2, 3\}$ if and only if there exists R_X and R_Y such that

1. $R_X = (R_1^X, R_2^X, R_3^X, r_1^X, r_2^X, r_3^X, k_1^X, k_2^X, k_3^X)$ is the border of $(C_1 \cap X, C_2 \cap X, C_3 \cap X)$,

2. $R_Y = (R_1^Y, R_2^Y, R_3^Y, r_1^Y, r_2^Y, r_3^Y, k_1^Y, k_2^Y, k_3^Y)$ is the border of $(C_1 \cap Y, C_2 \cap Y, C_3 \cap Y)$,
3. the composition of R_X and R_Y is $(\emptyset, \emptyset, \emptyset, r_1, r_2, r_3, k_1, k_2, k_3)$, where $r_1 + r_2 + r_3 = \alpha$ and $k_i < |\delta(W)|/2$ for each i , and
4. for each i it holds that $k_i^X + |R_i^X| < |\delta(W)|$ and $k_i^Y + |R_i^Y| < |\delta(W)|$.

Proof. Suppose that such R_X and R_Y exists. By [Lemma 7.3](#) and the fact that $\delta(E(G)) = \emptyset$, $(\emptyset, \emptyset, \emptyset, r_1, r_2, r_3, k_1, k_2, k_3)$ is the border of (C_1, C_2, C_3) . By the definition of border we have that $k_i = |\delta(C_i)|$ and $r_1 + r_2 + r_3$ is the number of non-empty sets in (C_1, C_2, C_3) . It remains to prove that $|\delta(C_i \cap W)| = k_i^X + |R_i^X|$ and that $|\delta(C_i \cap \overline{W})| = k_i^Y + |R_i^Y|$ for each i . We have that

$$\begin{aligned}
\delta(W \cap C_i) &= (\delta(W \cap C_i) \cap \delta(\overline{W})) \cup (\delta(W \cap C_i) \cap \delta(W \setminus C_i)) \\
&= (\delta(X \cap C_i) \cap \delta(X)) \cup (\delta(X \cap C_i) \cap \delta(X \setminus C_i)) \\
&= (\delta(X \cap C_i) \cap \delta(X)) \cup (\delta(X \cap C_i) \cap \delta(X \setminus C_i) \cap \delta(X)) \\
&\quad \cup (\delta(X \cap C_i) \cap \delta(X \setminus C_i) \setminus \delta(X)) \\
&= (\delta(X \cap C_i) \cap \delta(X)) \cup (\delta(X \cap C_i) \cap \delta(X \setminus C_i) \setminus \delta(X)).
\end{aligned}$$

Therefore, by the definition of border,

$$\begin{aligned}
&|(\delta(X \cap C_i) \cap \delta(X)) \cup (\delta(X \cap C_i) \cap \delta(X \setminus C_i) \setminus \delta(X))| \\
&= |\delta(X \cap C_i) \cap \delta(X)| + |\delta(X \cap C_i) \cap \delta(X \setminus C_i) \setminus \delta(X)| = |R_i^X| + k_i^X.
\end{aligned}$$

The other case is symmetric.

The above is the proof of the if direction. The proof for the only if direction is the same but starting from supposing that such W -improvement (C_1, C_2, C_3) exists and letting R_X be the border of $(C_1 \cap X, C_2 \cap X, C_3 \cap X)$ and R_Y the border of $(C_1 \cap Y, C_2 \cap Y, C_3 \cap Y)$. \square

7.3 Refinement data structure for graph branch decompositions

In the refinement data structure for branch decompositions we maintain an augmented branch decomposition T rooted at edge $r \in E(T)$ and a dynamic programming table that stores for each node $w \in V(T)$ all k -bounded borders of tripartitions of $T_r[w]$ and information about how many nodes in the r -subtree of w they intersect. We call this dynamic programming table an r -table, to signify that it is directed towards r .

In this subsection we always assume that k is an integer such that $\text{bw}(T) \leq k$, and therefore we only care about k -bounded borders of tripartitions. Next we formally define the contents of an r -table.

Definition 7.5 (r -table). *Let T be a branch decomposition, $r \in E(T)$, $w \in V(T)$, and $A = T_r[w]$. The r -table of w is the pair $(\mathcal{B}, \mathcal{I})$, where \mathcal{B} is the set of all k -bounded borders of tripartitions of A , and \mathcal{I} is a function mapping each $R \in \mathcal{B}$ to the least integer i such that there exists a tripartition of A whose border R is and that r -intersects i nodes of the r -subtree of w .*

As there are $2^{\mathcal{O}(k)}$ k -bounded tripartitions of $T_r[w]$, the r -table of w can be represented in $2^{\mathcal{O}(k)}$ space.

Lemma 7.5. *Let T be an augmented branch decomposition, $r \in E(T)$, and w a non-leaf node of T with r -children w_1 and w_2 . Given the r -tables of w_1 and w_2 , the r -table of w can be constructed in $2^{\mathcal{O}(k)}$ time.*

Proof. Denote $A = T_r[w]$, $X = T_r[w_1]$, and $Y = T_r[w_2]$. Let $(\mathcal{B}_{w_1}, \mathcal{I}_{w_1})$ and $(\mathcal{B}_{w_2}, \mathcal{I}_{w_2})$ be the r -tables of w_1 and w_2 .

We construct the r -table $(\mathcal{B}, \mathcal{I})$ of w as follows. We iterate over all pairs $(R_X, R_Y) \in \mathcal{B}_{w_1} \times \mathcal{B}_{w_2}$ and let \mathcal{B} be the set of compositions of those pairs. This correctly constructs \mathcal{B} by [Lemma 7.3](#) and the observation that if (C_1, C_2, C_3) is a tripartition of A whose border is k -bounded, then $(C_1 \cap X, C_2 \cap X, C_3 \cap X)$ is a tripartition of X whose border is k -bounded and $(C_1 \cap Y, C_2 \cap Y, C_3 \cap Y)$ is a tripartition of Y whose border is k -bounded. For each $R \in \mathcal{B}$ we set $\mathcal{I}(R)$ as the minimum value of $\mathcal{I}_{w_1}(R_X) + \mathcal{I}_{w_2}(R_Y) + i_w$ over such pairs R_X, R_Y whose composition R is, where $i_w = 1$ if R is of form $(\dots, r_1, r_2, r_3, \dots)$ where $r_1 + r_2 + r_3 \geq 2$, and $i_w = 0$ otherwise. This correctly constructs \mathcal{I} by the observations that (C_1, C_2, C_3) r -intersects a node w' in the r -subtree of w_1 if and only if $(C_1 \cap X, C_2 \cap X, C_3 \cap X)$ intersects w' , (C_1, C_2, C_3) r -intersects a node w' in the r -subtree of w_2 if and only if $(C_1 \cap Y, C_2 \cap Y, C_3 \cap Y)$ intersects w' , and that (C_1, C_2, C_3) intersects w if and only if $r_1 + r_2 + r_3 \geq 2$.

As $|\mathcal{B}_{w_1}| |\mathcal{B}_{w_2}| = 2^{\mathcal{O}(k)}$, the time complexity is $2^{\mathcal{O}(k)}$. \square

Now the $\text{Init}(T, r)$ operation can be implemented in $|V(T)| 2^{\mathcal{O}(k)}$ time by first making T augmented by $2|V(T)|$ applications of [Lemma 7.2](#) and then constructing the k -bounded r -tables of all nodes in the order from leafs to root by $|V(T)|$ applications of [Lemma 7.5](#). For the $\text{Move}(vw)$ operation, we note the r -table of a node $x \in V(T)$ depends only on the r -subtree of x , and therefore by [Observation 5.1](#) it suffices to recompute only the r -table of the node v when using $\text{Move}(vw)$. Therefore $\text{Move}(vw)$ can be implemented in $2^{\mathcal{O}(k)}$ time by a single application of [Lemma 7.5](#). The $\text{Width}()$ operation returns $|\delta(T[uv])|$, which is available because T is augmented. The $\text{Output}()$ operation is also straightforward as it just returns the branch decomposition we are maintaining.

The following lemma implements the operations $\text{CanRefine}()$ and $\text{EditSet}()$ based on [Lemma 7.4](#).

Lemma 7.6. *Let T be a branch decomposition, $uv = r \in E(T)$, and $W = T[uv]$. For each node $w \in V(T)$ let $(\mathcal{B}_w, \mathcal{I}_w)$ be the r -table of w . There is an algorithm that returns \perp if there is no W -improvement, and otherwise returns a tuple (R, N_1, N_2, N_3) , where (r, C_1, C_2, C_3) is a global T -improvement, R is the edit set of (r, C_1, C_2, C_3) and (N_1, N_2, N_3) is the neighbor partition of R . The algorithm works in time $2^{\mathcal{O}(k)}(|R| + 1)$.*

Proof. Denote $X = W = T_r[u]$, $Y = \overline{W} = T_r[v]$. We iterate over all pairs $(R_X, R_Y) \in \mathcal{B}_u \times \mathcal{B}_v$, using [Lemma 7.4](#) to either determine that there is no W -improvement or to find a pair (R_X, R_Y) such that there is a global T -improvement (r, C_1, C_2, C_3) so that R_X is the border of $(C_1 \cap X, C_2 \cap X, C_3 \cap X)$, R_Y is the border of $(C_1 \cap Y, C_2 \cap Y, C_3 \cap Y)$, and the number of nodes of T r -intersected by (C_1, C_2, C_3) is $\mathcal{I}_u(R_X) + \mathcal{I}_v(R_Y)$. In time $2^{\mathcal{O}(k)}$ we either find such a pair or conclude that there is no W -improvement.

We compute the edit set and the neighbor partition with a BFS-type algorithm that maintains a queue Q containing pairs (w, R_w) , where $w \in V(T)$, with the invariant that there exists a global T -improvement (r, C_1, C_2, C_3) so that for all pairs (w, R_w) that appear in the queue, R_w is the border of $(C_1 \cap T_r[w], C_2 \cap T_r[w], C_3 \cap T_r[w])$. We start by inserting the pairs (u, R_X) and (v, R_Y) to Q . We iteratively pop a pair (w, R_w) from the queue. Denote $R_w = (\dots, r_1, r_2, r_3, \dots)$. If there is i such that $r_j = 0$ for both $j \neq i$, then it holds that $T_r[w] \subseteq C_i$, and therefore we insert w to N_i . Otherwise, we insert w to R , let w_1 and w_2 be the r -children of w , and find a pair $(R_{w_1}, R_{w_2}) \in \mathcal{B}_{w_1} \times \mathcal{B}_{w_2}$ so that the composition of R_{w_1} and R_{w_2} is R_w and $\mathcal{I}_{w_1}(R_{w_1}) + \mathcal{I}_{w_2}(R_{w_2}) + 1 = \mathcal{I}_w(R_w)$. This kind of pair exists and maintains the invariant by the definition of r -table and [Lemma 7.3](#).

For each node $w \in R \cup N_1 \cup N_2 \cup N_3$ we iterate over $\mathcal{B}_{w_1} \times \mathcal{B}_{w_2}$ and access some tables, so the total amount of work is bounded by $|R \cup N_1 \cup N_2 \cup N_3| 2^{\mathcal{O}(k)} = |R| 2^{\mathcal{O}(k)}$. \square

What is left is the $\text{Refine}(R, (N_1, N_2, N_3))$ operation. Computing the refinement of T is done in $\mathcal{O}(|R|)$ time by applying [Lemma 5.2](#). Computing the border descriptions of the newly inserted edges can be done in a bottom-up fashion starting from $N_1 \cup N_2 \cup N_3$ by $2|R|$ applications of [Lemma 7.2](#). Then, computing the r -tables of the newly inserted nodes can be done also in a similar fashion in $|R|2^{\mathcal{O}(k)}$ time by $|R|$ applications of [Lemma 7.5](#).

This completes the description of the refinement data structure for branch decompositions and thus also the proof of [Lemma 7.1](#).

Acknowledgements

We thank Eunjung Kim and Sang-il Oum for answering our questions about their paper. We also thank Michał Pilipczuk for suggesting the problem of approximating rankwidth.

References

- [1] S. ARNBORG, J. LAGERGREN, AND D. SEESE, *Easy problems for tree-decomposable graphs*, J. Algorithms, 12 (1991), pp. 308–340. [1](#)
- [2] H. L. BODLAENDER, *A linear-time algorithm for finding tree-decompositions of small treewidth*, SIAM J. Computing, 25 (1996), pp. 1305–1317. [1](#), [4](#), [8](#)
- [3] H. L. BODLAENDER, P. G. DRANGE, M. S. DREGI, F. V. FOMIN, D. LOKSHTANOV, AND M. PILIPCZUK, *A $c^k n$ 5-approximation algorithm for treewidth*, SIAM J. Computing, 45 (2016), pp. 317–378. [4](#), [8](#)
- [4] H. L. BODLAENDER AND T. KLOKS, *Efficient and constructive algorithms for the pathwidth and treewidth of graphs*, J. Algorithms, 21 (1996), pp. 358–402. [3](#)
- [5] H. L. BODLAENDER AND D. M. THILIKOS, *Constructive linear time algorithms for branch-width*, in Automata, languages and programming (Bologna, 1997), vol. 1256 of Lecture Notes in Comput. Sci., Springer, Berlin, 1997, pp. 627–637. [4](#)
- [6] R. B. BORIE, R. G. PARKER, AND C. A. TOVEY, *Automatic generation of linear-time algorithms from predicate calculus descriptions of problems on recursively constructed graph families*, Algorithmica, 7 (1992), pp. 555–581. [1](#)
- [7] B. BUI-XUAN, J. A. TELLE, AND M. VATSHELLE, *H-join decomposable graphs and algorithms with runtime single exponential in rankwidth*, Discret. Appl. Math., 158 (2010), pp. 809–819. [3](#), [24](#), [26](#), [27](#)
- [8] ———, *Boolean-width of graphs*, Theor. Comput. Sci., 412 (2011), pp. 5187–5204. [2](#), [3](#)
- [9] W. COOK AND P. D. SEYMOUR, *Tour merging via branch-decomposition*, INFORMS Journal on Computing, 15 (2003), pp. 233–248. [3](#)
- [10] B. COURCELLE, *The monadic second-order logic of graphs. III. Tree-decompositions, minors and complexity issues*, RAIRO Inform. Théor. Appl., 26 (1992), pp. 257–286. [1](#)
- [11] B. COURCELLE, *The expression of graph properties and graph transformations in monadic second-order logic*, Handbook of Graph Grammars, (1997), pp. 313–400. [1](#)
- [12] B. COURCELLE AND J. ENGELFRIET, *Graph Structure and Monadic Second-Order Logic: A Language-Theoretic Approach*, Cambridge University Press, 2012. [1](#)

- [13] B. COURCELLE, J. ENGELFRIET, AND G. ROZENBERG, *Handle-rewriting hypergraph grammars*, J. Comput. Syst. Sci., 46 (1993), pp. 218–270. [1](#)
- [14] B. COURCELLE, J. A. MAKOWSKY, AND U. ROTICS, *Linear time solvable optimization problems on graphs of bounded clique-width*, Theory Comput. Syst., 33 (2000), pp. 125–150. [2](#), [3](#)
- [15] ———, *On the fixed parameter complexity of graph enumeration problems definable in monadic second-order logic*, Discrete Applied Mathematics, 108 (2001), pp. 23–52. [2](#)
- [16] B. COURCELLE AND S. OUM, *Vertex-minors, monadic second-order logic, and a conjecture by seese*, J. Comb. Theory, Ser. B, 97 (2007), pp. 91–126. [2](#), [3](#), [4](#)
- [17] M. CYGAN, F. V. FOMIN, L. KOWALIK, D. LOKSHTANOV, D. MARX, M. PILIPCZUK, M. PILIPCZUK, AND S. SAURABH, *Parameterized Algorithms*, Springer, 2015. [1](#), [8](#)
- [18] G. DAMIAND, M. HABIB, AND C. PAUL, *A simple paradigm for graph recognition: application to cographs and distance hereditary graphs*, Theor. Comput. Sci., 263 (2001), pp. 99–111. [3](#)
- [19] C. C. FAST AND I. V. HICKS, *A branch decomposition algorithm for the p-median problem*, INFORMS J. Comput., 29 (2017), pp. 474–488. [3](#)
- [20] F. V. FOMIN AND D. M. THILIKOS, *Dominating sets in planar graphs: Branch-width and exponential speed-up*, SIAM J. Computing, 36 (2006), pp. 281–309. [3](#)
- [21] R. GANIAN AND P. HLINENÝ, *On parse trees and myhill-nerode-type tools for handling graphs of bounded rank-width*, Discret. Appl. Math., 158 (2010), pp. 851–867. [3](#), [24](#)
- [22] R. GANIAN, P. HLINENÝ, AND J. OBDRZÁLEK, *Better algorithms for satisfiability problems for formulas of bounded rank-width*, Fundam. Informaticae, 123 (2013), pp. 59–76. [3](#), [24](#)
- [23] M. U. GERBER AND D. KOBLER, *Algorithms for vertex-partitioning problems on graphs with fixed clique-width*, Theoret. Comput. Sci., 299 (2003), pp. 719–734. [3](#)
- [24] B. GODLIN, T. KOTEK, AND J. A. MAKOWSKY, *Evaluations of graph polynomials*, in Proceedings of the 34th International Workshop on Graph-Theoretic Concepts in Computer Science (WG), vol. 5344 of Lecture Notes in Comput. Sci., 2008, pp. 183–194. [3](#)
- [25] P. HLINENÝ, *A parametrized algorithm for matroid branch-width*, SIAM J. Comput., 35 (2005), pp. 259–277. [3](#)
- [26] P. HLINENÝ, *Branch-width, parse trees, and monadic second-order logic for matroids*, J. Combin. Theory Ser. B, 96 (2006), pp. 325–351. [3](#)
- [27] P. HLINENÝ AND S. OUM, *Finding branch-decompositions and rank-decompositions*, SIAM J. Computing, 38 (2008), pp. 1012–1032. [1](#), [3](#), [4](#)
- [28] P. HLINENÝ, S. OUM, D. SEESE, AND G. GOTTLÖB, *Width parameters beyond tree-width and their applications*, Comput. J., 51 (2008), pp. 326–362. [2](#)
- [29] J. JEONG, E. J. KIM, AND S. OUM, *Finding branch-decompositions of matroids, hypergraphs, and more*, in Proceedings of the 45th International Colloquium of Automata, Languages and Programming (ICALP), vol. 107 of LIPIcs, Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2018, pp. 80:1–80:14. [1](#), [2](#), [3](#), [4](#)

- [30] D. KOBLER AND U. ROTICS, *Polynomial algorithms for partitioning problems on graphs with fixed clique-width (extended abstract)*, in SODA'01, ACM-SIAM, 2001, pp. 468–476. [3](#)
- [31] ———, *Edge dominating set and colorings on graphs with fixed clique-width*, Discrete Appl. Math., 126 (2003), pp. 197–221. [3](#)
- [32] T. KORHONEN, *A single-exponential time 2-approximation algorithm for treewidth*, CoRR/To appear in FOCS 2021, abs/2104.07463 (2021). [3](#), [4](#), [8](#), [38](#)
- [33] S. OUM, *Rank-width and vertex-minors*, J. Comb. Theory, Ser. B, 95 (2005), pp. 79–100. [3](#)
- [34] S. OUM, *Approximating rank-width and clique-width quickly*, ACM Transactions on Algorithms, 5 (2008). [1](#), [2](#), [3](#), [4](#)
- [35] S. OUM, *Rank-width: Algorithmic and structural results*, Discret. Appl. Math., 231 (2017), pp. 15–24. [1](#), [3](#)
- [36] S. OUM AND P. D. SEYMOUR, *Testing branch-width*, J. Combinatorial Theory Ser. B, 97 (2007), pp. 385–393. [1](#), [3](#)
- [37] S.-I. OUM, *Graphs of Bounded Rank-width*, PhD thesis, Princeton University, 2005. [2](#)
- [38] S.-I. OUM AND P. SEYMOUR, *Approximating clique-width and branch-width*, J. Combin. Theory Ser. B, 96 (2006), pp. 514–528. [1](#), [2](#), [3](#), [4](#), [24](#)
- [39] M. RAO, *MSOL partitioning problems on graphs of bounded treewidth and clique-width*, Theoret. Comput. Sci., 377 (2007), pp. 260–267. [3](#)
- [40] B. A. REED, K. SMITH, AND A. VETTA, *Finding odd cycle transversals*, Operations Research Letters, 32 (2004), pp. 299–301. [8](#)
- [41] N. ROBERTSON AND P. D. SEYMOUR, *Graph minors. X. Obstructions to tree-decomposition*, J. Combinatorial Theory Ser. B, 52 (1991), pp. 153–190. [1](#), [3](#), [4](#)
- [42] P. D. SEYMOUR AND R. THOMAS, *Call routing and the ratcatcher*, Combinatorica, 14 (1994), pp. 217–241. [4](#), [38](#)
- [43] K. SUCHAN AND I. TODINCA, *On powers of graphs of bounded NLC-width (clique-width)*, Discrete Appl. Math., 155 (2007), pp. 1885–1893. [3](#)
- [44] E. WANKE, *k-NLC graphs and polynomial algorithms*, Discret. Appl. Math., 54 (1994), pp. 251–266. [2](#), [3](#)

Appendix. Definitions of treewidth and cliquewidth

Treewidth. A *tree decomposition* of a graph G is a pair (X, T) where T is a tree whose vertices we will call *nodes* and $X = (\{X_i \mid i \in V(T)\})$ is a collection of subsets of $V(G)$ such that

1. $\bigcup_{i \in V(T)} X_i = V(G)$,
2. for each edge $(v, w) \in E(G)$, there is an $i \in V(T)$ such that $v, w \in X_i$, and
3. for each $v \in V(G)$ the set of nodes $\{i \mid v \in X_i\}$ forms a subtree of T .

The *width* of a tree decomposition $(\{X_i \mid i \in V(T)\}, T)$ equals $\max_{i \in V(T)} \{|X_i| - 1\}$. The *treewidth* of a graph G is the minimum width over all tree decompositions of G .

Cliquewidth. Let G be a graph, and k be a positive integer. A *k-graph* is a graph whose vertices are labeled by integers from $\{1, 2, \dots, k\}$. We call the *k-graph* consisting of exactly one vertex labeled by some integer from $\{1, 2, \dots, k\}$ an *initial k-graph*. The *cliquewidth* is the smallest integer k such that G can be constructed by means of repeated application of the following four operations on *k-graphs*:

- *introduce*: construction of an initial *k-graph* labeled by i and denoted by $i(v)$ (that is, $i(v)$ is a *k-graph* with a single vertex),
- *disjoint union* (denoted by \oplus),
- *relabel*: changing all labels i to j (denoted by $\rho_{i \rightarrow j}$), and
- *join*: connecting all vertices labeled by i with all vertices labeled by j by edges (denoted by $\eta_{i,j}$).

Using the symbols of these operation, we can construct well-formed expressions. An expression is called *k-expression* for G if the graph produced by performing these operations, in the order defined by the expression, is isomorphic to G when labels are removed, and the *cliquewidth of G* is the minimum k such that there is a *k-expression* for G .