


COMPUTING THE DIMENSION OF A BIPARTITION MATRIX

DAWSON FREEMAN AND RONALD UMBLE

ABSTRACT. This article presents a computer program that computes the dimension of a bipartition matrix. Its dimension has three independent components: row dimension, column dimension, and entry dimension. The program applies four routines of independent interest: (1) a routine that factors a bipartition as a formal product of indecomposables, (2) a routine that computes the inverse and recovers the bipartition, (3) a routine that factors a bipartition matrix as a formal product of indecomposables, and (4) a routine that calculates the “transpose-rotation” of a bipartition matrix (the column dimension is the row dimension of the transpose-rotation).

1. INTRODUCTION

An *ordered set* is either the empty set or a strictly increasing set of positive integers. The *permutahedron* P_n is an $(n - 1)$ -dimensional contractible polytope whose vertices are identified with the $n!$ permutations $A_1 | \cdots | A_n$ of the ordered set $\underline{n} = \{1, 2, \dots, n\}$. The edges of P_n are identified with the *partitions* of \underline{n} obtained by removing a single bar, called a *divider*, from each permutation $A_1 | \cdots | A_n$. For example, from the permutation $3|1|2$ we obtain the partitions $13|2$ and $3|12$, which are identified with the edges of P_3 having common vertex $3|1|2$ (see Figure 1). In general, removing $n - k$ dividers from a permutation of \underline{n} produces a partition of length k , which is identified with an $(n - k)$ -dimensional face of P_n . While P_4 was known to Johannes Kepler in 1619 [2], the family $\{P_n\}_{n \geq 1}$ of permutahedra was first studied by the Dutch mathematician Pieter Hendrik Schoute in 1911 [6]. In low dimensions, P_1 is a point, P_2 is a unit interval, P_3 is a hexagon, and P_4 is a truncated octahedron (see Figure 1).

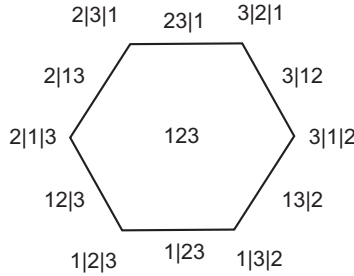Figure 1. The Permutahedron P_3 .

Date: January 29, 2024.

2020 Mathematics Subject Classification. 03E05, 05A18, 52B05, 52B11 .

Key words and phrases. Permutahedron, associahedron, bipartition, bipartition matrix.

There is a combinatorial bijection between the set of partitions of \underline{n} and the set of faces of P_n ; the *dimension* of a partition of \underline{n} is the geometric dimension of the corresponding face. Furthermore, there is a combinatorial bijection between the set of faces of P_n and the set of down-rooted planar leveled trees (PLTs) with $n+1$ leaves. Given a PLT T with $n+1$ leaves and k levels, number the leaves from left-to-right and assign the label ℓ to the vertex of T at which the branch containing leaf ℓ meets the branch containing leaf $\ell+1$ (a vertex may have multiple labels). With level 1 as the top level, let A_i denote the set of vertex labels in level i ; then T corresponds to the $(n-k)$ -dimensional face $A_1 | \cdots | A_k$ of P_n . For example, the 2-dimensional face of P_5 corresponding to $5|13|24$ appears in Figure 2.




Figure 2. The PLT corresponding to $5|13|24$.

There is a related family of contractible polytopes $K := \{K_n\}_{n \geq 2}$ called *associahedra* constructed by J. Stasheff [5] whose faces are indexed by planar rooted trees (PRTs) with n leaves (without levels), and there is a natural projection $\vartheta : P_{n-1} \rightarrow K_n$ due to A. Tonks [7] given by forgetting levels. Let θ_1 denote the PRT with a single leaf (and no vertices), and let θ_n denote the n -leaf *corolla* with a single vertex. Then the PRT in Figure 2 (forgetting levels) can be constructed by grafting a copy of θ_2 onto each leaf of θ_3 .

Think of θ_n as a multilinear operator with n inputs and one output, and think of θ_1 as the identity operator $\mathbf{1}$. Define the \circ_i -composition $(\theta_n \circ_i \theta_m)(x_1 \otimes \cdots \otimes x_n) := \theta_n(x_1 \otimes \cdots \otimes x_{i-1} \otimes \theta_m \otimes x_{i+1} \otimes \cdots \otimes x_n)$; then the grafting process can be thought of as a sequence of \circ_i -composition. For example, the PRT in Figure 2 can be represented (non-uniquely) as

$$((\theta_3 \circ_1 \theta_2) \circ_3 \theta_2) \circ_5 \theta_2.$$

A collection of multilinear operators $\{\theta_n : \theta_1 = \mathbf{1}\}$ together with \circ_i -composition is a *non- Σ operad*. For example, top-dimensional cells $\{\theta_n\}$ of K thought of as multilinear operators form a non- Σ operad and faces of K are identified with \circ_i -compositions.

The levels in a PLT encode grafting order. For example, the PLT in Figure 2 with one vertex in level 1, two vertices in level 2, and one vertex in level 3 is *uniquely* represented as the composition $\theta_3(\theta_2 \otimes \theta_2 \otimes \mathbf{1})(\mathbf{1}^{\otimes 4} \otimes \theta_2)$, which indicates that a copy of θ_2 is grafted onto the third leaf of θ_3 , after which two copies of θ_2 are grafted onto the first and second leaves simultaneously. Equality as operators is an equivalence relation of the set of PLTs. Thus $\theta_3(\theta_2 \otimes \theta_2 \otimes \mathbf{1})(\mathbf{1}^{\otimes 4} \otimes \theta_2)$ and $\theta_3(\theta_2 \otimes \theta_2 \otimes \theta_2)$ are equivalent in P_5 and their image under ϑ is the equivalence class $[\theta_3(\theta_2 \otimes \theta_2 \otimes \theta_2)]$ in K_6 .

Stasheff defined the notion of an A_∞ -algebra by appealing to the operadic structure of the associahedra K in the following way: Denote the cellular chain complex of K by $(CC_*(K), \partial)$. Given a commutative ring R with unity and a DG R -module (A, d) , denote the tensor module of A by TA , and let ∇ denote the differential on $Hom^*(TA, A)$ induced by d .

Definition 1. A DG R -module A with differential d of degree $+1$ together with a family of operations $m = \{m_n \in Hom^{2-n}(A^{\otimes n}, A)\}_{n \geq 2}$ is an A_∞ -**algebra** if there exists a chain map $\alpha : (CC_*(K), \partial) \rightarrow (Hom^*(TA, A), \nabla)$ of non- Σ operads such that $\alpha(\theta_n) = m_n$.

S. Sanedidze and the second author extended Stasheff's ideas in [3] and [4]. There is a family of $(m+n-1)$ -dimensional contractible polytopes $PP := \{PP_{n,m}\}_{m+n \geq 1}$ called *bipermutahedra*, of which $PP_{n,0} \cong PP_{0,n}$ is the permutahedron P_n , and a related family of $(m+n-3)$ -dimensional contractible polytopes $KK := \{KK_{n,m}\}_{m+n \geq 2}$ called *biassociahedra*, of which $KK_{1,n} \cong KK_{n,1}$ is the associahedron K_n . There is a natural projection $\vartheta : PP_{n,m} \rightarrow KK_{n+1,m+1}$ that agrees with ϑ when $mn = 0$, and the notion of a matrad, which generalizes the definition of a non- Σ operad. Denote the top-dimensional cell of $KK_{n,m}$ by θ_m^n .

Definition 2. A DG R -module A with differential d of degree $+1$ together with a family of operations $\omega = \{\omega^{n,m} \in Hom^{3-m-n}(A^{\otimes m}, A^{\otimes n})\}_{m+n \geq 3}$ is an A_∞ -**bialgebra** if there exists a chain map $\alpha : (CC_*(KK), \partial) \rightarrow (Hom^*(TA, TA), \nabla)$ of matrads such that $\alpha(\theta_m^n) = \omega^{n,m}$.

The definition of a matrad rests heavily on the notion of a *bipartition matrix* (BPM). A *bipartition* is an ordered pair of partitions of the same length. A BPM has bipartition entries and tight conditions on its rows and columns. A bipartition factors as a formal product of indecomposable BPMs, and the dimension of a bipartition is the sum of the dimensions of its indecomposable factors. The fact that a face of $PP_{n,m}$ is identified with a bipartition or some generalization thereof relates the dimension of a BPM to the geometry of $PP_{n,m}$ and is fundamentally important. The dimension of a BPM is defined recursively and is well-suited for machine computation.

This article presents a computer program that computes the dimension of a BPM. Its dimension has three independent components: row dimension, column dimension, and entry dimension. The program applies four routines of independent interest: (1) a routine that factors a bipartition as a formal product of indecomposables, (2) a routine that computes the inverse and recovers the bipartition, (3) a routine that factors a BPM as a formal product of indecomposables, and (4) a routine that calculates the “transpose-rotation” of a BPM (the column dimension is the row dimension of the transpose-rotation).

2. BIPARTITIONS AND BIPARTITION MATRICES

2.1. Partitions and Bipartitions.

Definition 3. A *partition* of length r , denoted $A_1|A_2|\cdots|A_r$, is an ordered set of disjoint subsets of a finite set A . Each subset A_i is called a **block**; two adjacent blocks are separated by a **divider**. An empty block $A_i = \emptyset$ is denoted by 0.

Definition 3 differs from the standard definition of a partition in which all blocks are non-empty. This difference is important—the algorithm for computing the

dimension of a bipartition matrix essentially reduces to counting empty blocks. Dividers will play a pivotal role in the definition of an “embedding partition” (Definition 6).

Example 1. The partition $p := 12|0|0$ of length 3 contains disjoint subsets of $A = \{1, 2\}$. The first block contains the elements 1 and 2, and as a stylistic choice we will not separate them by commas. The second and third blocks are empty. In the context of the program in Appendix A, the partition p is represented as

$$[[1, 2], [], []].$$

Definition 4. A **bipartition** of length r is an ordered pair of partitions $b := (A_1|A_2|\cdots|A_r, B_1|B_2|\cdots|B_r)$ displayed as the fraction $b = \frac{B_1|B_2|\cdots|B_r}{A_1|A_2|\cdots|A_r}$. The **input set** of b is the union $IS(b) := A_1 \cup A_2 \cup \cdots \cup A_r$; the **output set** of b is the union $OS(b) := B_1 \cup B_2 \cup \cdots \cup B_r$. An **elementary bipartition** is a bipartition of length 1; a **null bipartition** has the form $\frac{0|\cdots|0}{0|\cdots|0}$.

Example 2. The bipartition $b := \frac{12|0|0}{1|2|4}$ has length 3, $IS(b) = \{1, 2, 4\}$, and $OS(b) = \{1, 2\}$. In the context of the program in Appendix A, the bipartition b is represented as

$$[[[1], [2], [4]], [[1, 2], [], []]].$$

The partitions $p := A_1|A_2|\cdots|A_r$ and $q := B_1|B_2|\cdots|B_r$ in Definition 4 may partition different sets; the only requirement is that p and q have the same length. In the development that follows, a bipartition q/p is thought of as a multivariable operator whose denominator p is a sequence of inputs and whose numerator q is a sequence of outputs.

2.2. Bipartition Matrices.

Definition 5. An $m \times n$ **bipartition matrix** (BPM) $C = (c_{ij})$ has the form

$$C = \begin{pmatrix} \frac{B_{11}^1|B_{11}^2|\cdots|B_{11}^{r_{11}}}{A_{11}^1|A_{11}^2|\cdots|A_{11}^{r_{11}}} & \cdots & \frac{B_{1n}^1|B_{1n}^2|\cdots|B_{1n}^{r_{1n}}}{A_{1n}^1|A_{1n}^2|\cdots|A_{1n}^{r_{1n}}} \\ \vdots & \ddots & \vdots \\ \frac{B_{m1}^1|B_{m1}^2|\cdots|B_{m1}^{r_{m1}}}{A_{m1}^1|A_{m1}^2|\cdots|A_{m1}^{r_{m1}}} & \cdots & \frac{B_{mn}^1|B_{mn}^2|\cdots|B_{mn}^{r_{mn}}}{A_{mn}^1|A_{mn}^2|\cdots|A_{mn}^{r_{mn}}} \end{pmatrix},$$

where for $1 \leq i \leq m$ and $1 \leq j \leq n$, the following conditions hold:

- (1) All bipartitions in a given column have equal input sets.
- (2) All bipartitions in a given row have equal output sets.
- (3) Either $IS(c_{ij}) = \emptyset$ or $\min IS(c_{ij}) > \max IS(c_{kj})$ for all $k < i$.
- (4) Either $OS(c_{ij}) = \emptyset$ or $\min OS(c_{ij}) > \max OS(c_{ik})$ for all $k < j$.

The entries of a **null matrix** are null bipartitions.

In other words, the elements of the output sets in a given column increase with the rows and the elements of the input sets in a given row increase with the columns.

Example 3. Since the matrix

$$C = \begin{pmatrix} \frac{1|2}{3|0} & \frac{12}{4} \\ \frac{5|6|7|8}{3|0|0|0} & \frac{5|67|8}{0|0|4} \end{pmatrix}$$

satisfies the conditions in Definition 5, it is a BPM. In the context of the program in Appendix A, the matrix C is represented as

$$\begin{aligned} &[[[[[3], []], [[1], [2]]], [[4]], [[1, 2]]], \\ &[[[3], [], [], []], [5], [6], [7], [8]], \\ &[[[], [], [4]], [5], [6, 7], [8]]]. \end{aligned}$$

3. EMBEDDING PARTITIONS

Let A and B be ordered sets with $A \subseteq B$. When calculating the dimension of a BPM, it is important to know the precise way in which A embeds in B . The “embedding partition,” which is the output of a function with inputs A and B , encodes this information.

Definition 6. Let $A = \{a_1, a_2, \dots, a_m\}$ and let $B = \{b_1, b_2, \dots, b_n\}$ be ordered sets such that $A \subseteq B$. The **embedding partition of A in B** , denoted by $\mathcal{EP}_B A$, is the partition of A with the following properties:

- (1) The elements of $\mathcal{EP}_B A$ appear in the same order as in A .
- (2) The number of dividers in $\mathcal{EP}_B A$ between consecutive elements a_i and a_{i+1} equals the number of elements between a_i and a_{i+1} in B .
- (3) The number of dividers preceding a_1 in $\mathcal{EP}_B A$ equals the number of elements preceding a_1 in B .
- (4) The number of dividers succeeding a_m in $\mathcal{EP}_B A$ equals the number of elements succeeding a_m in B .
- (5) If A is empty, the number of dividers in $\mathcal{EP}_B A$ equals the number of elements in B .

It follows that the number of dividers in $\mathcal{EP}_B A$ is the difference in cardinalities $\#B - \#A$.

Example 4. Let $A = \{3, 5, 8, 9\}$ and let $B = \{1, 2, 3, 4, 5, 6, 7, 8, 9\}$. Then

$$\mathcal{EP}_B A = 0|0|3|5|0|89,$$

which has $\#B - \#A = 5$ dividers. To compute $\mathcal{EP}_B A$ using the code in Appendix A, input

```
print(augmentedConsecutivePartition([1, 2, 3, 4, 5,
                                     6, 7, 8, 9], [3, 5, 8, 9]));
```

the program returns

$$[[[], [], [3], [5], [], [8, 9]]].$$

4. FACTORING BIPARTITIONS

The first step in calculating the dimension of an $m \times n$ BPM C is to factor C as a formal product of indecomposables. Our first algorithm factors C when $m = n = 1$. For notational simplicity, we abuse notation and represent C as a bipartition. Nevertheless, C does not equal its bipartition entry, and we understand the expression “factoring a bipartition” to mean “factoring a 1×1 BPM.”

Algorithm 1. Let $c = \frac{B_1|B_2|\dots|B_r}{A_1|A_2|\dots|A_r}$ be a bipartition with $r > 1$.

For $k = 1$ to r :

Let $a_1^k|a_2^k|\dots|a_k^{p_k} := \mathcal{EP}_{A_1 \cup \dots \cup A_k} A_k$.

Let $b_1^k|b_2^k|\dots|b_k^{q_k} := \mathcal{EP}_{B_k \cup \dots \cup B_r} B_k$.

Form the matrix

$$C_k = \begin{pmatrix} \frac{b_k^1}{a_k^1} & \dots & \frac{b_k^1}{a_k^{p_k}} \\ \vdots & \ddots & \vdots \\ \frac{b_k^{q_k}}{a_k^1} & \dots & \frac{b_k^{q_k}}{a_k^{p_k}} \end{pmatrix}.$$

The **indecomposable factorization** of c is the formal matrix product

$$c = C_1 \cdots C_r.$$

The formal matrix product in Algorithm 1 is not to be confused with the standard matrix product in linear algebra.

Example 5. The bipartition $\frac{0|34|5}{1|0|2}$ factors as a product of 3 matrices whose entries are determined by

$$\begin{aligned} a_1^1 &= 1 & b_1^1|b_1^2|b_1^3|b_1^4 &= 0|0|0|0 \\ a_2^1 &= 0|0 & b_2^1|b_2^2 &= 34|0 \\ a_3^1|a_3^2 &= 0|2 & b_3^1 &= 5. \end{aligned}$$

Thus

$$\frac{0|34|5}{1|0|2} = \begin{pmatrix} \frac{0}{1} \\ \frac{0}{1} \\ \frac{0}{1} \\ \frac{0}{1} \end{pmatrix} \begin{pmatrix} \frac{34}{0} & \frac{34}{0} \\ \frac{0}{0} & \frac{0}{0} \end{pmatrix} \begin{pmatrix} \frac{5}{0} & \frac{5}{2} \end{pmatrix}.$$

To compute this factorization using the code in Appendix A, input

```
print (indecomposableFactorization ([[[1], [], [2]],
[[[], [3, 4], [5]]])).
```

The program returns the following list of bipartition matrices:

```
[[[[[1]], [], []], [[[[1]], [], []], [[[[1]],
[[[]]], [[[[1]], [], []], [[[[[]], [3, 4]]],
[[[]], [3, 4]]]], [[[[[]], [], []], [[[]],
[[[]]]], [[[[[]], [[5]]], [[2]], [[5]]]]].
```

Another type of factorization, called the “transverse decomposition,” appears in the discussion below. The notion of an “equalizer” distinguishes it from the factorization above.

5. EQUALIZERS

5.1. Row Equalizers. A row equalizer transforms a BPM into one with equal numerators in each row.

Definition 7. Let $C = (c_{ij})$ be a $q \times p$ BPM, where $c_{ij} := \frac{B_1^{ij} | B_2^{ij} | \dots | B_r^{ij}}{A_1^{ij} | A_2^{ij} | \dots | A_r^{ij}}$. A **row equalizer of C** is a $q \times p$ matrix of ordered sets $E^{req} = (e_{ij}^{req} = \{e_{ij}^1, \dots, e_{ij}^{n_{ij}}\})$ such that, when the blocks of the corresponding bipartitions are combined in the following way, the resulting output partitions in each row are equal:

$$c_{ij}^{req} = \frac{(B_1^{ij} \cup \dots \cup B_{e_{ij}^1}^{ij}) | (B_{e_{ij}^1+1}^{ij} \cup \dots \cup B_{e_{ij}^2}^{ij}) | \dots | (B_{e_{ij}^{n_{ij}}+1}^{ij} \cup \dots \cup B_r^{ij})}{(A_1^{ij} \cup \dots \cup A_{e_{ij}^1}^{ij}) | (A_{e_{ij}^1+1}^{ij} \cup \dots \cup A_{e_{ij}^2}^{ij}) | \dots | (A_{e_{ij}^{n_{ij}}+1}^{ij} \cup \dots \cup A_r^{ij})}.$$

The matrix $C^{req} = (c_{ij}^{req})$ is the **row equalization of C** .

A row equalizer combines blocks in numerators and denominators so that all numerators in the same row are equal. A row equalizer entry $e_{ij}^{req} = \{2, 5\}$ indicates that blocks 3, 4, and 5 in the numerator and denominator of c_{ij} are to be combined.

Example 6. Consider the matrix in Example 3:

$$C = \begin{pmatrix} \frac{1|2}{3|0} & \frac{12}{4} \\ \frac{5|6|7|8}{3|0|0|0} & \frac{5|6|7|8}{0|0|4} \end{pmatrix}.$$

To equalize numerators in the first row, combine all blocks in the numerator and denominator of the first entry; then the first row becomes

$$\frac{12}{3} \quad \frac{12}{4}.$$

To equalize numerators in the second row, combine second and third blocks of the numerator and denominator of the first entry; then the second row becomes

$$\frac{5|6|7|8}{3|0|0} \quad \frac{5|6|7|8}{0|0|4}.$$

A row equalizer for the matrix C is

$$E^{row} = \begin{pmatrix} \{\} & \{\} \\ \{1, 3\} & \{1, 2\} \end{pmatrix}.$$

Note that an empty set in an equalizer indicates that all blocks in the numerator and denominator of the corresponding entry are to be combined. As a general rule, if a bipartition entry has length r , all elements of the corresponding ordered set in the equalizer are less than r .

Column equalizers are defined in a similar manner.

5.2. Column Equalizers. A column equalizer transforms a BPM into one with equal denominators in each column.

Definition 8. Let $C = (c_{ij})$ be a $q \times p$ BPM, where $c_{ij} = \frac{B_1^{ij}|B_2^{ij}|\dots|B_r^{ij}}{A_1^{ij}|A_2^{ij}|\dots|A_r^{ij}}$. A **column equalizer of C** is a $q \times p$ matrix of ordered sets $E^{ceq} = (e_{ij}^{ceq} = \{e_{ij}^1, \dots, e_{ij}^{n_{ij}}\})$ such that, when the blocks of the corresponding bipartition are combined in the following way, the resulting input partitions in each column are equal:

$$c_{ij}^{ceq} = \frac{(B_1^{ij} \cup \dots \cup B_{e_{ij}^1}^{ij})|(B_{e_{ij}^1+1}^{ij} \cup \dots \cup B_{e_{ij}^2}^{ij})|\dots|(B_{e_{ij}^{n_{ij}}+1}^{ij} \cup \dots \cup B_r^{ij})}{(A_1^{ij} \cup \dots \cup A_{e_{ij}^1}^{ij})|(A_{e_{ij}^1+1}^{ij} \cup \dots \cup A_{e_{ij}^2}^{ij})|\dots|(A_{e_{ij}^{n_{ij}}+1}^{ij} \cup \dots \cup A_r^{ij})}.$$

The matrix $C^{ceq} = (c_{ij}^{ceq})$ is the **column equalization of C** .

Example 7. Consider the matrix in Example 3:

$$C = \begin{pmatrix} \frac{1|2}{3|0} & \frac{12}{4} \\ \frac{5|6|7|8}{3|0|0|0} & \frac{5|67|8}{0|0|4} \end{pmatrix}.$$

To equalize denominators in the first column, combine second, third, and fourth blocks in the numerator and denominator of the entry in the second row; then the first column becomes

$$\begin{pmatrix} \frac{1|2}{3|0} & \frac{5|678}{3|0} \end{pmatrix}^T.$$

To equalize denominators in the second column, combine all blocks in the numerator and denominator of the entry in the second row; then the second column becomes

$$\begin{pmatrix} \frac{12}{4} & \frac{5678}{4} \end{pmatrix}^T.$$

A column equalizer for the matrix C is

$$E^{col} = \begin{pmatrix} \{1\} & \{\} \\ \{1\} & \{\} \end{pmatrix}.$$

5.3. Equalizers.

Definition 9. An **equalizer** of a $q \times p$ BPM C is a $q \times p$ matrix of ordered sets E that is simultaneously a row equalizer and a column equalizer of C .

The program in Appendix A generates a list of all row and column equalizers of C . Matrices in both lists are equalizers of C .

Example 8. Consider the matrix C in Example 3:

$$C = \begin{pmatrix} \frac{1|2}{3|0} & \frac{12}{4} \\ \frac{5|6|7|8}{3|0|0|0} & \frac{5|67|8}{0|0|4} \end{pmatrix}.$$

The only way to equalize numerators in each row and denominators in each column is to combine all blocks. The equalized matrix is the elementary matrix

$$C^{eq} = \begin{pmatrix} \frac{12}{3} & \frac{12}{4} \\ \frac{5678}{3} & \frac{5678}{4} \end{pmatrix}.$$

Its equalizer is the **null equalizer**

$$E_{\emptyset} = \begin{pmatrix} \{\} & \{\} \\ \{\} & \{\} \end{pmatrix}.$$

One can always trivially equalize a BPM by combining all blocks as in Example 8.

Example 9. A non-trivial equalization of the BPM

$$C = \begin{pmatrix} \frac{1|2|0}{3|0|4} & \frac{1|2}{5|0} \\ \frac{6|7|8|9}{0|3|0|4} & \frac{6|7|8|9}{0|5|0|0} \end{pmatrix}$$

is

$$C^{eq} = \begin{pmatrix} \frac{1|2}{3|4} & \frac{1|2}{5|0} \\ \frac{67|89}{3|4} & \frac{67|89}{5|0} \end{pmatrix}$$

with equalizer

$$E = \begin{pmatrix} \{1\} & \{1\} \\ \{2\} & \{2\} \end{pmatrix}.$$

Definition 10. Let C be a $q \times p$ BPM. Let \mathcal{EP} denote the set of all equalizers of C with the following property: The order of each entry is greater than or equal to the orders of the corresponding entries in all equalizers of C . The **maximal equalizer** of C is the matrix in \mathcal{EP} whose entries are smaller than the corresponding entries in all other matrices in \mathcal{EP} with respect to lexicographic ordering.

Example 10. To compute the maximal equalizer of the matrix in Example 3 using the code in Appendix A, input

```
print(getMaximalEqualizer([[[[3], []], [[1],
[2]]], [[4]], [[1, 2]]], [[3], [], [], []],
[[5], [6], [7], [8]], [[], [], [4]], [[5], [6],
7], [8]]))
```

The program returns the maximal equalizer

```
[[[], []], [[], []]]
```

Example 11. Suppose C is a 2×2 matrix has the following equalizers:

$$E_1 = \begin{pmatrix} \{1,2\} & \{2,3\} \\ \{1,3\} & \{1,2\} \end{pmatrix}, \quad E_2 = \begin{pmatrix} \{1\} & \{2\} \\ \{2\} & \{1\} \end{pmatrix},$$

$$E_3 = \begin{pmatrix} \{1,2\} & \{1,3\} \\ \{1,3\} & \{1,2\} \end{pmatrix}, \quad \text{and} \quad E_4 = \begin{pmatrix} \{\} & \{\} \\ \{\} & \{\} \end{pmatrix}.$$

Then $\#E_1 = \#E_3 > \#E_2 > \#E_4$, and E_3 precedes E_1 in a least-to-greatest lexicographically sorted list. Therefore, E_3 is the maximal equalizer of C .

Example 12. Refer to Example 9 and consider the equalizers

$$E_{\emptyset} = \begin{pmatrix} \{\} & \{\} \\ \{\} & \{\} \end{pmatrix} \quad \text{and} \quad E = \begin{pmatrix} \{1\} & \{1\} \\ \{2\} & \{2\} \end{pmatrix}.$$

The maximal equalizer is

$$\begin{pmatrix} \{1\} & \{1\} \\ \{2\} & \{2\} \end{pmatrix}.$$

Equalizers enable us to decompose a matrix into its indecomposable factors and play a pivotal role in calculating the dimension of a BPM.

6. TRANSVERSE DECOMPOSITION

As mentioned above, the first step in computing the dimension of a $q \times p$ BPM C is to factor it as a product of indecomposables. Recall that embedding partitions but not equalizers are required when C is a 1×1 matrix. In general, both embedding partitions and equalizers are required to construct the “transverse decomposition” of C given by Algorithm 2.

Algorithm 2. Let $C = (c_{ij})$ be an $m \times n$ BPM with non-null maximal equalizer $E = (e_{ij})$.

For each $c_{ij} = \frac{B_1^{ij}|B_2^{ij}|\dots|B_r^{ij}}{A_1^{ij}|A_2^{ij}|\dots|A_r^{ij}}$ in C :

Let e be the first element in e_{ij} .

Let $a_1^{ij}|\dots|a_p^{ij} := \mathcal{EP}_{IS(c_{ij})}(A_{e+1}^{ij} \cup \dots \cup A_r^{ij})$.

Let $b_1^{ij}|\dots|b_q^{ij} := \mathcal{EP}_{OS(c_{ij})}(B_1^{ij} \cup \dots \cup B_e^{ij})$.

For k from 1 to p :

Let $a_{k,e+1}^{ij}|\dots|a_{k,r}^{ij} := (A_{e+1}^{ij} \cap a_k^{ij})|\dots|(A_r^{ij} \cap a_k^{ij})$.

For k from 1 to q :

Let $b_{k,1}^{ij}|\dots|b_{k,e}^{ij} := (B_1^{ij} \cap b_k^{ij})|\dots|(B_e^{ij} \cap b_k^{ij})$.

Define the formal matrix decomposition

$$C_1^{ij} C_2^{ij} = \begin{pmatrix} \frac{b_{1,1}^{ij}|\dots|b_{1,e}^{ij}}{A_1^{ij}|\dots|A_e^{ij}} \\ \vdots \\ \frac{b_{q,1}^{ij}|\dots|b_{q,e}^{ij}}{A_1^{ij}|\dots|A_e^{ij}} \end{pmatrix} \begin{pmatrix} \frac{B_{e+1}^{ij}|\dots|B_r^{ij}}{a_{1,e+1}^{ij}|\dots|a_{1,r}^{ij}} & \dots & \frac{B_{e+1}^{ij}|\dots|B_r^{ij}}{a_{p,e+1}^{ij}|\dots|a_{p,r}^{ij}} \end{pmatrix}.$$

The **transverse decomposition of C with respect to E** is the formal matrix factorization $C := C_1 C_2$ where

$$C_1 = \begin{pmatrix} C_1^{ij} \end{pmatrix} = \begin{pmatrix} \frac{b_{1,1}^{11}|\dots|b_{1,e}^{11}}{A_1^{11}|\dots|A_e^{11}} & & \frac{b_{1,1}^{1n}|\dots|b_{1,e}^{1n}}{A_1^{1n}|\dots|A_e^{1n}} \\ \vdots & \dots & \vdots \\ \frac{b_{q,1}^{11}|\dots|b_{q,e}^{11}}{A_1^{11}|\dots|A_e^{11}} & & \frac{b_{q,1}^{1n}|\dots|b_{q,e}^{1n}}{A_1^{1n}|\dots|A_e^{1n}} \\ \vdots & & \vdots \\ \frac{b_{1,1}^{m1}|\dots|b_{1,e}^{m1}}{A_1^{m1}|\dots|A_e^{m1}} & & \frac{b_{1,1}^{mn}|\dots|b_{1,e}^{mn}}{A_1^{mn}|\dots|A_e^{mn}} \\ \vdots & \dots & \vdots \\ \frac{b_{q,1}^{m1}|\dots|b_{q,e}^{m1}}{A_1^{m1}|\dots|A_e^{m1}} & & \frac{b_{q,1}^{mn}|\dots|b_{q,e}^{mn}}{A_1^{mn}|\dots|A_e^{mn}} \end{pmatrix}$$

and $C_2 = \begin{pmatrix} C_2^{ij} \end{pmatrix} =$

$$\begin{pmatrix} \frac{B_{e+1}^{11}|\dots|B_r^{11}}{a_{1,e+1}^{11}|\dots|a_{1,r}^{11}} & \dots & \frac{B_{e+1}^{11}|\dots|B_r^{11}}{a_{p,e+1}^{11}|\dots|a_{p,r}^{11}} & \dots & \frac{B_{e+1}^{1n}|\dots|B_r^{1n}}{a_{1,e+1}^{1n}|\dots|a_{1,r}^{1n}} & \dots & \frac{B_{e+1}^{1n}|\dots|B_r^{1n}}{a_{p,e+1}^{1n}|\dots|a_{p,r}^{1n}} \\ \vdots & & \vdots & & \vdots & & \vdots \\ \frac{B_{e+1}^{m1}|\dots|B_r^{m1}}{a_{1,e+1}^{m1}|\dots|a_{1,r}^{m1}} & \dots & \frac{B_{e+1}^{m1}|\dots|B_r^{m1}}{a_{p,e+1}^{m1}|\dots|a_{p,r}^{m1}} & \dots & \frac{B_{e+1}^{mn}|\dots|B_r^{mn}}{a_{1,e+1}^{mn}|\dots|a_{1,r}^{mn}} & \dots & \frac{B_{e+1}^{mn}|\dots|B_r^{mn}}{a_{p,e+1}^{mn}|\dots|a_{p,r}^{mn}} \end{pmatrix}.$$

Using first elements of the entries in $E_1 := E$ compute the transverse decomposition $C = C_1 C_2$; then C_1 is indecomposable. If C_2 is decomposable, its maximal equalizer E_2 is non-null. Using the first elements of the entries in E_2 , calculate the transverse decomposition $C_2 := C'_2 C_3$; then C'_2 is indecomposable. Continue recursively $s - 1$ steps until the maximal equalizer is null. The **indecomposable factorization** is $C = C_1 C'_2 \cdots C'_{s-1} C_s$.

Example 13. To compute the factorization of the (indecomposable) matrix in Example 8 using the code in Appendix A, input

```
print(factorization([[[[3], []], [[1], [2]]],
                    [[4]], [[1, 2]]], [[[[3], [], [], []], [[5],
                    [6], [7], [8]]], [[[], [], [4]], [[5], [6, 7],
                    [8]]]]))
```

Since the matrix is indecomposable, the program returns the input matrix. For a non-trivial example, see Appendix B.

The factors in the transverse decomposition of a decomposable BPM have the following properties:

- (1) The first factor is a column matrix and the second factor is a row matrix.
- (2) The number of inputs in each entry of the column matrix equals the number of entries in the row matrix.
- (3) The number of outputs in each entry of the row matrix equals the number of entries in the column matrix.

All tools necessary to calculate the dimension of a BPM are now in place.

7. THE DIMENSION ALGORITHM

Given a BPM C , let $\pi(C)$ denote the matrix obtained from C by discarding empty biblocks 0/0 in non-null entries and by reducing null entries to 0/0.

Definition 11. Let C be a $q \times p$ BPM. Denote the dimension of C by $|C|$. If C is null, define $|C| := 0$. Otherwise, define

$$(7.1) \quad |C| := |C|^{\text{row}} + |C|^{\text{col}} + |C|^{\text{ent}},$$

where the **row dimension** $|C|^{\text{row}}$, **column dimension** $|C|^{\text{col}}$, and **entry dimension** $|C|^{\text{ent}}$ are independent and given by the following recursive algorithms:

Row Dimension Algorithm. Let C be a $q \times p$ BPM with indecomposable factorization $C = C_1 \cdots C_r$.

If $r > 1$, define $|C|^{\text{row}} := \sum_{k \in \mathbb{I}} |C_k|^{\text{row}}$, where $|C_k|^{\text{row}}$ is given by setting $C = C_k$ and continuing recursively.

If $r = 1$ and $q > 1$, define $|C|^{\text{row}} := \sum_{i \in \mathbb{Q}} |C_{i*}|^{\text{row}}$, where $|C_{i*}|^{\text{row}}$ is given by setting $C = C_{i*}$ and continuing recursively.

Otherwise, C is a row matrix $(c_1 \cdots c_p)$. Set $|C| = \pi(C)$.

If C is an elementary matrix and $OS(C) \neq \emptyset$, define $|C|^{\text{row}} := 0$.

If $C = \begin{pmatrix} 0 & \cdots & 0 \\ \mathbf{a}_1 & & \mathbf{a}_p \end{pmatrix}$, define $|C|^{\text{row}} := \begin{cases} 0, & C \text{ is null} \\ \#IS(C) - 1, & \text{otherwise.} \end{cases}$

Otherwise, define $|C|^{row} := \sum_{j \in \underline{p}} |c_j|^{row}$, where $|c_j|^{row}$ is given by setting $C = c_j$ and continuing recursively.

Column Dimension Algorithm. Let C be a $q \times p$ BPM with indecomposable factorization $C = C_1 \cdots C_r$.

If $r > 1$, define $|C|^{col} := \sum_{k \in \underline{r}} |C_k|^{col}$, where $|C_k|^{col}$ is given by setting $C = C_k$ and continuing recursively.

If $r = 1$ and $p > 1$, define $|C|^{col} := \sum_{j \in \underline{p}} |C_{*j}|^{col}$, where $|C_{*j}|^{col}$ is given by setting $C = C_{*j}$ and continuing recursively.

Otherwise, C is a column matrix $(c_1 \cdots c_q)^T$. Set $C = \pi(C)$.

If C is an elementary matrix and $IS(C) \neq \emptyset$, define $|C|^{col} := 0$.

If $C = \begin{pmatrix} \mathbf{b}_1 & \cdots & \mathbf{b}_q \\ 0 & & 0 \end{pmatrix}^T$, define $|C|^{col} := \begin{cases} 0, & C \text{ is null} \\ \#OS(C) - 1, & \text{otherwise.} \end{cases}$

Otherwise, define $|C|^{col} := \sum_{i \in \underline{q}} |c_i|^{col}$, where $|c_i|^{col}$ is given by setting $C = c_i$ and continuing recursively.

Entry Dimension Algorithm. Let $C = (c_{ij})$ be a $q \times p$ BPM with indecomposable factorization $C = C_1 \cdots C_r$.

If $r > 1$, define $|C|^{ent} := \sum_{k \in \underline{r}} |C_k|^{ent}$, where $|C_k|^{ent}$ is given by setting $C = C_k$ and continuing recursively.

Otherwise, define $|C|^{ent} := \sum_{(i,j) \in \underline{q} \times \underline{p}} |c_{ij}|^{ent}$, where $|c_{ij}|^{ent}$ is given by setting $C = c_{ij}$ and continuing recursively unless $c_{ij} = \frac{\mathbf{b}_i}{\mathbf{a}_j}$, in which case define

$$|c_{ij}|^{ent} := \begin{cases} \#\mathbf{a}_j + \#\mathbf{b}_i - 1, & \mathbf{a}_j, \mathbf{b}_i \neq \emptyset \\ 0, & \text{otherwise.} \end{cases}$$

Example 14. Consider the matrix in Example 3:

$$C = \begin{pmatrix} \frac{1|2}{3|0} & \frac{12}{4} \\ \frac{5|6|7|8}{3|0|0|0} & \frac{5|6|7|8}{0|0|4} \end{pmatrix}.$$

Using the program in Appendix, the row dimension is 0, the column dimension is 1, and the entry dimension is 5. Therefore the dimension of C is 6. A similar example with output given by the program in Appendix A appears in Appendix B.

Example 15. Consider the matrix

$$\begin{pmatrix} \frac{1|2|0}{0|1|2} & \frac{1|0|2}{0|3|4} & \frac{1|2|0|0}{5|0|6|0} & \frac{1|2}{7|8} \\ \frac{3|4}{0|12} & \frac{3|0|4}{0|3|4} & \frac{3|0|4|0}{5|0|6|0} & \frac{3|4}{7|8} \\ \frac{5|6|0}{0|1|2} & \frac{5|6|0}{0|3|4} & \frac{5|6|0|0}{5|0|6|0} & \frac{5|6}{7|8} \\ \frac{7|8}{0|12} & \frac{7|8}{0|34} & \frac{7|8|0|0}{5|0|6|0} & \frac{7|8|0|0}{7|0|0|8} \end{pmatrix}.$$

Using the program in Appendix, the row dimension is 4, the column dimension is 10, and the entry dimension is 23. Therefore the dimension of C is 37.

Example 16. Consider the matrix

$$\begin{pmatrix} \frac{1|2|0}{0|1|2} & \frac{1|0|2}{0|3|4} & \frac{1|2|0|0}{5|0|6|0} & \frac{1|2}{7|8} & \frac{1|2}{0|9} \\ \frac{3|4}{0|12} & \frac{3|0|4}{0|3|4} & \frac{3|0|4|0}{5|0|6|0} & \frac{3|4}{7|8} & \frac{3|4|0}{0|9|0} \\ \frac{5|6|0}{0|1|2} & \frac{5|6|0}{0|3|4} & \frac{5|6|0|0}{5|0|6|0} & \frac{5|6}{7|8} & \frac{5|6}{0|9} \\ \frac{7|8}{0|12} & \frac{7|8}{0|34} & \frac{7|8|0|0}{5|0|6|0} & \frac{7|8|0|0}{7|0|8} & \frac{7|0|8}{0|9|0} \\ \frac{9|0}{0|12} & \frac{9|0}{0|34} & \frac{9|0}{5|6} & \frac{9|0|0|0}{7|0|8|0} & \frac{9|0|0}{0|9|0} \end{pmatrix}.$$

This matrix has one more row and one more column than the matrix in Example 15. The row dimension of this matrix is 6, the column dimension is 12, and the entry dimension is 28. Therefore, its dimension is 46.

Example 17. Consider the matrix

$$\begin{pmatrix} \frac{1|2|0}{0|1|2} & \frac{1|0|2}{0|3|4} & \frac{1|2|0|0}{5|0|6|0} & \frac{1|2}{7|8} \\ \frac{3|4}{12|0} & \frac{3|0|4}{0|3|4} & \frac{3|0|4|0}{5|0|6|0} & \frac{3|4}{7|8} \\ \frac{5|6|0}{0|1|2} & \frac{5|6|0}{0|3|4} & \frac{5|6|0|0}{5|0|6|0} & \frac{5|6}{7|8} \\ \frac{7|8}{0|12} & \frac{7|8}{0|34} & \frac{7|8|0|0}{5|0|6|0} & \frac{7|8|0|0}{7|0|8} \end{pmatrix}.$$

This matrix is almost identical to the matrix in Example 15, except that the bipartition in the first column and second row is altered so that the maximal equalizer is null and the BPM is indecomposable. The row dimension of this matrix is 6, the column dimension is 7, and the entry dimension is 23. Therefore, the dimension is 36.

8. OTHER RESULTS AND FUTURE PROJECTS

In Sections 4 we discussed the indecomposable factorization of a bipartition. There is an inverse algorithm that recovers the bipartition from its indecomposable factorization.

Algorithm 3. Let $c = \frac{B_1|B_2|\dots|B_r}{A_1|A_2|\dots|A_r}$ be a bipartition and let $c = C_1 \dots C_r$ be its indecomposable factorization.

For k from 1 to r :

Let n be the number of columns in C_k and let C_k^{ij} be the $(i, j)^{th}$ entry of C_k .

Then $B_k = C_k^{11}$ and $A_k = C_k^{1n}$.

The efficiency of the algorithm for computing the dimension of a BPM in Appendix A can be improved by applying the “transpose-rotation.”

Definition 12. Let $c = \frac{B_1|B_2|\dots|B_r}{A_1|A_2|\dots|A_r}$ be a bipartition. The **rotation** of c is the bipartition $c^{rot} := \frac{A_r|A_{r-1}|\dots|A_1}{B_r|B_{r-1}|\dots|B_1}$. The **transpose-rotation** of a BPM $C = (c_{ij})$ is the matrix $C^{T-R} := (c_{ji}^{rot})$.

The row and column dimensions of C^{T-R} are the column and row dimensions of C , respectively. Thus we can use the same algorithm to compute the row and column dimensions of C . This computationally more efficient algorithm appears in Appendix A.

Finally, there are “generalized bipartition matrices”, whose entries are bipartitions, products of bipartition matrices, or products of generalized bipartition matrices. The dimension algorithm for generalized bipartition matrices is identical to the algorithm for bipartition matrices, but a computer implementation of the algorithm in the more general setting has yet to be developed.

9. APPENDIX A: THE PYTHON CODE

```

import itertools

def intersection(list1, list2):
    list3 = [v for v in list1 if v in list2]
    return list3

def subsets(set):
    powerSet = []
    for i in range(1 << len(set)):
        powerSet.append([set[j] for j in range(len(set)) if
            (i & (1 << j))])
    return powerSet

def setOfPowersets(r):
    p = []
    for s in r:
        p.append(subsets([i for i in range(1, len(s[1]))]))
    return p

# returns all possible equalizers

def possibleEqualizers(p):
    return list(itertools.product(*p))

# checks if a matrix is equalized

def equalized(e):
    for x in e:
        if x != e[0]:
            return 0
    return 1

def combineEqualizers(e, isRow):
    if isRow == 1:
        return [transpose(transpose(eq)) for eq in list(
            itertools.product(*e))]
    else:
        return [transpose(eq) for eq in list(itertools.
            product(*e))]

def transpose(m):
    return [[row[i] for row in m] for i in range(len(m)
        [0]))]

```

```

def unionize(m, i, j):
    unionizedList = []
    for h in range(i, j):
        unionizedList = unionizedList + m[h]
    return unionizedList

# row equalizer for matrix of arbitrary size

def arbitraryRE(b):
    equalizers = [[] for row in b]
    j = 0
    for row in b:
        pows = setOfPowersets(row)
        peqr = possibleEqualizers(pows)
        for eqr in peqr:
            i = 0
            eq = []
            for bip in row:
                n = 0
                eq.append([])
                for m in eqr[i]:
                    if m < len(bip[1]) + 1:
                        eq[i].append(unionize(bip[1], n, m))
                n = m
            elif n != len(bip[1]):
                eq[i].append(unionize(bip[1], n, len(bip[1])))
            for a in eq[i]:
                a.sort()
            i = i + 1
            if equalized(eq):
                equalizers[j].append(eqr)
            j = j + 1
    return equalizers

# column equalizer for matrix of arbitrary size

def arbitraryCE(b):
    bt = transpose(b)
    equalizers = [[] for col in bt]
    j = 0
    for col in bt:
        pows = setOfPowersets(col)
        peqr = possibleEqualizers(pows)
        for eqr in peqr:

```



```

i = 0
eq = []
for bip in col:
    n = 0
    eq.append([])
    for m in eqr[i]:
        if m < len(bip[0]) + 1:
            eq[i].append(unionize(bip[0], n, m))
    n = m
    elif n != len(bip[0]):
        eq[i].append(unionize(bip[0], n, len(bip[0])))
    for a in eq[i]:
        a.sort()
    i = i + 1
    if equalized(eq):
        equalizers[j].append(eqr)
    j = j + 1
return equalizers

# returns all actual equalizers for a matrix

def equalize(b):
    equalizers = []
    rowEqualizers = combineEqualizers(arbitraryRE(b),
                                      1)
    colEqualizers = combineEqualizers(arbitraryCE(b),
                                      0)
    for req in rowEqualizers:
        for ceq in colEqualizers:
            if req == ceq:
                equalizers.append(req)
    return equalizers

# returns the maximal equalizer for a matrix

def getMaximalEqualizer(b):
    e = equalize(b)
    maxEq = e[0].copy()
    for i in range(len(e)):
        for j in range(len(e[i])):
            jBreak = 0
            for k in range(len(e[i][j])):
                kBreak = 0
                if len(e[i][j][k]) > len(maxEq[j][k]):
                    maxEq = e[i]

```

```

jBreak = 1
break
elif len(e[i][j][k]) == len(maxEq[j][k]):
    for l in range(len(e[i][j][k])):
        if e[i][j][k][l] < maxEq[j][k][l]:
            maxEq = e[i]
            jBreak = 1
            kBreak = 1
            break
    else:
        break
else:
    jBreak = 1
    kBreak = 1
    if kBreak == 1:
        break
    if jBreak == 0:
        break
return maxEq

# returns the ACP of a set and a subset

def augmentedConsecutivePartition(B, A):
    ACP = [[]]
    j = 0
    for i in range(len(B)):
        if B[i] in A:
            ACP[j].append(B[i])
        else:
            ACP.append([])
            j = j + 1
    return ACP

# returns the indecomposable factorization of a
# bipartition

def indecomposableFactorization(b):
    if len(b[0]) == 1:
        return [[b]]
    c = [[] for i in range(len(b[0]))]
    for k in range(len(b[0])):
        A = (augmentedConsecutivePartition(unionize(b[0],
            0, k + 1), b[0][k]))
        B = (augmentedConsecutivePartition(unionize(b[1], k
            , len(b[0])), b[1][k]))

```

```

for j in range(len(B)):
    c[k].append([])
    for i in range(len(A)):
        c[k][j].append([A[i], B[j]])
    return c

# returns the indecomposable factorization of a
# bipartition matrix

def factorization(b):
    if getMaximalEqualizer(b)[0][0] == []:
        return [b]
    factoredMatrix = [[[[] for col in b[0]] for row in b
                        ]
                       ]
    for row in range(len(b)):
        for col in range(len(b[row])):
            lam = getMaximalEqualizer(b)[row][col][0]
            A_ACP = []
            B_ACP = []
            Ai = []
            Bj = []
            setA = unionize(b[row][col][0], 0, len(b[row][col]
                ][0]))
            setA.sort()
            setB = unionize(b[row][col][1], 0, len(b[row][col]
                ][1]))
            setB.sort()
            A_ACP = (augmentedConsecutivePartition(setA,
                unionize(b[row][col][0], lam, len(b[row][col]
                ][0])))
            B_ACP = (augmentedConsecutivePartition(setB,
                unionize(b[row][col][1], 0, lam)))
            for i in range(len(A_ACP)):
                Ai.append([intersection(A_ACP[i], b[row][col][0][l
                    ]) for l in range(lam, len(b[row][col][0]))])
            for i in range(len(B_ACP)):
                Bj.append([intersection(B_ACP[i], b[row][col][1][l
                    ]) for l in range(lam)])
            factoredMatrix[row][col] = [[[[[b[row][col][0][k]
                for k in range(lam)], [Bj[j][l] for l in range(
                lam)]]] for j in range(len(B_ACP))],
                [[[Ai[i][k] for k in range(len(Ai[i]))], [b[row][
                col][1][l] for l in range(lam, len(b[row][col]
                ][1]))] for i in range(len(A_ACP))]]]

```

```

m1 = [[[] for innerRow in factoredMatrix[row
    ][0][0]], [[] for innerRow in factoredMatrix[row
    ][0][1]] for row in range(len(factoredMatrix))]
for row in range(len(b)):
    for innerRow in range(len(factoredMatrix[row
        ][0][0])):
        for col in range(len(b[row])):
            m1[row][0][innerRow] = m1[row][0][innerRow] +
                factoredMatrix[row][col][0][innerRow]
        for innerRow in range(len(factoredMatrix[row
            ][0][1])):
            for col in range(len(b[row])):
                m1[row][1][innerRow] = m1[row][1][innerRow] +
                    factoredMatrix[row][col][1][innerRow]

m2 = [[], []]
for row in range(len(b)):
    for innerRow in range(len(m1[row][0])):
        m2[0] = m2[0] + [m1[row][0][innerRow]]
    for innerRow in range(len(m1[row][1])):
        m2[1] = m2[1] + [m1[row][1][innerRow]]
    return [m2[0]] + factorization(m2[1])

# calculates the row dimension of a bipartition
# matrix

def rowDimension(b):
    dimension = 0
    for m in factorization(b):
        dimension = dimension + rowDimension2(m)
    return dimension

def rowDimension2(b):
    rowDim = 0
    for row in b:
        isElementary = 1
        nonElementary = 1
        allEmpty = 1
        for bipartition in row:
            if len(bipartition[1]) > 1:
                isElementary = 0
            if len(bipartition[1]) <= 1:
                nonElementary = 0
        if nonElementary == 1:

```

```

if getMaximalEqualizer([row]) != [[] for bip in
    row]]:
rowDim = rowDim + rowDimension([row])
if isElementary == 0:
for bipartition in row:
if getMaximalEqualizer([row]) == [[] for bip in
    row]]:
for m in indecomposableFactorization(bipartition):
rowDim = rowDim + rowDimension(m)
if isElementary == 1:
if len(row) >= 1:
for bipartition in row:
if bipartition[1] != [[]]:
allEmpty = 0
break
if allEmpty == 1:
isC = 0
for bipartition in row:
for s in bipartition[0]:
isC = isC + len(s)
if isC != 0:
rowDim = rowDim + isC - 1
return rowDim

```

```

# calculates the column dimension of a bipartition
matrix

```

```

def colDimension(b):
dimension = 0
for m in factorization(b):
dimension = dimension + colDimension2(m)
return dimension

```

```

def colDimension2(b):
colDim = 0
bt = transpose(b)
for col in bt:
nonElementary = 1
isElementary = 1
allEmpty = 1
for bipartition in col:
if len(bipartition[1]) > 1:
isElementary = 0
if len(bipartition[1]) <= 1:

```

```

nonElementary = 0
if nonElementary == 1:
if getMaximalEqualizer(transpose([col])) != [[]]
    for bip in col]:
colDim = colDim + colDimension(transpose([col]))
for bipartition in col:
if len(bipartition[0]) > 1:
isElementary = 0
if getMaximalEqualizer(transpose([col])) == [[]]
    for bip in col]:
for m in indecomposableFactorization(bipartition):
colDim = colDim + colDimension(m)
if isElementary == 1:
if len(col) >= 1:
for bipartition in col:
if bipartition[0] != [[]] and bipartition[0] != []:
allEmpty = 0
break
if allEmpty == 1:
osC = 0
for bipartition in col:
for s in bipartition[1]:
osC = osC + len(s)
if osC != 0:
colDim = colDim + osC - 1
return colDim

# calculates the entry dimension of a bipartition
matrix

def entDimension(b):
dimension = 0
for m in factorization(b):
dimension = dimension + entDimension2(m)
return dimension

def entDimension2(b):
entDim = 0
for row in b:
for bipartition in row:
if len(bipartition) == 2:
if len(bipartition[0]) > 1:
for m in indecomposableFactorization(bipartition):
entDim = entDim + entDimension(m)

```

```

elif len(bipartition[0]) == 1 and len(bipartition
    [1]) == 1 and len(bipartition[0][0]) != 0 and
    len(bipartition[1][0]) != 0:
entDim = entDim + len(bipartition[0][0]) + len(
    bipartition[1][0]) - 1
return entDim

# calculates the dimension of a bipartition matrix

def dimension(b):

return rowDimension(b) + colDimension(b) +
    entDimension(b)

# returns transpose-rotation of a matrix for the
    simplified dimension algorithm

def newAlgorithm(b):
bt_rot = []
bt = transpose(b)
for row in range(len(bt)):
bt_rot.append([])
for bipartition in range(len(bt[row])):
bt_rot[row].append([], [])
for i in range(len(bt[row][bipartition][0])):
bt_rot[row][bipartition][0].append(bt[row][
    bipartition][1][len(bt[row][bipartition][0]) - i
    - 1])
bt_rot[row][bipartition][1].append(bt[row][
    bipartition][0][len(bt[row][bipartition][0]) - i
    - 1])
return bt_rot

# returns the composition of a decomposition of a
    bipartition

def multiply(C):
c = [], []
for i in range(len(C)):
j = len(C[i][0])
a = C[i][0][j - 1][0]
b = C[i][0][0][1]
c[0].append(a)
c[1].append(b)
return c

```

[illegible]

- [1] D. Freeman. “Computing the Dimension of a Bipartition Matrix,” Senior Honors Thesis, Millersville Univ., Millersville PA (2020)
- [2] J. Kepler. “Harmonices Mundi V.” Opera omnia, Linz (1619).
- [3] S. Sanedlidze and R. Umble. Matroids, bialgebras, and A_∞ -bialgebras, *J. Homology, Homotopy and Appl.*, **13** (1) (2011), 1-57.
- [4] ———. Framed matrices and A_∞ -bialgebras. *Adv. Studies: Euro-Tbilisi Math. J.*, **15** (4) (2022), 41-140.
- [5] J. Stasheff. Homotopy associativity of H -spaces I, II. *Trans. Am. Math. Soc.*, **108** (1963), 275-312.
- [6] P. H. Schoute. “Analytical treatment of the polytopes regularly derived from the regular polytopes.” J. Muller publisher, Amsterdam (1911).
- [7] A. Tonks. Relating the associahedron and the permutohedron, In “Operads: Proceedings of the Renaissance Conferences (Hartford CT / Luminy Fr 1995)”, Contemporary Mathematics, **202** (1997), 33-36.

DEPARTMENT OF MATHEMATICS, MILLERSVILLE UNIVERSITY OF PENNSYLVANIA, MILLERSVILLE,
PA. 17551
Email address: ron.umble@millersville.edu