

# Combinatorial Algorithms for Rooted Prize-Collecting Walks and Applications to Orienteering and Minimum-Latency Problems

Sina Dezfuli\*    Zachary Friggstad†    Ian Post‡    Chaitanya Swamy§

## Abstract

We consider the rooted *prize-collecting walks* (PCW) problem, wherein we seek a collection  $\mathcal{C}$  of rooted walks having minimum *prize-collecting cost*, which is the (total cost of walks in  $\mathcal{C}$ ) + (total node-reward of the nodes not visited by any walk in  $\mathcal{C}$ ). This problem arises naturally as the Lagrangian relaxation of both *orienteering*, where we seek a length-bounded walk of maximum reward, and the  *$\ell$ -stroll problem*, where we seek a minimum-length walk covering at least  $\ell$  nodes. Our main contribution is to devise a *simple, combinatorial algorithm* for the PCW problem that returns a rooted tree whose prize-collecting cost is at most the *optimum value* of the prize-collecting walks problem. This result applies to both directed and undirected graphs, and holds for arbitrary nonnegative edge costs.

We present two applications of our result, where we utilize our algorithm to develop combinatorial approximation algorithms for two fundamental vehicle-routing problems (VRPs): (1) *orienteering*; and (2)  *$k$ -minimum-latency problem* ( $k$ -MLP), wherein we seek to cover all nodes using  $k$  paths starting at a prescribed root node, so as to minimize the sum of the node visiting times. Our combinatorial algorithm allows us to sidestep the part where we solve a preflow-based LP in the LP-rounding algorithms of [14] for orienteering, and in the state-of-the-art 7.183-approximation algorithm for  $k$ -MLP in [20]. Consequently, we obtain combinatorial implementations of these algorithms (with the same approximation factors). Compared to algorithms that achieve the current-best approximation factors for orienteering and  $k$ -MLP, our algorithms have substantially improved running time, and achieve approximation guarantees that match ( $k$ -MLP), or are slightly worse (orienteering) than the current-best approximation factors for these problems.

We report various computational results for our resulting (combinatorial implementations of) orienteering algorithms, which show that the algorithms perform quite well in practice, both in terms of the quality of the solution they return, as also the upper bound they yield on the orienteering optimum (which is obtained by leveraging the workings of our PCW algorithm).

---

\*dezfuli@ualberta.ca. Dept. of Computer Science, Univ. Alberta, Edmonton, AB T6G 2E8.

†zacharyf@ualberta.ca. Dept. of Computer Science, Univ. Alberta, Edmonton, AB T6G 2E8. Supported by an NSERC Discovery grant and an NSERC Discovery Accelerator Supplement Award.

‡ian@ianpost.org

§cswamy@uwaterloo.ca. Dept. of Combinatorics and Optimization, Univ. Waterloo, Waterloo, ON N2L 3G1. Supported in part by NSERC grant 327620-09 and an NSERC Discovery Accelerator Supplement Award.

# 1 Introduction

Vehicle-routing problems (VRPs) are a rich class of optimization problems that find various applications, and have been extensively studied in the Operations Research and Computer Science literature (see, e.g., [23]). Broadly speaking, we can distinguish between two types of vehicle-routing problems: one where resource constraints require us to select which set of nodes or clients to visit *and* plan a suitable route(s) for visiting these clients; and the other, where we have a *fixed set* of clients, and seek the most effective route(s) for visiting these clients.

We consider two prominent and well-motivated problems in these two categories: (1) *orienteering* [4, 2, 8, 14], belonging to the first category, wherein nodes have associated rewards for visiting them, and we seek a length-bounded path that collects maximum reward; and (2) *minimum-latency problems* (MLPs) [3, 7, 20], belonging to the second category, wherein, we seek one or more rooted paths to visit a given set of clients so as to minimize the sum of the client visiting times (i.e., the total latency). Besides its appeal as a natural and clean way of capturing resource constraints in a VRP, the fundamental nature of orienteering stems from the fact that it often naturally arises as a subroutine when solving other VRPs, both in approximation algorithms—e.g., for minimum-latency problems (see [10, 5, 20]), TSP with time windows [2], VRPs distance bounds [17] and regret bounds [13], as also in computational methods where orienteering corresponds to the “pricing” problem encountered in solving set covering/partitioning LPs (a.k.a configuration LPs) for VRPs via a column-generation or branch-cut-and-price method (see, e.g., [9]). In particular, in various settings (including MLPs, VRP with distance- and regret- bounds), we can formulate the VRP as the problem of covering a set of clients using suitable paths, and solving this covering problem, approximately via a set-cover approach, or its corresponding configuration-LP relaxation, then entails solving an orienteering problem.

Some recent work on orienteering [14] and MLPs [20], has led to promising LP-based approaches for tackling these problems, yielding, for multi-vehicle MLPs, the current-best approximation factors. This approach is based on moving to a bidirected version of the underlying metric and considering a preflow-based LP-relaxation for rooted walk(s), and using a powerful arborescence-packing result of Bang-Jensen et al. [1] to decompose an (optimal) LP solution into a convex combination of arborescences that is “at least as good” as the LP solution. Viewing these arborescences as rooted trees in the undirected graph, one can convert the tree into a rooted path/cycle by doubling and shortcutting, and the above works show how to leverage the resulting convex combination of paths/cycles to extract a good solution.

**Our contributions and related work.** We study the *prize-collecting walks* (PCW) problem, which is the problem of finding a collection  $\mathcal{C}$  of  $r$ -rooted walks in a digraph  $G = (V, E)$  with nonnegative edge costs and node rewards, having minimum *prize-collecting cost*, which is the total cost of the walks in  $\mathcal{C}$  + the total node-reward of the nodes not visited by any walk in  $\mathcal{C}$ . This problem arises as the Lagrangian relaxation of orienteering, and a subroutine encountered in MLP algorithms, namely that of finding a rooted path of minimum cost covering a certain number of nodes.

Our main contribution is to devise a *simple, combinatorial algorithm* for the PCW problem that returns a *directed tree* (more precisely, an out-arborescence) rooted at  $r$  whose *prize-collecting cost is at most the optimal value of the PCW problem*. To state our result a bit more precisely, we introduce some notation. Let  $G = (V, A)$  be a directed graph with arc-set  $A$ , arc lengths  $c_a \geq 0$  for all  $a \in A$ , and root  $r$ . Let each node  $v \in V$  have a reward or penalty  $\pi_v \geq 0$ . For a multiset of arcs  $T$ , define  $c(T) = \sum_{a \in A} c_a \cdot (\text{number of occurrences of } a \text{ in } T)$ . Define  $\pi(S) = \sum_{v \in S} \pi_v$  for any set of nodes  $S$ . An *out-arborescence rooted at  $r$*  is a subgraph  $T$  whose undirected version is a tree containing  $r$ , and where every node spanned by  $T$  except  $r$  has exactly one incoming arc in  $T$ ; we will often abbreviate this to an out-arborescence. For any subgraph  $T$  of  $G$  where all nodes in  $V(T)$  are reachable from  $r$  in  $T$  (such as an out-arborescence rooted at  $r$ ), define the *prize-collecting cost* of  $T$  to be  $\text{PCC}(T) := c(T) + \pi(V \setminus V(T))$ .

We give a combinatorial polynomial-time algorithm ITERPCA (see Section 3), that finds an out-arborescence  $T$  whose prize-collecting cost is at most the prize-collecting cost of any collection of  $r$ -rooted walks, i.e.,

$$c(T) + \pi(V \setminus V(T)) \leq O^* := \min_{\substack{\text{collections } \mathcal{C} \text{ of} \\ r\text{-rooted walks}}} \left[ \sum_{P \in \mathcal{C}} c(P) + \pi\left(V \setminus \bigcup_{P \in \mathcal{C}} V(P)\right) \right].$$

We actually obtain the stronger guarantee that  $\text{PCC}(T)$  is at most the optimal value  $OPT$  of a preflow-based LP-relaxation of PCW (P).

We briefly discuss the ideas underlying our combinatorial algorithm ITERPCA. Our algorithm and analysis is quite simple, and resembles Edmonds’ algorithm for finding a minimum-cost arborescence. It is based on three main ideas for iteratively simplifying the instance.

We observe that if we modify the instance by picking any non-root node  $v$ , and subtracting a common value  $\theta$  from the cost of all incoming arcs of  $v$  and from  $\pi_v$ , while ensuring that the new values of these quantities is nonnegative, then it suffices to prove the desired guarantee for the modified instance. Next, by choosing a suitable  $\theta_v$  for all non-root nodes, and modifying costs and rewards as above, we may assume that in the modified instance, either: (a) there is a node  $v \in V'$  with zero reward; (b) there is a (directed) cycle  $Z$  consisting of zero (modified) cost arcs; or (c) there is an out-arborescence consisting of zero cost arcs. If (c) applies, then we are done. If (a) or (b) apply, then we argue that may further simplify the instance as follows: in case (a), we shortcut past  $v$  by merging every pair of incoming and outgoing arcs of  $v$  and deleting  $v$ ; in case (b), we contract the cycle  $Z$  and set the reward of the contracted node to be the sum of the (modified) rewards of nodes in  $Z$ . We then recurse on the simplified instance. We believe that the above result, and the techniques underlying it, are of independent interest, and will find various applications. We present two applications of our result (see Section 4), where we use our combinatorial algorithm for PCW to give combinatorial implementations of the LP-rounding algorithms in [14] and [20] for orienteering and  $k$ -MLP respectively. We now discuss these applications, and in doing so place our main result in the context of some extant work. We say that  $x \in \mathbb{R}_+^A$  is an  $r$ -preflow (or simply preflow), if we have  $x(\delta^{\text{in}}(v)) \geq x(\delta^{\text{out}}(v))$  for all non-root nodes  $v$ .

- Friggstad and Swamy [14] proposed a novel LP-based approach for orienteering, wherein the LP-relaxation searches for a ( $r$ -) preflow of large reward (see (RO-P) in Appendix B). The first step (and key insight) in their rounding algorithm is to utilize the arborescence-packing result of [1] to cast the LP-solution  $x$  as a convex combination of arborescences whose expected reward is at least the LP-optimum and whose expected cost is at most the length bound, say  $B$ . They leverage this to show that one can then extract a rooted path having reward at least (LP-optimum)/3 via a simple combinatorial procedure.

We show (see Section 4.1) that one can utilize our algorithm ITERPCA, in conjunction with binary search, to obtain the desired convex combination combinatorially, that is, without having to solve their LP-relaxation, and thereby obtain a combinatorial 3-approximation. This follows because the PCW problem is obtained by Lagrangifying the “length at most  $B$ ” constraint. A standard fine tuning of the Lagrangian variable (which affects the node rewards) via binary search then yields the desired distribution (over at most two rooted trees). The same ideas also apply and yield combinatorial approximation algorithms for other variants of orienteering, such as *P2P-orienteering* (where the other end-point of the path is also specified) and *cycle orienteering* (where we seek a cycle containing  $r$ ).<sup>1</sup>

While the approximation factor of 3 does not as yet beat the  $(2 + \epsilon)$ -approximation factor for orienteering [8], our algorithm is significantly simpler and faster algorithm than prior dynamic-programming (DP) based algorithms for orienteering [4, 2, 8].<sup>2</sup> Moreover, an added subtle benefit of the algorithms in [14]

<sup>1</sup>Cycle orienteering is not considered in [14], but their ideas can be easily adapted.

<sup>2</sup>A straightforward implementation of our combinatorial algorithm for orienteering takes  $O(n^4 \cdot K)$  time, where  $K$  is the time for binary search. In contrast, the the algorithm in [8] has running time at least  $O(n^{1/\epsilon^2} \cdot K)$  for obtaining a  $\frac{2}{1-\epsilon}$ -approximation; thus,  $O(n^9 \cdot K)$  time for returning a 3-approximation. The DP-algorithm of Blum et al. [4] has running time at least  $O(n^5 \cdot K)$ , and its approximation guarantee is no better than 4.

is that they also yield an upper bound on the optimum, which is useful since it can be used to evaluate the approximation factor of the solution computed on a per-instance basis. Our combinatorial algorithms inherit this benefit, and also provide an upper bound on the orienteering optimum.

Our combinatorial algorithm and the associated upper bound may also find use in the context of computational methods for solving other VRPs, since (as mentioned earlier) orienteering corresponds to the pricing problem that needs to be solved in these contexts. Indeed [9] utilizes our combinatorial algorithm to obtain near-optimal solutions to distance-constrained vehicle routing.

In Section 5, we undertake an extensive computational study of our combinatorial orienteering algorithms, in order to better understand the performance of our algorithms in practice. Our computational experiments show that our algorithms perform fairly well in practice—both in terms of the solution computed, and the upper bound computed—and much better than that indicated by the theoretical analysis.

- Post and Swamy [20] consider multi-vehicle MLPs. For  $k$ -MLP, wherein we seek  $k$  rooted paths of minimum total latency that together visit all nodes, they devise two 7.183-approximation algorithms. One of their algorithms (Algorithm 3 in §6.2 [20]) utilizes a subroutine for computing a distribution of rooted trees covering at least  $k$  nodes in expectation, whose expected cost is at most that of any collection of rooted walks that together cover at least  $k$  nodes. Lagrangifying the coverage constraint again yields a PCW problem. Post and Swamy [20] devised an LP-rounding algorithm for this problem, by considering its LP-relaxation (P), using arborescence packing to obtain a rooted tree with  $PCC(T)$  at most the LP-optimum  $OPT$ , and then fine-tuning the node rewards via binary search to obtain the desired distribution. In particular, for the PCW problem, they obtain the same guarantee that we do, but via solving the LP (P). While not a combinatorial algorithm, they dub their resulting  $k$ -MLP algorithm a “more combinatorial” algorithm (as opposed to their other 7.183-approximation algorithm, which needs to explicitly solve a configuration LP).

We can instead utilize *our combinatorial algorithm* to produce the rooted tree  $T$  (see Section 4.2); incorporating this within the “more combinatorial” algorithm of [20] yields a fully and truly combinatorial 7.183-approximation algorithm for  $k$ -MLP, which is the state-of-the-art for this problem.

We remark that our result bounding the prize-collecting cost of the tree  $T$  by the prize-collecting cost of *any* collection of rooted walks is a substantial generalization of an analogous result in [7], who compare against the prize-collecting cost of a *single* walk (and specifically in undirected graphs). As noted in [20], the stronger guarantee where we compare against multiple walks is essential for obtaining guarantees for  $k$ -MLP.

## 2 LP-relaxation for the prize-collecting-walks problem

Recall that we are given a directed graph  $G = (V, A)$ , arc costs  $c_a \geq 0$  for all  $a \in A$ , root node  $r \in V$ , and a reward or penalty  $\pi_v \geq 0$  for each node  $v$ . (Note that  $\pi_r$  is inconsequential, as it does not affect the prize-collecting cost of any rooted object (out-arborescence, walk); so it will sometimes be convenient notationally to assume that  $\pi_r = 0$ .)

Our LP-relaxation (P) for prize-collecting walks has a variable  $x_a$  for each arc  $a$ , which represents the multiplicity of arc  $a$  in the walk-collection, and a variable  $p_v$  for each node  $v \neq r$ , which indicates whether node  $v$  is not covered.

$$\min \sum_{a \in A} c_a x_a + \sum_{v \in V} \pi_v p_v \tag{P}$$

$$\text{s.t. } x(\delta^{\text{in}}(S)) + p_v \geq 1 \quad \forall S \subseteq V \setminus \{r\}, v \in S \tag{1}$$

$$x(\delta^{\text{in}}(v)) \geq x(\delta^{\text{out}}(v)) \quad \forall v \in V \setminus \{r\} \tag{2}$$

$$x, p \geq 0.$$

Constraint (1) encodes that for every set  $S$  of nodes  $S$  not containing the root, and  $v \in S$ , either  $S$  has an incoming arc or we pay the penalty  $\pi_v$  for not visiting  $v$ . Constraint (2) encodes that the in-degree of every node other than the root is always at least its out-degree, so that the solution corresponds to a collection of walks rather than a tree. (Note that while we have included the variable  $p_r$  above, it does not appear in any constraint, so we may assume that  $p_r = 0$  in any feasible solution to (P).)

### 3 A combinatorial algorithm

We now present a combinatorial algorithm for prize-collecting walks based on iteratively simplifying the instance. Recall that  $O^*$  is the minimum value of  $[\sum_{P \in \mathcal{C}} c(P) + \pi(V \setminus \bigcup_{P \in \mathcal{C}} V(P))]$  over all collections  $\mathcal{C}$  of  $r$ -rooted walks. (Recall that a walk may have repeated nodes and arcs, and  $c(T) = \sum_{a \in A} c_a \cdot$  (number of occurrences of  $a$  in  $T$ ) for a multiset of arcs  $T$ .) Throughout this section, the root will remain  $r$ , so will frequently drop  $r$  from the notation used to refer to an instance. Since we will modify the instance  $(G, c, \pi)$  during the course of our algorithm (but not change the root), we use  $O^*(G, c, \pi)$  to denote the above quantity. Also, we use  $(P_{(G, c, \pi)})$  to refer to the LP-relaxation (P) for the instance  $(G, c, \pi)$ , and  $OPT(G, c, \pi)$  to denote its optimal value. We use  $PCC(T; G, c, \pi) := c(T) + \pi(V \setminus V(T))$  to denote the prize-collecting value of  $T$  under arc costs  $c$  and penalties  $\pi$ , where  $T$  is a subgraph of  $G$  such that all nodes in  $V(T)$  are reachable from  $r$  in  $T$ . Whenever we say optimal solution below, we mean the optimal walk-collection (i.e., an optimal integral solution to (P)).

Our algorithm ITERPCA resembles Edmond's algorithm for finding a minimum-cost arborescence, and is based on three main ideas for simplifying the instance. However, unlike in the case of min-cost spanning arborescences, our simplifications do *not* leave the problem unchanged; we really exploit the asymmetry that we seek an out-arborescence but are comparing its value against the best collection of  $r$ -rooted walks in  $(G, c, \pi)$ .

Let  $V' = V \setminus \{r\}$ . We observe that we may modify the instance by picking a node  $v \in V'$ , and subtracting a common value  $\theta$  from the cost of all incoming arcs of  $v$  and from  $\pi_v$ , while ensuring that the new values of these quantities is nonnegative (see step (7)). That is, it suffices to prove the desired guarantee for the modified instance  $(G, \tilde{c}, \tilde{\pi})$ : if  $T$  is an out-arborescence with  $PCC(T; G, \tilde{c}, \tilde{\pi}) \leq O^*(G, \tilde{c}, \tilde{\pi})$ , then  $PCC(T; G, c, \pi) \leq O^*(G, c, \pi)$  (Lemma 3.2). By choosing a suitable  $\theta_v$  for all  $v \in V'$  and modifying costs and penalties as above, we may assume that either: (a) there is a node  $v \in V'$  with  $\tilde{\pi}_v = 0$ ; (b) there is a (directed) cycle  $Z$  consisting of zero  $\tilde{c}$ -cost arcs; or (c) there is an out-arborescence consisting of zero  $\tilde{c}$ -cost arcs. If (c) applies, then we are done. If (a) or (b) apply, then we argue that may further simplify the instance as follows. In case (a), we shortcut past  $v$  by merging every pair of incoming and outgoing arcs of  $v$  to create a new arc, and delete  $v$  (see steps (9)–(15), Lemma 3.3). In case (b), we contract the cycle  $Z$  and set the penalty of the contracted node to be  $\sum_{v \in V(Z)} \tilde{\pi}_v$  (see steps (18)–(28), Lemma 3.4). We then recurse on the simplified instance.

An additional feature of our algorithm is that, by aggregating the  $\theta_v$  values computed by our algorithm across all recursive calls and translating them suitably to the original graph  $G$ , we obtain a certificate  $y = (y_S)_{S \subseteq V'}$  such that the quantity  $Y = \sum_{S \subseteq V'} y_S$  is sandwiched between the prize-collecting value  $PCC(T; G, c, \pi)$  of our solution, and  $O^*(G, c, \pi)$  (which is *NP*-hard to compute). (We can in fact strengthen the upper bound on  $Y$  to  $Y \leq OPT(G, c, \pi)$ , where recall that  $OPT(G, c, \pi)$  is the optimal value of  $(P_{(G, c, \pi)})$ ; see Theorem 3.7.)

This property of our algorithm is especially useful when we utilize ITERPCA to implement approximation algorithms for orienteering (see Section 4.1), because there we can utilize  $Y$  to obtain a suitable *upper bound* on the optimum value of the orienteering problem (and in fact, the optimal value of the LP-relaxation for orienteering proposed by [14]). This allows us to obtain an *instance-wise approximation guarantee* i.e., an instance-specific bound on the approximation factor of the solution computed for each instance. This

instance-wise approximation guarantee is often significantly better than the worst-case approximation guarantee, as is demonstrated by our computational results (Section 5). Our computational results also show that our upper bound is a fairly good (over-)estimate of the orienteering optimum. We remark that having both (good) lower and upper bounds on the optimum can be quite useful also for *exact* computational methods for orienteering based on the branch-and-bound method.

The precise description of our algorithm appears as Algorithm ITERPCA. By the “null” vector below, we mean a vector with no-coordinates.

**Analysis.** We prove the following guarantee.

**Theorem 3.1.** *On any input  $(G, c, \pi)$ , algorithm ITERPCA runs in polynomial time and returns an out-arborescence  $T$  and vector  $y$  such that  $\text{PCC}(T; G, c, \pi) \leq \sum_{S \subseteq V \setminus \{r\}} y_S \leq O^*(G, c, \pi)$ .*

As noted earlier, one of the above inequalities can be strengthened to  $\sum_{S \subseteq V \setminus \{r\}} y_S \leq \text{OPT}(G, c, \pi)$ . We defer the proof of this, which is a bit technical and involves suitably extrapolating the arguments made for the integral case, to Section 3.1.

Given the recursive nature of ITERPCA, it is natural that the proof of Theorem 3.1 uses induction (on  $|V(G)|$ ). First, Lemma 3.2 argues that it suffices to show the inequalities stated in Theorem 3.1 hold for the instance  $(G, \tilde{c}, \tilde{\pi})$  specified in step (7) (with “simpler” edge costs and penalties), the out-arborescence  $T$ , and the vector  $\tilde{y}$  returned in step (29) or (16). Next, Lemmas 3.3 and 3.4 supply essentially the induction step. They show that if the output  $(\overline{T}, \overline{y})$  of ITERPCA when it is called recursively on the smaller instance  $(\overline{G}, \overline{c}, \overline{\pi})$  in step (12) or (23) satisfies the inequalities stated in Theorem 3.1, then  $(T, \tilde{y})$  satisfies  $\text{PCC}(T; G, \tilde{c}, \tilde{\pi}) \leq \sum_{S \subseteq V'} \tilde{y}_S \leq O^*(G, \tilde{c}, \tilde{\pi})$ . Combining this with Lemma 3.2 finishes the proof.

**Lemma 3.2.** *Consider the PCW instance  $(G, \tilde{c}, \tilde{\pi})$  obtained after step (7). If the out-arborescence  $T$  computed in step (15), (26), (28), or (31), and the vector  $\tilde{y}$  satisfy  $\text{PCC}(T; G, \tilde{c}, \tilde{\pi}) \leq \sum_{S \subseteq V'} \tilde{y}_S \leq O^*(G, \tilde{c}, \tilde{\pi})$ , then  $T$  and the final vector  $y$  returned satisfy  $\text{PCC}(T; G, c, \pi) \leq \sum_{S \subseteq V'} y_S \leq O^*(G, c, \pi)$ .*

*Proof.* We show that  $\text{PCC}(T; G, c, \pi) = \text{PCC}(T; G, \tilde{c}, \tilde{\pi}) + \sum_{v \in V'} \theta_v$ , and  $O^*(G, \tilde{c}, \tilde{\pi}) \leq O^*(G, c, \pi) - \sum_{v \in V'} \theta_v$ . Combining these inequalities, along with the fact that  $\sum_{S \subseteq V'} y_S = \sum_{S \subseteq V'} \tilde{y}_S + \sum_{v \in V'} \theta_v$ , yields the lemma.

The first equality follows quite easily, since every node  $v \in V'$  covered by  $T$  has exactly one incoming edge whose cost increases by  $\theta_v$  when going from  $\tilde{c}$  to  $c$ , and the penalty of every node  $v \in V'$  not covered by  $T$  increases by  $\theta_v$  when going from  $\tilde{\pi}$  to  $\pi$ . (Note that here we are crucially exploiting that  $T$  is an *out-arborescence*; if  $T$  were instead the (multi)set of edges of an  $r$ -rooted walk, or collection of walks, then  $\text{PCC}(T; G, c, \pi)$  could be larger than  $\text{PCC}(T; G, \tilde{c}, \tilde{\pi}) + \sum_{v \in V'} \theta_v$  since  $T$  could contain multiple edges entering a node.)

To see the second inequality, let  $\mathcal{C}$  be an optimal solution to the  $(G, c, \pi)$  instance. So for every node  $v \in V'$ , if  $v$  is covered by  $\mathcal{C}$ , it has at least one incoming edge in this collection of paths, whose cost decreases by  $\theta_v$  when moving from  $c$  to  $\tilde{c}$ ; if  $v$  is not covered, its penalty decreases by  $\theta_v$  when moving from  $\pi$  to  $\tilde{\pi}$ . Hence,  $O^*(G, \tilde{c}, \tilde{\pi}) \leq O^*(G, c, \pi) - \sum_{v \in V'} \theta_v$ . ■

**Lemma 3.3.** *Consider a recursive call ITERPCA  $(G, c, \pi, r)$ , where steps (9)–(16) are executed. If  $(\overline{T}, \overline{y})$  obtained in step (12) satisfies  $\text{PCC}(\overline{T}; \overline{G}, \overline{c}, \overline{\pi}) \leq \sum_{S \subseteq V(\overline{G}) \setminus \{r\}} \overline{y}_S \leq O^*(\overline{G}, \overline{c}, \overline{\pi})$ , then the out-arborescence  $T$  and the vector  $\tilde{y}$  computed in steps (15), (16) satisfy  $\text{PCC}(T; G, \tilde{c}, \tilde{\pi}) \leq \sum_{S \subseteq V'} \tilde{y}_S \leq O^*(G, \tilde{c}, \tilde{\pi})$ .*

*Proof.* The key observation is that  $O^*(\overline{G}, \overline{c}, \overline{\pi}) \leq O^*(G, \tilde{c}, \tilde{\pi})$ . Consider an optimal solution  $\mathcal{C}$  to the PCW instance  $(G, \tilde{c}, \tilde{\pi})$ . If  $v$  is not covered by  $\mathcal{C}$ , it is easy to see that  $\mathcal{C}$  is a feasible solution to  $(\overline{G}, \overline{c}, \overline{\pi})$ . Otherwise, we modify each walk  $P \in \mathcal{C}$  containing  $v$  to obtain a corresponding walk in  $\overline{G}$  as follows. Consider an occurrence of  $v$  on  $P$ , and let  $(u, v)$  be the arc entering  $v$  in this occurrence. If  $(u, v)$  is the last arc of  $P$ , then

---

**Algorithm** IterPCA( $G, c, \pi, r$ ): iterative simplification algorithm for prize-collecting arborescence
 

---

**Input:** PCW instance  $(G = (V, A), c, \pi, r)$   
**Output:**  $r$ -rooted out-arborescence  $T$  in  $G$ ;  $y = (y_S)_{S \subseteq V \setminus \{r\}}$  (of polynomial support)

- 1 Let  $V' = V \setminus \{r\}$ , initialize  $y \leftarrow \vec{0}$ ,  $\tilde{y} \leftarrow \vec{0}$
- 2 **if**  $|V| = 1$  **then return**  $(T = \emptyset, \text{null vector})$
- 3 **if**  $|V| = 2$ , say  $V = \{r, v\}$  **then**
- 4   Set  $y_{\{v\}} \leftarrow \min\{c_{r,v}, \pi_v\}$
- 5   **if**  $\pi_v > c_{r,v}$  **then return**  $(T = \{(r, v)\}, y)$  **else return**  $(T = \emptyset, y)$
- 6 Set  $\theta_v \leftarrow \min\{\min_{(u,v) \in A} c_{u,v}, \pi_v\}$  for all  $v \in V'$
- 7 For all  $v \in V'$ , set  $\tilde{c}_{u,v} \leftarrow c_{u,v} - \theta_v$  for all  $(u, v) \in A$ , and  $\tilde{\pi}_v \leftarrow \pi_v - \theta_v$ ; set  $\tilde{\pi}_r \leftarrow 0$
- 8 **if there exists**  $v \in V'$  **with**  $\tilde{\pi}_v = 0$  **then**
- 9   Set  $\overline{G} \leftarrow (V \setminus \{v\}, A \setminus (\delta^{\text{in}}(v) \cup \delta^{\text{out}}(v)) \cup \{(u, w) : u \in V \setminus \{v\}, w \in V \setminus \{r, v\}\})$
- 10   For all  $u \in V \setminus \{v\}$ ,  $w \in V \setminus \{r, v\}$ , set  $\bar{c}_{u,w} \leftarrow \min\{\tilde{c}_{u,w}, \tilde{c}_{u,v} + \tilde{c}_{v,w}\}$
- 11   Set  $\bar{\pi} \leftarrow \{\tilde{\pi}_u\}_{u \in V(\overline{G})}$
- 12    $(\overline{T}, \overline{y}) \leftarrow \text{ITERPCA}(\overline{G}, \bar{c}, \bar{\pi}, r)$
- 13    $\overline{A} \leftarrow \{(u, w) \in \overline{T} : \bar{c}_{u,w} < \tilde{c}_{u,w}\}$  // note that  $\bar{c}_{u,w} = \tilde{c}_{uw} + \tilde{c}_{v,w} \quad \forall (u, w) \in \overline{A}$
- 14    $T' \leftarrow \overline{T} \setminus \overline{A} \cup \bigcup_{(u,w) \in \overline{A}} \{(u, v), (v, w)\}$
- 15    $T \leftarrow$  minimum  $\tilde{c}$ -cost spanning arborescence in  $(V(T'), A(T'))$
- 16   Set  $\tilde{y}_S \leftarrow \overline{y}_S$  for all  $S \subseteq V \setminus \{r, v\}$
- 17 **else if there exists a cycle**  $Z$  **with**  $r \notin V(Z)$  **and**  $\tilde{c}_{u,v} = 0$  **for all**  $(u, v) \in A(Z)$  **then**
- 18   Set  $\overline{G} \leftarrow$  digraph obtained from  $G$  by contracting  $Z$  into a single supernode  $u_Z$ , removing self-loops, and replacing parallel (incoming or outgoing) arcs incident to  $u_Z$  by a single arc
- 19   Set  $\bar{c}_{u,v} \leftarrow \tilde{c}_{u,v}$  for all  $u \in V \setminus V(Z), v \in V \setminus V(Z)$
- 20   For all  $u \in V \setminus V(Z)$  such that  $\delta^{\text{out}}(u) \cap \delta^{\text{in}}(Z) \neq \emptyset$ , set  $\bar{c}_{u,u_Z} \leftarrow \min_{(u,v) \in \delta^{\text{in}}(Z)} \tilde{c}_{u,v}$
- 21   For all  $u \in V' \setminus V(Z)$  such that  $\delta^{\text{in}}(u) \cap \delta^{\text{out}}(Z) \neq \emptyset$ , set  $\bar{c}_{u_Z,u} \leftarrow \min_{(v,u) \in \delta^{\text{out}}(Z)} \tilde{c}_{v,u}$
- 22   Set  $\bar{\pi}_{u_Z} \leftarrow \sum_{v \in V(Z)} \tilde{\pi}_v$ ,  $\bar{\pi}_u \leftarrow \tilde{\pi}_u$  for all  $u \in V \setminus V(Z)$
- 23    $(\overline{T}, \overline{y}) \leftarrow \text{ITERPCA}(\overline{G}, \bar{c}, \bar{\pi}, r)$
- 24   **if**  $u_Z \in V(\overline{T})$  **then**
- 25     Obtain  $T'$  from  $\overline{T}$  as follows: replace every arc  $a \in \overline{T}$  entering or leaving  $u_Z$  by the arc in  $G$  entering or leaving  $V(Z)$  respectively whose  $\tilde{c}$ -cost defines  $\bar{c}_a$ ; also add (the nodes and edges of)  $Z$
- 26      $T \leftarrow$  minimum  $\tilde{c}$ -cost spanning arborescence in  $(V(T'), A(T'))$
- 27   **else**
- 28      $T \leftarrow \overline{T}$
- 29   For each set  $\overline{S} \subseteq V(\overline{G}) \setminus \{r\}$ , consider the corresponding set  $S \subseteq V'$ , which is  $\overline{S}$  if  $u_Z \notin \overline{S}$ , and  $\overline{S} \setminus \{u_Z\} \cup V(Z)$  otherwise; set  $\tilde{y}_S \leftarrow \overline{y}_S$
- 30 **else**
- 31   Let  $T \leftarrow$  arborescence spanning  $V$  with  $\tilde{c}_{u,v} = 0$  for all  $(u, v) \in A(T)$
- 32 Set  $y_{\{v\}} \leftarrow \tilde{y}_{\{v\}} + \theta_v$  for all  $v \in V'$ , and  $y_S \leftarrow \tilde{y}_S$  for all other subsets  $S \subseteq V'$ .
- 33 **return**  $(T, y)$

---

we simply delete this arc; note that  $\tilde{c}_{u,v} \geq 0$ . Otherwise, if  $(v, w)$  is the arc in  $P$  leaving  $v$  in this occurrence, then we replace arcs  $(u, v), (v, w)$  in  $P$  with the arc  $(u, w)$ ; note that  $\bar{c}_{u,w} \leq \tilde{c}_{u,v} + \tilde{c}_{v,w}$ . Doing this for all occurrences of  $v$  on  $P$  yields an  $r$ -rooted walk in  $\bar{G}$ , and doing this for all walks  $P \in \mathcal{C}$  containing  $v$  yields a feasible solution  $\mathcal{C}'$  to  $(\bar{G}, \bar{c}, \bar{\pi})$  of no greater prize-collecting cost, i.e.,  $\text{PCC}(\mathcal{C}'; \bar{G}, \bar{c}, \bar{\pi}) \leq \text{PCC}(\mathcal{C}; G, \tilde{c}, \tilde{\pi})$ . Therefore,  $O^*(\bar{G}, \bar{c}, \bar{\pi}) \leq O^*(G, \tilde{c}, \tilde{\pi})$ .

We now have the following sequence of inequalities.

$$\begin{aligned}
\text{PCC}(T; G, \tilde{c}, \tilde{\pi}) &\leq \text{PCC}(T'; G, \tilde{c}, \tilde{\pi}) && (T \text{ is a min } \tilde{c}\text{-cost spanning arborescence in } (V(T'), A(T'))) \\
&= \text{PCC}(\bar{T}; \bar{G}, \bar{c}, \bar{\pi}) \\
&\quad \text{(if we add } (u, v), (v, w) \text{ to } T', \text{ we remove } (u, w); \bar{c}_{u,w} = \tilde{c}_{u,v} + \tilde{c}_{v,w}) \\
&\leq \sum_{S \subseteq V(\bar{G}) \setminus \{r\}} \bar{y}_S \leq O^*(\bar{G}, \bar{c}, \bar{\pi}) && \text{(given by lemma statement)} \\
&\leq O^*(G, \tilde{c}, \tilde{\pi}). && \text{(shown above)}
\end{aligned}$$

Finally, note that, by definition,  $\sum_{S \subseteq V'} \tilde{y}_S = \sum_{S \subseteq V(\bar{G}) \setminus \{r\}} \bar{y}_S$ .  $\blacksquare$

**Lemma 3.4.** *Consider a recursive call ITERPCA  $(G, c, \pi, r)$ , where steps (18)–(29) are executed. If  $(\bar{T}, \bar{y})$  obtained in step (23) satisfies  $\text{PCC}(\bar{T}; \bar{G}, \bar{c}, \bar{\pi}) \leq \sum_{S \subseteq V(\bar{G}) \setminus \{r\}} \bar{y}_S \leq O^*(\bar{G}, \bar{c}, \bar{\pi})$ , then the out-arborescence  $T$  computed in step (26) or (28), and the vector  $\tilde{y}$  computed in step (29) satisfy  $\text{PCC}(T; G, \tilde{c}, \tilde{\pi}) \leq \sum_{S \subseteq V'} \tilde{y}_S \leq O^*(G, \tilde{c}, \tilde{\pi})$ .*

*Proof.* Again, the key property to show is that  $O^*(\bar{G}, \bar{c}, \bar{\pi}) \leq O^*(G, \tilde{c}, \tilde{\pi})$ . Consider an optimal solution  $\mathcal{C}$  to the PCW instance  $(G, \tilde{c}, \tilde{\pi})$ . If no nodes of  $Z$  are covered by  $\mathcal{C}$ , then it is easy to see that  $\mathcal{C}$  is a feasible solution to  $(\bar{G}, \bar{c}, \bar{\pi})$  of no-greater prize-collecting cost, so  $O^*(\bar{G}, \bar{c}, \bar{\pi}) \leq O^*(G, \tilde{c}, \tilde{\pi})$ . Otherwise, pick some  $v \in V(Z)$  that lies on some walk in our collection  $\mathcal{C}$ , and think of  $Z$  being contracted into the node  $v$ ; i.e., formally, we are replacing every occurrence of every node of  $Z$  in our collection  $\mathcal{C}$  by the contracted node  $u_Z$  of  $\bar{G}$  that stands for the cycle  $Z$ , and deleting self-loops. This yields a walk-collection in  $\bar{G}$  visiting  $\bigcup_{P \in \mathcal{C}} V(P) \cup \{u_Z\}$  where the  $\bar{c}$ -cost of the arcs used is at most  $\sum_{P \in \mathcal{C}} \tilde{c}(P)$ , since for every arc  $(u, v) \in \delta^{\text{in}}(Z)$  (respectively  $(u, v) \in \delta^{\text{out}}(Z)$ ), we have the arc  $(u, u_Z) \in \bar{G}$  (respectively,  $(u_Z, u) \in \bar{G}$ ) with  $\bar{c}_{(u, u_Z)} \leq \tilde{c}_{u,v}$  (respectively,  $\bar{c}_{(u_Z, u)} \leq \tilde{c}_{v,u}$ ). So we again have  $O^*(\bar{G}, \bar{c}, \bar{\pi})$  is at most  $\sum_{P \in \mathcal{C}} \tilde{c}(P) + \tilde{\pi}(V \setminus \bigcup_{P \in \mathcal{C}} V(P)) = O^*(G, \tilde{c}, \tilde{\pi})$ .

If we obtain  $T$  in step (26), then

$$\text{PCC}(T; G, \tilde{c}, \tilde{\pi}) \leq \text{PCC}(T'; G, \tilde{c}, \tilde{\pi}) = \text{PCC}(\bar{T}; \bar{G}, \bar{c}, \bar{\pi}) \leq \sum_{S \subseteq V(\bar{G}) \setminus \{r\}} \bar{y}_S \leq O^*(\bar{G}, \bar{c}, \bar{\pi}) \leq O^*(G, \tilde{c}, \tilde{\pi}).$$

The equality above follows since all arcs  $a \in Z$  have  $\tilde{c}_a = 0$ , and for every arc  $a$  of  $\bar{G}$  in  $\bar{T}$  that is replaced by an arc  $a'$  of  $G$ , we have  $\bar{c}_a = \tilde{c}_{a'}$ . If we obtain  $T$  in step (28), then clearly  $\text{PCC}(T; G, \tilde{c}, \tilde{\pi}) = \text{PCC}(\bar{T}; \bar{G}, \bar{c}, \bar{\pi})$ , which is at most  $\sum_{S \subseteq V(\bar{G}) \setminus \{r\}} \bar{y}_S \leq O^*(\bar{G}, \bar{c}, \bar{\pi}) \leq O^*(G^{\text{met}}, \tilde{c}, \tilde{\pi})$  as before.

Finally, the lemma follows by noting that  $\sum_{S \subseteq V'} \tilde{y}_S = \sum_{S \subseteq V(\bar{G}) \setminus \{r\}} \bar{y}_S$ .  $\blacksquare$

*Proof of Theorem 3.1.* The proof follows by induction on  $|V(G)|$ . The bases cases are when  $|V(G)| \leq 2$ , for which the statement follows trivially. Suppose that the statement is true whenever  $|V(G)| \leq k$ , and consider an instance  $(G, c, \pi)$  with  $|V(G)| = k + 1$ . Recall that  $V' = V \setminus \{r\}$ .

By Lemma 3.2, it suffices to show that  $\text{PCC}(T; G, \tilde{c}, \tilde{\pi}) \leq \sum_{S \subseteq V'} \tilde{y}_S \leq O^*(G, \tilde{c}, \tilde{\pi})$ . If  $T$  is obtained in step (31), then clearly  $\text{PCC}(T; G, \tilde{c}, \tilde{\pi}) = 0 = \sum_{S \subseteq V'} \tilde{y}_S \leq O^*(G, \tilde{c}, \tilde{\pi})$ . Otherwise, by the induction hypothesis, we have that the tuple  $(\bar{T}, \bar{y})$  returned for  $(\bar{G}, \bar{c}, \bar{\pi})$  in step (12) or (23) satisfies  $\text{PCC}(\bar{T}; \bar{G}, \bar{c}, \bar{\pi}) \leq \sum_{S \subseteq V(\bar{G}) \setminus \{r\}} \bar{y}_S \leq O^*(\bar{G}, \bar{c}, \bar{\pi})$ , since  $|V(\bar{G})| \leq k$ . Lemmas 3.3 and 3.4, then show that  $\text{PCC}(T; G, \tilde{c}, \tilde{\pi}) \leq \sum_{S \subseteq V'} \tilde{y}_S \leq O^*(G, \tilde{c}, \tilde{\pi})$ . This completes the induction step and the induction proof showing that  $\text{PCC}(T; G, c, \pi) \leq \sum_{S \subseteq V'} y_S \leq O^*(G, c, \pi)$ .  $\blacksquare$



### 3.1 Showing that $\sum_{S \subseteq V \setminus \{r\}} y_S \leq OPT(G, c, \pi)$

Recall that  $V' = V \setminus \{r\}$ , and that  $OPT(G, c, \pi)$  is the optimal value of the LP-relaxation (P) for the instance  $(G, c, \pi)$ . We prove the above inequality by suitably generalizing the arguments involving  $O^*$  in Lemmas 3.2–3.4 to work with fractional solutions to (P). A key technical tool that we utilize, is the following powerful *splitting-off* result due to Frank [12] and Jackson [15]. For a digraph  $D$ , and any ordered pair of nodes  $u, v$ , let  $\lambda_D(u, v)$  denote the  $(u, v)$  edge connectivity in  $D$ , which is the number of  $u \rightsquigarrow v$  edge-disjoint paths in  $D$ .

**Theorem 3.5** ([12, 15]). *Let  $D = (N + s, E)$  be an Eulerian digraph, possibly with parallel edges. Then, for every arc  $(u, s) \in \delta^{\text{in}}(s)$ , there is an arc  $(s, w) \in \delta^{\text{out}}(s)$  such that letting  $D_{uw}$  be the digraph obtained by replacing the pair of arcs  $(u, s), (s, w)$  with (a new parallel copy of) the arc  $(u, w)$ —an operation called *splitting off*  $(u, s), (s, w)$ —we have that  $\lambda_{D_{uw}}(v, t) = \lambda_D(v, t)$  for all  $v, t \in N$ .*

Given a digraph  $D = (N, E)$  with root node  $r \in N$ , we say that a vector  $x \in \mathbb{R}_+^E$  is an  $r$ -preflow if  $x(\delta^{\text{in}}(v)) \geq x(\delta^{\text{out}}(v))$  holds for every  $v \in N \setminus \{r\}$ . We say that  $D$  is an  $r$ -preflow digraph if  $\chi^E$  is an  $r$ -preflow. Given a solution  $(x, p)$  to (P), scaling  $x$  suitably yields an  $r$ -preflow digraph, whereas Theorem 3.5 pertains to Eulerian digraphs. However, since we are only interested in  $(r, u)$  edge-connectivities, we can always make this  $r$ -preflow digraph Eulerian by adding enough parallel  $(v, r)$  edges for each node  $v \neq r$ . Applying Theorem 3.5 repeatedly to the resulting Eulerian digraph then yields the following.

**Lemma 3.6.** *Let  $D = (N + s, E)$  be an  $r$ -preflow digraph, where  $r \in N$ . Then, we can perform a sequence of the following two types of operations: (i) delete an arc entering  $s$ ; (ii) split off arcs  $(u, s) \in \delta^{\text{in}}(s)$  and  $(s, w) \in \delta^{\text{out}}(s)$ , to obtain an  $r$ -preflow digraph  $D' = (N, E')$  such that  $\lambda_{D'}(r, v) = \lambda_D(r, v)$  for all  $v \in N$ .*

*Proof.* We first make  $D$  Eulerian by adding, for each node  $v$ ,  $|\delta^{\text{in}}(v)| - |\delta^{\text{out}}(v)|$  parallel  $(v, r)$  edges; we call these edges artificial edges. Let  $D'' = (N + s, E'')$  be the resulting Eulerian digraph. Note that this operation leaves the  $(r, v)$  edge-connectivities unchanged, for all  $v \in N \cup \{s\}$ . Now, we apply Theorem 3.5 repeatedly to split off pairs of incoming and outgoing edges incident to  $s$ . If the outgoing edge of  $s$  that is split off is an artificial edge, then we simply delete the corresponding incoming edge. Note that each such operation preserves the property that every node  $v \in N \setminus \{r\}$  has in-degree at least its out-degree. This yields a digraph  $\tilde{D} = (N, \tilde{E})$  such that  $\lambda_{\tilde{D}}(r, v) = \lambda_{D''}(r, v) = \lambda_D(r, v)$  for all  $x \in N$ . Removing the artificial edges from  $\tilde{D}$  (which again does not affect  $(r, v)$  edge-connectivities) yields the desired  $r$ -preflow digraph  $D'$ . ■

**Theorem 3.7.** *The vector  $y$  returned by algorithm ITERPCA satisfies  $\sum_{S \subseteq V'} y_S \leq OPT(G, c, \pi)$ .*

*Proof.* As with Theorem 3.1, we proceed by induction on  $|V(G)|$ . The statement again holds trivially for the base cases, where  $|V(G)| \leq 2$ . So consider an instance  $(G, c, \pi)$  with  $|V(G)| \geq 3$  and  $\delta_G^{\text{in}}(r) = \emptyset$ .

We first claim that  $OPT(G, \tilde{c}, \tilde{\pi}) \leq OPT(G, c, \pi) - \sum_{v \in V'} \theta_v$ . This follows because if  $(x, p)$  is a feasible solution to  $(P_{(G, c, \pi)})$  (with  $p_r = 0$ ) then we have

$$\sum_{a \in A} c_a x_a + \sum_{v \in V} \pi_v p_v = \sum_{v \in V'} \left( \sum_{a \in \delta^{\text{in}}(v)} \tilde{c}_a x_a + \tilde{\pi}_v p_v + \theta_v (x(\delta^{\text{in}}(v)) + p_v) \right) \geq OPT(G, \tilde{c}, \tilde{\pi}) + \sum_{v \in V'} \theta_v.$$

Given the above, it suffices to argue that the vector  $\tilde{y}$  that we have in the algorithm at the end of step (16), (29), or (31) satisfies  $\sum_{S \subseteq V'} \tilde{y}_S \leq OPT(G, \tilde{c}, \tilde{\pi})$ . If  $\tilde{y}$  is the vector at step (31), then  $\tilde{y} = \vec{0}$ , so this holds trivially.

Suppose that  $\tilde{y}$  is obtained from step (16). By the induction hypothesis, the vector  $\tilde{y}$  returned in step (12) satisfies  $\sum_{S \subseteq V(\overline{G}) \setminus \{r\}} \tilde{y}_S \leq OPT(\overline{G}, \tilde{c}, \tilde{\pi})$ . We show that the RHS is at most  $OPT(G, \tilde{c}, \tilde{\pi})$  by showing that any feasible solution  $(x, p)$  to  $(P_{(G, \tilde{c}, \tilde{\pi})})$  induces a feasible solution to  $(P_{(\overline{G}, \tilde{c}, \tilde{\pi})})$  of no greater cost.

Let  $K$  be such that  $Kx$  is integral. Consider the digraph  $D = (V, E)$  obtained by including  $Kx_{u,w}$  parallel  $(u, w)$  arcs for every  $(u, w) \in A$ . Observe that  $D$  is an  $r$ -preflow digraph. We apply Lemma 3.6 to  $D$ , taking  $s = v$ , to obtain an  $r$ -preflow digraph  $D' = (V \setminus \{v\}, E')$  with  $\lambda_{D'}(r, u) = \lambda_D(r, u) \geq K(1 - p_u)$  for all  $u \in V' \setminus \{v\}$ . We give every parallel edge  $(u, w)$  in  $E'$  cost equal to  $\tilde{c}_{u,w}$ . Observe that  $\tilde{c}(E') \leq \tilde{c}(E)$  since every edge  $(u, w) \in E' \setminus E$  is obtained by splitting off a pair  $(u, v), (v, w)$ , and  $\tilde{c}_{u,w} \leq \tilde{c}_{u,v} + \tilde{c}_{v,w}$ . Let  $\bar{x} \in \mathbb{R}_+^{A(\overline{G})}$  be the vector where  $\bar{x}_{u,w} = (\text{no. of parallel copies of } (u, w) \text{ in } D')/K$ . Then, note that  $(\bar{x}, \{p_u\}_{u \in V \setminus \{v\}})$  is a feasible solution to  $(P_{(\overline{G}, \tilde{c}, \tilde{\pi})})$  having objective value at most  $\tilde{c}(E')/K + \sum_{u \in V' \setminus \{v\}} \tilde{\pi}_u p_u \leq \sum_{a \in A} \tilde{c}_a x_a + \sum_{u \in V} \tilde{\pi}_u p_u$ .

Next, suppose that  $\tilde{y}$  is obtained from step (29). Again, by the induction hypothesis, the vector  $\tilde{y}$  returned in step (23) satisfies  $\sum_{S \subseteq V(\overline{G}) \setminus \{r\}} \tilde{y}_S \leq OPT(\overline{G}, \tilde{c}, \tilde{\pi})$ , and we show that the RHS is at most  $OPT(G, \tilde{c}, \tilde{\pi})$ .

Let  $(x, p)$  be a feasible solution to  $(P_{(G, \tilde{c}, \tilde{\pi})})$ . Define  $\bar{x} \in \mathbb{R}_+^{A(\overline{G})}$  and  $\bar{p} \in \mathbb{R}_+^{V(\overline{G})}$  as follows. For every arc  $(u, v) \in A(\overline{G})$ , where  $u, v \in V \setminus V(Z)$ , set  $\bar{x}_{u,v} = x_{u,v}$ ; for every arc  $(u, u_Z) \in A(\overline{G})$ , set  $\bar{x}_{u, u_Z} = x(\delta^{\text{out}}(u) \cap \delta^{\text{in}}(Z))$ ; for every arc  $(u_Z, u) \in A(\overline{G})$ , set  $\bar{x}_{u_Z, u} = x(\delta^{\text{in}}(u) \cap \delta^{\text{out}}(Z))$ . Set  $\bar{p}_u = p_u$  for all  $u \in V \setminus V(Z)$ , and  $\bar{p}_{u_Z} := \min_{u \in V(Z)} p_u$ . We claim that  $(\bar{x}, \bar{p})$  is a feasible solution to  $(P_{(\overline{G}, \tilde{c}, \tilde{\pi})})$  of cost at most the cost of  $(x, p)$  for  $(P_{(G, \tilde{c}, \tilde{\pi})})$ .

Any set  $\bar{S} \subseteq V(\overline{G}) \setminus \{r\}$  maps to a corresponding set  $S \subseteq V'$ , which is  $\bar{S}$  if  $u_Z \notin \bar{S}$ , and  $\bar{S} \setminus \{u_Z\} \cup V(Z)$  otherwise, and we have defined  $\bar{x}$  to ensure that  $\bar{x}(\delta^{\text{in}}(\bar{S})) = x(\delta^{\text{in}}(S))$ . So for any  $u \in \bar{S}$ , taking  $w = u$  if  $u \neq u_Z$ , and  $w = \text{argmin}_{v \in V(Z)} p_v$  if  $u = u_Z$ , we obtain that  $\bar{x}(\delta^{\text{in}}(\bar{S})) + \bar{p}_u = x(\delta^{\text{in}}(S)) + p_w \geq 1$ . We have  $\sum_{a \in A(\overline{G})} \tilde{c}_a \bar{x}_a \leq \sum_{a \in E} \tilde{c}_a x_a$ , since each arc  $(u, u_Z) \in A(\overline{G})$  has  $\tilde{c}_{u, u_Z} = \min_{v \in V(Z)} \tilde{c}_{u,v}$ , and each  $(u_Z, u) \in A(\overline{G})$  has  $\tilde{c}_{u_Z, u} = \min_{v \in V(Z)} \tilde{c}_{v,u}$ . Finally, we also have

$$\sum_{v \in V(\overline{G})} \tilde{\pi}_v \bar{p}_v = \sum_{v \in V \setminus V(Z)} \tilde{\pi}_v p_v + \left( \sum_{v \in V(Z)} \tilde{\pi}_v \right) \cdot \min_{v \in V(Z)} p_v \leq \sum_{v \in V \setminus V(Z)} \tilde{\pi}_v p_v + \sum_{v \in V(Z)} \tilde{\pi}_v p_v.$$

This completes the induction step, and hence the proof. ■

## 4 Applications

### 4.1 Orienteering

We now show that our algorithm for prize-collecting arborescence (PCA) can be used to obtain a fast, combinatorial implementation of the LP-rounding based approximation algorithms devised by Friggstad and Swamy [14] for orienteering. The input to the orienteering problem consists of a (rational) metric space  $(V, c)$ , root  $r \in V$ , a distance bound  $B \geq 0$ , and nonnegative node rewards  $\{\pi_v\}_{v \in V}$ . Let  $G = (V, E)$  denote the complete graph on  $G$ . Three versions of orienteering are often considered in the literature.

- *Rooted orienteering*: find an  $r$ -rooted path of cost at most  $B$  that collects the maximum reward.
- *Point-to-point (P2P) orienteering*: we are also given an end node  $t$ , and we seek an  $r$ - $t$  path of cost at most  $B$  that collects maximum reward.
- *Cycle orienteering*: find a cycle containing  $r$  of cost at most  $B$  that collects maximum reward.

By merging nodes at zero distance from each other, we may assume that all distances are positive, and by scaling, we may further assume that they are positive integers. We may therefore also assume that  $B$  is an integer.

Friggstad and Swamy [14] propose an LP-relaxation for rooted orienteering, and show that an optimal LP-solution can be rounded to an integer solution losing a factor of 3. This is obtained by decomposing an LP-optimal solution into a convex combination of out-arborescences, and then extracting a rooted path from these arborescences. They adapt their approach to also obtain a 6-approximation for P2P orienteering.

We show that one can utilize ITERPCA to obtain combinatorial algorithms for rooted- and P2P- orienteering with the above approximation factors. The high level idea is that Lagrangifying the “cost at most  $B$ ” constraint for rooted orienteering yields a prize-collecting walks problem, and by fine-tuning the value of the Lagrangian variable, we can leverage ITERPCA to obtain a distribution of  $r$ -rooted trees having expected cost at most  $B$ , and expected reward (essentially) at least the optimum of the rooted orienteering problem. We can then combine this with the LP-rounding algorithm in [14] to obtain the stated approximation factors. Our algorithms can thus be seen as a combinatorial implementation of the LP-rounding algorithms in [14]. For cycle orienteering, we adapt the above idea and the analysis in [14], to obtain a combinatorial 4-approximation algorithm.

We also leverage the certificate  $y$  returned by ITERPCA (whose value  $\sum_{S \subseteq V'} y_S$  is a lower bound on the optimal value of PCW problem) and show that this can be used to provide *upper bounds on the optimal value of the {rooted, P2P, cycle}- orienteering problem*. As mentioned earlier, having such upper bounds is quite useful as it allows to assess the approximation guarantee on an instance-by-instance basis, which can often be much better than the worst-case approximation guarantee (of 3). Indeed, our computational experiments in Section 5 emphatically confirm this.

**Finding a cost-bounded tree with good reward.** The following primitive will be the basis of all our algorithms. Let  $N \subseteq V$  be a node-set,  $r, w \in N$ , and  $L$  be a cost-budget such that  $c_{rw} \leq L$ . Let  $Q^*$  be an  $r$ -rooted path such that  $\{w\} \subseteq V(Q^*) \subseteq N$  (but  $w$  need not be an end-node of  $Q^*$ ) and  $c(Q^*) \leq L$ , and collecting the maximum reward among such paths; let  $\Pi^* = \pi(V(Q^*))$ .

We would ideally like to find an  $r$ -rooted tree  $T$  such that: (a)  $\{w\} \subseteq V(T) \subseteq N$ ; (b)  $c(T) \leq L$ ; and (c)  $\pi(V(T)) \geq \Pi^*$ . We will not quite be able to achieve this, we describe how to use our PCA algorithm to obtain a distribution of (at most) two trees satisfying (a) with probability 1, and (b) and (c) in expectation. Roughly speaking, we run ITERPCA for the prize-collecting  $r$ -rooted walks problem with node-set  $N$ , metric  $c$ , and penalties  $\{\lambda\pi_v\}_{v \in N}$ , and tune the parameter  $\lambda$  using binary search to obtain the weighted trees; algorithm BINSEARCHPCA describes this precisely.

---

**Algorithm** BinSearchPCA( $N, c, \pi, L, r, w; \epsilon$ ): binary search using IterPCA

---

- Output:**  $(\gamma_1, \mathcal{T}_1), (\gamma_2, \mathcal{T}_2)$  such that  $\gamma_1, \gamma_2 \geq 0, \gamma_1 + \gamma_2 = 1$ ; if  $\gamma_1 = 1$ , we do not specify  $(\gamma_2, \mathcal{T}_2)$
- 1 Let  $D = (N, A)$  be the digraph obtained by restricting  $G$  to the nodes in  $N$  and bidirecting its edges, where both  $(u, v)$  and  $(v, u)$  get cost  $c_{uv}$ . Let  $n = |N|$  and  $N' = N \setminus \{r\}$ .
  - 2 Let  $c_{\max} = \max_{u, v \in N} c_{uv}$ ,  $\pi_{\min} = \min_{u \in N: \pi_u > 0} \pi_u$ ,  
 $\text{LB} = \max \{ \pi_u : u \in N, \min\{c_{ru}, c_{rw}\} + c_{uw} \leq L \}$
  - 3 Set  $\tilde{\pi}_v(\lambda) = \lambda\pi_v$  for all  $v \in N \setminus \{w\}$ , and  $\tilde{\pi}_w(\lambda) = \tilde{\pi}_w = n c_{\max}$   
*// For  $\lambda \geq 0$ , let  $(T_\lambda, y^{(\lambda)})$  denote the tuple returned by ITERPCA( $D, c, \tilde{\pi}(\lambda), r$ )*
  - 4 Let  $\text{high} \leftarrow n c_{\max} / \pi_{\min}$  and  $\text{low} \leftarrow 1 / \pi(N')$  *// we show that  $c(T_{\text{low}}) \leq L$*
  - 5 **if**  $c(T_{\text{high}}) \leq L$  **then return**  $(1, T_{\text{high}})$
  - 6 Perform binary search in the interval  $[\text{low}, \text{high}]$  to find either: (i) a value  $\lambda \in [\text{low}, \text{high})$  such that  $c(T_\lambda) = L$ ; or (ii) values  $\lambda_1, \lambda_2 \in [\text{low}, \text{high}]$  with  $0 < \lambda_2 - \lambda_1 \leq \epsilon \cdot \text{low}^2 \cdot \text{LB}$  such that  $c(T_{\lambda_1}) < L < c(T_{\lambda_2})$
  - 7 **if case (i) occurs then return**  $(1, T_\lambda)$
  - 8 **if case (ii) occurs then**
  - 9 | Let  $a, b \geq 0, a + b = 1$  be such that  $a \cdot c(T_{\lambda_1}) + b \cdot c(T_{\lambda_2}) = L$ . **return**  $(a, T_{\lambda_1}), (b, T_{\lambda_2})$
-

**Theorem 4.1.** *Let  $\epsilon \in (0, 1)$ . The output of  $\text{BINSEARCHPCA}(N, c, \pi, L, r, w; \epsilon)$  satisfies the following: (a)  $\{w\} \subseteq V(T_i) \subseteq N$  for  $i = 1, 2$ ; (b)  $\sum_{i=1}^2 \gamma_i c(T_i) \leq L$ ; and (c)  $\sum_{i=1}^2 \gamma_i \pi(V(T_i)) \geq (1 - \epsilon)\Pi^*$ .*

*Proof.* We abbreviate  $O^*(D, c, \tilde{\pi}(\lambda), r)$  to  $O^*(\lambda)$ , and  $\text{PCC}(T_\lambda; D, c, \tilde{\pi}(\lambda), r)$  to  $\text{PCC}(\lambda)$ . Let  $Y(\lambda)$  denote  $\sum_{S \subseteq N'} y_S^{(\lambda)}$ . Part (b) holds by construction. Note that  $O^*(\lambda) \leq (n-1)c_{\max}$  for all  $\lambda \geq 0$ . So  $T_\lambda$  must include  $w$  for all  $\lambda \geq 0$ , and so (a) holds. We also have that  $c(T_{\text{low}}) \leq L$  as otherwise,  $c(T_{\text{low}}) \geq L+1$ , whereas  $O^*(\text{low}) < c_{rw} + 1 \leq L+1$ .

For all  $\lambda \geq 0$ , we have  $O^*(\lambda) \leq c(Q^*) + \lambda \cdot \pi(N \setminus V(Q^*)) \leq L + \lambda \cdot \pi(N \setminus V(Q^*))$ . By Theorem 3.1, for all  $\lambda \geq 0$ , we then have

$$c(T_\lambda) + \lambda \cdot \pi(N \setminus V(T_\lambda)) = \text{PCC}(\lambda) \leq Y(\lambda) \leq O^*(\lambda) \leq L + \lambda \cdot \pi(N \setminus V(Q^*)). \quad (3)$$

Note that  $T_{\text{high}}$  must be an arborescence spanning  $N$ , otherwise we have  $\text{PCC}(\text{high}) \geq nc_{\max} > O^*(\text{high})$ . So if we return in step (5) then we are done. If we return in step (7), then again we are done, since (3) implies that  $\pi(V(T_\lambda)) \geq \Pi^*$ .

Suppose we return in step (9). Note that  $\Pi^* \geq \text{LB}$ . Multiplying (3) for  $\lambda = \lambda_1$  by  $a$ , and (3) for  $\lambda = \lambda_2$  by  $b$ , and adding and simplifying, we obtain that

$$\begin{aligned} a\lambda_1 \cdot \pi(N \setminus V(T_{\lambda_1})) + b\lambda_2 \cdot \pi(N \setminus V(T_{\lambda_2})) &\leq (a\lambda_1 + b\lambda_2) \cdot \pi(N \setminus V(Q^*)) \\ \implies \lambda_2 \left[ a \cdot \pi(N \setminus V(T_{\lambda_1})) + b \cdot \pi(N \setminus V(T_{\lambda_2})) \right] &\leq \lambda_2 \cdot \pi(N \setminus V(Q^*)) + a(\lambda_2 - \lambda_1) \cdot \pi(N \setminus V(T_{\lambda_1})). \end{aligned}$$

This implies that  $a \cdot \pi(V(T_{\lambda_1})) + b \cdot \pi(V(T_{\lambda_2})) \geq \Pi^* - (a\epsilon \cdot \text{low}^2 \cdot \text{LB} \cdot \pi(N'))/\lambda_2 \geq (1 - \epsilon)\Pi^*$ .  $\blacksquare$

We remark that we can avoid the  $(1 - \epsilon)$ -factor loss in Theorem 4.1 (while still retaining polynomial running time) by terminating the binary search at a smaller value of  $\lambda_2 - \lambda_1$ ; see Appendix A.

#### 4.1.1 Rooted orienteering

The rounding theorem of [14] is stated below, paraphrased to suit our purposes. The *regret* (also called *excess* [4, 2]) of a  $u$ - $v$  path  $P$  with respect to its end-points is  $c^{\text{reg}}(P) = c(P) - c_{uv}$ .

**Theorem 4.2** ([14]). *Fix  $w \in V$ . Let  $T_1, \dots, T_k$  be rooted trees in  $G$  with associated weights  $\gamma_1, \dots, \gamma_k \geq 0$  such that: (i)  $\sum_{i=1}^k \gamma_i = 1$ ; (ii)  $\sum_{i=1}^k \gamma_i c(T_i) \leq B$ ; and (iii)  $w \in V(T_i)$  for all  $i = 1, \dots, k$ . Then, for each  $i = 1, \dots, k$ , we can extract a rooted path  $P_i$  from  $T_i$  (visiting some subset of  $V(T_i)$ ) with  $c^{\text{reg}}(P_i) \leq B - c_{rw}$ , such that  $\max_{i=1, \dots, k} \pi(V(P_i)) \geq \frac{1}{3} \cdot \sum_{i=1}^k \gamma_i \pi(V(T_i))$ .*

Friggstad and Swamy [14] obtain the  $T_i$ s from an optimal solution to the LP-relaxation for rooted orienteering that they propose, and they satisfy  $V(T_i) \subseteq \{u \in V : c_{ru} \leq c_{rw}\}$ , so that each path  $P_i$  obtained above has  $c(P_i) \leq B$ . But it is not hard to see that the trees required in Theorem 4.2 can instead be supplied using algorithm  $\text{BINSEARCHPCA}$ , thereby avoiding the need for solving the LP in [14] and decomposing its optimal solution into out-arborescences.

For any  $w \in V$  with  $c_{rw} \leq B$ , let  $\Pi_w^*$  be the maximum reward of rooted path that visits  $w$ , and can only visit nodes in  $\bar{V}_w = \{u \in V : c_{rw} \leq c_{ru}\}$ . Let  $\epsilon \in (0, 1)$  be a given parameter. We execute  $\text{BINSEARCHPCA}(\bar{V}_w, c, \pi, B, r, w; \epsilon)$ . Recall that this procedure calls  $\text{ITERPCA}$  on  $\text{PCW}$ -instances of the form  $(D, c, \tilde{\pi}(\lambda), r)$ , for different  $\lambda \geq 0$  values. The output of  $\text{BINSEARCHPCA}$  is a distribution over at most two  $T_\lambda$  trees, each containing only nodes from  $\bar{V}_w$ , which, by Theorem 4.1, satisfies the conditions of Theorem 4.2 (when viewed as a weighted collection of trees) and has expected reward at least  $(1 - \epsilon)\Pi_w^*$ . So combining this with Theorem 4.2 yields the following.

**Theorem 4.3.** *Considering all  $w \in V$  with  $c_{rw} \leq B$ , and applying Theorem 4.2 to the output of  $\text{BINSEARCHPCA}(\bar{V}_w, c, \pi, B, r, w; \epsilon)$ , and taking the best solution returned, yields a combinatorial  $3/(1 - \epsilon)$ -approximation algorithm for rooted orienteering.*

**Upper bound.** For a given guess  $w$ , and any  $\lambda \geq 0$ , we have from (3) that  $Y(\lambda) \leq O^*(\lambda) \leq B + \lambda(\pi(\overline{V}_w) - \Pi_w^*)$ . Rearranging gives  $\Pi_w^* \leq \text{UB1}(w, B; \lambda) := \pi(\overline{V}_w) + \frac{B - Y(\lambda)}{\lambda}$ . This holds for all  $\lambda \geq 0$ , so we have  $\Pi_w^* \leq \min_{\lambda \geq 0} \text{UB1}(w, B; \lambda)$ .<sup>3</sup> Since we do not know the right choice for  $w$ , we can say that the optimal value for rooted orienteering is at most  $\text{UB1}(B) := \max_{w \in V: c_{rw} \leq B} \min_{\lambda \geq 0} \text{UB1}(w, B; \lambda)$ .<sup>4</sup>

*Remark 1.* We can strengthen our bounds to show that our approximation guarantee and our upper bound  $\text{UB1}(B)$ , both hold with respect to the optimal value of the LP-relaxation for rooted orienteering proposed by [13]. More precisely, let  $OPT_{(\text{RO-P})}$  be the optimal value of the LP-relaxation for rooted orienteering in [14]. In Appendix B, we show that if  $\Pi$  is the reward of the solution returned by Theorem 4.3, then we have  $OPT_{(\text{RO-P})} \leq \text{UB1}(B) \leq \frac{3}{1-\epsilon} \cdot \Pi$ . In particular, similar to [14], we obtain an approximation guarantee of  $\frac{3}{1-\epsilon}$  with respect to the LP-optimum.

#### 4.1.2 P2P orienteering

Recall that here we seek an  $r$ - $t$  path of cost at most  $B$  that achieves maximum reward. Friggstad and Swamy [14] show that one can utilize Theorem 4.2 on two suitable weighted collections of trees to obtain a 6-approximation for P2P orienteering. Suppose we “guess” the node  $w$  on the optimal  $r$ - $t$  path with largest  $c_{ru} + c_{ut}$  value. Suppose that we can obtain two weighted collections of trees  $(\gamma_i^{(r)}, T_i^{(r)})_{i=1, \dots, k}$  and  $(\gamma_i^{(t)}, T_i^{(t)})_{i=1, \dots, \ell}$  such that:

- (a)  $(\gamma_i^{(r)}, T_i^{(r)})_{i=1, \dots, k}$  satisfies the conditions of Theorem 4.2 with root  $r$  and cost budget  $B^{(r)} = B - c_{wt}$ ;
- (b)  $(\gamma_i^{(t)}, T_i^{(t)})_{i=1, \dots, \ell}$  satisfies the conditions of Theorem 4.2 with root  $t$  and cost budget  $B^{(t)} = B - c_{rw}$ ;
- (c) each tree in both collections contains only nodes  $u$  with  $c_{ru} + c_{ut} \leq c_{rw} + c_{wt}$ .

We apply Theorem 4.2 with root  $r$  and budget  $B^{(r)}$  on the  $(\gamma_i^{(r)}, T_i^{(r)})_{i=1, \dots, k}$  collection, and apply Theorem 4.2 with root  $t$  and budget  $B^{(t)}$  on the  $(\gamma_i^{(t)}, T_i^{(t)})_{i=1, \dots, \ell}$  collection. Due to (c), the path extracted from any of the trees in the two collections extends to an  $r$ - $t$  path of cost at most  $B$ . So one of the paths extracted from the two collections attains reward at least  $\frac{1}{6}$  times the total weighted reward of the two collections.

In [14], the two collections are obtained from an optimal solution to their P2P-orienteering LP. But, as with rooted orienteering, we can utilize BINSEARCHPCA to obtain the two collections. More precisely, let  $w$  be a guess with  $c_{rw} + c_{wt} \leq B$ . Let  $P_w^*$  be the optimal P2P-orienteering solution that visits  $w$ , and only visits nodes in  $\overline{V}_w^{\text{P2P}} = \{u \in V : c_{ru} + c_{ut} \leq c_{rw} + c_{wt}\}$ . Let  $\Pi_w^{\text{P2P}} = \pi(V(P_w^*))$ . For any two nodes  $u, v \in V(P_w^*)$ , we use  $P_{w,uv}^*$  to denote the  $u$ - $v$  portion of  $P_w^*$ .

- BINSEARCHPCA  $(\overline{V}_w^{\text{P2P}}, c, \pi, B - c_{wt}, r, w; \epsilon)$  yields a distribution over at most two  $r$ -rooted trees, each containing  $w$  and only nodes from  $\overline{V}_w^{\text{P2P}}$ , with expected cost at most  $B - c_{wt}$  and expected reward at least  $(1 - \epsilon)\pi(V(P_{w,rw}^*))$ .
- BINSEARCHPCA  $(\overline{V}_w^{\text{P2P}}, c, \pi, B - c_{rw}, t, w; \epsilon)$  yields a distribution over at most two  $t$ -rooted trees, each containing  $w$  and only nodes from  $\overline{V}_w^{\text{P2P}}$ , with expected cost at most  $B - c_{rw}$  and expected reward at least  $(1 - \epsilon)\pi(V(P_{w,wt}^*))$ .

Thus, as discussed above, using Theorem 4.2 on these two distributions, we obtain an  $r$ - $t$  path of reward at least  $\frac{1-\epsilon}{6} \cdot \Pi_w^{\text{P2P}}$ . Trying all  $w \in V$  with  $c_{rw} + c_{wt} \leq B$ , and returning the best solution yields a  $6/(1 - \epsilon)$ -approximation.

As a side-note, we can refine the analysis in [14] to show that their P2P-orienteering algorithm is in fact a 4-approximation algorithm. We discuss this in Appendix C

<sup>3</sup>As  $\lambda \rightarrow \infty$ ,  $\text{UB1}(w, B; \lambda)$  approaches the trivial upper bound  $\pi(\overline{V}_w)$ ; we expect the term  $\frac{B - Y(\lambda)}{\lambda}$  to be negative for large  $\lambda$  (unless the min-cost arborescence spanning  $\overline{V}_w$  has cost at most  $B$ ), and hence to yield savings over this trivial upper bound.

<sup>4</sup>Note that  $\text{UB1}(r, B; \lambda) = \pi_r$  for all  $\lambda \geq 0$ , since  $\overline{V}_r = \{r\}$  and so  $T_\lambda = \emptyset$  and  $Y(\lambda) = 0$  for all  $\lambda$ .

**Upper bound.** We can easily extend the upper-bound approach used for rooted orienteering as follows. For a given guess  $w$ , let  $Y_r(\lambda)$  denote  $\sum_{S \subseteq N'} y_S^{(\lambda)}$  in the run  $\text{BINSEARCHPCA}(\overline{V}_w^{\text{P2P}}, c, \pi, B - c_{wt}, r, w; \epsilon)$ , and  $Y_t(\lambda)$  denote  $\sum_{S \subseteq N'} y_S^{(\lambda)}$  in the run  $\text{BINSEARCHPCA}(\overline{V}_w^{\text{P2P}}, c, \pi, B - c_{rw}, t, w; \epsilon)$ .

For any  $r$ -rooted walk  $Q$  such that  $\{w\} \subseteq V(Q) \subseteq \overline{V}_w^{\text{P2P}}$ , and any  $\lambda \geq 0$ , we have that  $Y_r(\lambda) \leq c(Q) + \lambda \cdot \pi(\overline{V}_w^{\text{P2P}}) - \lambda \cdot \pi(V(Q))$ , which implies that  $\pi(V(Q)) \leq \pi(\overline{V}_w^{\text{P2P}}) + \frac{c(Q) - Y_r(\lambda)}{\lambda}$ .

- Taking  $Q = P_{w,rw}^*$  gives  $\pi(V(P_{w,rw}^*)) \leq \text{UB2}(w, B; \lambda) := \pi(\overline{V}_w^{\text{P2P}}) + \frac{B - c_{wt} - Y_r(\lambda)}{\lambda}$ .
- Taking  $Q = P_w^*$  gives  $\Pi_w^{\text{P2P}} = \pi(V(P_w^*)) \leq \pi(\overline{V}_w^{\text{P2P}}) + \frac{B - Y_t(\lambda)}{\lambda}$ .

Similarly, for any  $t$ -rooted walk  $Q$  with  $\{w\} \subseteq V(Q) \subseteq \overline{V}_w^{\text{P2P}}$ , and any  $\lambda \geq 0$ , we have that  $\pi(V(Q)) \leq \pi(\overline{V}_w^{\text{P2P}}) + \frac{c(Q) - Y_t(\lambda)}{\lambda}$ . Therefore

$$\pi(V(P_{w,wt}^*)) \leq \text{UB3}(w, B; \lambda) := \pi(\overline{V}_w^{\text{P2P}}) + \frac{B - c_{rw} - Y_t(\lambda)}{\lambda}, \quad \Pi_w^{\text{P2P}} \leq \pi(\overline{V}_w^{\text{P2P}}) + \frac{B - Y_t(\lambda)}{\lambda}.$$

Combining all these bounds, we obtain that

$$\text{UB-P2P}(B) := \max_{w \in V: c_{rw} + c_{wt} \leq B} \min \left\{ \pi(\overline{V}_w^{\text{P2P}}) + \min_{\lambda \geq 0} \min \left\{ \frac{B - Y_r(\lambda)}{\lambda}, \frac{B - Y_t(\lambda)}{\lambda} \right\}, \right. \\ \left. \left( \min_{\lambda \geq 0} \text{UB2}(w, B; \lambda) + \min_{\lambda \geq 0} \text{UB3}(w, B; \lambda) \right) \right\}$$

is an upper bound on the optimal value for P2P orienteering.

### 4.1.3 Cycle orienteering

Recall that here we seek a cycle containing  $r$  of cost at most  $B$  that achieves maximum reward. Taking  $t = r$  in our approach for P2P-orienteering yields a combinatorial 6-approximation algorithm.<sup>5</sup> But we can refine this approach and utilize  $\text{BINSEARCHPCA}$  to obtain a 4-approximation, as also refine our upper-bounding strategy, by leveraging the fact that the tree returned by  $\text{ITERPCA}$  has prize-collecting cost at most the optimal value of (P).

Following a familiar theme, for any  $w \in V$  with  $c_{rw} \leq B/2$ , let  $C_w^*$  be the optimal cycle-orienteering solution that visits  $w$ , and only visits nodes in  $\overline{V}_w = \{u \in V : c_{ru} \leq c_{rw}\}$ . Let  $\Pi_w^{\text{Cyc}} = \pi(V(C_w^*))$ . Consider the distribution over (at most two)  $r$ -rooted trees output by  $\text{BINSEARCHPCA}(\overline{V}_w, c, \pi, B/2, r, w; \epsilon)$ . We claim that this has expected reward at least  $\Pi_w^{\text{Cyc}}/2 - \epsilon \cdot \Pi_w^{\text{Cyc}}$ . This is because sending a  $\frac{1}{2}$ -unit of flow from  $r$  to  $w$  along the two  $r$ - $w$  paths in  $C_w^*$  yields a solution to the LP-relaxation  $(P_{(D,c,\pi(\lambda),r)})$  of objective value at most  $B/2 + \lambda(\pi(\overline{V}_w) - \Pi_w^{\text{Cyc}}/2 - \pi_r/2 - \pi_w/2) \leq B/2 + \lambda(\pi(\overline{V}_w) - \Pi_w^{\text{Cyc}}/2)$ . The claim then follows by reasoning exactly as in the proof of Theorem 4.1.

If  $\text{BINSEARCHPCA}$  returns a single tree (of cost at most  $B/2$ ), then doubling and shortcutting yields a rooted cycle of cost at most  $B$  and reward at least  $\Pi_w^{\text{Cyc}}/2$ . Otherwise, suppose  $\text{BINSEARCHPCA}$  returns  $(a, T_{\lambda_1}), (b, T_{\lambda_2})$ . We convert each  $T_{\lambda_i}$  to an  $r$ - $w$  path  $Q_i$ , and we can extract a rooted path  $P_i$  from  $Q_i$  ending at some node in  $\overline{V}_w$  such that  $c^{\text{reg}}(P_i) \leq B - 2c_{rw}$ , and  $\pi(V(P_i)) \geq \pi(V(Q_i)) / \left( \frac{c^{\text{reg}}(Q_i)}{B - 2c_{rw}} + 1 \right)$  (see Lemma 5.1 in [4], or Lemma 2.2 in [13]). Each  $P_i$  can thus be completed to a rooted cycle of cost at most  $B$ . Also, noting that  $a \cdot c^{\text{reg}}(Q_1) + b \cdot c^{\text{reg}}(Q_2) \leq B - 2c_{rw}$ , it follows that one of the  $P_i$ s has reward at least

$$\frac{a \cdot \pi(V(Q_1)) + b \cdot \pi(V(Q_2))}{a \cdot \frac{c^{\text{reg}}(Q_1)}{B - 2c_{rw}} + b \cdot \frac{c^{\text{reg}}(Q_2)}{B - 2c_{rw}} + 1} \geq \frac{(\frac{1}{2} - \epsilon) \cdot \Pi_w^{\text{Cyc}}}{2} = \frac{1 - 2\epsilon}{4} \cdot \Pi_w^{\text{Cyc}}.$$

<sup>5</sup>If  $w$  is a node on the optimal solution with maximum  $c_{ru}$ , then running Theorem 4.2 on the output of  $\text{BINSEARCHPCA}(\overline{V}_w, c, \pi, B - c_{rw}, r, w; \epsilon)$ , where  $\overline{V}_w = \{u \in V : c_{ru} \leq c_{rw}\}$ , yields an  $r$ -rooted path  $P$  ending at some node  $u \in \overline{V}_w$  with  $c^{\text{reg}}(P) \leq B - 2c_{rw}$  and  $\pi(V(P))$  at least  $\frac{1-\epsilon}{6}$  times the optimum;  $P$  then extends to a cycle of cost at most  $B$ .

**Theorem 4.4.** *Executing the above procedure for all  $w \in V$  with  $c_{rw} \leq B/2$ , and returning the best solution yields a  $4/(1 - 2\epsilon)$ -approximation algorithm for cycle orienteering.*

**Upper bound.** Fix a given  $w$  with  $c_{rw} \leq B/2$ . Let  $Y(\lambda)$  denote  $\sum_{S \subseteq N'} y_S^{(\lambda)}$  in the run `BINSEARCHPCA`  $(\bar{V}_w, c, \pi, L, r, w; \epsilon)$ . (For a fixed  $\lambda \geq 0$ , the instance  $(D, c, \tilde{\pi}(\lambda), r)$  constructed in `BINSEARCHPCA`  $(\bar{V}_w, c, \pi, L, r, w; \epsilon)$ , and hence  $Y(\lambda)$ , does not depend on  $L$ .) Comparing  $Y(\lambda)$  with the prize-collecting cost of two solutions, then yields the following upper bounds.

- Considering  $C_w^*$  (interpreted as two  $r$ - $w$  walks), we obtain that  $Y(\lambda) \leq B + \lambda(\pi(\bar{V}_w) - \Pi_w^{*\text{Cyc}})$ , or  $\Pi_w^{*\text{Cyc}} \leq \text{UB1}(w, B; \lambda)$ , where recall that  $\text{UB1}(w, B; \lambda) := \pi(\bar{V}_w) + \frac{B - Y(\lambda)}{\lambda}$ .
- Considering the fractional solution where we send  $\frac{1}{2}$ -unit of flow along the two  $r$ - $w$  paths in  $C_w^*$ , we have that  $Y(\lambda) \leq B/2 + \lambda(\pi(\bar{V}_w) - \Pi_w^{*\text{Cyc}}/2 - \pi_r/2 - \pi_w/2)$ , which leads to  $\Pi_w^{*\text{Cyc}} \leq \text{UB4}(w, B; \lambda) := 2 \cdot \pi(\bar{V}_w) - \pi_r - \pi_w + \frac{B - 2 \cdot Y(\lambda)}{\lambda}$ .

Combining these bounds, we obtain that the optimal value for cycle orienteering is at most

$$\text{UB-Cyc}(B) := \max_{w \in V: c_{rw} \leq B/2} \min_{\lambda \geq 0} \min \left\{ \text{UB1}(w, B; \lambda), \text{UB4}(w, B; \lambda) \right\}.$$

## 4.2 The $k$ minimum-latency problem ( $k$ -MLP)

Recall that in  $k$ -MLP, we have a metric space  $(V, c)$  and root  $r \in V$ . The goal is to find (at most)  $k$ -rooted paths that together cover every node, so as to minimize the sum of visiting times of the nodes. The current-best approximation ratio for  $k$ -MLP is 7.183 [20]. Post and Swamy [20] devise two algorithms for  $k$ -MLP, both having approximation ratio (roughly) 7.183. One of their algorithms is “more combinatorial” (see Algorithm 3, in Section 6.2 in [20]) and relies on having access to the following procedure:

Given a node-set  $N \subseteq V$ , root  $r \in N$ , and an integer  $1 \leq k \leq |N|$ , let  $L^*$  be the minimum cost of a collection of  $r$ -rooted walks that together cover at least  $k$  nodes. Find a distribution over  $r$ -rooted trees, that in expectation cover at least  $k$  nodes, and whose expected cost is at most  $L^*$ .

In [20], the distribution is obtained by applying the arborescence-packing result of Bang-Jensen et al. [1] to the optimal solution to (P) with node rewards  $\lambda$  to obtain a rooted tree of no-greater prize-collecting cost, and then varying  $\lambda$  in a binary-search procedure (as we do) to obtain the desired distribution (see the proof of Corollary 3.3 in [20]).<sup>6</sup> We can instead utilize `ITERPCA` within a binary-search procedure to obtain the desired distribution (over at most two trees). Incorporating this in the more-combinatorial algorithm of [20] yields a fully (and truly) combinatorial 7.183-approximation algorithm for  $k$ -MLP.

**Theorem 4.5.** *The output of `BSEARCH`( $N, k$ ) satisfies: (a)  $\sum_{i=1}^2 \gamma_i c(\mathcal{T}_i) \leq L^*$ ; and (b)  $\sum_{i=1}^2 \gamma_i |V(\mathcal{T}_i)| = k$ .*

*Proof.* We abbreviate  $O^*(D, c, \{\pi_v = \lambda\}_{v \in N}, r)$  to  $O^*(\lambda)$ , and  $\text{PCC}(T_\lambda; D, c, \{\pi_v = \lambda\}_{v \in N}, r)$  to  $\text{PCC}(\lambda)$ . Part (b) holds by construction.

We mimic (and simplify) the proof of part (i) of Corollary 3.3 in [20]. We have  $O^*(\lambda) \leq (n - 1)c_{\max}$  for all  $\lambda \geq 0$ , so  $T_{\text{high}}$  must be an arborescence spanning  $N$ . Also, note that  $T_{\text{low}}$  is the trivial tree  $\{r\}$ . Let  $\mathcal{C}^*$  be a min-cost collection of  $r$ -rooted walks covering at least  $k$  nodes. So  $L^* = \sum_{P \in \mathcal{C}^*} c(P)$ . Let  $n^* = |\bigcup_{P \in \mathcal{C}^*} V(P)| \geq k$ . For all  $\lambda \geq 0$ , we have  $O^*(\lambda) \leq L^* + \lambda(n - n^*)$ . By Theorem 3.1, for all  $\lambda \geq 0$ , we then have

$$\text{PCC}(\lambda) = c(T_\lambda) + \lambda(n - |V(T_\lambda)|) \leq L^* + \lambda(n - n^*). \quad (4)$$

If we return in steps (3), (4), or (6), then we are done, since (4) implies that  $c(T_\lambda) \leq L^*$ .

<sup>6</sup>More directly, one can modify (P) by changing the prize-collecting objective to the cost objective, and adding the coverage constraint to the LP, and apply [1] to decompose the optimal solution to this LP into a convex combination of  $r$ -rooted trees.

---

**Algorithm** BSearch( $N, k$ ): binary search using IterPCA

---

- Output:**  $(\gamma_1, \mathcal{T}_1), (\gamma_2, \mathcal{T}_2)$  such that  $\gamma_1, \gamma_2 \geq 0, \gamma_1 + \gamma_2 = 1$ ; if  $\gamma_1 = 1$ , we do not specify  $(\gamma_2, \mathcal{T}_2)$
- 1 Let  $D = (N, A)$  be the digraph obtained by restricting  $G$  to the nodes in  $N$  and bidirecting its edges, where both  $(u, v)$  and  $(v, u)$  get cost  $c_{uv}$ . Let  $n = |N|$ .  
Let  $c_{\max} = \max_{u,v \in N} c_{uv}$ . Let  $M$  be an integer (computable in polytime) with  $\log M = \text{poly}(\text{input size})$  such that the  $c_e$ s are integer multiples of  $\frac{1}{M}$ .  
// For  $\lambda \geq 0$ , let  $(T_\lambda, y^{(\lambda)})$  denote the tuple returned by  $\text{ITERPCA}(D, c, \{\pi_v = \lambda\}_{v \in N}, r)$
  - 2 Let  $\text{high} \leftarrow nc_{\max}$  and  $\text{low} \leftarrow 0$  // we show that  $|V(T_{\text{low}})| \leq k \leq |V(T_{\text{high}})|$
  - 3 **if**  $|V(T_{\text{low}})| = k$  **then return**  $(1, T_{\text{low}})$
  - 4 **if**  $|V(T_{\text{high}})| = k$  **then return**  $(1, T_{\text{high}})$
  - 5 Perform binary search in the interval  $[\text{low}, \text{high}]$  to find either: (i) a value  $\lambda \in [\text{low}, \text{high}]$  such that  $|V(T_\lambda)| = k$ ; or (ii) values  $\lambda_1, \lambda_2 \in [\text{low}, \text{high}]$  with  $0 < \lambda_2 - \lambda_1 \leq 1/n^2 M$  such that  $|V(T_{\lambda_1})| < k < |V(T_{\lambda_2})|$
  - 6 **if case (i) occurs then return**  $(1, T_\lambda)$
  - 7 **if case (ii) occurs then**
  - 8 | Let  $a, b \geq 0, a + b = 1$  be such that  $a \cdot |V(T_{\lambda_1})| + b \cdot |V(T_{\lambda_2})| = k$ . **return**  $(a, T_{\lambda_1}), (b, T_{\lambda_2})$
- 

Suppose we return in step (8). Multiplying (4) for  $\lambda = \lambda_1$  by  $a$ , and (4) for  $\lambda = \lambda_2$  by  $b$ , and adding and simplifying, we obtain that

$$\begin{aligned} a \cdot c(T_{\lambda_1}) + b \cdot c(T_{\lambda_2}) &\leq L^* + \lambda_2(n - n^*) - \left[ a\lambda_1(n - |V(T_{\lambda_1})|) + b\lambda_2(n - |V(T_{\lambda_2})|) \right] \\ &\leq L^* + a(\lambda_2 - \lambda_1)(n - |V(T_{\lambda_1})|) < L^* + \frac{1}{nM}. \end{aligned}$$

Noting that  $a$  and  $b$  are rational numbers with denominator at most  $n$ , and all  $c_e$ s are multiples of  $1/M$ , the quantity  $a \cdot c(T_{\lambda_1}) + b \cdot c(T_{\lambda_2}) - L^*$  is an integer multiple of  $\frac{1}{nM}$  for some  $n' \leq n$ . So if this quantity is less than  $\frac{1}{nM}$ , then it must be nonpositive; that is, we have  $a \cdot c(T_{\lambda_1}) + b \cdot c(T_{\lambda_2}) \leq L^*$ . ■

## 5 Computational results for orienteering

In this section, and its continuation in Appendix D, we present various computational results on the performance of our orienteering algorithms (from Section 4.1) in order to assess the performance of our algorithms in practice. Our experiments clearly demonstrate the effectiveness of both our algorithms and our upper bounds. They show that the instance-wise approximation ratios, for both the solution returned and the computed upper bound, are substantially better than the theoretical worst-case bounds, and in fact fairly close to 1.

We implemented our algorithms in Section 4.1 (and Section 3) in C++11, and our experiments were run on a 2019 MacBook Pro laptop with a 2.3 GHz Intel Core i9 processor (8 cores) and 16 GB of RAM. Our implementation matches almost exactly the description in Section 4.1 (and Section 3), with the following salient differences.

- We terminate the binary search (in `BINSEARCHPCA`) when the interval  $[\lambda_1, \lambda_2]$  has width  $\lambda_2 - \lambda_1 \leq 10^{-6}$ , the precision of the `double` data type in C++.
- For a given guess  $w$ , our analysis shows that if the binary search for  $\lambda$  terminates with the interval  $[\lambda_1, \lambda_2]$ , then the solution extracted from one of  $T_{\lambda_1}$  and  $T_{\lambda_2}$  achieves the stated approximation. In our experiments, we extract a solution from  $T_\lambda$  for every  $\lambda$  encountered in the binary search, and return the best of these solutions (which clearly retains the stated approximation guarantee).



- In the computation of the upper bounds on the orienteering optimum—i.e., UB1, UB-P2P, UB-Cyc—instead of considering all  $\lambda \geq 0$ , we consider only the  $\lambda$ s encountered in the relevant binary search procedures.
- In our cycle orienteering experiments, we actually consider two binary searches. One where the search is guided by a cost budget of  $B/2$  and one where the search is guided by a cost budget of  $B - c_{rw}$ . This produces a different set of  $\lambda$  values to consider, which, in many cases, led to better solutions (and upper bounds) than those found by using just the binary search for distance  $B/2$ .<sup>7</sup>
- When extracting a rooted path of a given regret bound  $R$  from a path  $P$  (that is obtained from a tree), instead of using a greedy procedure (Lemma 5.1 in [4], or Lemma 2.2 in [13]), we find the maximum-reward subpath  $Q$  of  $P$  such that the rooted path with node sequence  $r, V(Q)$  has regret at most  $R$ .
- If the current binary search for a guessed node  $w$  encounters a value  $\lambda$  such that the upper bound for orienteering computed from the output of ITERPCA is at most the value of the best orienteering solution found thus far, then we prematurely terminate the binary search for this guess  $w$  and move on to the next guess, since we know that we cannot find a better solution for this guess. This pruning improves the running time by roughly 40%.

We proceed to describe our computational results for {rooted, P2P, cycle}-orienteering in detail. We discuss cycle orienteering first, as this is computationally the most well-studied version of orienteering, and discuss rooted orienteering (Section 5.3) last, as this does not seem to have been computationally studied in the literature. We use the following legend throughout: Val denotes the reward of the solution returned by our algorithm, Opt is the optimal value, and UB is the upper bound computed by our algorithm. For each orienteering version, we first give an overview of the approximation ratios obtained by our algorithm, and the quality of our upper bounds, and then present detailed results. Our histograms specify the distribution of various quantities (e.g., the ratios Opt/Val, UB/Opt etc.) across the instances used in the computational experiments. Each histogram bar corresponds to a range of values (for a particular quantity) as indicated on the  $x$ -axis, and its height specifies the number of instances for which the quantity lies in the range.

## 5.1 Cycle orienteering experiments

As noted earlier, for each guess  $w$  of furthest node, we run two binary-search procedures, with target budgets  $B/2$  and  $B - c_{rw}$ , and output the best cycle-orienteering solution extracted from the trees  $T_{w,\lambda}$ , over all  $w$ , and all  $\lambda$  values encountered in the binary-search procedures run for  $w$ . Also, the upper bound we compute is UB-Cyc( $B$ ) except that for a given  $w$ , we only consider the  $\lambda$  values encountered in the binary searches for  $w$ .

**Test Data.** We use the same TSP instances considered in [16]. All but three of these datasets were also considered in [11]. We note that 5 of these are not metric, however upper bounds still apply to non-metric instances so we kept them in our experiments. Interestingly, we still obtain good approximations in these instances. See Appendix D for details.

For each dataset, [11] and [16] generate node rewards in three ways:

- **Gen 1 - Uniform Rewards:** All nodes apart from the root  $r$  have reward 1.
- **Gen 2 - Pseudo-Random Rewards:** The reward of the  $j$ 'th node in the dataset is  $1 + (7141 \cdot j + 73) \pmod{100}$  apart from the root, which has reward 0.
- **Gen 3 - Far Away Rewards:** The reward of a node  $v \neq r$  is  $1 + \lfloor 99 \cdot c_{rv} / \max_w c_{rw} \rfloor$ . This is meant to create more challenging instances where the high-reward nodes are further from the root.

---

<sup>7</sup>Theoretically speaking, if we consider *all*  $\lambda$  values (instead of only those encountered in the binary search), then the cost budget becomes inconsequential and does not influence either the final solution obtained or the upper bound computed.

In total, this yields 135 different datasets. The distance bound used in each case is  $\lceil \text{TSPOpt}/2 \rceil$ , where  $\text{TSPOpt}$  is the cost of the optimal TSP-tour for that dataset (which is provided in TSPLIB). Optimal values are known for all these datasets; most of these were computed in [11], and the rest are from [16]. This allows us to evaluate not only the gap between our solution’s value and our computed upper bound, but also the true approximation guarantee of our algorithm on these datasets.

No. of nodes	# Experiments	Mean Opt/Val	Max Opt/Val	Mean UB/Opt	Max UB/Opt
48–400	135	1.29	1.5	1.14	1.304

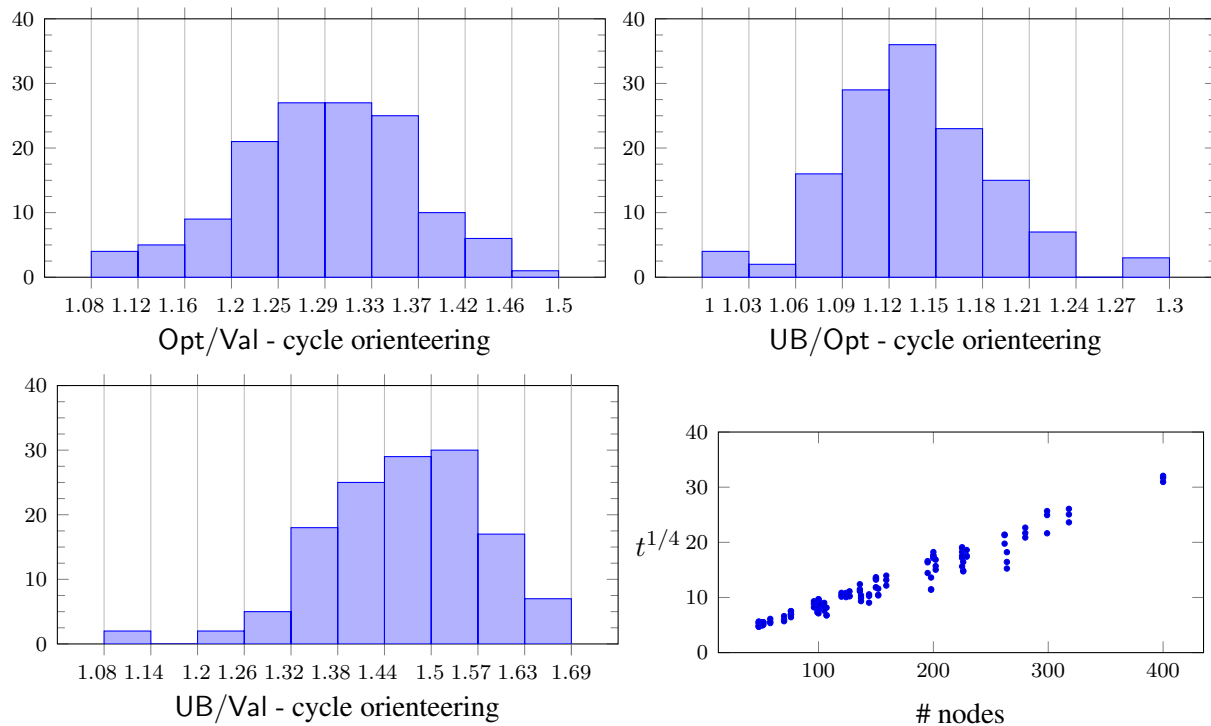


Figure 1: Cycle orienteering statistics. In the scatter plot,  $t$  denotes the running time in milliseconds on the corresponding instance. The slowest running time was 17.6 minutes.

Tables 1 and 2 report the results of our experiments on the Gen 1 and Gen 3 data sets. Table 4 in Appendix D gives our results for the Gen 2 data sets. Besides reporting the value (Val) of our solution, and the computed upper bound (UB), we also report the instance-wise approximation ratio Opt/Val, and the ratio UB/Opt, which measures the quality of our upper bound.

The five TSPLIB datasets marked by \* in these tables, *att48*, *gr48*, *hk48*, *brazil158* and *gr120*, are in fact non-metric (but still symmetric) instances. The maximum of  $c_{uw}/(c_{uw} + c_{wv})$  over all distinct triples of nodes in these datasets is 1.002, 1.580, 1.326, 9.783, and 5.218, respectively. Rather than moving to the shortest-path metric, we used these distance matrices as is, to facilitate a comparison with the optimal solution computed in prior work. Our upper bounds remain valid even with non-metric instances. While we cannot claim any (worst-case) guarantees on non-metric instances, as our results show, our algorithm performs fairly well even on these non-metric instances.

It is pertinent to compare our results with Paul et al. [19], which is the only other work that performs a computational evaluation of a (polytime) approximation algorithm for orienteering. They develop a 2-approximation algorithm for cycle orienteering (which they call budgeted prize-collecting TSP), and run computational experiments on two types of datasets: 1) 37 metric TSPLIB instances with at most 400 nodes,

each having unit reward; and 2) 37 instances constructed from different weeks of usage of the Citi Bike network of bike sharing stations in New York City, where node rewards correspond to an estimate of the number of broken docks at that station during the week. In all datasets, they consider cost budgets equal to 0.5, 1, 1.5 times the cost of an MST (note that twice the MST cost is an upper bound on the optimal TSP-tour cost).

However, their experiments are only run for the unrooted version of cycle orienteering, wherein the solution does not have to involve any particular root node. Running our algorithm by trying all possible root nodes would lead to a factor- $n$  blow up in our running time. Instead of this, we considered running our algorithms in *combination* to see if this yields improved solutions for the underlying instances. In particular, we run our algorithm as a fast *postprocessing* step: we pick an arbitrary node on the solution output by the algorithm in [19] as the root node  $r$ , and (in the same spirit) pick the node furthest from  $r$  on their solution as our guess  $w$  of the furthest node. Our results (see Fig. 2) show that this postprocessing almost always yields improvements, sometimes by a significant factor, on both the TSPLIB and the Citi Bike data sets. (This is despite the fact that our worst-case analysis only shows that the algorithm that tries all possible guesses for  $w$  is a 4-approximation for the rooted case, whereas the algorithm in [19] is a 2-approximation.) The results are summarized in Figure 2.<sup>8</sup>

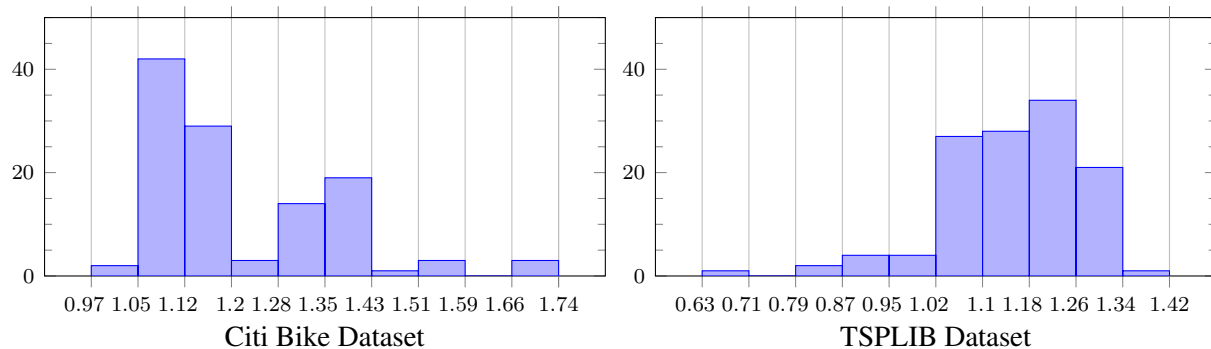


Figure 2: A histogram of the factors by which we improve the solutions from [19]. Ratios  $\leq 1.0$  indicate that we found no improvement.

<sup>8</sup>We have omitted one instance each from the TSPLIB and Citi Bike datasets in [19], where our algorithm yields an improvement by a factor exceeding 2. This would seemingly contradict the 2-approximation guarantee of [19], but the discrepancy arises because the implementation in [19] is slightly different from their 2-approximation algorithm [18].

Table 1: Cycle orienteering results - Gen 1

<b>Dataset</b>	<b><i>B</i></b>	<b>Val</b>	<b>Opt</b>	<b>UB</b>	<b>Opt/Val</b>	<b>UB/Opt</b>	<b>UB/Val</b>
*att48	5314	26	31	35.92	1.192	1.159	1.381
*gr48	2523	23	31	35.48	1.348	1.145	1.543
*hk48	5731	21	30	34.17	1.429	1.139	1.627
eil51	213	22	29	32.31	1.318	1.114	1.469
berlin52	3771	32	37	42.34	1.156	1.144	1.323
*brazil58	12698	39	46	52.87	1.179	1.149	1.356
st70	338	34	43	48.09	1.265	1.118	1.414
eil76	269	36	47	49.94	1.306	1.063	1.387
pr76	54080	39	49	56.06	1.256	1.144	1.437
gr96	27605	47	64	72.45	1.362	1.132	1.542
rat99	606	38	52	58.27	1.368	1.12	1.533
kroA100	10641	46	56	63.99	1.217	1.143	1.391
kroB100	11071	47	58	65.66	1.234	1.132	1.397
kroC100	10375	41	56	64.1	1.366	1.145	1.563
kroD100	10647	45	59	67.59	1.311	1.146	1.502
kroE100	11034	45	57	67.14	1.267	1.178	1.492
rd100	3955	47	61	68.6	1.298	1.125	1.46
eil101	315	50	64	69.47	1.28	1.086	1.389
lin105	7190	50	66	77.58	1.32	1.175	1.552
pr107	22152	49	54	54	1.102	1	1.102
*gr120	3471	54	75	83.51	1.389	1.114	1.547
pr124	29515	57	75	89.32	1.316	1.191	1.567
bier127	59141	88	103	112.72	1.17	1.094	1.281
pr136	48386	54	71	78.03	1.315	1.099	1.445
gr137	34927	61	81	92.45	1.328	1.141	1.516
pr144	29269	56	77	93.55	1.375	1.215	1.67
kroA150	13262	71	86	97.37	1.211	1.132	1.371
kroB150	13065	63	87	99.82	1.381	1.147	1.585
pr152	36841	61	77	93.45	1.262	1.214	1.532
u159	21040	73	93	110.08	1.274	1.184	1.508
rat195	1162	73	102	109.15	1.397	1.07	1.495
d198	7890	91	123	143.82	1.352	1.169	1.58
kroA200	14684	95	117	131.82	1.232	1.127	1.388
kroB200	14719	89	119	131.41	1.337	1.104	1.477
gr202	20080	116	145	166.88	1.25	1.151	1.439
ts225	63322	95	124	127.64	1.305	1.029	1.344
tsp225	1958	100	129	144.03	1.29	1.116	1.44
pr226	40185	99	126	150.3	1.273	1.193	1.518
gr229	67301	143	176	189.37	1.231	1.076	1.324
gil262	1189	118	158	172.19	1.339	1.09	1.459
pr264	24568	106	132	132	1.245	1	1.245
a280	1290	115	147	152.93	1.278	1.04	1.33
pr299	24096	119	162	188.78	1.361	1.165	1.586
lin318	21045	150	205	228.33	1.367	1.114	1.522
rd400	7641	181	239	257.93	1.32	1.079	1.425

Table 2: Cycle orienteering results - Gen 3

<b>Dataset</b>	<b>B</b>	<b>Val</b>	<b>Opt</b>	<b>UB</b>	<b>Opt/Val</b>	<b>UB/Opt</b>	<b>UB/Val</b>
*att48	5314	930	1049	1234.92	1.128	1.177	1.328
*gr48	2523	1134	1480	1782.62	1.305	1.204	1.572
*hk48	5731	1265	1764	2039.93	1.394	1.156	1.613
eil51	213	1127	1399	1638.23	1.241	1.171	1.454
berlin52	3771	826	1036	1334.5	1.254	1.288	1.616
*brazil58	12698	1473	1702	1902.32	1.155	1.118	1.291
st70	338	1601	2108	2440.8	1.317	1.158	1.525
eil76	269	1704	2467	2721.6	1.448	1.103	1.597
pr76	54080	1890	2430	2868.22	1.286	1.18	1.518
gr96	27605	2283	3170	3624.93	1.389	1.144	1.588
rat99	606	1939	2908	3257.75	1.5	1.12	1.68
kroA100	10641	2578	3211	3642.86	1.246	1.134	1.413
kroB100	11071	2136	2804	3284.42	1.313	1.171	1.538
kroC100	10375	2610	3155	3759.26	1.209	1.192	1.44
kroD100	10647	2272	3167	3834.63	1.394	1.211	1.688
kroE100	11034	2154	3049	3440.24	1.416	1.128	1.597
rd100	3955	2291	2926	3546.66	1.277	1.212	1.548
eil101	315	2563	3345	3674.77	1.305	1.099	1.434
lin105	7190	2401	2986	3888.52	1.244	1.302	1.62
pr107	22152	1702	1877	2447.62	1.103	1.304	1.438
*gr120	3471	2995	3779	4479.38	1.262	1.185	1.496
pr124	29515	3193	3557	4303.36	1.114	1.21	1.348
bier127	59141	1852	2365	2769.98	1.277	1.171	1.496
pr136	48386	3068	4390	4994	1.431	1.138	1.628
gr137	34927	2759	3954	4382.23	1.433	1.108	1.588
pr144	29269	2859	3745	4603.35	1.31	1.229	1.61
kroA150	13262	4174	5039	5645.92	1.207	1.12	1.353
kroB150	13065	4147	5314	6090.14	1.281	1.146	1.469
pr152	36841	2960	3905	4799.2	1.319	1.229	1.621
u159	21040	4163	5272	6260.51	1.266	1.188	1.504
rat195	1162	4384	6195	6851.98	1.413	1.106	1.563
d198	7890	4657	6320	7715.83	1.357	1.221	1.657
kroA200	14684	4781	6123	6981.26	1.281	1.14	1.46
kroB200	14719	4902	6266	6910.18	1.278	1.103	1.41
gr202	20080	6651	8616	10048.9	1.295	1.166	1.511
ts225	63322	5642	7575	8362.16	1.343	1.104	1.482
tsp225	1958	6075	7740	9014.54	1.274	1.165	1.484
pr226	40185	5638	6993	8687.94	1.24	1.242	1.541
gr229	67301	5179	6328	7120.19	1.222	1.125	1.375
gil262	1189	7335	9246	10698.1	1.261	1.157	1.459
pr264	24568	5726	8137	8846.52	1.421	1.087	1.545
a280	1290	7036	9774	10600.8	1.389	1.085	1.507
pr299	24096	7870	10343	11959.9	1.314	1.156	1.52
lin318	21045	7638	10368	11771.6	1.357	1.135	1.541
rd400	7641	11216	13223	14445.5	1.179	1.092	1.288

## 5.2 P2P orienteering experiments

For each  $w$ , we run two binary searches: one to search for an  $r$ -rooted PCA solution with budget  $B - c_{wt}$ , and the other to search for a  $t$ -rooted PCA solution with budget  $B - c_{rw}$ . Let  $\Lambda_r^w, \Lambda_t^w$  denote the two sets of  $\lambda$  values encountered during these searches. The solution we output is the best P2P-orienteering solution extracted from all the trees we find during the binary search procedures. We compute an upper bound in the same way as  $\text{UB-P2P}(B)$ , except that we only consider the  $\lambda$  values encountered in the binary search procedures. Specifically, we return the upper bound

$$\overline{\text{UB-P2P}}(B) := \max_{w \in V: c_{rw} + c_{wt} \leq B} \min \left\{ \pi(\overline{V}_w^{\text{P2P}}) + \min \left\{ \min_{\lambda_r \in \Lambda_r} \frac{B - Y_r(\lambda_r)}{\lambda_r}, \min_{\lambda_t \in \Lambda_t} \frac{B - Y_t(\lambda_t)}{\lambda_t} \right\}, \right. \\ \left. \left( \min_{\lambda \in \Lambda_r^w} \text{UB2}(w, B; \lambda) + \min_{\lambda \in \Lambda_t^w} \text{UB3}(w, B; \lambda) \right) \right\}$$

**Test Data.** We use two datasets that have previously been used for evaluating P2P-orienteering algorithms. Both involve Euclidean instances with various distance bounds. The first dataset is from [24] (see Table 5), and includes Euclidean instances with 32, 21, and 33 nodes, with node rewards that are integer multiples of 5 in the range  $[5, 40]$ . The optimal values for these instances are reported in [22].

The second dataset is from [6] (see Table 6) and includes two Euclidean instances. The first instance has 66 nodes that are distributed among four concentric squares. The nodes take rewards from  $\{5, 15, 25, 35\}$  depending on the square they lie on (smaller rewards for smaller squares). The start and end nodes are located near each other in the middle of the innermost square. The second instance has 64 nodes that are distributed in a diamond shape. The start and end nodes are at the top and bottom of the diamond, respectively. Nodes further away from the start and end nodes get higher rewards. The rewards are integer multiples of 6 between 6 and 42.

In total, 89 different experiments were run on the above instances using varying distance bounds. Figure 3 presents a summary of our results; the detailed table of results is included in Appendix D (see Tables 5 and 6). The entries that refer to Opt (i.e., two histograms and two table columns) only consider the 49 experiments using data from [24], where we do know the optimal values. The entries referring to UB/Val involve all the P2P instances considered.

No. of nodes	# Experiments	Mean Opt/Val	Max Opt/Val	Mean UB/Val	Max UB/Val
21 – 66	89	1.169	1.364	1.371	2.164

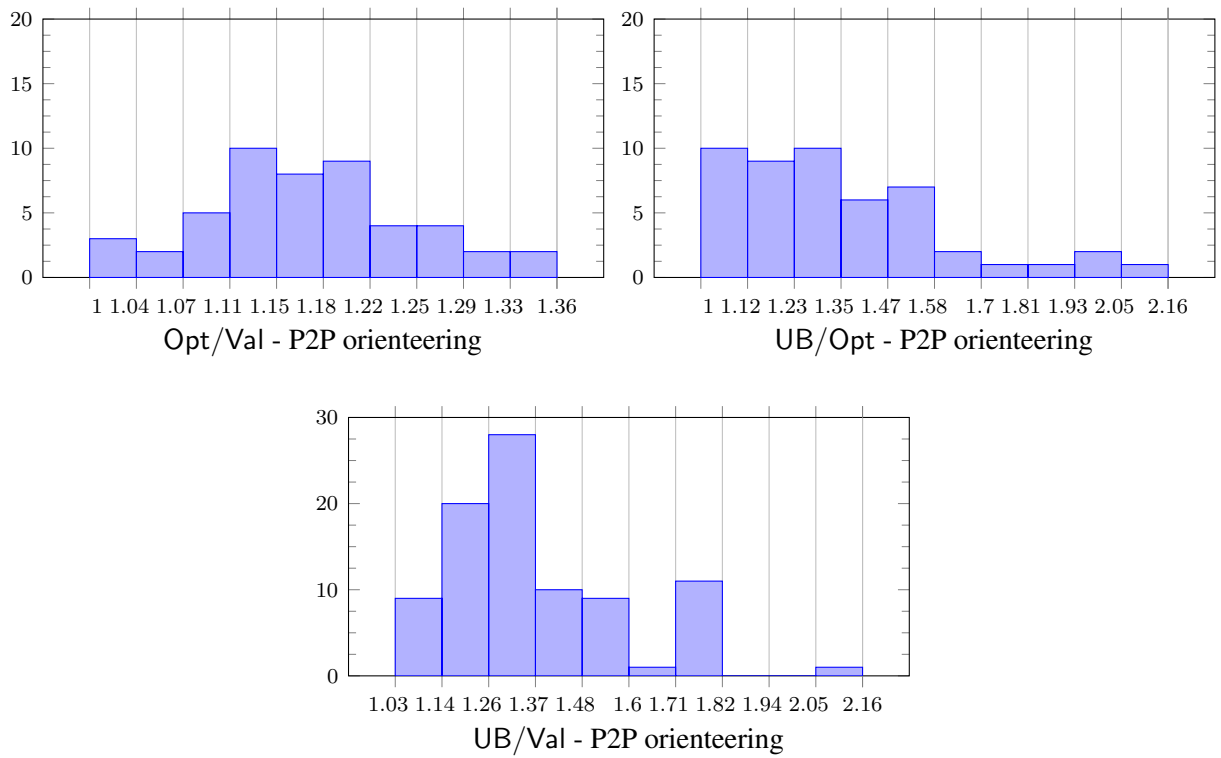


Figure 3: P2P orienteering statistics.

### 5.3 Rooted orienteering experiments

For each guess  $w$  of furthest node, we run binary search with target budget  $B$ . We extract a rooted-orienteering solution from each tree that we find in the binary search, and return the best of these solutions. Our computed upper bound is  $UB_1(B)$ , but considering only the  $\lambda$  values encountered in the binary search procedures.

**Test Data.** We are not aware of any benchmark data for rooted orienteering, so we use the benchmark data as for cycle orienteering. That is, we consider every cycle-orienteering instance here as well, with the same distance bound. While we do not have the optimal value for any instance, we can still compute  $UB/Val$ , which yields an upper bound on the approximation ratio for the instance. We continue to use the non-metric instances from TSPLIB as input to our rooted orienteering experiments, just like we did with cycle orienteering.

No. of nodes	# Experiments	Mean UB / Val	Max UB / Val
48–400	135	1.216	1.407

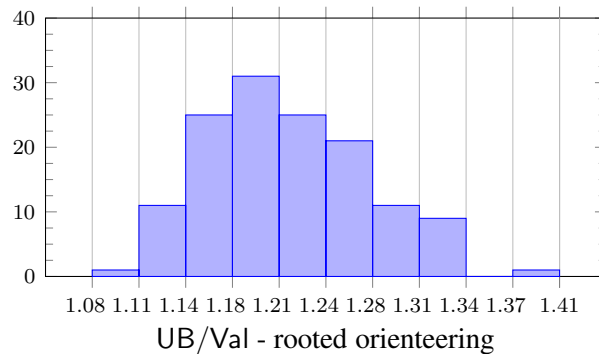


Figure 4: Rooted orienteering statistics.

### 5.4 Observations

On all datasets, we see that the instance-wise approximation ratio— $\frac{Opt}{Val}$ , if  $Opt$  is available, or  $\frac{UB}{Opt}$  otherwise—much smaller than the worst-case approximation guarantee of the corresponding algorithm. While this could be due to the fact we are dealing with real-world or Euclidean data, it is also possible that our worst-case analysis is not tight. We do have examples showing that the ratio  $\frac{UB}{Opt}$  (and hence  $\frac{UB}{Val}$ ) for rooted orienteering can be as large as 3 (so Theorem B.2 (b) is tight), but we do not know if a better worst-case bound can be proved for  $\frac{Opt}{Val}$  (or  $OPT_{(RO-P)}/Val$ , where  $OPT_{(RO-P)}$  is the optimal value of the LP-relaxation for orienteering proposed in [14]). Another noteworthy aspect to emerge from our results is that, despite the worst-case bound on  $\frac{UB}{Opt}$  mentioned above, our computed upper bounds are often quite close to the optimal value.

## References

- [1] J. Bang-Jensen, A. Frank, and B. Jackson. Preserving and increasing local edge-connectivity in mixed graphs. *SIAM J. Discrete Math.*, 8(2):155–178, 1995.



Table 3: Rooted orienteering results

Dataset	$B$	Gen 1			Gen 2			Gen 3		
		Val	UB	UB/Val	Val	UB	UB/Val	Val	UB	UB/Val
*att48	5314	30	35.87	1.196	1546	1900.14	1.229	1175	1482.59	1.262
*gr48	2523	27	35.42	1.312	1616	2035.82	1.26	1554	1782.62	1.147
*hk48	5731	29	33.83	1.167	1483	1875.09	1.264	1449	2039.17	1.407
eil51	213	26	32.18	1.238	1455	1875.55	1.289	1367	1613.83	1.181
berlin52	3771	34	42.18	1.241	1815	2200.52	1.212	1036	1333.1	1.287
*brazil58	12698	47	52.53	1.118	2225	2620.01	1.178	1778	2002.44	1.126
st70	338	41	47.36	1.155	2317	2658.29	1.147	2267	2637.92	1.164
eil76	269	44	49.94	1.135	2250	2841.78	1.263	2179	2715.55	1.246
pr76	54080	48	56.15	1.17	2489	3017.23	1.212	2406	2883.85	1.199
gr96	27605	56	72.23	1.29	3126	3807.18	1.218	3132	3621.27	1.156
rat99	606	51	58.56	1.148	2862	3323.17	1.161	2838	3670.18	1.293
kroA100	10641	54	63.96	1.184	3057	3635.36	1.189	2881	3640.52	1.264
kroB100	11071	53	65.66	1.239	3106	3627.93	1.168	2642	3208.23	1.214
kroC100	10375	50	64.03	1.281	2965	3338.71	1.126	3355	3758.62	1.12
kroD100	10647	56	67.22	1.2	3110	3827.83	1.231	3101	3923.96	1.265
kroE100	11034	55	66.14	1.203	3017	3635.8	1.205	2779	3675.43	1.323
rd100	3955	55	68.6	1.247	3150	3746.51	1.189	2990	3544.12	1.185
eil101	315	56	69.23	1.236	3171	3943.33	1.244	2851	3665.5	1.286
lin105	7190	69	77.54	1.124	3575	3970.13	1.111	3254	3889.56	1.195
pr107	22152	54	62.13	1.15	2839	3597.88	1.267	3909	4533.29	1.16
*gr120	3471	64	83.51	1.305	3717	4819.29	1.297	3618	4464.9	1.234
pr124	29515	74	89.24	1.206	3647	4596.56	1.26	4440	4785.48	1.078
bier127	59141	95	112.7	1.186	4943	5873.66	1.188	2060	2760.56	1.34
pr136	48386	65	78.03	1.2	3922	4849.45	1.236	4222	5073.17	1.202
gr137	34927	80	94.38	1.18	4425	5092.28	1.151	4021	5100.05	1.268
pr144	29269	80	93.55	1.169	4294	4818.47	1.122	4296	5736.39	1.335
kroA150	13262	85	97.22	1.144	4856	5506.87	1.134	4778	5644.87	1.181
kroB150	13065	75	99.8	1.331	4307	5382.69	1.25	4982	6088.58	1.222
pr152	36841	81	101.24	1.25	4524	5375.38	1.188	5442	6226.95	1.144
u159	21040	90	109.44	1.216	5050	5810.4	1.151	5236	6195.74	1.183
rat195	1162	88	109.34	1.243	4969	6098.92	1.227	5431	7088.95	1.305
d198	7890	141	165.35	1.173	7445	8469.94	1.138	7389	8583.75	1.162
kroA200	14684	106	131.66	1.242	5406	7228.18	1.337	5798	6980.88	1.204
kroB200	14719	106	131.37	1.239	5791	7072.28	1.221	5884	6906.16	1.174
gr202	20080	135	166.7	1.235	7537	8787.99	1.166	8026	10014.7	1.248
ts225	63322	111	127.64	1.15	5922	7311.91	1.235	7001	8549	1.221
tsp225	1958	123	144.25	1.173	6588	7920.81	1.202	7336	8996.21	1.226
pr226	40185	143	173.72	1.215	7555	8925.1	1.181	9005	10211.7	1.134
gr229	67301	160	189.24	1.183	8258	9768.7	1.183	5905	7119.57	1.206
gil262	1189	141	169.93	1.205	7109	9262.61	1.303	8125	10698.1	1.317
pr264	24568	130	165.24	1.271	7456	9150.09	1.227	8698	11255	1.294
a280	1290	129	154.79	1.2	7511	9014.64	1.2	9384	11030.8	1.175
pr299	24096	152	189.98	1.25	8565	10835.5	1.265	10164	12144.4	1.195
lin318	21045	171	228.08	1.334	9783	12180.8	1.245	9397	11760.9	1.252
rd400	7641	194	257.93	1.33	11973	14635.7	1.222	12304	14445.1	1.174

- [2] N. Bansal, A. Blum, S. Chawla, and A. Meyerson. Approximation algorithms for deadline-TSP and vehicle routing with time windows. In *36th STOC*, 2004.
- [3] A. Blum, P. Chalasani, D. Coppersmith, B. Pulleyblank, P. Raghavan, and M. Sudan. The Minimum Latency Problem. In *26th STOC*, pages 163–171, 1994.
- [4] A. Blum, S. Chawla, D. R. Karger, T. Lane, A. Meyerson, and M. Minkoff. Approximation algorithms for orienteering and discount-reward TSP. *SICOMP*, 37:653–670, 2007.
- [5] D. Chakrabarty and C. Swamy. Facility location with client latencies: linear-programming based techniques for minimum-latency problems. In *Mathematics of Operations Research*, 41(3):865–883, 2016.
- [6] I.-M. Chao, B. L. Golden, and E. A. Wasil. A fast and effective heuristic for the orienteering problem. *European Journal on Operational Research*, 88, pages 475–489, 1996.
- [7] K. Chaudhuri, P. B. Godfrey, S. Rao, and K. Talwar. Paths, Trees and Minimum Latency Tours. In *Proceedings of 44th FOCS*, pages 36–45, 2003.
- [8] C. Chekuri, N. Korula, and M. Pál. Improved algorithms for orienteering and related problems. *ACM Transactions on Algorithms*, 8(3), 2012.
- [9] S. S. Dezfuli. Solving the LP relaxation of distance-constrained vehicle routing problem using column generation. Master’s Thesis, University of Alberta, 2019.
- [10] J. Fakcharoenphol, C. Harrelson, and S. Rao. The  $k$ -traveling repairman problem. *ACM Trans. on Alg.*, Vol 3, Issue 4, Article 40, 2007.
- [11] M. Fischetti, J. José Salazar-González, and P. Toth. Solving the Orienteering Problem through Branch and Cut *INFORMS Journal on Computing*, 10:133–148.
- [12] A. Frank. On Connectivity properties of Eulerian digraphs. *Annals of Discrete Mathematics*, 41, 1989.
- [13] Z. Friggstad and C. Swamy. Approximation algorithms for regret-bounded vehicle routing and applications to distance-constrained vehicle routing. In *Proceedings of STOC*, 744–753, 2014.
- [14] Z. Friggstad and C. Swamy. Compact, provably-good LPs for orienteering and regret-bounded vehicle routing. In *Proceedings of IPCO*, pages 199–211, 2017.
- [15] B. Jackson. Some remarks on arc-connectivity, vertex splitting, and orientation in digraphs. *Journal of Graph Theory*, 12(3):429–436, 1988.
- [16] G. Kobeaga, M. Merino, and J. A. Lozano. A revisited branch-and-cut algorithm for large-scale orienteering problems. *CoRR*: 2011.02743, 2021.
- [17] V. Nagarajan and R. Ravi. Approximation algorithms for distance constrained vehicle routing problems. *Networks*, 59(2):209–214, 2012.
- [18] A. Paul. Personal communication, 2021.
- [19] A. Paul, D. Freund, A. Ferber, D. B. Shmoys, and D. B. Williamson. Budgeted prize-collecting traveling salesman and minimum spanning tree problems. *Math. of Operations Research*, 45(2):576–590, 2019.

- [20] I. Post and C. Swamy. Linear-programming based techniques for multi-vehicle minimum latency problems. In *Proceedings of 26th SODA*, pages 512–531, 2015.
- [21] G. Reinelt. TSPLIB - A Traveling Salesman Library. *ORSA Journal on Computing*, 3, 376–384, 1991.
- [22] M. Schilde, K. F. Doerner, R. F. Hartl, and G. Kiechle. Metaheuristics for the bi- objective orienteering problem. *Swarm Intelligence*, 3, pages 179–201, 2009.
- [23] P. Toth and D. Vigo, eds. *The Vehicle Routing Problem*. SIAM Monographs on Discrete Mathematics and Applications, Philadelphia, 2002.
- [24] T. Tsiligirides. Heuristic methods applied to orienteering. *Journal of the Operational Research Society*, 35(9), pages 797–809, 1984.

## A Avoiding the $(1 - \epsilon)$ -factor loss in Theorem 4.1

Recall that the  $c_{es}$  are integers, and  $c_{\max} = \max_{u,v \in N}$ . Let  $M$  be a polytime computable integer with  $\log M = \text{poly}(\text{input size})$  such that all the  $\pi_v$ s are integer multiples of  $1/M$ ; therefore, the optimal reward  $\Pi^*$  (among rooted paths  $P$  with  $\{w\} \subseteq V(P) \subseteq N$ ) is also a multiple of  $1/M$ . Recall that  $\text{low} = 1/\pi(N')$ , where  $N' = N \setminus \{r\}$ .

We can avoid the  $(1 - \epsilon)$ -factor loss in part (c) of Theorem 4.1 by continuing the binary search until  $\lambda_2 - \lambda_1 \leq \frac{\text{low}^2}{M c_{\max}}$ . Then, by the analysis in Theorem 4.1, we have that

$$a \cdot \pi(V(T_{\lambda_1})) + b \cdot \pi(V(T_{\lambda_2})) - \Pi^* \geq -\frac{a(\lambda_2 - \lambda_1)\pi(N')}{\lambda_2} \geq -\frac{\text{low}^2 \cdot \pi(N')}{\lambda_2 M c_{\max}} > -\frac{1}{M c_{\max}} \quad (5)$$

where the final inequality is because  $\lambda_2 > \text{low}$  and  $\text{low} \cdot \pi(N') = 1$ . Now  $a$  and  $b$  are rational numbers whose denominators are bounded by  $c_{\max}$ . So the LHS of (5) is an integer multiple of  $\frac{1}{c' M}$  for some  $c' \leq c_{\max}$ . So if the LHS is strictly larger than  $-\frac{1}{M c_{\max}}$  then it is in fact nonnegative. ■

## B LP-relative bounds for orienteering

We show that the guarantees returned by our combinatorial algorithms for orienteering in Section 4.1—both the quality of the solution returned, and the upper bounds—hold with respect to the optimal value of the LP-relaxation for orienteering proposed by [14]. We focus on rooted orienteering, but similar arguments apply to P2P- and cycle- orienteering as well.

Friggstad and Swamy [14] proposed the LP-relaxation (RO-P) for rooted orienteering. Recall that the input is a metric space  $(V, c)$ , root  $r \in V$ , cost bound  $B$ , and node rewards  $\{\pi_v\}_{v \in V}$ . Let  $G = (V, E)$  be the complete graph on  $V$ , and  $D_G = (V, A_G)$  be the bidirected version of  $G$ , where both  $(u, v)$  and  $(v, u)$  get cost  $c_{uv}$ . Let  $V' = V \setminus \{r\}$ . To avoid unnecessary notational complication, we assume that there is at

least one node  $w \in V'$  with  $c_{rw} \leq B$ .

$$\begin{aligned}
\max \quad & \pi_r + \sum_{u,w \in V'} \pi_u z_u^w & \text{(RO-P)} \\
\text{s.t.} \quad & x^w(\delta^{\text{in}}(u)) \geq x^w(\delta^{\text{out}}(u)) & \forall u, w \in V' \\
& x^w(\delta^{\text{in}}(u)) = 0 & \forall u, w \in V' : c_{ru} > c_{rw} \\
& x^w(\delta^{\text{in}}(S)) \geq z_u^w & \forall w \in V', S \subseteq V', u \in S \\
& \sum_{a \in A_G} c_a x_a^w \leq B z_w^w & \forall w \in V' \\
& x^w(\delta^{\text{out}}(r)) = z_w^w \quad \forall w \in V', \quad \sum_w z_w^w = 1, \quad x, z \geq 0.
\end{aligned}$$

Let  $(\text{RO-P}_w)$  denote  $(\text{RO-P})$ , when we fix  $z_w^w = 1$ , and hence  $z_v^v = 0$  for all other  $v \in V'$ . As noted in [14],  $z_v^v = 0$  implies that  $z_u^v = 0$  for all  $u \in V'$ , and hence, we may assume that  $x_a^v = 0$  for all  $a \in A_G$ . So we obtain the following simpler LP.

$$\begin{aligned}
\max \quad & \pi_r + \sum_{u \in V'} \pi_u z_u & \text{(RO-P}_w) \\
\text{s.t.} \quad & x(\delta^{\text{in}}(u)) \geq x(\delta^{\text{out}}(u)) & \forall u \in V' \\
& x(\delta^{\text{in}}(u)) = 0 & \forall u \in V' : c_{ru} > c_{rw} & (6) \\
& x(\delta^{\text{in}}(S)) \geq z_u & \forall S \subseteq V', u \in S & (7) \\
& \sum_{a \in A_G} c_a x_a \leq B \\
& x(\delta^{\text{out}}(r)) = z_w = 1, \quad x, z \geq 0.
\end{aligned}$$

For notational convenience, define  $(\text{RO-P}_r)$  to be the vacuous LP with no variables and constraints, and objective function fixed to  $\pi_r$ .

**Lemma B.1.** *We have  $OPT_{(\text{RO-P})} = \max_{w \in V' : c_{rw} \leq B} OPT_{(\text{RO-P}_w)}$ .*

*Proof.* First, note that we can exclude  $r$  from the maximization on the RHS since there is some  $w \in V'$  with  $c_{rw} \leq B$ , and  $OPT_{(\text{RO-P}_r)} = \pi_r \leq OPT_{(\text{RO-P}_w)}$ . It is clear that  $OPT_{(\text{RO-P})} \geq \max_{w : c_{rw} \leq B} OPT_{(\text{RO-P}_w)}$  since  $(\text{RO-P}_w)$  is obtained by fixing certain variables of  $(\text{RO-P})$ .

For the other direction, let  $(\bar{x}, \bar{z})$  be an optimal solution to  $(\text{RO-P})$ . We show that the objective value of  $(\bar{x}, \bar{z})$  can be written as the  $\bar{z}_w^w$ -weighted convex combination of the objective values of feasible solutions to  $(\text{RO-P}_w)$ , for nodes  $w \in V'$  such that  $c_{rw} \leq B$ . This proves the lemma.

Consider any  $w \in V'$  with  $\bar{z}_w^w > 0$ . It is immediate that  $(\{\bar{x}_a^w / \bar{z}_w^w\}_{a \in A_G}, \{\bar{z}_u^w / \bar{z}_w^w\}_{u \in V'})$  yields a feasible solution to  $(\text{RO-P}_w)$ . Moreover, since  $(\text{RO-P}_w)$  is feasible, it must be that  $c_{rw} \leq B$ : constraints(7) together with  $z_w = 1$  imply that there is an  $(r, w)$  flow  $f \leq x$  of value 1. But then the cost of  $f$  is at least  $c_{rw}$  (due to a path decomposition of  $f$ ) and at most  $\sum_{a \in A_G} c_a x_a \leq B$ . ■

Consider any  $w \in V$  with  $c_{rw} \leq B$ . Define  $\text{UB1}(w, B) := \min_{\lambda \geq 0} \text{UB1}(w, B; \lambda)$ . Recall that  $\text{UB1}(w, B; \lambda) = \pi(\bar{V}_w) + \frac{B - Y(\lambda)}{\lambda}$ , where  $\bar{V}_w := \{u \in V : c_{ru} \leq c_{rw}\}$ , and  $Y(\lambda)$  denotes  $\sum_{S \subseteq N'} y_S^{(\lambda)}$  in the run  $\text{BINSEARCHPCA}(\bar{V}_w, c, \pi, B, r, w; \epsilon)$ .

**Theorem B.2.** *(a)  $\text{UB1}(w, B) \geq OPT_{(\text{RO-P}_w)}$ ; and (b) the value of the solution returned by our algorithm for the guess  $w$  is at least  $\frac{1-\epsilon}{3} \cdot \text{UB1}(w, B)$ .*

Theorem B.2 and Lemma B.1 together imply that the solution returned by Theorem 4.3 has value at least  $\frac{1-\epsilon}{3} \cdot \text{UB1}(B)$ , and  $\text{UB1}(B) \geq \text{OPT}_{(\text{RO-P})}$ .

*Proof.* If  $w = r$ , then (a) and (b) trivially hold since  $\text{UB1}(r, B; \lambda) = \pi_r = \text{OPT}_{(\text{RO-P}_r)}$  for all  $\lambda \geq 0$ . So suppose  $w \in V'$ . Recall that  $\text{BINSEARCHPCA}(\overline{V}_w, c, \pi, B, r, w; \epsilon)$  calls  $\text{ITERPCA}$  on instances  $(D, c, \tilde{\pi}(\lambda), r)$  for varying  $\lambda$ , where  $D = (\overline{V}_w, A)$  is the digraph obtained by restricting  $G$  to  $\overline{V}_w$  and bidirecting the edges so that  $(u, v), (v, u)$  both get cost  $c_{uv}$ .

Let  $(x^*, z^*)$  be an optimal solution to  $(\text{RO-P}_w)$ . Note that  $z_v^* \leq 1$  for all  $v \in V'$ , due to constraint (7) for the set  $S = V'$ . Observe that  $(x^*|_D = \{x_a^*\}_{a \in A}, \{p_v = 1 - z_v^*\}_{v \in \overline{V}_w})$  is a feasible solution to  $(P_{(D, c, \tilde{\pi})})$ . So by Theorem 3.7, we have  $Y(\lambda) \leq \sum_{a \in A} c_a x_a^* + \sum_{v \in \overline{V}_w} \lambda \pi_V(1 - z_v^*) \leq B + \lambda \cdot \pi(\overline{V}_w) - \lambda \cdot \text{OPT}_{(\text{RO-P}_w)}$  where the last inequality is because constraints (6), (7) imply that  $z_v^* = 0$  for all  $v \notin \overline{V}_w$ . Rearranging the inequality yields that  $\text{OPT}_{(\text{RO-P}_w)} \leq \text{UB1}(w, B; \lambda)$ ; since this holds for all  $\lambda \geq 0$ , we also have  $\text{OPT}_{(\text{RO-P}_w)} \leq \text{UB1}(w, B)$ . This proves (a).

For (b), suppose that  $\text{BINSEARCHPCA}(\overline{V}_w, c, \pi, B, r, w; \epsilon)$  returns the distribution  $(a, T_{\lambda_1}), (b, T_{\lambda_2})$  (where  $a$  or  $b$  could be 0). Then, by Theorem 4.2, the reward of the solution returned is at least  $(a \cdot \pi(V(T_{\lambda_1})) + b \cdot \pi(V(T_{\lambda_2}))) / 3$ . We now argue that  $a \cdot \pi(V(T_{\lambda_1})) + b \cdot \pi(V(T_{\lambda_2})) \geq (1 - \epsilon) \text{UB1}(w, B)$ . If  $\text{BINSEARCHPCA}$  returns in step (5)—so say  $a = 0$  and  $\lambda_2 = \text{high}$ —we have  $\pi(V(T_{\lambda_2})) = \pi(\overline{V}_w) \geq \text{UB1}(w, B)$ . Otherwise, we have  $a \cdot c(T_{\lambda_1}) + b \cdot c(T_{\lambda_2}) = B$  (this holds even when  $\text{BINSEARCHPCA}$  returns in step (7)), and  $\text{low} \leq \lambda_1 \leq \lambda_2 \leq \lambda_1 + \epsilon \cdot \text{low} \cdot \min\{1, \text{low}\} \cdot \text{LB}$ . From (3), we have that

$$c(T_{\lambda_1}) + \lambda_1 \cdot \pi(\overline{V}_w \setminus V(T_{\lambda_1})) \leq Y(\lambda_1), \quad c(T_{\lambda_2}) + \lambda_2 \cdot \pi(\overline{V}_w \setminus V(T_{\lambda_2})) \leq Y(\lambda_2).$$

Multiplying the first inequality by  $a$ , and the second one by  $b$ , and adding and simplifying, gives

$$B + \lambda_1 \left[ a \cdot \pi(\overline{V}_w \setminus V(T_{\lambda_1})) + b \cdot \pi(\overline{V}_w \setminus V(T_{\lambda_2})) \right] \leq aY(\lambda_1) + bY(\lambda_2) \quad (8)$$

$$\implies B + \lambda_1 \cdot \pi(\overline{V}_w) - \lambda_1 \left[ a \cdot \pi(V(T_{\lambda_1})) + b \cdot \pi(V(T_{\lambda_2})) \right] \leq aY(\lambda_1) + bY(\lambda_2) \quad (9)$$

If  $B \geq aY(\lambda_1) + bY(\lambda_2)$ , then (9) implies that  $a \cdot \pi(V(T_{\lambda_1})) + b \cdot \pi(V(T_{\lambda_2})) \geq \pi(\overline{V}_w) \geq \text{UB1}(w, B)$ . Otherwise, from (8), we obtain that

$$\begin{aligned} B + \lambda_2 \left[ a \cdot \pi(\overline{V}_w \setminus V(T_{\lambda_1})) + b \cdot \pi(\overline{V}_w \setminus V(T_{\lambda_2})) \right] &\leq aY(\lambda_1) + bY(\lambda_2) + (\lambda_2 - \lambda_1) \pi(\overline{V}_w \setminus \{r\}) \\ &\leq aY(\lambda_1) + bY(\lambda_2) + \epsilon \cdot \text{low}^2 \cdot \text{LB} \cdot \pi(\overline{V}_w \setminus \{r\}) \\ &\leq aY(\lambda_1) + bY(\lambda_2) + \epsilon \lambda_2 \cdot \text{UB1}(w, B). \end{aligned}$$

The last inequality above follows since  $\text{low} \leq \lambda_2$ ,  $\text{low} \cdot \pi(\overline{V}_w \setminus \{r\}) = 1$ , and  $\text{LB} \leq \Pi_w^* \leq \text{UB1}(w, B)$ . Dividing the above by  $\lambda_2$  and rearranging yields,

$$\begin{aligned} a \cdot \pi(V(T_{\lambda_1})) + b \cdot \pi(V(T_{\lambda_2})) &\geq \pi(\overline{V}_w) + \frac{B - aY(\lambda_1) - bY(\lambda_2)}{\lambda_2} - \epsilon \cdot \text{UB1}(w, B) \\ &\geq \pi(\overline{V}_w) + \frac{B - aY(\lambda_1) - bY(\lambda_2)}{a\lambda_1 + b\lambda_2} - \epsilon \cdot \text{UB1}(w, B) \\ &\geq \pi(\overline{V}_w) + \min \left\{ \frac{B - Y(\lambda_1)}{\lambda_1}, \frac{B - Y(\lambda_2)}{\lambda_2} \right\} - \epsilon \cdot \text{UB1}(w, B) \geq (1 - \epsilon) \text{UB1}(w, B). \end{aligned}$$

The second inequality is because we are in the case where  $B - aY(\lambda_1) - bY(\lambda_2) < 0$ , and the final inequality follows because  $\text{UB1}(w, B)$  is the minimum of  $\text{UB1}(w, B; \lambda)$  over all  $\lambda \geq 0$ . ■

## C Improved analysis of P2P-orienteing algorithm in [14]

. Friggstad and Swamy [14] modify their LP-relaxation for rooted orienteing to obtain an LP-relaxation for P2P orienteing, using which they obtain an approximation factor of 6 for P2P orienteing. We show that their analysis can be improved to show an approximation factor of 4.

While the P2P-orienteing LP in [14] does not require any “guesswork” (i.e., enumeration steps), to get to the heart of their approach, and our improved analysis, we assume that we know (or “guess”) the node  $w$  on the optimal  $r$ - $t$  path with largest  $c_{ru} + c_{ut}$  value. Recall that  $\bar{V}_w^{\text{P2P}} = \{u \in V : c_{ru} + c_{ut} \leq c_{rw} + c_{wt}\}$ , and  $\Pi_w^{\text{P2P}}$  is the maximum reward of an  $r$ - $t$  path visits  $w$ , and only visits nodes in  $\bar{V}_w^{\text{P2P}}$ .

In [14], two weighted collections of trees,  $(\gamma_i^{(r)}, T_i^{(r)})_{i=1, \dots, k}$  and  $(\gamma_i^{(t)}, T_i^{(t)})_{i=1, \dots, \ell}$ , are extracted from the LP solution, such that:

- (a) all  $\gamma_i^{(r)}$  and  $\gamma_i^{(t)}$  values are nonnegative, and  $\sum_{i=1}^k \gamma_i^{(r)} = 1 = \sum_{i=1}^{\ell} \gamma_i^{(t)}$ ;
- (b) each  $T_i^{(r)}$  and  $T_i^{(t)}$  tree contains  $w$ , and contains only nodes from  $\bar{V}_w^{\text{P2P}}$ .
- (c) each  $T_i^{(r)}$  tree is rooted at  $r$ , and each  $T_i^{(t)}$  tree is rooted at  $t$ ;
- (d)  $\sum_{i=1}^k \gamma_i^{(r)} c(T_i^{(r)}) + \sum_{i=1}^{\ell} \gamma_i^{(t)} c(T_i^{(t)}) \leq B$ ; and
- (e)  $\sum_{i=1}^k \gamma_i^{(r)} \pi(V(T_i^{(r)})) + \sum_{i=1}^{\ell} \gamma_i^{(t)} \pi(V(T_i^{(t)})) \geq \Pi_w^{\text{P2P}}$ .

We convert each  $T_i^{(r)}$  tree to an  $r$ - $w$  path  $Q_i^{(r)}$ , and extract an  $r$ -rooted path  $P_i^{(r)}$  from  $Q_i^{(r)}$  ending at some node in  $\bar{V}_w^{\text{P2P}}$  such that  $c^{\text{reg}}(P_i^{(r)}) \leq B - c_{rw} - c_{wt}$ , and  $\pi(V(P_i^{(r)})) \geq \pi(V(Q_i^{(r)})) / (\frac{c^{\text{reg}}(Q_i^{(r)})}{B - c_{rw} - c_{wt}} + 1)$  (see Lemma 5.1 in [4], or Lemma 2.2 in [13]); note that  $P_i^{(r)}$  can be completed to an  $r$ - $t$  path of cost at most  $B$ . Similarly, we convert each  $T_i^{(t)}$  tree to  $t$ - $w$  path  $Q_i^{(t)}$ , and extract a  $t$ -rooted path  $P_i^{(t)}$  from  $Q_i^{(t)}$  ending at some node in  $\bar{V}_w^{\text{P2P}}$  such that  $c^{\text{reg}}(P_i^{(t)}) \leq B - c_{rw} - c_{wt}$ , and  $\pi(V(P_i^{(t)})) \geq \pi(V(Q_i^{(t)})) / (\frac{c^{\text{reg}}(Q_i^{(t)})}{B - c_{rw} - c_{wt}} + 1)$ ; note that  $P_i^{(t)}$  can be completed to an  $r$ - $t$  path of cost at most  $B$ .

We claim that the best of the  $P_i^{(r)}$  and  $P_i^{(t)}$  paths earns reward at least  $\Pi_w^{\text{P2P}}/4$ . The maximum reward earned by one of these paths is at least

$$\begin{aligned}
& \max \left\{ \max \left\{ \frac{\pi(V(Q_i^{(r)}))}{\frac{c^{\text{reg}}(Q_i^{(r)})}{B - c_{rw} - c_{wt}} + 1} : i = 1, \dots, k \right\}, \max \left\{ \frac{\pi(V(Q_i^{(t)}))}{\frac{c^{\text{reg}}(Q_i^{(t)})}{B - c_{rw} - c_{wt}} + 1} : i = 1, \dots, \ell \right\} \right\} \\
& \geq \frac{\sum_{i=1}^k \gamma_i^{(r)} \pi(V(Q_i^{(r)})) + \sum_{i=1}^{\ell} \gamma_i^{(t)} \pi(V(Q_i^{(t)}))}{\sum_{i=1}^k \gamma_i^{(r)} \cdot (\frac{c^{\text{reg}}(Q_i^{(r)})}{B - c_{rw} - c_{wt}} + 1) + \sum_{i=1}^{\ell} \gamma_i^{(t)} \cdot (\frac{c^{\text{reg}}(Q_i^{(t)})}{B - c_{rw} - c_{wt}} + 1)} \quad (\text{using (a)}) \\
& \geq \frac{\Pi_w^{\text{P2P}}}{\sum_{i=1}^k \gamma_i^{(r)} \cdot \frac{2c(T_i^{(r)}) - 2c_{rw}}{B - c_{rw} - c_{wt}} + \sum_{i=1}^{\ell} \gamma_i^{(t)} \cdot \frac{2c(T_i^{(t)}) - 2c_{wt}}{B - c_{rw} - c_{wt}} + 2} \quad (\text{using (a) and (e)}) \\
& \geq \frac{\Pi_w^{\text{P2P}}}{\frac{2B - 2c_{rw} - 2c_{wt}}{B - c_{rw} - c_{wt}} + 2} = \frac{\Pi_w^{\text{P2P}}}{4}. \quad (\text{using (a) and (d)})
\end{aligned}$$

However, it is not immediate as to how one can leverage the above improved analysis via our combinatorial PCA algorithm. The roadblock is property (d), which is a combined guarantee on the  $\gamma$ -weighted average cost of a tree in the two collections, and it is not clear how one can obtain this by running BIN-SEARCHPCA with roots  $r$  and  $t$  separately. One way of circumventing this obstacle is as follows. Let  $P_w^*$  be the P2P-orienteing solution yielding reward  $\Pi_w^{\text{P2P}}$ . We guess (within some factor) the regrets of the

$r$ - $w$  and  $w$ - $t$  portions of  $P_w^*$ , which add up to  $B - c_{rw} - c_{wt}$ , and run  $\text{BINSEARCHPCA}(\overline{V}_w^{\text{P2P}}, c, \pi, \cdot, r, w; \epsilon)$  and  $\text{BINSEARCHPCA}(\overline{V}_w^{\text{P2P}}, c, \pi, \cdot, t, w; \epsilon)$  with the corresponding length bounds. An analysis similar to above can then be used to show that this yields a  $4/(1 - \epsilon)$ -approximation.

## D Computational results continued: omitted tables and further discussion

We complete our discussion of computational results by listing here the tables omitted from Section 5, which report the detailed results of our computational experiments for the following datasets.

- For cycle orienteering, Table 4 contains the results for the Gen 2 data sets.
- For P2P orienteering, Tables 5 and 6 list the results obtained for the instances from Tsiligirides [24] (where we do have optimal values) and Chao [6] (where we do not have optimal values) respectively.

For cycle orienteering, we use optimal values as reported in [16]. Most of these were first computed in [11]. The distance bound used in [11] for the dataset `gr229` seems to be incorrectly reported (it is far too small to support the optimum value they claim), so we use the bound from [16]. Further, [16] include three TSPLIB data sets with at most 400 nodes that we not considered in [11]: `berlin52`, `tsp225`, and `a280`. We include these datasets in our experiments for cycle orienteering.

Table 4: Cycle orienteering results - Gen 2

<b>Dataset</b>	<b><i>B</i></b>	<b>Val</b>	<b>Opt</b>	<b>UB</b>	<b>Opt/Val</b>	<b>UB/Opt</b>	<b>UB/Val</b>
*att48	5314	1379	1717	1852.61	1.245	1.079	1.343
*gr48	2523	1380	1761	2046.2	1.276	1.162	1.483
*hk48	5731	1232	1614	1883.5	1.31	1.167	1.529
eil51	213	1330	1674	1875.15	1.259	1.12	1.41
berlin52	3771	1644	1897	2215.32	1.154	1.168	1.348
*brazil58	12698	1864	2220	2622.08	1.191	1.181	1.407
st70	338	1905	2286	2730.13	1.2	1.194	1.433
eil76	269	1905	2550	2844.06	1.339	1.115	1.493
pr76	54080	2038	2708	3020.77	1.329	1.115	1.482
gr96	27605	2630	3396	3811.41	1.291	1.122	1.449
rat99	606	2179	2944	3285.75	1.351	1.116	1.508
kroA100	10641	2686	3212	3638.26	1.196	1.133	1.355
kroB100	11071	2581	3241	3646.73	1.256	1.125	1.413
kroC100	10375	2343	2947	3358.61	1.258	1.14	1.433
kroD100	10647	2425	3307	3891.9	1.364	1.177	1.605
kroE100	11034	2331	3090	3653.97	1.326	1.183	1.568
rd100	3955	2735	3359	3749.78	1.228	1.116	1.371
eil101	315	2991	3655	3975.64	1.222	1.088	1.329
lin105	7190	2727	3544	4023	1.3	1.135	1.475
pr107	22152	2477	2667	2667	1.077	1	1.077
*gr120	3471	3285	4371	4819.97	1.331	1.103	1.467
pr124	29515	2914	3917	4609.9	1.344	1.177	1.582
bier127	59141	4622	5383	5874.66	1.165	1.091	1.271
pr136	48386	3380	4309	4854.86	1.275	1.127	1.436
gr137	34927	3147	4286	4925.73	1.362	1.149	1.565
pr144	29269	3389	4003	4816.59	1.181	1.203	1.421
kroA150	13262	4025	4918	5546.29	1.222	1.128	1.378
kroB150	13065	3608	4869	5383.39	1.35	1.106	1.492
pr152	36841	3403	4279	5150.82	1.257	1.204	1.514
u159	21040	4055	4960	5957.21	1.223	1.201	1.469
rat195	1162	4108	5791	6098.92	1.41	1.053	1.485
d198	7890	5042	6670	8223.9	1.323	1.233	1.631
kroA200	14684	4790	6547	7228.18	1.367	1.104	1.509
kroB200	14719	4943	6419	7075.14	1.299	1.102	1.431
gr202	20080	6338	7789	8836.24	1.229	1.134	1.394
ts225	63322	4995	6834	7332.41	1.368	1.073	1.468
tsp225	1958	5576	6987	7920.81	1.253	1.134	1.421
pr226	40185	4991	6662	7583.05	1.335	1.138	1.519
gr229	67301	7512	9177	9858.24	1.222	1.074	1.312
gil262	1189	6265	8321	9255.62	1.328	1.112	1.477
pr264	24568	5892	6654	7071.99	1.129	1.063	1.2
a280	1290	6219	8428	9016.01	1.355	1.07	1.45
pr299	24096	6898	9182	10712.4	1.331	1.167	1.553
lin318	21045	8121	10923	12296.2	1.345	1.126	1.514
rd400	7641	11099	13652	14671	1.23	1.075	1.322



Table 5: P2P orienteering results for the instances in [24] with varying distance bounds.

Dataset	$B$	Val	Opt	UB	Opt/Val	UB/Opt	UB/Val
21 nodes	15	120	120	176.176	1	1.468	1.468
	20	150	200	230	1.333	1.15	1.533
	23	180	210	261.012	1.167	1.243	1.45
	25	180	230	308.824	1.278	1.343	1.716
	27	200	230	347.219	1.15	1.51	1.736
	30	220	265	381.686	1.205	1.44	1.735
	32	230	300	404.665	1.304	1.349	1.759
	35	255	320	439.132	1.255	1.372	1.722
	38	300	355	450	1.2	1.268	1.5
	40	300	395	450	1.317	1.139	1.5
	45	330	450	450	1.364	1	1.364
32 nodes	5	10	10	15	1	1.5	1.5
	10	15	15	32.4525	1	2.164	2.164
	15	40	45	69.3954	1.125	1.542	1.735
	20	60	65	105.706	1.083	1.626	1.762
	25	85	90	135.92	1.059	1.51	1.599
	30	95	110	149.883	1.158	1.363	1.578
	35	120	135	171.063	1.125	1.267	1.426
	40	135	150	188.634	1.148	1.258	1.397
	46	155	175	209.31	1.129	1.196	1.35
	50	165	190	223.778	1.152	1.178	1.356
	55	175	205	241.349	1.171	1.177	1.379
	60	190	220	258.601	1.184	1.175	1.361
	65	205	240	274.642	1.171	1.144	1.34
	70	215	260	285	1.209	1.096	1.326
	73	215	265	285	1.233	1.075	1.326
	75	215	275	285	1.256	1.036	1.326
80	225	280	285	1.244	1.018	1.267	
85	235	285	285	1.213	1	1.213	
33 nodes	15	150	100	196.966	1.133	1.97	1.313
	20	180	140	272.853	1.111	1.949	1.516
	25	230	190	357.41	1.13	1.881	1.554
	30	270	240	411.068	1.185	1.713	1.522
	35	320	290	464.726	1.219	1.603	1.452
	40	360	340	518.385	1.194	1.525	1.44
	45	400	370	571.741	1.175	1.545	1.429
	50	460	420	608.073	1.13	1.448	1.322
	55	490	460	639.928	1.122	1.391	1.306
	60	550	500	675.7	1.055	1.351	1.229
	65	550	530	710.258	1.109	1.34	1.291
	70	580	560	747.245	1.103	1.334	1.288
	75	610	600	778.495	1.098	1.297	1.276
	80	650	640	798.285	1.092	1.247	1.228
	85	650	670	800	1.138	1.194	1.231
	90	680	700	800	1.132	1.143	1.176
	95	620	740	800	1.274	1.081	1.29
100	650	770	800	1.231	1.039	1.231	
105	660	790	800	1.212	1.013	1.212	
110	670	800	800	1.194	1	1.194	

Table 6: P2P orienteering results for the instances in [6] with varying distance bounds.

<b>Dataset</b>	<b><i>B</i></b>	<b>Val</b>	<b>Best-Val</b>	<b>UB</b>	<b>UB/Val</b>	<b>UB/Best-Val</b>
64 nodes	15	96	96	139.089	1.449	1.449
	20	294	294	366.823	1.248	1.248
	25	390	390	499.509	1.281	1.281
	30	474	474	602.878	1.272	1.272
	35	570	576	707.428	1.241	1.228
	40	714	714	810.633	1.135	1.135
	45	816	816	911.482	1.117	1.117
	50	900	900	974.528	1.083	1.083
	55	984	984	1044.97	1.062	1.062
	60	1044	1062	1112.21	1.065	1.047
	65	1116	1116	1169.31	1.048	1.048
	70	1176	1188	1227.36	1.044	1.033
	75	1224	1236	1277.78	1.044	1.034
	80	1272	1284	1308.82	1.029	1.019
66 nodes	5	10	10	17.6658	1.767	1.767
	10	40	40	71.6148	1.79	1.79
	15	105	120	181.896	1.732	1.516
	20	175	205	301.747	1.724	1.472
	25	250	290	395.022	1.58	1.362
	30	355	400	482.882	1.36	1.207
	35	410	465	570.381	1.391	1.227
	40	530	575	657.881	1.241	1.144
	45	600	650	745.381	1.242	1.147
	50	670	730	832.88	1.243	1.141
	55	775	825	920.38	1.188	1.116
	60	785	915	1007.88	1.284	1.102
	65	815	980	1087.54	1.334	1.11
	70	885	1070	1157.58	1.308	1.082
	75	985	1140	1198.84	1.217	1.052
	80	985	1215	1261.34	1.281	1.038
	85	1020	1270	1323.84	1.298	1.042
	90	1045	1340	1386.34	1.327	1.035
	95	1090	1395	1448.84	1.329	1.039
	100	1195	1465	1510.38	1.264	1.031
105	1245	1520	1569.17	1.26	1.032	
110	1275	1560	1581.61	1.24	1.014	
115	1335	1595	1619.11	1.213	1.015	
120	1360	1635	1656.61	1.218	1.013	
125	1435	1670	1678.13	1.169	1.005	
130	1465	1680	1680	1.147	1	