

Distribution-Free Models for Community Detection

Huan Qing

QINGHUAN@CUMT.EDU.CN

School of Mathematics

China University of Mining and Technology

Xuzhou, 221116, P.R. China

Editor: **

Abstract

Community detection for un-weighted networks has been widely studied in network analysis, but the case of weighted networks remains a challenge. In this paper, a Distribution-Free Models (DFM) is proposed for networks in which nodes are partitioned into different communities. DFM is a general, interpretable and identifiable model for both un-weighted networks and weighted networks. The proposed model does not require prior knowledge on a specific distribution for elements of adjacency matrix but only the expected value. The distribution-free property of DFM even allows adjacency matrix to have negative elements. We develop an efficient spectral algorithm to fit DFM. By introducing a noise matrix, we build a theoretic framework on perturbation analysis to show that the proposed algorithm stably yields consistent community detection under DFM. Numerical experiments on both synthetic networks and two social networks from literature are used to illustrate the algorithm.

Keywords: Community detection, weighted networks, spectral clustering, consistent estimation, sparsity, perturbation analysis.

1. Introduction

For decades, network analysis appears in various of applications in areas such as social science, biological science, physics, compute science and statistics Watts et al. (2002); Girvan and Newman (2002); Newman (2003); Palla et al. (2007); Barabási and Oltvai (2004); Guimerà and Amaral (2005); Lusseau and Newman (2004); Newman (2001); Newman et al. (2002); Airoldi et al. (2013); Ji and Jin (2016); Ji et al. (2021). Overviews of network science and statistical modeling can be found in, for example, Newman (2003); Goldenberg et al. (2010).

Community detection is a popular tool to extract latent structural information of network in which nodes are partitioned into different communities. The Stochastic Block-model (SBM) (Holland et al., 1983) is a classical and widely used model to model un-weighted networks. Based on SBM, various meaningful models are developed, for example: the Degree-Corrected Stochastic Blockmodels (DCSBM) Karrer and Newman (2011) extends SBM by introducing degree heterogeneity to model real-world networks in which nodes have variation degrees; the Mixed Membership Stochastic Blockmodel (MMSB) Airoldi et al. (2008) models networks in which nodes may belong to multiple communities based on SBM; Jin et al. (2017)'s DCMM and Zhang et al. (2020)'s OCCAM extends MMSB by considering degree heterogeneity; the ScBM and DCScBM proposed in Rohe et al. (2016) extend SBM and DCSBM to model directed networks in which edges

have directional property. Recent years, based on these models, substantial works related with applications, algorithms and theoretical framework have been developed, for example, Rohe et al. (2011); Lei and Rinaldo (2015); Jin (2015); Mao et al. (2020); Chen et al. (2018); Zhou and A.Amini (2019); Wang et al. (2020); Zhao et al. (2012); Joseph and Yu (2016); Choi et al. (2011); Abbe and Sandon (2015); Abbe et al. (2016); Hajek et al. (2016); Gao et al. (2017), and the references therein. An overview of recent developments on SBM can be found in Abbe (2017).

However, a significant limitation of SBM is that it can not model edge-weighted networks. Edge weights are meaningful in network, and can improve community detection Newman (2004); Barrat et al. (2004). To overcome this limitation, some Weighted Stochastic Blockmodels (WSBM) are developed recent years Aicher et al. (2015); Jog and Loh (2015); Ahn et al. (2018); Palowitch et al. (2018); Xu et al. (2020); Ng and Murphy (2021). However, these weighted models always limit the connectivity matrix (defined in Eq (3)) to having nonnegative elements or just a few elements compared to the number of communities, another limitation of these weighted models is some of them require the edges to follow certain distributions. Though the multi-way blockmodels proposed in Airoldi et al. (2013) model directed networks in which nodes have mixed memberships and limit network edges to following Normal distribution, the above weighted models can not model edges from Normal distribution because of their nonnegative requirement on elements of the connectivity matrix. To overcome these shortcomings of weighted models, this paper proposes Distribution-Free Models which can model weighted or un-weighted networks. The detailed comparisons of SBM and these WSBM with our model can be found in Section 2.

The key methodological contributions in this article are as follows: (i) we provide a general, interpretable and identifiable model Distribution-Free Models (DFM for short) to model weighted or un-weighted networks. DFM has no prior distribution limitation on the distributions of adjacency matrix's elements but only a expected value closely related with latent structural information for community detection. DFM allows the connectivity matrix to have negative entries, and this guarantees the generality of DFM such that it can even model network with adjacency matrix having negative elements. (ii) we design an efficient spectral algorithm called Distribution-Free Algorithm (DFA for short) to fit DFM. Given the population adjacency matrix, DFA exactly returns community labels for all nodes, and this supports the identifiability of DFM in turn. (iii) we analyze the theoretical consistency of DFA under DFM by considering network sparsity. In our theoretical study, by introducing a noise matrix, the observed adjacency matrix is allowed to differ from the adjacency matrix since there may exist some measurement error when recording adjacency matrix's elements and these elements may be any finite real numbers. Especially, theoretical results show that DFA enjoys stable and consistent estimation when noise has small variance, and this result is also supported by our numerical experiments on both simulated networks and two real-world social networks. Since DFM is a straightforward extension of SBM, spectral method can be applied to fit DFM, and consistent estimation can be obtained for spectral method by perturbation analysis, contributions in this article provide a start on studying both weighted and un-weighted networks without the constraint on distributions using spectral method, and the beginning of perturbation analysis in community detection.

Notations. We take the following general notations in this paper. For any positive integer m , let $[m] := \{1, 2, \dots, m\}$. For a vector x , $\|x\|_q$ denotes its l_q -norm. M' is the

transpose of the matrix M , and $\|M\|$ denotes the spectral norm, $\|M\|_F$ denotes the Frobenius norm, and $\|M\|_0$ denotes the l_0 norm by counting the number of nonzero entries in M . Let $\sigma_k(M)$ and $\lambda_k(M)$ be the k -th largest singular value and its corresponding eigenvalue of matrix M ordered by the magnitude. $M(i, :)$ and $M(:, j)$ denote the i -th row and the j -th column of matrix M , respectively. $M(S_r, :)$ and $M(:, S_c)$ denote the rows and columns in the index sets S_r and S_c of matrix M , respectively. $\text{rank}(M)$ denotes the rank of matrix M .

2. Distribution-Free Models

Consider a undirected network $\mathcal{N} = (V, E)$, where $V = \{1, 2, \dots, n\}$ is the set of nodes, and E is the set of edges. Let $A \in \mathbb{R}^{n \times n}$ be the symmetric adjacency matrix of \mathcal{N} such that $A(i, j)$ denotes the weight between node i and node j for $i, j \in [n]$, and A is called adjacency matrix in this paper. It should be emphasized that $A(i, j)$ can be 0, 1, or some other real numbers in this paper. We assume

Network \mathcal{N} consists of K perceivable nonoverlapping communities $\mathcal{C}_1, \mathcal{C}_2, \dots, \mathcal{C}_K$. (1)

Let ℓ be an $n \times 1$ vector such that $\ell(i) = k$ if node i belongs to community k for $i \in [n], k \in [K]$. Let $Z \in \{0, 1\}^{n \times K}$ be the membership matrix of nodes such that

$$\text{rank}(Z) = K, \text{ and } Z(i, \ell(i)) = 1, \|Z(i, :)\|_1 = 1 \quad \text{for } i \in [n]. \quad (2)$$

In Eq (2), $\text{rank}(Z) = K$ means that the set $\{i \in [n] : \ell(i) = k\}$ for any $k \in [K]$ is not the null set \emptyset , and $Z(i, \ell(i)) = 1, \|Z(i, :)\|_1 = 1$ mean that node i only belong to one of the K communities for $i \in [n]$.

Let $n_k = \sum_{i \in [n]} Z(i, k)$ be the number of nodes belonging to community k for $k \in [K]$. Set $n_{\max} = \max_{k \in [K]} n_k, n_{\min} = \min_{k \in [K]} n_k$. For $k \in [K]$, let $\mathcal{I}^{(k)} = \{i \in [n] : Z(i, k) = 1\}$ be the set of nodes belonging to community k . For $k \in [K]$, select one node from $\mathcal{I}^{(k)}$ to construct the index set \mathcal{I} , i.e., \mathcal{I} is the indices of nodes corresponding to K nodes, one from each community. W.L.O.G., let $Z(\mathcal{I}, :) = I_K$.

Let $P \in \mathbb{R}^{K \times K}$ be a matrix (call P connectivity matrix in this paper) satisfying

$$P = P', 1 \leq K_0 := \text{rank}(P) \leq K, \text{ and } \max_{k, l \in [K]} |P(k, l)| = 1. \quad (3)$$

We'd emphasize that P may have negative elements. Meanwhile, unless specified, throughout this article, K_0 and K are assumed to be known integers satisfying constraints in Eq (3). W.L.O.G., let n_{K_0} be the K_0 -th largest number among $\{n_1, n_2, \dots, n_K\}$. For such definition, we have $\sigma_{K_0}(Z) = \sqrt{n_{K_0}}$. Meanwhile, since $\text{rank}(P) = K_0$, P has K_0 nonzero eigenvalues. The smallest nonzero eigenvalue $\sigma_{K_0}(P)$ (call it separation parameter in this paper) measures the separation between communities, and we will let it into the theoretical error bound of algorithm fitting our model for further analysis.

Let $\rho > 0$, since we will let ρ control the sparsity of the undirected network \mathcal{N} , we call ρ sparsity parameter in this paper. Note that ρ can be larger than 1 in this paper since P may contain negative elements and P may not be the probability matrix considered in most community detection literature, to name a few, Holland et al. (1983); Karrer and Newman (2011); Rohe et al. (2011); Jin (2015); Lei and Rinaldo (2015); Chen et al. (2018).

For arbitrary distribution \mathcal{F} , and all pairs of (i, j) with $i, j \in [n]$, our model assumes that $A(i, j)$ are independent random variables generated according to \mathcal{F} satisfying

$$\mathbb{E}[A(i, j)] = \Omega(i, j), \text{ where } \Omega := \rho Z P Z'. \quad (4)$$

Eq (4) means that we only assume all elements of A are independent random variables and $\mathbb{E}[A] = \rho Z P Z'$ without any prior knowledge on specific distribution of $A(i, j)$ for $i, j \in [n]$ since the distribution \mathcal{F} can be arbitrary. Call Ω population adjacency matrix in this paper. Now, we are ready to present our model.

Definition 1 *Call model (1)-(4) the Distribution-Free Models (DFM), and denote it by $DFM_n(K_0, K, P, Z, \rho)$.*

In the naming of our model DFM, the term ‘‘Distribution-Free’’ comes from the fact that \mathcal{F} can be arbitrary distribution as long as $A(i, j)$ is a random variable generated from \mathcal{F} with expectation $\Omega(i, j)$. Due to the arbitrariness of \mathcal{F} , examples of some classical distributions such as Bernoulli, Normal, Binomial, Poisson, Exponential and Gamma are discussed after Corollary 1.

Next proposition guarantees the identifiability of DFM, suggesting that DFM is well-defined.

Proposition 1 *(Identifiability of DFM). DFM is identifiable: For eligible (P, Z) and (\tilde{P}, \tilde{Z}) , if $\rho Z P Z' = \rho \tilde{Z} \tilde{P} \tilde{Z}'$, then $Z = \tilde{Z}$ and $P = \tilde{P}$.*

Since the arbitrariness of \mathcal{F} allows P to have negative elements in Eq (3), Ω may have negative elements, and this suggests the generality of DFM, especially when we compare our DFM with some previous models for un-weighted or weighted networks. The details of comparisons are given below.

- Compared with the classical stochastic blockmodels (SBM) of Holland et al. (1983), as emphasized in Eq (3) and Eq (4), P can have negative elements and there is no constraint on the distribution of $A(i, j)$ for all nodes under DFM, while P must have nonnegative entries and $A(i, j) \sim \text{Bernoulli}(\Omega(i, j))$ under SBM, which suggests that DFM is more applicable than SBM since DFM can capture the latent structure of more general network \mathcal{N} than SBM. Sure, when P is nonnegative and \mathcal{F} is Bernoulli, our DFM reduces to SBM. Meanwhile, both DFM and SBM are identifiable for the case $K_0 \leq K$, which means that \mathcal{N} can be generated from DFM even when P is not full rank, and such property will also be considered in theoretical study in this article.
- Compared with the 1st Weighted Stochastic Blockmodels (WSBM) Aicher et al. (2015), WSBM requires elements of A (A 's elements are also known as edges or edge weights) drawn from exponential family distribution while our the distribution \mathcal{F} can be arbitrary as long as Eq (4) holds under DFM.
- Compared with the 2nd WSBM proposed in Ng and Murphy (2021), this WSBM requires that A 's elements are independent random variables from Bernoulli distribution, Z follows from a multinomial distribution, all entries of weighted adjacency matrix (i.e., weights) are independent random variables from Gamma distribution and all

entries of P are in $[0, 1]$. For comparison, our DFM allows that $A(i, j)$ can be random variable from any distribution as long as Eq (4) holds, P can have negative elements, and no distribution constraint on Z as long as Eq (2) holds for the identifiability of DFM.

- Compared with the 3rd WSBM considered in Ahn et al. (2018), though this WSBM does not assume a specific edge weight distribution, it limits P to having two positive distinct entries and edge weight belonging to $[0, 1]$.
- Compared with the 4th WSBM proposed in Palowitch et al. (2018), though this WSBM also has no constraint on distribution \mathcal{F} , it requires that all entries of P should be nonnegative and \mathcal{F} is a distribution on the non-negative real line while our DFM allows \mathcal{F} to be a distribution on real line and P to have negative elements.
- Compared with the 5th WSBM (also known as homogeneous weighted stochastic block model, we call it hWSBM for short) proposed in Jog and Loh (2015), tough edges can also be generated from arbitrary distributions, hWSBM only models the case that P has two different positive elements, which is the main limitation of hWSBM compared with our DFM. Meanwhile, another hWSBM proposed in Xu et al. (2020) also limits P to having two different positive entries.

In the above comparisons, we emphasize the significance on the fact that our DFM allows P to have negative elements while the above WSBMs limit P to having nonnegative entries since the mean of Normal distribution can be negative suggested by the multi-way block-models of Airoldi et al. (2013) which allows elements of adjacency matrix to follow Normal distribution. Therefore, the above weighted models can not model networks in which edges follow Normal distribution with negative mean due to their nonnegative elements requirement of P while our DFM can model such networks, and this guarantees the generality of our DFM compared with the above WSBMs.

3. Method: DFA

After introducing the model DFM, now we aim at designing an algorithm to fit DFM and building theoretical guarantee on consistent estimation for this algorithm. Since DFM is distribution-free, designing algorithms by using the idea of likelihood maximization of Holland et al. (1983); Karrer and Newman (2011); Zhao et al. (2012) or pseudo log-likelihood of Amini et al. (2013) to fit DFM is inappropriate since expectation-maximization requires prior knowledge on certain distribution of all elements of A . Instead, designing algorithm based on the idea of spectral clustering is a good choice to fit DFM without losing DFM's distribution-free property. In this paper, one simple spectral clustering algorithm is proposed to fit our DFM, and we introduce our algorithm from the oracle case given Ω to the real case given A . Since $\text{rank}(Z) = K, \text{rank}(P) = K_0$, and $K_0 \leq K \ll n$, we have $\text{rank}(\Omega) = K_0$ by basic algebra, giving that Ω has a low-dimensional structure with K_0 nonzero eigenvalue values. Let $\Omega = U\Lambda U'$ be the compact eigenvalue decomposition of Ω , where $U \in \mathbb{R}^{n \times K_0}, \Lambda \in \mathbb{R}^{K_0 \times K_0}$, and $U'U = I_{K_0}$ where I_{K_0} is a $K_0 \times K_0$ identity matrix. Below lemma presents innovation on designing approach to fit DFM from the oracle case.

Lemma 1 Under $DFM_n(K_0, K, P, Z, \rho)$, we have $U = ZB$ where $B = U(\mathcal{I}, :)$.

Since $U = ZU(\mathcal{I}, :)$ by Lemma 1, we have $U(i, :) = U(j, :)$ if $\ell(i) = \ell(j)$ for $i, j \in [n]$, i.e., U has K distinct rows and applying k-means algorithm on all rows of U assuming there are K communities exactly returns nodes memberships up to a label permutation. Meanwhile, since k-means puts i, j into the same community if $U(i, :) = U(j, :)$, without causing confusion, we still say that applying k-means algorithm on U with K clusters exactly recovers ℓ .

We are now ready to give an ideal algorithm which we call Ideal DFA. Input: Ω, K_0 and K . Output: ℓ .

- Let $\Omega = U\Lambda U'$ be the top- K_0 eigen-decomposition of Ω such that $U \in \mathbb{R}^{n \times K_0}, \Lambda \in \mathbb{R}^{K_0 \times K_0}, U'U = I_{K_0}$.
- Apply k-means algorithm on U with K communities, i.e., find solution to the following problem

$$M^* = \operatorname{argmin}_{M \in \mathcal{M}_{n, K_0, K}} \|M - U\|_F^2,$$

where $\mathcal{M}_{n, K_0, K}$ is the set of $n \times K_0$ matrices with only K different rows.

- use M^* to obtain the labels vector ℓ .

For convenience, call the last two steps as ‘‘Apply k-means on all rows of U with K communities to obtain ℓ ’’. By Lemma 1, Ideal DFA exactly returns ℓ , and this supports the identifiability of DFM in turn. To extend the ideal case to the real case, we introduce some notations for further study.

Let W be an $n \times n$ symmetric random matrix such that all elements of W are independent random variables satisfying

$$\mathbb{E}[W] = 0_{n \times n}, W_{\max} = \max_{i, j \in [n]} |W(i, j)| \text{ is finite, } \sigma_W^2 = \max_{i, j \in [n]} \operatorname{Var}(W(i, j)) \text{ is finite,} \quad (5)$$

where $0_{n \times n}$ denotes the $n \times n$ matrix with all elements being zeros, $\operatorname{Var}(W(i, j))$ denotes the variance of $W(i, j)$, we use σ_W^2 denotes the maximum variance without causing confusion with the singular value notation, and note that there is no distribution constraint of W 's elements. Call W noise matrix in this paper.

Since $A(i, j)$ can be any finite real numbers for $i, j \in [n]$ under DFM, let $\hat{A} = A + W$ and call \hat{A} observed adjacency matrix. We introduce the noise matrix W mainly for the fact that some entries of A may be slightly perturbed by noise. Since A 's elements are finite real numbers, such noise may occur from measurement error when recording the elements of A . Sure, if $W = 0_{n \times n}$ which suggests that there is no noise when recording A , the observed adjacency matrix \hat{A} equals to the adjacency matrix A . Instead, we assume that there exists some noise such that W may not be a zero matrix, and how the noise matrix W influences the theoretical and numerical studies of method proposed to fit our model will be studied in this article.

The community labels ℓ are unknown, and we aim at using (\hat{A}, K) to predict them when A is generated from DFM and W is generated satisfying Eq (5). Let $\tilde{A} = \hat{U}\hat{\Lambda}\hat{U}'$ be the top- K_0 -dimensional eigen-decomposition of the observed adjacency \hat{A} such that $\hat{U} \in \mathbb{R}^{n \times K_0}, \hat{\Lambda} \in$

$\mathbb{R}^{K_0 \times K_0}$, $\hat{U}'\hat{U} = I_{K_0}$, and $\hat{\Lambda}$ contains the top K_0 eigenvalues of \hat{A} . Algorithm 1 called DFA is a natural extension of the Ideal DFA to the real case. We use DFA to name this algorithm in order to emphasize its distribution-free property since it is designed to fit our DFM. When P is full rank such that $K_0 = K$ under DFM and the noise matrix W is a zero matrix such that the observed adjacency matrix \hat{A} equals to the adjacency matrix A , DFA is the oPCA algorithm mentioned in Jin (2015), and the Algorithm 1 of Lei and Rinaldo (2015) using k-means to replace their $(1 + \epsilon)$ approximate k-means algorithm. Meanwhile, since DFA is designed by applying the eigen-decomposition of the adjacency matrix to fit our model DFM, we see that DFA is spectral algorithm. Furthermore, since the adjacency matrix A generated under DFM may contain negative elements, the idea of using Laplacian matrix or regularized Laplacian matrix introduced in Rohe et al. (2011); Joseph and Yu (2016) to design spectral algorithms to fit our DFM is inappropriate. Sure,

Algorithm 1 Distribution-Free Algorithm (DFA)

Require: The observed adjacency matrix $\hat{A} \in \mathbb{R}^{n \times n}$, number of communities K , and P 's rank K_0 .

Ensure: The estimated $n \times 1$ labels vector $\hat{\ell}$.

- 1: Let $\tilde{A} = \tilde{U}\tilde{\Lambda}\tilde{U}'$ be the top- K_0 eigen-decomposition of \hat{A} such that $\tilde{\Lambda}$ contains the leading K_0 eigenvalues of \hat{A} and $\tilde{U}'\tilde{U} = I_{K_0}$.
 - 2: Apply k-means on all rows of \tilde{U} with K clusters to obtain $\hat{\ell}$.
-

DFA is designed to fit DFM. Now, we aim to study DFA's consistency under DFM. First, we make two assumptions which are powerful in building our theoretical guarantee for DFA. Assume the following two bullets related with elements of A hold.

Assumption 1 *Assume that*

- $A_{\max} = \max_{i,j \in [n]} |A(i, j)|$ is finite.
- $\gamma = \frac{\sigma_A^2}{\rho}$ is finite, where $\sigma_A^2 = \max_{i,j \in [n]} \text{Var}(A(i, j))$.

Assumption 1 is mild as long as all elements and their variance of A are finite. Meanwhile, note that Assumption 1 also has no constraint on the distribution of $A(i, j)$ under DFM for $i, j \in [n]$, and this assumption is useful to bound $\|\hat{A} - \Omega\|$ for further theoretical analysis. To control the sparsity of \mathcal{N} , we assume that

Assumption 2 $\frac{\gamma\rho n + \sigma_W^2 n}{\log(n)} \rightarrow \infty$ as $n \rightarrow \infty$.

Theoretical results of Theorem 1 (to be given later) requires that ρ should grow faster than W 's noise variance term σ_W^2 for consistent estimation of DFA, suggesting that assumption 2 equals to require that $\frac{\gamma\rho n}{\log(n)} \rightarrow \infty$ and $\frac{\rho}{\sigma_W^2} \rightarrow \infty$ when $n \rightarrow \infty$. After we have Assumptions 1 and 2, now we are ready to bound $\|\hat{A} - \Omega\|$ as below.

Lemma 2 *Under $DFM_n(K_0, K, P, Z, \rho)$, when assumptions 1 and 2 hold, with probability at least $1 - o(n^{-\alpha})$ for any $\alpha > 0$, we have*

$$\|\hat{A} - \Omega\| = O(\sqrt{(\gamma\rho n + \sigma_W^2 n)\log(n)}).$$

We consider the performance criterion defined in Joseph and Yu (2016) to measure estimation error of DFA. This measurement is given below.

Let $\{\hat{\mathcal{C}}_1, \hat{\mathcal{C}}_2, \dots, \hat{\mathcal{C}}_K\}$ be the estimated partition of nodes $\{1, 2, \dots, n\}$ obtained from $\hat{\ell}$ in algorithm 1 such that $\hat{\mathcal{C}}_k = \{i : \hat{\ell}(i) = k\}$ for $k \in [K]$. Define the criterion as

$$\hat{f} = \min_{\pi \in S_K} \max_{k \in [K]} \frac{|\mathcal{C}_k \cap \hat{\mathcal{C}}_{\pi(k)}^c| + |\mathcal{C}_k^c \cap \hat{\mathcal{C}}_{\pi(k)}|}{n_k},$$

where S_K is the set of all permutations of $\{1, 2, \dots, K\}$ and the superscript c denotes complementary set. As mentioned in Joseph and Yu (2016), \hat{f} measures the maximum proportion of nodes in the symmetric difference of \mathcal{C}_k and $\hat{\mathcal{C}}_{\pi(k)}$. The theoretical bounds on \hat{f} are provided by the following theorem, which guarantees the consistency of DFA under DFM.

Theorem 1 *Under $DFM_n(K_0, K, P, Z, \rho)$, let $\hat{\ell}$ be obtained from Algorithm 1, when assumptions 1 and 2 hold, with probability at least $1 - o(n^{-\alpha})$, we have*

$$\hat{f} = O\left(\frac{K_0 K (\gamma \rho n + \sigma_W^2 n) \log(n)}{\sigma_{K_0}^2(P) \rho^2 \delta^2 n_{K_0}^2 n_{\min}}\right),$$

where $\delta = \min_{k \neq l} \|B(k, \cdot) - B(l, \cdot)\|_F$. When $K_0 = K$, we have

$$\hat{f} = O\left(\frac{K^2 (\gamma \rho n + \sigma_W^2 n) n_{\max} \log(n)}{\sigma_K^2(P) \rho^2 n_{\min}^3}\right).$$

When $K_0 = K = O(1)$ and $\frac{n_{\max}}{n_{\min}} = O(1)$, we have

$$\hat{f} = O\left(\frac{(\gamma \rho n + \sigma_W^2 n) \log(n)}{\sigma_K^2(P) \rho^2 n^2}\right).$$

Note that since $\delta \geq \sqrt{\frac{2}{n_{\max}}}$ when $K_0 = K$, and it is difficult to obtain a positive lower bound of δ when $K_0 \neq K$, one may use $\sqrt{\frac{2}{n_{\max}}}$ as the lower bound of δ for convenience. Since DFM has no distribution constraint on A as long as $\mathbb{E}[A] = \Omega$, Theorem 1 provides a general upper bound on DFA's estimation error. From Theorem 1, we find that increasing the variance of the noise matrix W , the error rate of DFA increases. And this phenomenon is consistent with our intuition that if the observed matrix \hat{A} differs with the adjacency matrix A too much caused by noise matrix, then \hat{A} deviates from Ω a lot since A is generated under DFM. Let the noise matrix have small variance such that ρ grow faster than σ_W^2 , we have below corollary.

Corollary 1 *Under $DFM_n(K_0, K, P, Z, \rho)$, let $\hat{\ell}$ be obtained from Algorithm 1, when assumptions 1 and 2 hold and ρ grow faster than σ_W^2 , with probability at least $1 - o(n^{-\alpha})$, we have*

$$\hat{f} = O\left(\frac{K_0 K \gamma n \log(n)}{\sigma_{K_0}^2(P) \rho \delta^2 n_{K_0}^2 n_{\min}}\right).$$

When $K_0 = K$, we have

$$\hat{f} = O\left(\frac{K^2 \gamma n_{\max} n \log(n)}{\sigma_K^2(P) \rho n_{\min}^3}\right).$$

When $K_0 = K = O(1)$ and $\frac{n_{\max}}{n_{\min}} = O(1)$, we have

$$\hat{f} = O\left(\frac{\gamma \log(n)}{\sigma_K^2(P) \rho n}\right).$$

From now on, we only consider the case $\sigma_W^2 = 0$. If A is further assumed to follow a specific distribution such that we can bound obtain A_{\max} and γ , then the exact bound of DFA can be obtained immediately from Corollary 1. We provide some examples to support our statement that results in Corollary 1 are general.

- The 1st example, when $A(i, j) \sim \text{Bernorlli}(\Omega(i, j))$ for $i, j \in [n]$ and all entries of P are nonnegative such that DFM reduces to SBM. For this case, since all entries of A are 0 or 1, we have $A_{\max} = 1$, and since $\text{Var}(A(i, j)) = \Omega(i, j)(1 - \Omega(i, j)) \leq \Omega(i, j) \leq \rho$ when $A(i, j) \sim \text{Bernorlli}(\Omega(i, j))$, we have $\gamma = 1$. Thus assumption 2 becomes ρn should grow faster than $\log(n)$, and the theoretical bound of estimation errors for DFA obtained immediately from Corollary 1 by setting $\gamma = 1$ is $\hat{f} = O\left(\frac{K_0 K n \log(n)}{\sigma_{K_0}^2(P) \rho \delta^2 n_{K_0}^2 n_{\min}}\right)$.

When $K_0 = K = O(1)$ and $\frac{n_{\max}}{n_{\min}} = O(1)$, the error rate is $\hat{f} = O\left(\frac{\log(n)}{\sigma_K^2(P) \rho n}\right)$, and it matches Corollary 3.2 of Lei and Rinaldo (2015) up to logarithmic factor, suggesting the optimality of our theoretical results.

- The 2nd example, when $A(i, j) \sim \text{Normal}(\Omega(i, j), \sigma_A^2)$ for all nodes. Note that, when A follows Normal distribution, elements generated under Normal distribution can be any real number, P can have negative elements under DFM as long as Eq (3) holds. For the Normal distribution case, A_{\max} is a finite number with high probability, $\gamma = \frac{\sigma_A^2}{\rho}$, assumption 2 becomes that ρn should grow faster than $\log(n)$ and $\frac{\sigma_A^2}{\rho} \leq C$ for some positive constant C , and theoretical bound of DFA in Corollary 1 is $\hat{f} = O\left(\frac{\sigma_A^2}{\rho^2} \frac{K_0 K n \log(n)}{\sigma_{K_0}^2(P) \delta^2 n_{K_0}^2 n_{\min}}\right)$, which is proportional to $\frac{\sigma_A^2}{\rho^2}$. Therefore, when σ_A^2 is fixed, increasing the sparsity parameter ρ decreases error rate of DFA; when ρ is fixed, assumption 2 always holds for large n , and decreasing σ_A^2 decreases error rate of DFA. An extreme case is when $\sigma_A^2 = 0$, we have $A(i, j) = \Omega(i, j)$ for $i, j \in [n]$, and for such case the error rate is 0 surely.
- The 3rd example, when $A(i, j) \sim \text{Binomial}(m, \frac{\Omega(i, j)}{m})$ for some positive integer m for $i, j \in [n]$. Note that for such Binomial distribution, we have $\mathbb{E}[A(i, j)] = \Omega(i, j)$ which satisfying Eq (4) under DFM. And $\frac{\Omega(i, j)}{m}$ is a probability, suggesting that P should have nonnegative elements when A follows Binomial distribution. In this case, we have $A_{\max} = m, \gamma = \max_{i, j \in [n]} m \frac{\Omega(i, j)}{m} (1 - \frac{\Omega(i, j)}{m}) / \rho \leq \max_{i, j \in [n]} \frac{\Omega(i, j)}{\rho} \leq 1$, i.e., γ is finite, and assumption 2 requires that ρn should grow faster than $\log(n)$. By Corollary 1, error rate for DFA for such case is $\hat{f} = O\left(\frac{K_0 K n \log(n)}{\sigma_{K_0}^2(P) \rho \delta^2 n_{K_0}^2 n_{\min}}\right)$.

- The 4th example, when $A(i, j) \sim \text{Poisson}(\Omega(i, j))$ as in Karrer and Newman (2011) for all nodes. By the property of Poisson distribution, we have $\mathbb{E}[A(i, j)] = \Omega(i, j)$ which satisfies Eq (4). Sure, when A follows Poisson distribution, all entries of P should be nonnegative under DFM. For this case, we have A_{\max} is finite with high probability, $\gamma = \max_{i,j \in [n]} \frac{\text{Var}(A(i, j))}{\rho} = \max_{i,j \in [n]} \frac{\Omega(i, j)}{\rho} \leq 1$, and assumption 2 equals to require that ρn grow faster than $\log(n)$. Error rate of DFA for such case is $\hat{f} = O(\frac{K_0 K n \log(n)}{\sigma_{K_0}^2(P) \rho \delta^2 n_{K_0}^2 n_{\min}})$.
- the 5th example, when $A(i, j) \sim \text{Exponential}(\frac{1}{\Omega(i, j)})$ for $i, j \in [n]$. For Exponential distribution, all elements of P should be larger than 0 to make the Exponential parameter $\Omega(i, j)$ well-defined under DFM. Since $\mathbb{E}[A(i, j)] = \Omega(i, j)$ and $\gamma = \max_{i,j \in [n]} \text{Var}(A(i, j))/\rho = \max_{i,j \in [n]} \Omega^2(i, j) \rho \leq \rho$ by the property of Exponential distribution, Eq (4) is satisfied and assumption (2) equals to require that $\rho^2 n$ should grow faster than $\log(n)$. Meanwhile, though $\sigma_A^2 \leq \rho^2$ is a small number for small ρ which gives that A and Ω are close, a too small ρ also gives larger error rates for DFA since assumption (2) may not be satisfied. From $\gamma \leq \rho$, error rate of DFA is $\hat{f} = O(\frac{K_0 K \gamma n \log(n)}{\sigma_{K_0}^2(P) \rho \delta^2 n_{K_0}^2 n_{\min}}) \leq O(\frac{K_0 K n \log(n)}{\sigma_{K_0}^2(P) \delta^2 n_{K_0}^2 n_{\min}})$, which is always a small number as long as ρ is a large number satisfying assumption (2), and such phenomenon is also verified by simulated studies.
- the 6th example, when $A(i, j) \sim \text{Gamma}(a, b)$ for $i, j \in [n]$ where $a > 0, b > 0$, and a is shape parameter, b is scale parameter. For Gamma distribution, there are two cases: Case (1), when $A(i, j) \sim \text{Gamma}(b\Omega(i, j), b)$. By the property of Gamma distribution, we have $\mathbb{E}[A(i, j)] = \frac{a}{b} = \Omega(i, j)$ satisfying Eq (4), and $\text{Var}(A(i, j)) = \frac{a}{b^2} = \frac{\Omega(i, j)}{b} \leq \frac{\rho}{b}$, thus $\gamma \leq \frac{1}{b}$ is finite. Then we can obtain DFA's error rate easily from Corollary 1. Meanwhile, when ρ is fixed, increasing b decreases γ and thus a smaller error rate of DFA; Case (2), when $A(i, j) \sim \text{Gamma}(a, \frac{a}{\Omega(i, j)})$. We have $\mathbb{E}[A(i, j)] = \frac{a}{b} = \Omega(i, j)$ satisfying Eq (4), and $\text{Var}(A(i, j)) = \frac{a}{b^2} = \frac{\Omega^2(i, j)}{a} \leq \frac{\rho^2}{a}$, thus $\gamma \leq \frac{\rho}{a}$ is finite, which gives assumption (2) requires $\rho^2 n$ grow faster than $\log(n)$, and DFA's error rate is similar as the 5th example. Meanwhile, when ρ is fixed, increasing a decreases DFA's error rate.

4. Experiments

In this section, we conduct experimental studies of DFA's performance on simulated data and two real-world networks. Unlike the theoretical studies where we allow $K_0 \leq K$ to show that DFM is identifiable even when $K_0 \leq K$, in the numerical study part, we always set $K_0 = K$ since this setting is common in both numerical and empirical studies.

4.1 Performance on synthetic networks

This subsection studies the numerical performance of DFA under different settings when A follows Normal distribution, Binomial distribution, Poisson distribution and Exponential distribution. We do not study the case when A follows Bernoulli distribution when DFM reduces to SBM, since the SBM case has been well studied recent years and SBM is also a special case when A follows Binomial distribution under DFM. Gamma distribution is

not studied in this part because it enjoys similar properties as Exponential distribution. Similar as the worst case relative error introduced in Lei and Rinaldo (2015), \hat{f} is a stronger criterion than the Hamming error introduced in Jin (2015) (Hamming error is same as the overall relative error of Lei and Rinaldo (2015)) because \hat{f} may be large for some small communities as shown by Theorem 1. In the numerical study part, instead of using \hat{f} , we apply the Hamming error to measure DFA's performance. This error rate is defined as

$$n^{-1} \min_{J \in \mathcal{P}_K} \|\hat{Z}J - Z\|_0,$$

where \mathcal{P}_K is the set of all $K \times K$ permutation matrices, and the $n \times K$ matrix \hat{Z} is defined as $\hat{Z}(i, \hat{\ell}(i)) = 1$ and all other $K - 1$ entries of $\hat{Z}(i, :)$ are 0 for $i \in [n]$.

In all synthetic networks, set $n = 200$, $K_0 = K = 3$, and generate ℓ such that each node belongs to one of the community with equal probability.

4.1.1 EXPERIMENT 1: NORMAL DISTRIBUTION

We investigate DFA's performance when A 's elements follow normal distribution here. Set P as

$$P = \begin{bmatrix} -1 & -0.4 & 0.5 \\ -0.4 & 0.9 & 0.2 \\ 0.5 & 0.2 & 0.8 \end{bmatrix}.$$

Note that when A follows Normal distribution, DFM allows P to have negative elements. After having P, Z, ρ , since $\Omega = \rho Z P Z'$, we have $A(i, j) \sim \text{Normal}(\Omega(i, j), \sigma_A^2)$ for some σ_A .

Experiment 1 contains three sub-experiments, and for the first two sub-experiments, we do not consider noise matrix by setting W as zero matrix, and this two sub-experiments contain the following steps:

Step (a): set $\Omega = \rho Z P Z'$.

Step (b): for $i \neq j \in [n]$, let $A(i, j)$ be a random variable generated from $\text{Normal}(\Omega(i, j), \sigma_A^2)$ and set $A(j, i) = A(i, j)$ since A is symmetric. For $i \in [n]$, let $A(i, i)$ be a random variable generated from $\text{Normal}(\Omega(i, i), \sigma_A^2)$.

Step (c): apply DFA to A with K communities. Record error rate.

Step (d): repeat steps (b)-(c) for 50 times, and report the averaged error rate.

Experiment 1[a]: Changing ρ . Let $\sigma_A^2 = 3$, and ρ range in $\{0.1, 0.2, \dots, 2\}$. Panel (a) of Figure 1 shows the result. We see that, when the network \mathcal{N} becomes denser as ρ increases, DFA performs better, which is consistent with Corollary 1.

Experiment 1[b]: Changing σ_A^2 . Let $\rho = 0.4$, and σ_A^2 range in $\{0.1, 0.2, \dots, 4\}$. Panel (b) of Figure 1 shows the result, from which we see that decreasing σ_A^2 decreases error rates, and this is consistent with the second bullet given after Corollary 1 since smaller σ_A^2 indicates a case that A and Ω are closer.

Experiment 1[c]: Changing σ_W^2 . In this sub-experiment, we study the influence of W on the performance of DFA by changing σ_W^2 . Set $\rho = 0.8$, $\sigma_A^2 = 1$, and use Steps (a) and (b) to generate A . Then this sub-experiment contains the following steps:

Step (a'): for $i \neq j \in [n]$, let $W(i, j)$ be a random variable generated from $\text{Normal}(0, \sigma_W^2)$ and set $W(j, i) = W(i, j)$ since the noise matrix W is symmetric. For $i \in [n]$, let $W(i, i)$ be a random variable generated from $\text{Normal}(0, \sigma_W^2)$.

Step (b'): let $\hat{A} = A + W$.

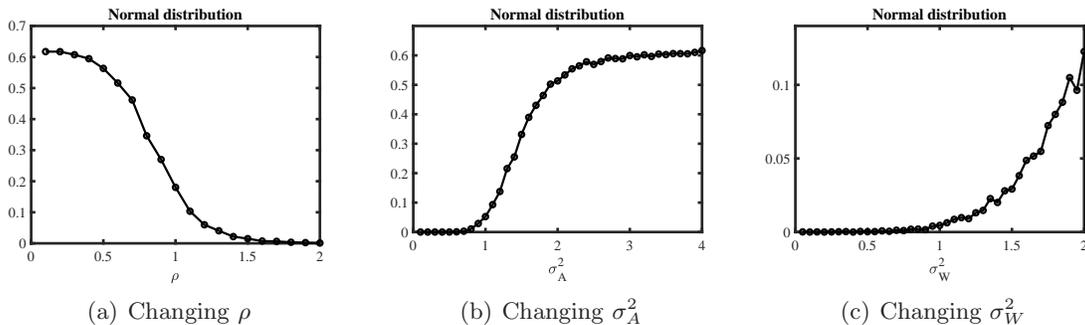


Figure 1: Numerical results of Experiment 1. y-axis: error rate.

Step (c'): apply DFA to \hat{A} with K communities. Record error rate.

Step (d'): Repeat steps (a')-(c') for 50 times, and report the averaged error rate.

Let σ_W^2 range in $\{0.05, 0.1, \dots, 2\}$, and the result is displayed by panel (c) of Figure 1. We see that DFA performs poorer as σ_W^2 increases, and this phenomenon is consistent with our theoretical finding in Theorem 1. Meanwhile, this phenomenon can be explained as below: since elements of W tends to be larger in magnitude when increasing σ_W^2 and W follows a Normal distribution with zero mean, the difference between A and \hat{A} becomes larger, causing it harder to detect communities from \hat{A} .

4.1.2 EXPERIMENT 2: BINOMIAL DISTRIBUTION

This experiment studies DFA's performance when A follows Binomial distribution. Set P as

$$P = \begin{bmatrix} 1 & 0.4 & 0.5 \\ 0.4 & 0.9 & 0.2 \\ 0.5 & 0.2 & 0.8 \end{bmatrix}.$$

Note that when A follows Binomial distribution, all elements of P should be nonnegative. Since $\Omega = \rho Z P Z'$, we have $A(i, j) \sim \text{Binomial}(m, \frac{\Omega(i, j)}{m})$ for some positive integer m .

Experiment 2 also contains three sub-experiments, and the first two sub-experiments contain Steps (a)-(d) same as Experiments 1[a] and 1[b] except that $A(i, j)$ is a random variable generated from $\text{Binomial}(m, \frac{\Omega(i, j)}{m})$ in Step (b).

Experiment 2[a]: Changing ρ . Let $m = 3$, and ρ range in $\{0.1, 0.2, \dots, 2\}$. Panel (b) of figure 2 shows the result, from which we see that DFA performs better as ρ increases.

Experiment 2[b]: Changing m . Let $\rho = 0.4$, and m range in $\{1, 2, \dots, 20\}$. Panel (b) of Figure 2 shows the result. We see that DFA performs poorer as m becomes larger. This can be explained as below: since A follows Binomial distribution and m is the number of trials in this experiment, a larger m indicates increasing the variation of $A(i, j)$ for all nodes, hence it becomes harder to detect networks when m is large. A special case is when $m = 1$ such that the Binomial distribution reduces to Bernoulli distribution, based on result of this experiment, we can conclude that detecting community from A generated under Binomial distribution is harder than detecting community from A under Bernoulli distribution for the same P and Z under DFM.

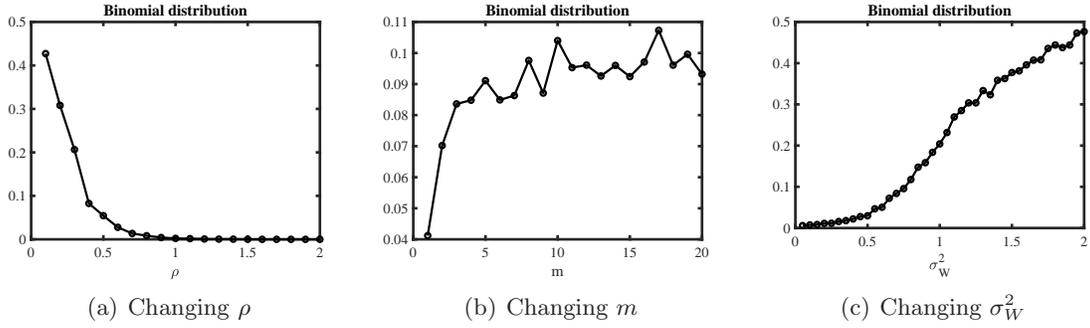


Figure 2: Numerical results of Experiment 2. y-axis: error rate.

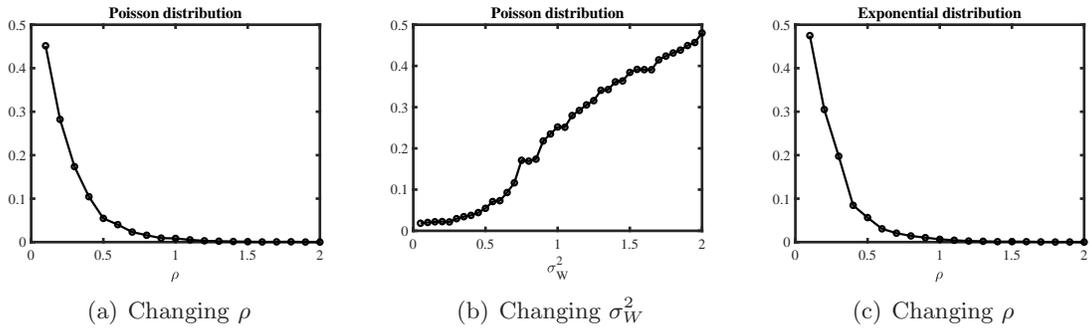


Figure 3: Numerical results of Experiments 3 and 4. y-axis: error rate.

Experiment 2[c]: Changing σ_W^2 . This sub-experiment contains same steps as Experiment 1[c] except that A is generated from Binomial distribution in Step (b). Set $\rho = 0.8$, $m = 3$, and let σ_W^2 range in $\{0.05, 0.1, \dots, 2\}$. The result is shown in last panel of Figure 2, and the conclusion is similar as that of Experiment 1[c].

4.1.3 EXPERIMENT 3: POISSON DISTRIBUTION

This part focus on investigating DFA's performance when A follows Poisson distribution. Set P same as Experiment 2. This experiment contains two sub-experiments: Experiment 3[a] contains Steps (a)-(d) same as Experiments 1[a] and 1[b] except that $A(i, j)$ is random variable generated from $\text{Poisson}(\Omega(i, j))$ in Step (b); Experiment 3[b] contains same steps as Experiment 1[c] except that A is generated from Poisson distribution in Step (b).

Experiment 3[a]: Changing ρ . Let ρ range in $\{0.1, 0.2, \dots, 2\}$. Panel (a) of Figure 3 shows the result, and conclusion is similar as that of Experiments 1[a] and 2[a].

Experiment 3[b]: Changing σ_W^2 . Set $\rho = 0.8$, $m = 3$, and let σ_W^2 range in $\{0.05, 0.1, \dots, 2\}$. Panel (b) of Figure 3 shows the results, with conclusion similar as that of Experiments 1[c] and 2[c].

4.1.4 EXPERIMENT 4: EXPONENTIAL DISTRIBUTION

This part focus on investigating DFA's performance when A follows Exponential distribution. All the settings for this experiment are same as Experiment 3[a] except that $A(i, j)$ is

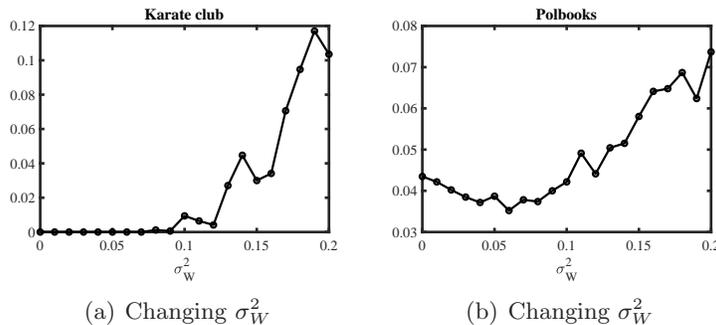


Figure 4: Error rates of DFA on Karate club and Polbooks. y-axis: error rate.

a random variable generated from $\text{Exponential}(\frac{1}{\Omega(i,j)})$ for all nodes. Meanwhile, this experiment only studies the changing of ρ and do not consider noise matrix since the influence of σ_W^2 on DFA's performance is always similar as the above experiments.

Experiment 4: Changing ρ . Let ρ range in $\{0.1, 0.2, \dots, 2\}$. Panel (c) of Figure 3 shows the result, and we see that when ρ is too small, the error rate is large, and vice versa, which is consistent with our theoretical finding given in the 5th bullet after Corollary 1.

4.2 Performance on empirical networks

This subsection studies DFA's performance on two empirical networks Zachary's karate club (Karate club for short) and Books about US politics (Polbooks for short) with known community information, where details of both networks will be introduced later. Full information about edges and community labels for the two networks can be downloaded from <http://www-personal.umich.edu/~mejn/netdata/>. Elements of adjacency matrices of the two real data sets are 1 or 0, to study DFA's behavior when there exists noise, we compute the observed matrix $\hat{A} = A + W$ where $W \sim \text{Normal}(0, \sigma_W^2)$ and let σ_W^2 range in $\{0, 0.01, 0.02, \dots, 0.2\}$. Note that, when $\sigma_W^2 = 0$, the observed adjacency matrix \hat{A} is A . For each σ_W^2 , we report the averaged error rate among 50 repetitions.

4.2.1 APPLICATION TO KARATE CLUB NETWORK

The Karate club network consists of 34 nodes (i.e., $n = 34$) where each node denotes a member in the karate club (Zachary, 1977), and this club split into two communities (i.e., $K = 2$) Mr. Hi's group and John's group due to a conflict. Zachary (1977) records all labels for each member, and these labels are treated as ground truth for our study. The left panel of Figure 4 records DFA's error rates on Karate club network. We see that DFA performs better when σ_W^2 increases, and DFA has stable performance when $\hat{A} \neq A$ under the case that σ_W^2 is small. Therefore, DFA enjoys performance stability when A is slightly perturbed by some noise, and this is consistent with our theoretical results and simulation results.

4.2.2 APPLICATION TO POLBOOKS NETWORK

Polbooks network is published around the 2004 presidential election. In this network, each node denotes a book on politics sold by the online bookseller Amazon.com, and there is an edge between two books if they are co-purchased frequently by the same buyers. The original network has 105 nodes labeled as either “Conservative”, “Liberal”, or “Neutral”, and we remove those labeled “Neutral” for community detection. After the preprocessing, Polbooks network contains 92 nodes (i.e., $n = 92$) belonging to either “Conservative” or “Liberal” (i.e., $K = 2$), and we treat the original label information as ground truth. The right panel displays results when applying DFA to Polbooks network. We see that conclusion analyzed from the results is similar as that of Karate club network, and we omit it here.

5. Conclusions

In this paper we introduced Distribution-Free Models to model both weighted and un-weighted networks. DFM does not require prior knowledge on the distribution of adjacency matrix’s elements as long as the population adjacency matrix satisfies latent structural equality on nodes labels. DFM also allows the connectivity matrix to have negative entries, thus elements of adjacency matrix can be negative. Benefitted from the distribution-free property, DFM provides powerful and exploratory tools for network analysis and it can model networks generated under various distributions. A spectral method DFA is designed to fit DFM. Theoretical guarantee with perturbation analysis on consistent estimation of DFA under DFM is provided. Behaviors of DFA when we apply it to detect communities for adjacency matrices generated from different distributions under DFM are discussed. Especially, when DFM reduces to SBM, our theoretical results are consistent with classical consistent findings for SBM under mild conditions. Numerical results for both simulated networks and two real-world social networks are consistent with our theoretical results. Especially, DFA enjoys stable performance even when adjacency matrix is polluted by noise matrix with zero mean and small variance for all elements. We expect that the model DFM, the algorithm DFA and the idea of perturbation analysis developed in this article will be widely applied in network science.

Appendix A. Proofs under DFM

A.1 Proof of Proposition 1

Proof By Lemma 1, since $U = ZB$, we have $ZB = \tilde{Z}B$. Let $\tilde{\ell}$ be the $n \times 1$ label vector obtained from \tilde{Z} , we have $e_i' ZB = Z(i, :)B = B(\ell(i), :) = B(\tilde{\ell}(i), :)$, which gives $\ell(i) = \tilde{\ell}(i)$ for $i \in [n]$. Hence, $Z = \tilde{Z}$. Since $\Omega(\mathcal{I}, \mathcal{I}) = \rho Z(\mathcal{I}, :)PZ'(\mathcal{I}, :) = \rho P = \rho \tilde{Z}(\mathcal{I}, :)\tilde{P}\tilde{Z}'(\mathcal{I}, :) = \rho \tilde{P}$, we have $P = \tilde{P}$, and this proposition follows. \blacksquare

A.2 Proof of Lemma 1

Proof Since $\Omega = \rho ZPZ' = U\Lambda U'$ and $U'U = I_{K_0}$, we have $U = \rho ZPZ'U\Lambda^{-1} = Z\rho PZ'U\Lambda^{-1}$, i.e., $B = \rho PZ'U\Lambda^{-1}$. Since $U = ZB$, we have $U(\mathcal{I}, :) = Z(\mathcal{I}, :)B = B$,

which gives $B = U(\mathcal{I}, :)$. ■

A.3 Proof of Lemma 2

Proof We apply the Theorem 1.4 (the Matrix Bernstein) of Tropp (2012) to bound $\|A - \Omega\|$. Write this theorem as below

Theorem 2 Consider a finite sequence $\{X_k\}$ of independent, random, self-adjoint matrices with dimension d . Assume that each random matrix satisfies

$$\mathbb{E}[X_k] = 0, \text{ and } \|X_k\| \leq R \text{ almost surely.}$$

Then, for all $t \geq 0$,

$$\mathbb{P}(\|\sum_k X_k\| \geq t) \leq d \cdot \exp\left(\frac{-t^2/2}{\sigma^2 + Rt/3}\right),$$

where $\sigma^2 := \|\sum_k \mathbb{E}(X_k^2)\|$.

It should be emphasized that Theorem 2 also has no constraint on the distribution of $\{X_k\}$ as long as $\{X_k\}$ are finite independent, random, self-adjoint matrices with expectation 0 and $\|X_k\| \leq R$, and this is the reason we can apply this theorem to bound $\|\hat{A} - \Omega\|$ without violating DFM's distribution-free property. Meanwhile, the fact Theorem 2 requires $\|X_k\| \leq R$ is the fundamental reason that we consider the assumption of the first bullet in assumption 1.

Let e_i be an $n \times 1$ vector with $e_i(i) = 1$ and 0 elsewhere for $i \in [n]$. Set $H = \hat{A} - \Omega$, then $H = \sum_{i=1}^n \sum_{j=1}^n H(i, j) e_i e_j'$. Set $H^{(i, j)} = H(i, j) e_i e_j'$. Since $\mathbb{E}[H(i, j)] = \mathbb{E}[\hat{A}(i, j) - \Omega(i, j)] = \mathbb{E}[A(i, j) + W(i, j) - \Omega(i, j)] = \mathbb{E}[A(i, j)] - \Omega(i, j) + \mathbb{E}[W(i, j)] = 0$, we have $\mathbb{E}[H^{(i, j)}] = 0$ and

$$\begin{aligned} \|\mathbb{E}[H^{(i, j)}]\| &= \|(\hat{A}(i, j) - \Omega(i, j)) e_i e_j'\| = |\hat{A}(i, j) - \Omega(i, j)| \|e_i e_j'\| = |\hat{A}(i, j) - \Omega(i, j)| \\ &= |A(i, j) + W(i, j) - \Omega(i, j)| \leq A_{\max} + W_{\max} + \rho, \end{aligned}$$

where the last inequality is obtained by applying assumption 1 and the fact that $|\Omega(i, j)| = |\rho P(\ell(i), \ell(j))| \leq \rho$ for $i, j \in [n]$ by Eq (3). Therefore, we have $R = A_{\max} + W_{\max} + \rho$ and R is a finite number.

For the variance term $\sigma^2 = \|\sum_{i=1}^n \sum_{j=1}^n \mathbb{E}[H^{(i, j)}(H^{(i, j)})']\|$, since $\mathbb{E}[H^2(i, j)] = \mathbb{E}[(\hat{A}(i, j) - \Omega(i, j))^2] = \mathbb{E}[(A(i, j) + W(i, j) - \Omega(i, j))^2] = \mathbb{E}[(A(i, j) - \Omega(i, j))^2] + 2\mathbb{E}[W(i, j)(A(i, j) - \Omega(i, j))] + \mathbb{E}[W^2(i, j)] = \text{Var}(A(i, j)) + \mathbb{E}[(W(i, j) - \mathbb{E}[W(i, j)])^2] = \text{Var}(A(i, j)) + \text{Var}(W(i, j)) \leq \gamma\rho + \sigma_W^2$ by Eq (5) and assumption 1, we have

$$\|\sum_{i=1}^n \sum_{j=1}^n \mathbb{E}(H^{(i, j)}(H^{(i, j)})')\| = \|\sum_{i=1}^n \sum_{j=1}^n \mathbb{E}(H^2(i, j)) e_i e_j' e_j e_i'\| = \|\sum_{i=1}^n \sum_{j=1}^n \mathbb{E}(H^2(i, j)) e_i e_i'\| \leq \gamma\rho n + \sigma_W^2 n.$$

So, we have $\sigma^2 \leq \gamma\rho n + \sigma_W^2 n$. Set $t = \frac{\alpha+1+\sqrt{\alpha^2+20\alpha+19}}{3} \sqrt{(\gamma\rho n + \sigma_W^2 n) \log(n)}$. By Theorem 2, we have

$$\mathbb{P}(\|H\| \geq t) \leq n \exp\left(-\frac{t^2/2}{\sigma^2 + \frac{Rt}{3}}\right) \leq n \exp\left(-\frac{t^2/2}{(\gamma\rho n + \sigma_W^2 n) + \frac{Rt}{3}}\right)$$

$$\begin{aligned}
&= \text{nexp}(-(\alpha + 1)\log(n)) \cdot \frac{1}{\frac{2(\alpha+1)(\gamma\rho n + \sigma_W^2 n)\log(n)}{t^2} + \frac{2(\alpha+1)}{3} \frac{R\log(n)}{t}} \\
&= \text{nexp}(-(\alpha + 1)\log(n)) \cdot \frac{1}{\frac{18}{(\sqrt{\alpha+19} + \sqrt{\alpha+1})^2} + \frac{2\sqrt{\alpha+1}}{\sqrt{\alpha+19} + \sqrt{\alpha+1}} \sqrt{\frac{R^2\log(n)}{\gamma\rho n + \sigma_W^2 n}}} \\
&\leq \text{nexp}(-(\alpha + 1)\log(n)) = \frac{1}{n^\alpha},
\end{aligned}$$

where the last inequality comes from assumption 2 such that $\frac{18}{(\sqrt{\alpha+19} + \sqrt{\alpha+1})^2} + \frac{2\sqrt{\alpha+1}}{\sqrt{\alpha+19} + \sqrt{\alpha+1}} \sqrt{\frac{R^2\log(n)}{\gamma\rho n + \sigma_W^2 n}} \leq \frac{18}{(\sqrt{\alpha+19} + \sqrt{\alpha+1})^2} + \frac{2\sqrt{\alpha+1}}{\sqrt{\alpha+19} + \sqrt{\alpha+1}} = 1$. Thus, the claim follows. \blacksquare

A.4 Proof of Theorem 1

Proof First, we provide a general lower bound of $\sigma_{K_0}(\Omega)$ under DFM, and such lower bound is directly related with sparsity parameter and separation parameter.

Lemma 3 *Under $DFM_n(K_0, K, P, Z, \rho)$, we have*

$$\sigma_{K_0}(\Omega) \geq \rho\sigma_{K_0}(P)n_{K_0}.$$

Proof For $\sigma_K(\Omega)$, we have

$$\begin{aligned}
\sigma_{K_0}^2(\Omega) &= \rho^2 \lambda_{K_0}(\Omega\Omega') = \rho^2 \lambda_{K_0}(ZPZ'ZPZ') = \rho^2 \lambda_{K_0}(Z'ZPZ'ZP') \geq \rho^2 \lambda_{K_0}(Z'Z) \lambda_{K_0}(PZ'ZP) \\
&= \rho^2 \lambda_{K_0}(Z'Z) \lambda_{K_0}(Z'ZP^2) \geq \rho^2 \lambda_{K_0}^2(Z'Z) \lambda_{K_0}(P^2) \geq \rho^2 \sigma_{K_0}^2(P) n_{K_0}^2,
\end{aligned}$$

where we have used the fact for any matrices X, Y , the nonzero eigenvalues of XY are the same as the nonzero eigenvalues of YX . \blacksquare

Since bound in Lemma 5.1 of Lei and Rinaldo (2015) is irrelevant with distribution, we can apply Lemma 5.1 of Lei and Rinaldo (2015) to bound \hat{U} and U without violating DFM's distribution-free property. By Lemma 5.1 of Lei and Rinaldo (2015), there exists a $K_0 \times K_0$ orthogonal matrix Q such that

$$\|\hat{U}Q - U\|_F \leq \frac{2\sqrt{2K_0}\|\hat{A} - \Omega\|}{\sigma_{K_0}(\Omega)}.$$

Under $DFM(n, K_0, K, P, Z, \rho)$, by Lemma 3, we have $\sigma_{K_0}(\Omega) \geq \rho\sigma_{K_0}(P)\sigma_{K_0}^2(Z) = \rho\sigma_{K_0}(P)n_{K_0}$, which gives

$$\|\hat{U}Q - U\|_F \leq \frac{2\sqrt{2K_0}\|\hat{A} - \Omega\|}{\sigma_{K_0}(P)\rho n_{K_0}}.$$

Let $\varsigma > 0$ be a small quantity, by Lemma 2 in Joseph and Yu (2016) where this lemma is also distribution-free, if one has

$$\frac{\sqrt{K}}{\varsigma} \|U - \hat{U}Q\|_F \left(\frac{1}{\sqrt{n_k}} + \frac{1}{\sqrt{n_l}} \right) \leq \|B(k, \cdot) - B(l, \cdot)\|_F, \text{ for each } 1 \leq k \neq l \leq K, \quad (6)$$

then the clustering error $\hat{f} = O(\varsigma^2)$. Recall that we set $\delta = \min_{k \neq l} \|B(k, \cdot) - B(l, \cdot)\|_F$ to measure the minimum center separation of B . Setting $\varsigma = \frac{2}{\delta} \sqrt{\frac{K}{n_{\min}}} \|U - \hat{U}Q\|_F$ makes Eq (6) hold for all $1 \leq k \neq l \leq K$. Then we have $\hat{f} = O(\varsigma^2) = O(\frac{K\|U - \hat{U}Q\|_F^2}{\delta^2 n_{\min}})$. By the upper bound of $\|\hat{U}Q - U\|_F$, we have

$$\hat{f} = O\left(\frac{K_0 K \|\hat{A} - \Omega\|^2}{\sigma_{K_0}^2(P) \rho^2 \delta^2 n_{K_0}^2 n_{\min}}\right).$$

Especially, fro the special case when $K_0 = K$, $\delta \geq \sqrt{\frac{2}{n_{\max}}}$ under DFM by Lemma 2.1 (a distribution-free lemma) of Lei and Rinaldo (2015) . Note that, it is challenge to obtain a positive lower bound of δ if $K_0 \neq K$. Meanwhile, when $K_0 = K$, $n_{K_0} = n_{\min}$, which gives

$$\hat{f} = O\left(\frac{K^2 \|\hat{A} - \Omega\|^2 n_{\max}}{\sigma_K^2(P) \rho^2 n_{\min}^3}\right).$$

When $K_0 = K = O(1)$ and $\frac{n_{\max}}{n_{\min}} = O(1)$, the last statement of this theorem follows immediately by basic algebra. Finally, use theoretical bound of Lemma 2 to replace $\|\hat{A} - \Omega\|$, and this theorem follows. ■

References

- Emmanuel Abbe. Community detection and stochastic block models: recent developments. *arXiv preprint arXiv:1703.10146*, 2017.
- Emmanuel Abbe and Colin Sandon. Community detection in general stochastic block models: Fundamental limits and efficient algorithms for recovery. In *2015 IEEE 56th Annual Symposium on Foundations of Computer Science*, pages 670–688, 2015.
- Emmanuel Abbe, Afonso S. Bandeira, and Georgina Hall. Exact recovery in the stochastic block model. *IEEE Transactions on Information Theory*, 62(1):471–487, 2016.
- Kwangjun Ahn, Kangwook Lee, and Changho Suh. Hypergraph spectral clustering in the weighted stochastic block model. *IEEE Journal of Selected Topics in Signal Processing*, 12(5):959–974, 2018.
- Christopher Aicher, Abigail Z. Jacobs, and Aaron Clauset. Learning latent block structure in weighted networks. *Journal of Complex Networks*, 3(2):221–248, 2015.
- Edoardo M. Airoldi, David M. Blei, Stephen E. Fienberg, and Eric P. Xing. Mixed membership stochastic blockmodels. *Journal of Machine Learning Research*, 9:1981–2014, 2008.
- Edoardo M. Airoldi, Xiaopei Wang, and Xiaodong Lin. Multi-way blockmodels for analyzing coordinated high-dimensional responses. *The Annals of Applied Statistics*, 7(4):2431–2457, 2013.

- Arash A. Amini, Aiyu Chen, Peter J. Bickel, and Elizaveta Levina. Pseudo-likelihood methods for community detection in large sparse networks. *Annals of Statistics*, 41(4):2097–2122, 2013.
- Albert-László Barabási and Zoltán N. Oltvai. Network biology: understanding the cell’s functional organization. *Nature Reviews Genetics*, 5(2):101–113, 2004.
- Alain Barrat, Marc Barthélemy, Romualdo Pastor-Satorras, and Alessandro Vespignani. The architecture of complex weighted networks. *Proceedings of the National Academy of Sciences of the United States of America*, 101(11):3747–3752, 2004.
- Yudong Chen, Xiaodong Li, and Jiaming Xu. Convexified modularity maximization for degree-corrected stochastic block models. *Annals of Statistics*, 46(4):1573–1602, 2018.
- David S. Choi, Patrick J. Wolfe, and Edoardo M. Airoldi. Stochastic blockmodels with a growing number of classes. *Biometrika*, 99(2):273–284, 2011.
- Chao Gao, Zongming Ma, Anderson Y. Zhang, and Harrison H. Zhou. Achieving optimal misclassification proportion in stochastic block models. *Journal of Machine Learning Research*, 18(60):1–45, 2017.
- Michelle Girvan and M. E. J. Newman. Community structure in social and biological networks. *Proceedings of the National Academy of Sciences of the United States of America*, 99(12):7821–7826, 2002.
- Anna Goldenberg, Alice X. Zheng, Stephen E. Fienberg, and Edoardo M. Airoldi. A survey of statistical network models. *Foundations and Trends® in Machine Learning archive*, 2(2):129–233, 2010.
- Roger Guimerà and Luís A. Nunes Amaral. Functional cartography of complex metabolic networks. *Nature*, 433(7028):895–900, 2005.
- Bruce Hajek, Yihong Wu, and Jiaming Xu. Achieving exact cluster recovery threshold via semidefinite programming. *IEEE Transactions on Information Theory*, 62(5):2788–2797, 2016.
- Paul W. Holland, Kathryn Blackmond Laskey, and Samuel Leinhardt. Stochastic block-models: First steps. *Social Networks*, 5(2):109–137, 1983.
- Pengsheng Ji and Jiashun Jin. Coauthorship and citation networks for statisticians. *The Annals of Applied Statistics*, 10(4):1779–1812, 2016.
- Pengsheng Ji, Jiashun Jin, Zheng Tracy Ke, and Wanshan Li. Co-citation and co-authorship networks of statisticians. *Journal of Business & Economic Statistics*, pages 1–32, 2021.
- Jiashun Jin. Fast community detection by SCORE. *Annals of Statistics*, 43(1):57–89, 2015.
- Jiashun Jin, Zheng Tracy Ke, and Shengming Luo. Estimating network memberships by simplex vertex hunting. *arXiv: Methodology*, 2017.

- Varun Jog and Po-Ling Loh. Information-theoretic bounds for exact recovery in weighted stochastic block models using the renyi divergence. *arXiv preprint arXiv:1509.06418*, 2015.
- Antony Joseph and Bin Yu. Impact of regularization on spectral clustering. *Annals of Statistics*, 44(4):1765–1791, 2016.
- Brian Karrer and M. E. J. Newman. Stochastic blockmodels and community structure in networks. *Physical Review E*, 83(1):16107, 2011.
- Jing Lei and Alessandro Rinaldo. Consistency of spectral clustering in stochastic block models. *Annals of Statistics*, 43(1):215–237, 2015.
- David Lusseau and M. E. J. Newman. Identifying the role that animals play in their social networks. *Proceedings of The Royal Society B: Biological Sciences*, 271, 2004.
- Xueyu Mao, Purnamrita Sarkar, and Deepayan Chakrabarti. Estimating mixed memberships with sharp eigenvector deviations. *Journal of American Statistical Association*, pages 1–13, 2020.
- M. E. J. Newman. The structure of scientific collaboration networks. *Proceedings of the National Academy of Sciences of the United States of America*, 98(2):404–409, 2001.
- M. E. J. Newman. Analysis of weighted networks. *Physical Review E*, 70(5):56131–56131, 2004.
- M. E. J. Newman, D. J. Watts, and S. H. Strogatz. Random graph models of social networks. *Proceedings of the National Academy of Sciences of the United States of America*, 99(90001):2566–2572, 2002.
- Mark E. J. Newman. The structure and function of complex networks. *SIAM Review*, 45(2):167–256, 2003.
- Tin Lok James Ng and Thomas Brendan Murphy. Weighted stochastic block model. *Statistical Methods and Applications*, 2021.
- Gergely Palla, Albert-László Barabási, and Tamás Vicsek. Quantifying social group evolution. *Nature*, 446(7136):664–667, 2007.
- John Palowitch, Shankar Bhamidi, and Andrew B. Nobel. Significance-based community detection in weighted networks. *Journal of Machine Learning Research*, 18(188):1–48, 2018.
- Karl Rohe, Sourav Chatterjee, and Bin Yu. Spectral clustering and the high-dimensional stochastic blockmodel. *Annals of Statistics*, 39(4):1878–1915, 2011.
- Karl Rohe, Tai Qin, and Bin Yu. Co-clustering directed graphs to discover asymmetries and directional communities. *Proceedings of the National Academy of Sciences of the United States of America*, 113(45):12679–12684, 2016.

- Joel A. Tropp. User-friendly tail bounds for sums of random matrices. *Foundations of Computational Mathematics*, 12(4):389–434, 2012.
- Zhe. Wang, Yingbin. Liang, and Pengsheng. Ji. Spectral algorithms for community detection in directed networks. *Journal of Machine Learning Research*, 21:1–45, 2020.
- Duncan J. Watts, Peter Sheridan Dodds, and M. E. J. Newman. Identity and search in social networks. *Science*, 296(5571):1302–1305, 2002.
- Min Xu, Varun Jog, and Po-Ling Loh. Optimal rates for community estimation in the weighted stochastic block model. *Annals of Statistics*, 48(1):183–204, 2020.
- Wayne W Zachary. An information flow model for conflict and fission in small groups. *Journal of anthropological research*, 33(4):452–473, 1977.
- Yuan Zhang, Elizaveta Levina, and Ji Zhu. Detecting overlapping communities in networks using spectral methods. *SIAM Journal on Mathematics of Data Science*, 2(2):265–283, 2020.
- Yunpeng Zhao, Elizaveta Levina, and Ji Zhu. Consistency of community detection in networks under degree-corrected stochastic block models. *Annals of Statistics*, 40(4):2266–2292, 2012.
- Zhixin Zhou and Arash A.Amini. Analysis of spectral clustering algorithms for community detection: the general bipartite setting. *Journal of Machine Learning Research*, 20(47):1–47, 2019.