

Evaluating importance of nodes in complex networks with local volume information dimension

Hanwen Li^a, Qiuyan Shang^{a,b}, Fangzheng Duan^a, Yong Deng^{a,c,d,e,*}

^aInstitute of Fundamental and Frontier Science, University of Electronic Science and Technology of China, Chengdu 610054, China

^bYingcai Honors of school, University of Electronic Science and Technology of China, Chengdu, 610054, China

^cSchool of Education, Shaanxi Normal University, Xi'an, 710062, China

^dSchool of Knowledge Science, Japan Advanced Institute of Science and Technology, Nomi, Ishikawa 923-1211, Japan

^eDepartment of Management, Technology, and Economics, ETH Zurich, Zurich, Switzerland

Abstract

How to evaluate the importance of nodes is essential in research of complex network. There are many methods proposed for solving this problem, but they still have room to be improved. In this paper, a new approach called local volume information dimension is proposed. In this method, the sum of degree of nodes within different distances of central node is calculated. The information within the certain distance is described by the information entropy. Compared to other methods, the proposed method considers the information of the nodes from different distances more comprehensively. For the purpose of showing the effectiveness of the proposed method, experiments on real-world networks are implemented. Promising results indicate the effectiveness of the proposed method.

Keywords: Complex network, Node importance, Local volume information dimension

1. Introduction

In recent days, complex network theory is deeply studied by massive researchers. Complex network theory can be used in many practical fields like economics [1], biology [2, 3], chemistry [4], sociology [5] effectively. There are many challenging topics in complex networks like link prediction [6], scale free property [7], fractal dimension [8, 9], game theory [10–12] and so forth. What is more, complex theory can be used to solve other types of topics or problems, including time series analysis [13, 14], uncertainty modeling [15–17]. We are witnessing and looking forward to the rapid development of complex networks [18].

In complex network, different nodes have different importance. Important node should have stronger effect on the network. Finding important nodes is useful in many areas, like disease control [19], industrial engineering [20] and so on. Hence, it is necessary to evaluate the importance of nodes correctly. There

*Corresponding author at: Institute of Fundamental and Frontier Science, University of Electronic Science and Technology of China, Chengdu, 610054, China. E-mail: dengentropy@uestc.edu.cn, prof.deng@hotmail.com.(Yong Deng)

are many methods proposed for evaluating importance of nodes. Li and Deng [21] propose local volume dimension based on power law theory and fractal theory. Li et al. [22] get inspiration from gravitation law and propose gravity model which considers both global and local information of nodes. a generalized mechanics model, which is proposed by Liu et al. [23], is also named weighted gravity model. Weighted gravity model considers both the self importance and the influence from other nodes. Li et al. [24] integrates local clustering coefficient and gravity model and propose generalized gravity model subsequently. Generalized gravity model is also the generalized form of gravity model, which is more flexible. Li and Xiao [25] propose effective gravity model based on information entropy. Density centrality is proposed by Ibnoulouafi et al. [26] based on density formula. Berahmand et al. [27] explore both the positive and negative effect of the local clustering coefficient in evaluating node importance. Zareie and Sheikahmadi [28] develop a hierarchical approach to mine vital nodes. Wang et al. [29] use discrete Moth-Flame optimization algorithm to find vital nodes. Tang et al. [30] propose k-order propagation number algorithm to investigate vital spreaders.

The main contribution of this paper is to propose a new approach called local volume information dimension (LVID) to evaluate importance of nodes. In this method, the sum of nodes' degree within different distances of central node is considered. The information within the certain distance is described by the Shannon entropy [31]. The distribution of information is considered more comprehensively with the proposed method. The superiority of the local volume information dimension is solidated by experiments in the comparison with five other existing methods on real-world networks.

The remaining part of this paper is introduced as follows. In Section 2, preliminaries in this paper are briefly introduced. Proposed method is introduced in Section 3. Experiments on real-world networks are used to verify whether the proposed method works in Section 4. Finally, conclusions will be made in Section 5.

2. Preliminaries

In this section, some preliminaries of this paper including complex network theory, local volume dimension, susceptible-infectious-recovered (SIR) model, Kendall correlation coefficient will be introduced.

2.1. Complex network theory

Complex network is represented in the form of a graph. A complex network is a graph $G = (V, E)$, where V denotes the vertices of the graph and E are the edges of the graph. A is the adjacency matrix of graph. If node i and node j are connected, $A_{ij} = 1$ otherwise 0. d_{ij} refers to the distance between node i and node j and can be calculated by the shortest path algorithms. d_{ij} are different for different nodes.




Figure 1: The process of SIR model

2.2. Kendall correlation coefficient

Kendall correlation coefficient [32], which is also called τ value, is an efficient methmatical measure to measure the correlation between two series. It is defined as follows.

Definition 2.1. Given two series X and Y with the same length. $X = (x_1, x_2, \dots, x_n)$ and $Y = (y_1, y_2, \dots, y_n)$, the pair (x_i, x_j) and (y_i, y_j) is called consistent if $x_i < x_j$ and $y_i < y_j$ or $x_i > x_j$ and $y_i > y_j$ otherwise inconsistent. The Kendall correlation coefficient can be cauculated as follows.

$$\tau(X, Y) = \frac{2(n_p - n_n)}{n(n-1)} \quad (1)$$

where n_p is the number of consistent pairs and n_n is the number of inconsistent pairs. n is the size of the series. Higher value of Kendall correlation coefficient refers to higher correlation between two series.

2.3. SIR model

Susceptible-infected recovered (SIR) model is used to simulate the whole process of disease propagation on the network [33]. The process of SIR model is illustrated in Figure 1. Each node in SIR model has three states, susceptible state, infected state and recovered state. Nodes in susceptible state can be infected by other infected nodes. Infected nodes can be recovered and recovered nots can not be infected again. There are some parameters of this model, the simulation time T means the number of simulation steps of the SIR model. The infection rate β is the probability of the susceptible node infected by adjacent infected nodes. The recovered rate γ denotes the probability of infected nodes to recover. When $\gamma = 0$, the SIR model degenerates into susceptible infected (SI) [34] model. N is the number of independent experiments.

2.4. Local volume dimension [21]

Local volume dimension [21], which is proposed by Li and Deng, is an effective approach for node importance evaluation. It is defined as follows.

$$LVD(i) = -\frac{d}{d \ln l} \ln s_i(l) \quad (2)$$

where $s_i(l)$ is the sum of degree of nodes within the distance l from the node i . l ranges from 1 to the maximum value of the distances from node i and other nodes.

3. Proposed method

In this section, the proposed method will be introduced. The proposed approach is defined as follows.

$$LVID(i) = -\frac{d}{d \ln l} - \left(\frac{s_i(l)}{S} \ln \frac{s_i(l)}{S} \right) \quad (3)$$

where $s_i(l)$ is the sum of degree of nodes within the distance l from the node i and S is the sum of the degrees of the network. l ranges from 1 to the maximum value of the distances from node i and other nodes. For calculation, LVID can be obtained from the slope of linear regression equation with $\ln(l)$ and the entropy measure.

The proposed method considers information of the central node from different topological distances, and information from different distances is measured by information entropy. Information from different distances' nodes is considered. As we can see, the differences between LVID and LVD is that LVID consider the information in the certain distance by the information entropy. The information entropy can better reflect the distribution of information within different distances. Hence, LVID considers the information of different distances more comprehensively than LVD.

4. Experiments

To verify the superiority of the proposed method, experiments on six real-world networks are carried out. The six networks are Jazz network (198 nodes, 2742 edges), NS network (379 nodes, 914 edges), PB network (1222 nodes, 16714 edges), Celegans network (297 nodes, 2359 edges), Infectious network (410 nodes, 17298 edges), PDZbase network (212 nodes, 2672 edges) respectively. LVID is compared with five other methods, including local volume dimension (LVD) [21], generalized gravity model (GG) [24], weighted gravity model (WG) [23], betweenness centrality (BC) [35] and pagerank algorithm (PR) [36].

4.1. The infection ability of top-10 ranked nodes

The infection ability of centrality measures are modeled by SIR model. The times of independent experiments is set as 100. The infection rate β is set with the value of 0.05 and the recover rate γ is 0 in this experiment. The number of steps for the SIR model T equals to 25 as the initial process of disease propagating is more influential at most times. After T steps, if the number of infected nodes is more, the centrality measure should have better ability to evaluate importance of nodes. The results are shown in Figure 2.

In Jazz network, LVD and WG performs the best and LVD performs better than BC. In NS network, GG and LVID performs better than other methods by a large margin. In PB network, LVD, GG and PR have good performance. In Celegans network, LVID beats all other methods and reaches the best performance. In Infectious network, GG performs best and LVID outperforms all other methods. In PDZbase network,

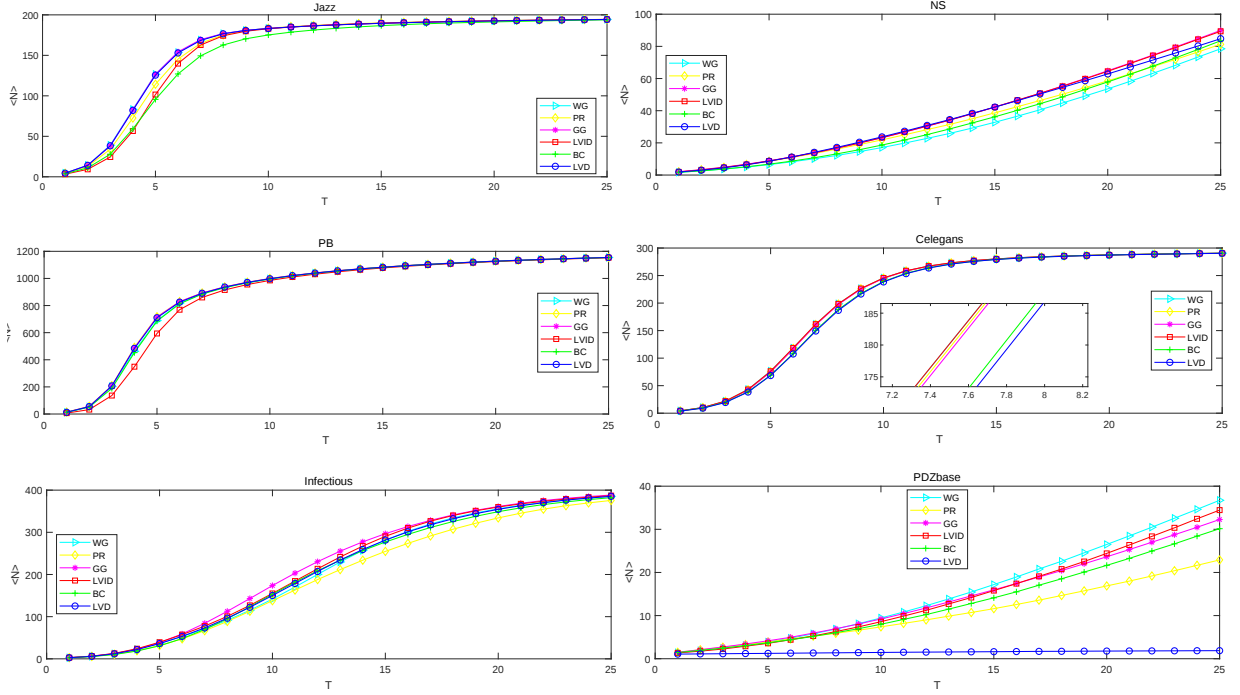


Figure 2: Spreading abilities of different centrality measures in networks

the proposed LVID method is only beaten by WG. Generally speaking, LVID has good performance in most networks, which shows the effectiveness of LVID.

4.2. The correlation with SIR model

In this experiment, compare the correlation the centrality measures with the spreading ability of nodes in SIR model. If the correlation is higher, the centrality measure should have better performance. In this experiment, the time step T is set to be 25. The experiment is executed for 100 times independently in order to reduce the effect of isolated results. Kendell correlation coefficients of LVD and LVID between spreading ability of nodes in SIR model are compared.

First, we change the value of γ and see the effect of β . γ is set to be 0 and β ranges from 0.01 to 0.1, the step length is 0.01. Results are shown in Figure 3 and Table 1-4. In NS network, when $\beta > 0.06$, LVID outperforms LVD by a large margin. In Celegans network, LVID is always better than LVD. In Infectious network, LVID outperforms LVD in every time step. In PDZbase network, the performance of LVD is not compatible with LVID. In a nutshell, LVID performs better than LVD, which shows the superiority of LVID.

Then, we fix β as 0.05 and change the value of γ . γ ranges from 0 to 1 and the step length is 0.1. Results are shown in Figure 4 and Table 5-8. Except the cases that $\gamma = 0$ and $\gamma = 1$, LVD outperforms LVID. In other cases, LVID reaches better performance. In Celegans network, LVID is greater than LVD in every cases. In Infectious network, LVID outperforms LVD. In PDZbase network, LVID is better than LVD every

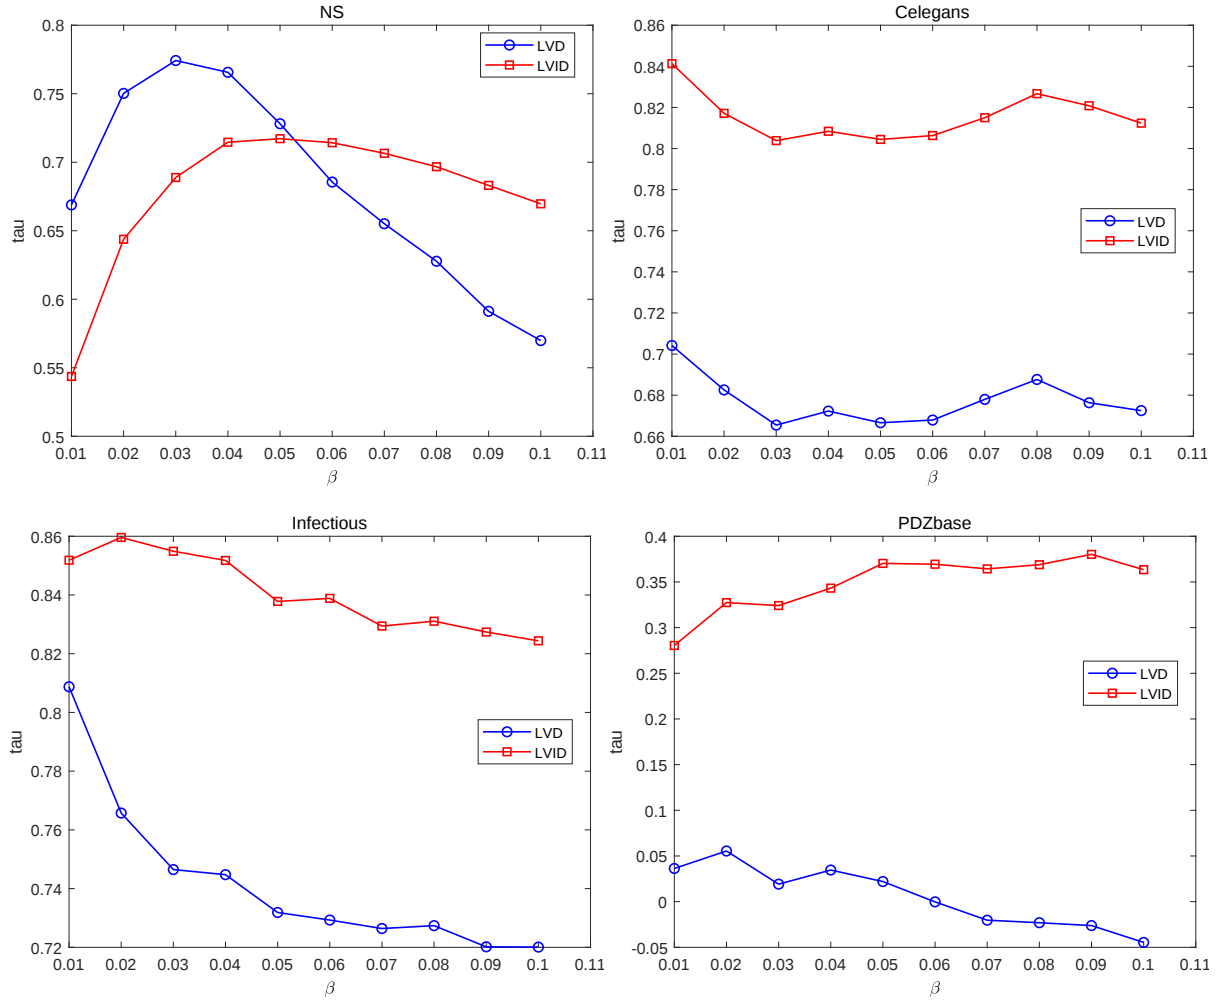


Figure 3: The correlation of the centrality measures and spreading ability of nodes in SIR model with β changes

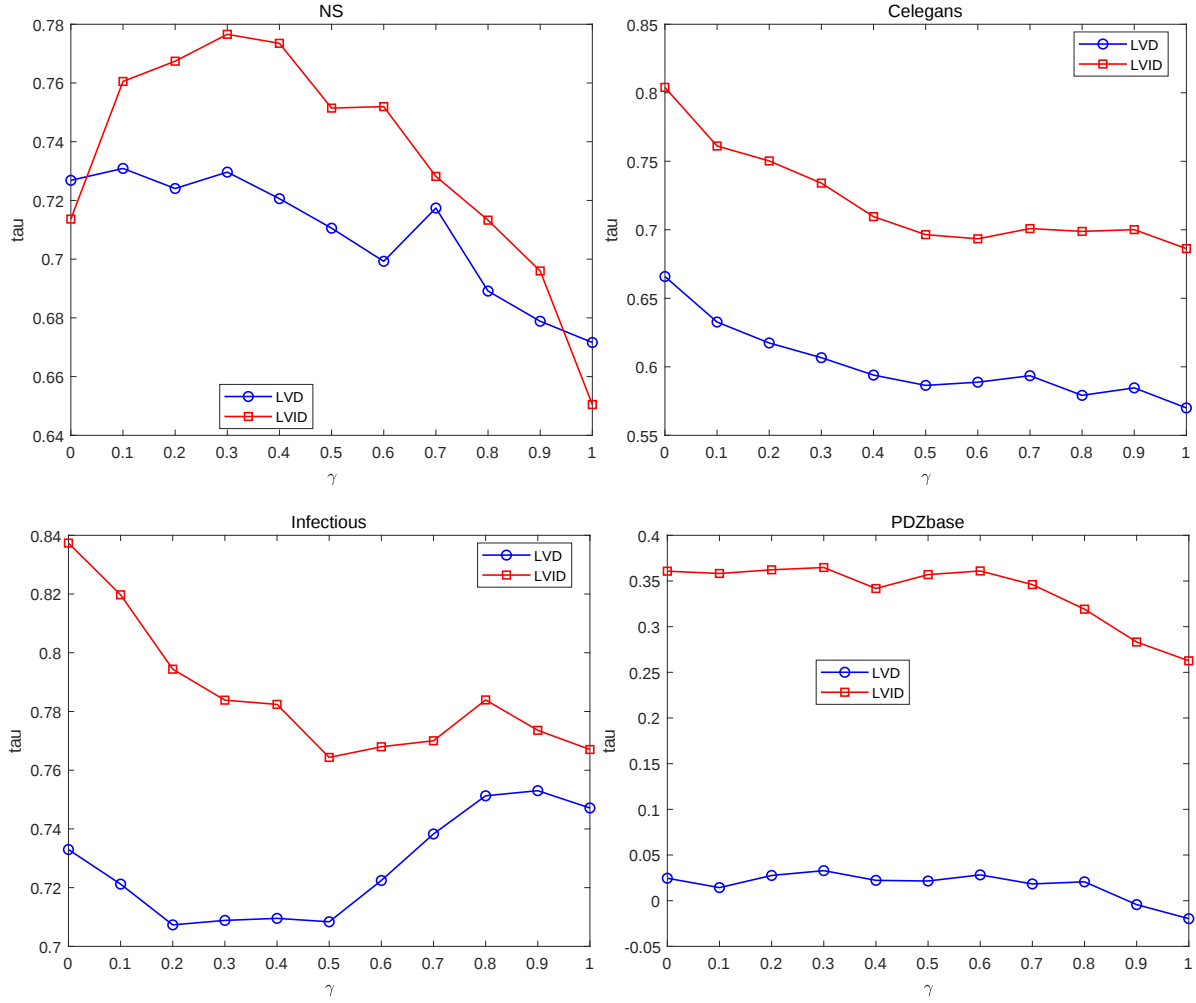


Figure 4: The correlation of the centrality measures and spreading ability of nodes in SIR model with γ changes

time. We can conclude that LVID is more effective alternative compared with LVD in this experiment.

5. Conclusion

In this paper, a novel approach for node importance evaluation in complex network, namely local volume information dimension, is proposed. The proposed method use information entropy to measure the information in the certain distance from the central node and considers information from different distance, which is superior to other methods. The superiority of the local volume dimension is validated by experiments on five networks obtained from the real-world. Encouraging results indicates the effectiveness of the proposed method with SIR model.

In the future, the proposed approach can be extended to more kinds of networks like signed networks, multiplex networks, temporal networks, hypergraphs and so forth. The estimation methods for the local

Table 1: The Kendell correlation coefficient when β changes in NS network

	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.1
LVD [21]	0.669	0.750	0.774	0.766	0.728	0.686	0.655	0.628	0.591	0.570
LVID	0.544	0.644	0.689	0.715	0.717	0.714	0.707	0.697	0.683	0.670

Table 2: The Kendell correlation coefficient when β changes in Celegans network

	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.1
LVD [21]	0.704	0.683	0.665	0.672	0.667	0.668	0.678	0.688	0.676	0.672
LVID	0.841	0.817	0.804	0.808	0.804	0.806	0.815	0.827	0.821	0.812

Table 3: The Kendell correlation coefficient when β changes in Infectious network

	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.1
LVD [21]	0.809	0.766	0.746	0.745	0.732	0.729	0.726	0.727	0.720	0.720
LVID	0.852	0.860	0.859	0.852	0.838	0.839	0.829	0.831	0.827	0.824

Table 4: The Kendell correlation coefficient when β changes in PDZbase network

	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.1
LVD [21]	0.036	0.055	0.019	0.035	0.022	0	-0.020	-0.023	-0.026	-0.045
LVID	0.544	0.644	0.689	0.715	0.717	0.714	0.707	0.697	0.683	0.670

Table 5: The Kendell correlation coefficient when γ changes in NS network

	0.	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
LVD [21]	0.727	0.731	0.724	0.730	0.721	0.711	0.699	0.717	0.689	0.679	0.672
LVID	0.714	0.761	0.767	0.777	0.774	0.751	0.752	0.728	0.713	0.696	0.650

Table 6: The Kendell correlation coefficient when γ changes in Celegans network

	0.	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
LVD [21]	0.666	0.637	0.617	0.607	0.594	0.586	0.589	0.594	0.579	0.585	0.570
LVID	0.804	0.761	0.750	0.734	0.710	0.696	0.693	0.701	0.699	0.700	0.686

Table 7: The Kendell correlation coefficient when γ changes in Infectious network

	0.	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
LVD [21]	0.733	0.721	0.707	0.709	0.710	0.708	0.722	0.738	0.751	0.753	0.747
LVID	0.837	0.820	0.794	0.784	0.782	0.764	0.768	0.770	0.784	0.774	0.767

Table 8: The Kendell correlation coefficient when γ changes in PDZbase network

	0.	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
LVD [21]	0.025	0.014	0.028	0.033	0.022	0.022	0.028	0.018	0.021	-0.004	-0.020
LVID	0.361	0.358	0.362	0.365	0.342	0.357	0.361	0.346	0.319	0.283	0.263

volume information dimension can also explored to make LVID faster. Practical applications of LVID in community detection, link prediction, decision making and so forth, can also be explored. More types of entropy measures may also be used to judge node importance.

Acknowledgment

The work is partially supported by National Natural Science Foundation of China (Grant No. 61973332), JSPS Invitational Fellowships for Research in Japan (Short-term).

References

References

- [1] J. Gao, Y.-C. Zhang, T. Zhou, Computational socioeconomics, *Physics Reports* 817 (2019) 1–104.
- [2] C. Liu, Y. Ma, J. Zhao, R. Nussinov, Y.-C. Zhang, F. Cheng, Z.-K. Zhang, Computational network biology: data, models, and applications, *Physics Reports* 846 (2020) 1–66.
- [3] K. H. Cheong, J. M. Koh, M. C. Jones, Paradoxical survival: Examining the parrondo effect across biology, *BioEssays* 41 (6) (2019) 1900027.
- [4] M. Chrayteh, E. Burevski, D. Loru, T. R. Huet, P. Dr  an, M. E. Sanz, Disentangling the complex network of non-covalent interactions in fenchone hydrates via rotational spectroscopy and quantum chemistry, *Physical Chemistry Chemical Physics* 23 (36) (2021) 20686–20694.
- [5] J. W. Lai, K. H. Cheong, Social dynamics and Parrondo’s paradox: A narrative review, *Nonlinear Dynamics* 101 (1) (2020) 1–20.
- [6] K. Berahmand, E. Nasiri, M. Rostami, S. Forouzandeh, A modified DeepWalk method for link prediction in attributed social network, *Computing* 103 (10) (2021) 2227–2249.
- [7] R. Rak, E. Rak, The Fractional Preferential Attachment scale-free network model, *Entropy* 22 (5) (2020) 509.
- [8] T. Wen, K. H. Cheong, The fractal dimension of complex networks: A review, *Information Fusion* 73 (2021) 87–102.
- [9] Q. Gao, T. Wen, Y. Deng, Information volume fractal dimension, *Fractals* (2021) DOI: 10.1142/S0218348X21502637.
- [10] P. Zhu, H. Guo, H. Zhang, Y. Han, Z. Wang, C. Chu, The role of punishment in the spatial public goods game, *Nonlinear Dynamics* 102 (4) (2020) 2959–2968.
- [11] C. Shen, M. Jusup, L. Shi, Z. Wang, M. Perc, P. Holme, Exit rights open complex pathways to cooperation, *Journal of the Royal Society Interface* 18 (174) (2021) 20200777.
- [12] K. H. Cheong, T. Wen, J. W. Lai, Relieving cost of epidemic by parrondo’s paradox: a COVID-19 case study, *Advanced Science* 7 (24) (2020) 2002324.
- [13] G. Liu, F. Xiao, C.-T. Lin, Z. Cao, A fuzzy interval time-series energy and financial forecasting model using network-based multiple time-frequency spaces and the induced-ordered weighted averaging aggregation operation, *IEEE Transactions on Fuzzy Systems* 28 (11) (2020) 2677–2690.

- [14] T. Zhan, F. Xiao, A fast evidential approach for stock forecasting, *International Journal of Intelligent Systems*.
- [15] J. Zhao, Y. Deng, Complex network modeling of evidence theory, *IEEE Transactions on Fuzzy Systems* 29 (11) (2021) 3470–3480.
- [16] L. Xiong, X. Su, H. Qian, Conflicting evidence combination from the perspective of networks, *Information Sciences* 580 (2021) 408–418.
- [17] L. Chen, Y. Deng, K. H. Cheong, Probability transformation of mass function: A weighted network method based on the ordered visibility graph, *Engineering Applications of Artificial Intelligence* 105 (2021) 104438.
- [18] D. A. Vega-Oliveros, L. da Fontoura Costa, F. A. Rodrigues, Influence maximization by rumor spreading on correlated networks through community identification, *Communications in Nonlinear Science and Numerical Simulation* 83 (2020) 105094.
- [19] M. Doostmohammadian, H. R. Rabiee, U. A. Khan, Centrality-based epidemic control in complex social networks, *Social Network Analysis and Mining* 10 (2020) 1–11.
- [20] C. Li, W. Yang, Y. Yu, B. Li, Research on node importance evaluation of complex products based on three-parameter interval grey number grey relational model, *Journal of Intelligent & Fuzzy Systems* (Preprint) (2021) 1–18.
- [21] H. Li, Y. Deng, Local volume dimension: A novel approach for important nodes identification in complex networks, *International Journal of Modern Physics B* 35 (05) (2021) 2150069.
- [22] Z. Li, T. Ren, X. Ma, S. Liu, Y. Zhang, T. Zhou, Identifying influential spreaders by gravity model, *Scientific reports* 9 (1) (2019) 1–7.
- [23] F. Liu, Z. Wang, Y. Deng, GMM: A generalized mechanics model for identifying the importance of nodes in complex networks, *Knowledge-Based Systems* 193 (2020) 105464.
- [24] H. Li, Q. Shang, Y. Deng, A generalized gravity model for influential spreaders identification in complex networks, *Chaos, Solitons & Fractals* 143 (2021) 110456.
- [25] S. Li, F. Xiao, The identification of crucial spreaders in complex networks by effective gravity model, *Information Sciences* 578 (2021) 725–749.
- [26] A. Iboulouafi, M. El Haziti, Density centrality: identifying influential nodes based on area density formula, *Chaos, Solitons & Fractals* 114 (2018) 69–80.
- [27] K. Berahmand, A. Bouyer, N. Samadi, A new centrality measure based on the negative and positive effects of clustering coefficient for identifying influential spreaders in complex networks, *Chaos, Solitons & Fractals* 110 (2018) 41–54.
- [28] A. Zareie, A. Sheikahmadi, A hierarchical approach for influential node ranking in complex social networks, *Expert Systems with Applications* 93 (2018) 200–211.
- [29] L. Wang, L. Ma, C. Wang, N.-g. Xie, J. M. Koh, K. H. Cheong, Identifying Influential Spreaders in Social Networks through Discrete Moth-Flame Optimization, *IEEE Transactions on Evolutionary Computation*.
- [30] P. Tang, C. Song, W. Ding, J. Ma, J. Dong, L. Huang, Research on the node importance of a weighted network based on the k-order propagation number algorithm, *Entropy* 22 (3) (2020) 364.
- [31] C. E. Shannon, A mathematical theory of communication, *The Bell system technical journal* 27 (3) (1948) 379–423.
- [32] M. G. Kendall, The treatment of ties in ranking problems, *Biometrika* 33 (3) (1945) 239–251.
- [33] H. W. Hethcote, The mathematics of infectious diseases, *SIAM review* 42 (4) (2000) 599–653.
- [34] T. Zhou, J.-G. Liu, W.-J. Bai, G. Chen, B.-H. Wang, Behaviors of susceptible-infected epidemics on scale-free networks with identical infectivity, *Physical Review E* 74 (5) (2006) 056109.
- [35] M. E. Newman, A measure of betweenness centrality based on random walks, *Social networks* 27 (1) (2005) 39–54.
- [36] S. Brin, L. Page, The anatomy of a large-scale hypertextual web search engine, *Computer networks and ISDN systems* 30 (1-7) (1998) 107–117.