

Linguistic Knowledge in Data Augmentation for Natural Language Processing: An Example on Chinese Question Matching

Zhengxiang Wang

jackwang196531@gmail.com

Abstract

To investigate the role of linguistic knowledge in data augmentation (DA) for Natural Language Processing (NLP), particularly, whether more linguistic knowledge leads to a better DA approach, we designed two adapted DA programs and applied them to LCQMC (a Large-scale Chinese Question Matching Corpus) for a binary Chinese question matching classification task. The two DA programs produce augmented texts by five simple text editing operations (or DA techniques), largely irrespective of language generation rules, but one is enhanced with a pre-trained n-gram language model to fuse it with prior linguistic knowledge. We then trained four neural network models (BOW, CNN, LSTM-RNN, and GRU-RNN) and a pre-trained model (ERNIE-Gram) on the LCQMC's train sets of varying size as well as the related augmented train sets produced by the two DA programs. The test set performances of the five classification models show that adding probabilistic linguistic knowledge as constrains does not make the base DA program better, since there are no significant performance differences between the models trained on the two types of augmented train sets, both when the five DA techniques are applied together or separately. Moreover, due to the inability of the five DA techniques to make strictly paraphrastic augmented texts, the results indicate the need of sufficient amounts of training examples for the classification models trained on them to mediate the negative impact of false matching augmented text pairs and improve performances, a limitation of random text editing perturbations used a DA approach.

1 Introduction

Data augmentation (DA) is a common solution to the problems of limited and imbalanced data. It works by generating novel and label-preserving data from the existing data (Qizhe et al., 2020), which would otherwise be unavailable or expensive to collect. Owing to the increasing popularity of supervised deep learning models that demand large-scale labeled data as well as more studies on understudied language and text domains, the Natural Language Processing (NLP) community has seen a growing interest in DA in recent years (Feng et al., 2021; P. Liu et al., 2020; Shorten et al., 2021). However, unlike image and speech, whose physical features can be relatively easily manipulated without deviating from the original labels, text augmentation poses a bigger challenge. This is simply because there is no easy and automatic way to paraphrase a randomly given piece of text while preserving its linguistic integrity and, above all, meaning. As such, while there are well established and widely applied DA techniques as well as frameworks in image and speech recognition research¹ with noteworthy success (Iwana & Uchida, 2021; Park et al., 2019; Shorten & Khoshgoftaar, 2019), DA for NLP as a whole remains underexplored (Feng et al., 2021).

¹ Although there is certain overlap between speech recognition and NLP, they are two independent fields with divergent concerns and specializations (Manning & Schütze, 1999). Typically, NLP is about text processing only.

The main purpose of this paper is to investigate a fundamental question we found unanswered to the best of our knowledge: the role of linguistic knowledge in DA for NLP; in particular, whether more linguistic knowledge leads to a better DA approach. By a better DA approach, we mean one that can lead to superior trained models’ performances on a given NLP task. Intuitively, with more linguistic knowledge instilled, a DA approach is expected to augment text of higher-quality or more grammatical and thus to be presumably better. We believe a deeper understanding of what counts as a better DA approach and the role of linguistic knowledge will trigger more in-depth experiments and discussions and advance this research area to the next stage.

To conduct our research, we present two DA programs and train five supervised classification models on the augmented train sets for a binary Chinese question matching classification task. For simplicity and interpretability concerns, the DA programs used in this study are adapted from the Easy Data Augmentation (EDA) program (Wei & Zou, 2019), which augments text by four naïve text editing operations, largely irrespective of language generation rules. The only difference between the two adapted programs is whether they have a pre-trained statistical n-gram language model (LM) to select the most linguistically likely outputs, an effective mechanism to fuse a program with probabilistic linguistic knowledge. We choose n-gram LM over neural LMs because it is more efficient to train, and most importantly, more interpretable for its straightforward frequency-based approach. As the EDA approach has shown success (Wei & Zou, 2019) in various sentiment-related and sentence type classification tasks with small datasets (e.g., mostly around 10k examples), we choose LCQMC (a Large-scale Chinese Question Matching Corpus) compiled by X. Liu et al. (2018) to compare the goodness of the two adapted programs, a large labeled corpus with over 260k examples. Since our corpus is much larger and the question matching task involves comparing a pair of text, instead of one, for label prediction, it is a more reliable way to test the capacity and generalizability of a DA approach. In principle, if a DA approach can work well for the question matching task, it should also show promise for those simpler and related NLP tasks, as question matching, or text matching, is one of the most basic tasks for NLP.

The contributions of this paper are threefold. First, we present the first study on the role of linguistic knowledge in DA for NLP with a special focus on the effects of more prior linguistic knowledge on a DA approach or technique. Second, we propose two DA programs adapted from the EDA program. Although the adapted programs are for augmenting Chinese, several changes we made, including a new DA technique and the added n-gram LM, can be universal for tailoring the EDA program to other languages. Third, we also fill the research gaps in two understudied areas: DA for question matching classification task and DA for Chinese NLP.

The code, data, and experimental results for this study are available at <https://github.com/jaaack-wang/linguistic-knowledge-in-DA-for-NLP>.

2 Related Works

Thus far, various DA techniques has been employed in NLP research, such as thesaurus-based (Zhang et al., 2015) and embedding-based (Wang & Yang, 2015) word replacement, random text-editing perturbation (Wei & Zou, 2019), rule-specific generation (Asai & Hajishirzi, 2020; Kang et al., 2018), back translation (Sennrich et al., 2016; Singh et al., 2019), and neural-model-based predictive text transformation (Hou et al., 2018; Kobayashi, 2018; Kurata et al., 2016) etc. Most of these studies find slight but stable performance gains for training models with augmented data for given NLP tasks, such as text classification, question answering, machine translation, for a

common reason that the augmented data introduces noise to the original train set and prevents the trained models from overfitting, which improves the models’ generalizability on the test set.

As the NLP community is more engaged in exploring the usefulness of DA for specific NLP tasks, we have not been able to find any focused studies from the existing literature related to the subject matter of this study, i.e., the role of linguistic knowledge in DA for NLP. However, some indirect evidence seems to be affirmative. For example, Kobayashi (2018) trained a recurrent neural network (RNN) LM, which replaces words with paradigmatic relations predicted by the RNN LM to generate new examples. Since this approach ignores the semantic association between the replaced words and the corresponding labels, he also constrained the LM to predict words more compatible with the given labels by probability. By so doing, he found about 0.2% overall improvements in accuracies for 5 sentiment-related and one question type classification tasks. According to the results reported by Kang et al (2018), we also find that while not consistently, a sequence to sequence (seq2seq) DA model blended with a few hand-crafted rules increases more test set accuracies than the base seq2seq DA model when certain ratios of two textual inference datasets were augmented. However, since these neural DA models already encode and learn implicit linguistic knowledge through complex representation learning, it is not possible to fully recognize the effects of those added linguistic knowledge, either implicit or explicit, in them.

Relevant to our hypothesis on what counts as a better DA approach, we can find strong supports by thinking in reverse. That is, although text augmentation helps increase the size of the training texts, which then improves the performances of the trained models through regularization, it is still incomparable to the human-produced-and-annotated training texts of a same size, which by default we assume to be superior in quality as well as more diverse. For example, in Wei & Zou’s (2019) research, they augmented the original training examples by a factor of 9, giving them 5,000 training examples when 500 were given. Although the augmented train set shows average 3% performance gains in accuracy on the test set for 5 classification tasks, compared to that without augmentation, this is still significantly lower than the average 10% performance improvements when the models are trained on 5,000 of the original training examples². Therefore, we expect that coupled with a n-gram LM, the adapted EDA program that utilizes random text-editing perturbations, will augment higher-quality text, and thus achieve better trained models’ performances.

3 Experimental Setup

3.1 LCQMC

LCQMC contains over 260k question pairs, extracted from BaiduKnows, a Quora-like online Q&A platform. Each question pair is manually annotated by three external professional annotators with a label, 1 or 0, to represent whether a question pair match or not in terms of the expressed intents. As judgements vary from person to person and the interpretation of some question pairs is bound to contexts, there are about 15% annotation inconsistency and 20% annotation uncertainty (X. Liu et al., 2018).

In this study, we keep the original separation of the train set, the development set, and the test set as is in LCQMC, whose basic statistics are shown in Table 1 below.

² Wei & Zou (2019) claims that with the augmented texts, their classification models achieve higher average accuracy using only 50% of the train set than when the models are trained on the entire train set without augmentation. This is misleading since the performances of their models start plateauing when the models see 20% of the train set.

Table 1: The basic statistics of LCQMC data sets.

<i>Dataset</i>	<i>Total Question Pairs</i>	<i>Matched Pairs</i>	<i>Mismatched Pairs</i>
<i>Training</i>	238,766	138,574	100,192
<i>Development</i>	8,802	4,402	4,400
<i>Test</i>	12,500	6,250	6,250

3.2 Two adapted DA programs

The base DA program developed in this study is adapted from the EDA program³ (Wei & Zou, 2019) and the control DA program is the base combined with a pre-trained statistical n-gram LM (see the next section for reference). We name these two programs as the REDA program and the REDA_{+N-gram} program respectively, where REDA stands for Revised Easy Data Augmentation.

Like the EDA program, the REDA program also has four text editing operations, i.e., Synonym Replacement (SR), Random Swap (RS), Random Insertion (RI), and Random Deletion (RD). Their functions are as follows: SR works by randomly replacing synonyms for eligible words based on a given dictionary, while RS works by randomly swapping word pairs. RI inserts random synonyms, if any, instead of random words, to avoid uncontrolled label change. In contrast, RD deletes words at random. We used jieba⁴, a popular Chinese text segmentation tool, to tokenize Chinese text throughout this research.

To further diversify the augmented texts, we also created a new text editing operation called Random Mix (RM), which randomly selects 2-4 of the other four operations to produce novel texts. Besides, a few major changes were also made to fix few bugs we found on the EDA program and to better serve our needs of augmenting Chinese and conducting this research, including:

1. We rewrote the entire program to ensure that there are no duplicates in the augmented texts, including one for the original text. Duplicates can occur when there are no synonyms to replace (SR) or insert (RS) for words in the original texts, or when the same words are replaced or swapped back during SR and RS operations.
2. The REDA program does not preprocess the input text by removing punctuations or by introducing stop words. We did not find this type of preprocessing helpful and necessary in general or makes sense for the basic idea of random text editing behind the EDA program.
3. Instead of using WordNet for SR, we compiled a preprocessed Chinese synonym dictionary leveraging multiple reputational sources⁵, including Chinese Open Wordnet⁶. Moreover, unlike the EDA program, the REDA program only replaces one word at a given position at a time, instead of replacing all its occurrences, which we see as extra edits.

The REDA_{+N-gram} program inherits the base REDA program but additionally utilizes the n-gram LM pre-trained to select the most likely augmented text(s) for each text editing operation from a variety of possible outputs. We have open-sourced two separate versions of code for these two DA programs, but during this study, we always combined them together in one working procedure so that the augmented texts outputted by these two programs are selected from the same pool. The implementation of this combination is also available at the open-sourced GitHub repository.

³ The source code for the EDA program can be found at: https://github.com/jasonwei20/eda_nlp/tree/master/code.

⁴ See: <https://github.com/fxsjy/jieba>.

⁵ See: <https://github.com/jaaack-wang/Chinese-Synonyms>.

⁶ See: <http://compling.hss.ntu.edu.sg/cow/>.

3.3 N-gram LM

To train the n-gram LM, we first compiled an independent corpus of BaiduKnows Q&A texts based on an existing project found on GitHub, which scrapes over 9 million question-answer pairs from BaiduKnows platform⁷. This compiled corpus contains over 654 million words (or over 1.1 billion Chinese characters). Then, the relative frequency of unigram, bigram, trigram, and 4-gram for this corpus was calculated based on words and line by line with the results saved in four separate json dictionaries as the pre-trained parameters. When counting these n-grams, we added two special tokens, <START> and <END>, in the beginning and end of each line, to keep track of their tendency to stay ahead or at the end of a line. For efficiency concerns, we adjusted the relative frequency for the unigrams simply by assigning unseen vocabulary the same frequency with those one-off unigrams and employed stupid backoff without discounting unseen non-unigrams (Brants et al., 2007). Finally, the n-gram LM takes the relative frequency of the n-grams as an estimation to their true probability of occurrence and calculates the maximum log probability of input text based on the chain rule of probability (Jurafsky & Martin, 2009) as follows:

$$\log P(NG_1 : NG_n) = \log \prod_{i=1}^n P(NG_i) = \sum_{i=1}^n \log P(NG_i)$$

where NG represents n-gram that is automatically generated by our n-gram LM. The n-gram starts with 4-gram, if any, and keeps backing off into low-order n-gram combination, if a higher-order n-gram is not available in the pre-made json dictionaries.

3.4 Classification models

We chose four neural network (NN) models and one transformer-based pre-trained model as the classification models. The NN models include the Bag of Words (BOW) model, the Convolutional Neural Network (CNN) model, and two RNN models: Long Short-Term Memory (LSTM-RNN) and Gated Recurrent Units (GRU-RNN). BOW model is a conventional technique to represent a text by summing up the embeddings of its words, and the similarity between texts is then often measured by Euclidean distance or cosine distance of the texts' embeddings. Since Kim (2014), CNN has been proven to be effective in various text classification tasks, including text pairing (Severyn & Moschitti, 2015). LSTM-RNN and GRU-RNN are two popular sequence models that consider word orders and have also been applied to semantic similarity tasks (Tai et al., 2015; Tien et al., 2018), which we think may be especially useful for distinguishing the augmented texts from the natural texts, and more importantly, distinguishing the casually augmented texts by the REDA program from the conditionally augmented texts by the REDA_{+N-gram} program in terms of the test set performances. Finally, the pre-trained model ERNIE-Gram (Xiao et al., 2021) was also chosen for its state-of-the-art performances on the LCQMC dataset.

We adapted the models⁸ already constructed using Baidu's deep learning framework paddle and its NLP software paddlenlp with several revisions on the training and prediction scripts to make them return our desired outputs.

⁷ See: <https://github.com/liuhuanyong/MiningZhiDaoQACorpus>.

⁸ See: https://github.com/PaddlePaddle/PaddleNLP/tree/develop/examples/text_matching.

4 Results

4.1 Quality of the augmented texts

To evaluate the quality of the augmented texts generated by the REDA and REDA_{+N-gram} programs, we designed three simple experiments to check their ability to restore to natural texts when modified texts or a pseudo synonym dictionary were given for three basic text editing operations, i.e., SR, RS, and RD. We skipped RI and RM because inserting random synonyms is generally not the natural way of language use however (un)natural the input text is and the text quality resulting from RM can be inferred from the other basic operations directly.

The experiments went as follows. For SR, we designed a pseudo synonym dictionary made up of 3855 one-word-four-synonym pairs, where every word is mapped to four pseudo synonyms, one being the word itself and the rest non-synonym random words. All the words in the dictionary are those whose frequencies rank between the 1000th and the 10000th place in the unigram dictionary compiled for the n-gram LM. For RS and RD, we randomly reordered the natural texts and added random words sampled from the texts respectively before RS and RD were performed. 10,000 pieces of texts were randomly sampled from the LCQMC’s train set for 5 times for every comparison we made. The average accuracy scores are reported in Table 2.

Table 2: The average accuracy scores of the two DA programs in three text restoration tasks based on different number of edits. SR: Synonym Replacement; RS: Random Swap; RD: Random Deletion.

<i>Editing Operation – Program</i>	<i>One Edit</i>	<i>Two Edits</i>	<i>Three Edits</i>
<i>SR – REDA</i>	22%	6%	2%
<i>SR – REDA_{+N-gram}</i>	88%	79%	64%
<i>RS – REDA</i>	9%	4%	4%
<i>RS – REDA_{+N-gram}</i>	69%	41%	34%
<i>RD – REDA</i>	16%	5%	2%
<i>RD – REDA_{+N-gram}</i>	39%	22%	15%

As can be seen, while both programs’ performances decline as the number of edits increase, the REDA_{+N-gram} program always outperform the REDA program in restoring to the natural texts. In fact, for the REDA program, restoring the modified texts to the original ones is a matter of chance equal to the inverse of the number of possible outputs available. However, the REDA_{+N-gram} program augments texts of maximum likelihood, which tends to be closer to the natural texts expected. This is also true when natural texts are given as inputs. For example, through manual inspections, we found the REDA_{+N-gram} program does much better in selecting the appropriate synonyms according to the linguistic contexts, which is a problem for the REDA program due to the ubiquitous existence of polysemy. By measuring the bigram overlap rate and edit distances of output texts randomly swapped twice from the natural texts, we found that the average overlap rate for the REDA program is much lower (i.e., 0.29 versus 0.77) and the average edit distances are much larger (i.e., 3.0 versus 1.4) than the REDA_{+N-gram} program, meaning the latter preserves more collocational features of the natural texts and thus augments higher-quality texts.

Nevertheless, the REDA_{+N-gram} program is also not free of considerable text quality decrease when more text edits are performed. This is largely due to the drastic increase of possible output texts as well as the more likely semantic shift of the original texts with large proportion of the input texts changed. Therefore, to conduct our research, the number of text edits performed is set proportional to the number of words of the input texts, so that a large quality difference of the augmented texts by the two programs can be maintained. More concretely, in the study, we set the

SR and SR rate at 0.2 and the RI and the RD rate at 0.1 and applied rounding rules as in Python⁹. RM will only randomly select two of the other four text editing operations with one text edit each for every input text to make the study more controlled.

4.2 Effects of the two DA programs

We trained the five classification models in Baidu Machine Learning (BML) CodeLab on its AI Studio¹⁰ with Tesla V100 GPU and 32 RAM. The models were trained with 64 mini batches, a fixed .0005 learning rate, and constantly 3 epochs. We used Adaptive Moment Estimation (Adam) optimizer and cross entropy as the loss function with the SoftMax as the output function. We kept the original development set for validation purposes.

The following training sizes were experimented: 5k, 10k, 50k, 100k, and full size, approximately equal to 2%, 4%, 21%, 42%, and 100% of the LCQMC’s train set respectively. When the train set size is 5k and 10k, we augmented two new texts for SR and RS, and one new text for RI, RD, and RM, because the last three text editing operations show smaller differences for the REDA and REDA+N-gram programs in terms of text quality (refer to the last section), which we want to hold as large as possible for the sake of this research. That translates into maximum 7 new texts for every text and up to 14 new texts for every text pair due to deduplication. Every augmented text was crossed paired with the other text that was a pair to the text being augmented with the original label kept for the newly made text pair. To make the training more manageable, we only augmented 5 new texts for every text with one output for every text editing operation, meaning a maximum tenfold increase in size when the associated train set size is 50k and more. The corresponding augmented train set size is given in Table 3.

Table 3: The train set size for the corresponding REDA and REDA+N-gram augmented train sets¹¹.

<i>LCQMC</i>	<i>5,000</i>	<i>10,000</i>	<i>50,000</i>	<i>100,000</i>	<i>238,766</i>
<i>REDA</i>	66,267	13,2513	563,228	929,176	2,218,512
<i>REDA+N-gram</i>	64,358	12,8649	544,583	893,779	2,133,163

The accuracy scores as well as the average precision, recall, and F1 scores on the test set are presented in Table 4 and Table 5, respectively. Contrary to our expectation, we do not find that the REDA+N-gram augmented train sets lead to better test set performances than the REDA augmented train sets, when it comes to the four metrics used in this study. Although the former program does produce higher-quality augmented texts from a linguistic perspective as discussed above, evidence shows that models trained on the REDA augmented train sets outperform those trained on the REDA+N-gram augmented train sets by an average 0.3% both in the accuracy and F1 scores. As can be seen from Table 4, the REDA+N-gram-led models only outperform the REDA-led ones in terms of the test set accuracies when the train set size is 5k for four models except the LSTM model and when the ERNIE-Gram models were finetuned on the full augmented train sets. Moreover, for any classification model trained on the REDA augmented train sets, in most cases, it achieves a slightly better score for the four metrics than the model trained on the REDA+N-gram augmented counterparts.

⁹ When an even number ends with “.5”, it will be rounded down; otherwise, rounded up.

¹⁰ See: <https://aistudio.baidu.com/aistudio/index>.

¹¹ The reason that the size of the REDA+N-gram augmented train sets is always smaller is because it selects the augmented texts based on maximum likelihood estimation instead of randomly. When some duplicates with highest probability are selected, including duplicates to the input text, they will be deduplicated when returned. Based on the augmented train sets for our ablation study, this is mainly due to Random Swap (and Random Mix which also may have RS).

It follows that the role of probabilistic linguistic knowledge instilled in the REDA+N-gram program is overall minimal and sometimes harmful to DA applied to the binary question matching task.

Table 4: Test set accuracies of the five classification models trained on the three types of train sets of varying size.

<i>Models</i>	<i>5k</i>	<i>10k</i>	<i>50k</i>	<i>100k</i>	<i>Full Set</i>	<i>Average</i>
<i>BOW</i>	59.4%	60.4%	65.4%	67.8%	73.8%	65.4%
+ <i>REDA</i>	58.1%	60.9%	68.2%	72.2%	76.4%	67.2%
+ <i>REDA+N-gram</i>	58.8%	59.6%	68.1%	71.2%	76.0%	66.7%
<i>CNN</i>	59.3%	63.4%	67.2%	69.0%	72.9%	66.4%
+ <i>REDA</i>	59.8%	62.6%	66.8%	69.8%	74.9%	66.8%
+ <i>REDA+N-gram</i>	60.3%	62.0%	67.9%	69.1%	74.0%	66.7%
<i>LSTM-RNN</i>	60.0%	62.1%	66.2%	69.6%	74.8%	66.5%
+ <i>REDA</i>	58.9%	61.5%	67.7%	71.8%	76.4%	67.3%
+ <i>REDA+N-gram</i>	57.7%	60.9%	67.7%	71.7%	75.9%	66.8%
<i>GRU-RNN</i>	59.9%	61.9%	68.1%	70.3%	76.8%	67.4%
+ <i>REDA</i>	58.7%	61.3%	68.7%	72.7%	76.8%	67.6%
+ <i>REDA+N-gram</i>	58.8%	60.0%	67.8%	72.5%	76.6%	67.1%
<i>ERNIE-Gram</i>	78.7%	81.7%	85.9%	87.1%	87.4%	84.2%
+ <i>REDA</i>	77.5%	80.3%	84.1%	85.0%	85.7%	82.5%
+ <i>REDA+N-gram</i>	78.6%	80.1%	83.8%	84.6%	85.8%	82.6%
<i>Average</i>	63.5%	65.9%	70.6%	72.8%	77.1%	70.0%
+ <i>REDA</i>	62.6%	65.3%	71.1%	74.3%	78.0%	70.3%
+ <i>REDA+N-gram</i>	62.8%	64.5%	71.1%	73.8%	77.7%	70.0%

Table 5: Average test set precision, recall, and f1 scores for the five classification models on the three types of train sets.

<i>Models</i>	<i>Baseline</i>			<i>REDA</i>			<i>REDA+N-gram</i>		
	Precision	Recall	F1	Precision	Recall	F1	Precision	Recall	F1
<i>BOW</i>	82.5%	61.5%	70.4%	81.7%	63.3%	71.3%	81.8%	62.9%	71.1%
<i>CNN</i>	80.5%	62.8%	70.5%	78.1%	63.6%	70.0%	76.2%	63.8%	69.3%
<i>LSTM-RNN</i>	82.7%	62.5%	71.2%	81.4%	63.4%	71.3%	82.1%	63.0%	71.3%
<i>GRU-RNN</i>	82.4%	63.4%	71.7%	81.9%	63.8%	71.9%	81.7%	63.3%	71.4%
<i>ERNIE-Gram</i>	95.8%	78.0%	85.9%	95.9%	75.8%	84.6%	95.3%	76.0%	84.6%
<i>Average</i>	84.8%	65.6%	73.9%	83.8%	66.0%	73.8%	83.4%	65.8%	73.5%

Also noticeable from Table 4 is that 50k training examples appear to be the threshold where the two DA programs start bringing gains to the related test set accuracy scores compared to the baselines, except for the finetuned ERNIE-Gram models. However, there is also a gap in the precision scores in favor of the baseline models, which may be attributed to the false matching text pairs produced by the two DA programs due to the inability of the underlying text editing operations to make strictly paraphrastic augmented texts. But these noisy augmented texts in return enable the classification models to generalize better on those matching text pairs judged to be non-matching by the baseline models, as indicated by the average larger recall scores. In addition, the advantage of the pre-trained model over the traditional NN models is significant: the ERNIE-Gram models, finetuned on all the three types of train sets, show about 12% to 17% average gains across the four metrics in relation to the other four trained models. This shows the promise of applying transfer learning to DA for NLP, which may be worth further studying in the future.

4.3 Ablation study: each DA technique

To gain a more nuanced understanding of the role of linguistic knowledge in each one of the DA techniques performed by the two DA programs, we conducted an ablation study where we trained models on train sets augmented by only one DA technique. That means, for a train set of given

size randomly sampled from the LCQMC’s train set, there are five types of corresponding augmented train sets. Our analyses are based on comparing the average test set performances of the five models trained on the three types of train sets for the five augmentation scenarios. We also excluded ERNIE-Gram models, which are revealed to be distinct from the rest models across the four metrics in the last section, to see if there is a noticeable difference.

As the training sizes are shown to have an effect on whether the DA-led models outperform the baseline models, to further validate that, we chose 11 training sizes for this ablation study, namely, 5k, 10k, 25k, 50k, 75k, 100k, 125k, 150k, 175k, 200k, and full set, roughly equal to 2%, 4%, 10%, 21%, 31%, 42%, 52%, 63%, 73%, 84%, and 100% of the LCQMC’s train set respectively. The basic hyperparameters are same with the previous section. However, to make the training more manageable, we only trained 2 epochs when the baseline training size is 50~100k (included) and 1 epoch when the baseline training size is over 100k for the three types of train sets. Since it is evident from Table 4 that a larger training size under the same condition always leads to a higher test set performance, spending extra time in training a total of 605 models¹² with fixed 3 epochs may thus not be worthwhile to re-verify. Moreover, we only augmented 2 texts per text per DA technique when the baseline training size is no less than 50k and 1 text when otherwise, with the cross pairing applied, similar to what we did in the previous section.

Figure 1 shows the average test set accuracy scores of the five classification models trained on the three types of train sets under different text editing conditions and across different training sizes. In line with the previous finding, the effect of probabilistic linguistic knowledge on each one of the five DA techniques is minimal both individually and on average. Although with certain text editing operations, such as RS, RI, and RM, there exist several points in which there is a relatively large difference in the accuracy scores between the two DA-led models, these differences fluctuate along the x-axis and eventually get reduced to be negligible when the average performances are concerned. This basic pattern remains true when we plotted the average test set performances based on any one of the four metrics with or without the ERNIE-Gram models¹³.

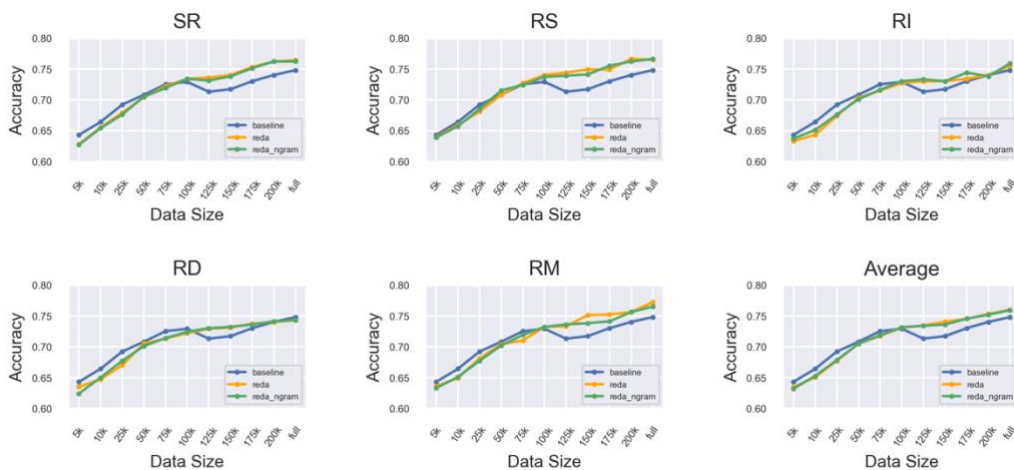


Figure 1 Average test set accuracy scores of the five classification models under different conditions (i.e., text editing type, training data size) for the three types of train sets. The sixth plot averages the statistics of the previous five plots.

¹² Since there are 11 training sizes and 5 classification models, that translates into 55 models for the baseline train sets. As there are 5 DA techniques applied in 2 different ways (with or without n-gram LM), that translates into 550 (55 * 5 * 2) models for the augmented train sets. Hence, we have 605 models to train in total.

¹³ The size of the augmented train sets, all the eight figures as well as their original statistics can be found in the GitHub project repository within the “ReduplicatingTheStudy” folder.

Also related to the previous finding is that there does exist a threshold where the DA-led models outperform the baseline models in the test set accuracy scores, which appears to be the 100k training size or so, instead of 50k as in Table 4. The discrepancy may be explained by the different epoch numbers (e.g., 2 vs 3 for 50k) and possibly more importantly the separation of the DA techniques, which, however, are beyond the scope of this study. We also examined plots based on the other three metrics with or without the ERNIE-Gram models to explore the cause of such phenomenon. Figures 2 and 3 present the average test set precision and recall scores of the five classification models trained on the three types of train sets respectively. As can be seen, there is no general trend in which the baseline models surpass the DA-led counterparts in the test set precision scores, but a similar pattern that resembles that of Figure 1 also exists in Figure 3. That means, the increase in the recall scores, after certain amounts of training examples are trained, are the main driver that makes the baseline models outperformed by the DA-led ones in terms of test set accuracy scores as well as the F1 scores, which are not shown here to save space. Moreover, this conclusion also largely holds when the ERNIE-Gram models are excluded.

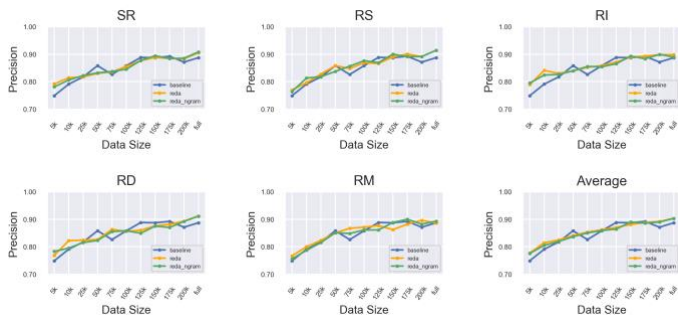


Figure 2 Average test set precision scores of the five classification models.

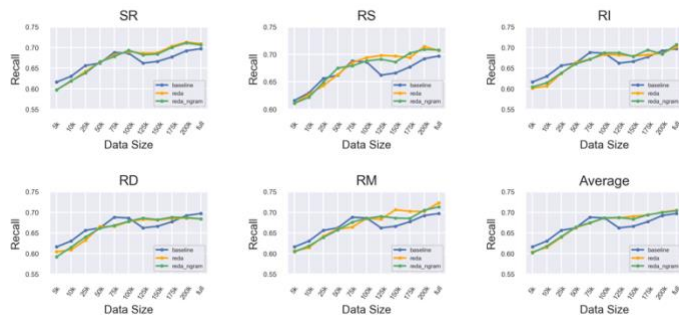


Figure 3 Average test set recall scores of the five classification models.

5 Discussion and Conclusion

In this study, we examined the effects of linguistic knowledge on DA for a binary Chinese question matching task. We proposed two DA programs, i.e., the REDA and REDA_{+N-gram} programs, that augment text by five random text editing operations (or DA techniques), with the REDA_{+N-gram} program combined with a n-gram LM to fuse it with more probabilistic linguistic knowledge. Surprisingly, we found that the REDA_{+N-gram}-led classification models did not surpass the REDA-led counterparts in the test set performances (i.e., accuracy, precision, recall, and F1 scores), which is also true when the five DA techniques in the two programs are applied and compared separately. In other words, our study indicates strongly that instilling more linguistic knowledge into a DA approach or technique does not necessarily make it a better one when it comes to training a better question matching classifier for Chinese, although doing so may make the augmented texts higher quality from a pure linguistic point of view.

However, since the two DA-led models achieve very close scores in the four metrics with trivial advantages for the REDA-led models, it is not possible for us to explain why adding probabilistic linguistic knowledge as a constrain does not make a meaningful difference, positive or negative. A possible explanation might be that as the five deep learning models used as classifiers compare a pair of texts in vector space and the way how word embeddings encode linguistic knowledge is different from humans, performing simple text editing operations in two different ways (i.e., random, conditional) on a text may result in different meanings for humans, but that for machines

nevertheless is less distinguishable in the dimension of vector space. Moreover, as we only used probabilistic linguistic knowledge as a filter to select augmented texts closer to human language use, the inherent inability of the underlying text editing operations made by the two DA programs to produce strictly paraphrastic augmented texts means the two types of augmented texts are to a considerable extent comparable in that they are mostly not the paraphrases to the original texts being augmented. However, such interpretation cannot explain why the REDA-led models often outperform the REDA+N-gram-led ones by a slight but consistent margin.

Unlike Wei & Zou (2019) who show general success of their EDA program in bring performance gains for several sentiment-related and text type classification tasks across train sets of varying sizes, we only found such gains when the classification models are trained with sufficient amounts of training examples. As we expected in the beginning, question matching presents a more difficult and fundamental classification task because it involves comparing a pair of texts, instead of a single text, to predict the label for the given text pair. This nature makes question matching, or text matching in general, inherently much more sensitive to and subject to some tiny semantic changes caused by text augmentation. Therefore, for random text editing DA approach to work for question matching, there is a need of sufficient training examples to enable the trained models to mediate the negative impact of the false matching augmented text pairs resulting from random text editing perturbations and turn it into a means of regularization that improves the models' generalizability. This is a limitation of random text editing perturbations applied as a DA approach.

Besides, our study also provide evidence as to which DA techniques may be comparatively more effective. For example, according to Figures 1 and 3, RS, SR, and RM appear to be the most effective DA techniques among the five, as the related models achieve overall best performances when trained with different training sizes. Future works in this respect may want to experiment with different classification tasks to check the effectiveness of the five DA techniques and to see if there is a better way of initializing the base DA program (e.g., number of edits) in which these DA techniques can improve the performances of trained models to a larger extent without considering the role of probabilistic linguistic knowledge.

References

- Asai, A., & Hajishirzi, H. (2020). Logic-Guided Data Augmentation and Regularization for Consistent Question Answering. *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 5642–5650. <https://doi.org/10.18653/v1/2020.acl-main.499>
- Brants, T., Popat, A. C., Xu, P., Och, F. J., & Dean, J. (2007). Large Language Models in Machine Translation. *Proceedings of the 2007 Joint Conference on Empirical Methods in Natural Language Processing and Computational Natural Language Learning (EMNLP-CoNLL)*, 858–867. <https://aclanthology.org/D07-1090>
- Feng, S. Y., Gangal, V., Wei, J., Chandar, S., Vosoughi, S., Mitamura, T., & Hovy, E. (2021). A Survey of Data Augmentation Approaches for NLP. *ArXiv:2105.03075 [Cs]*. <http://arxiv.org/abs/2105.03075>
- Hou, Y., Liu, Y., Che, W., & Liu, T. (2018). Sequence-to-Sequence Data Augmentation for Dialogue Language Understanding. *ArXiv:1807.01554 [Cs]*. <http://arxiv.org/abs/1807.01554>

- Iwana, B. K., & Uchida, S. (2021). An empirical survey of data augmentation for time series classification with neural networks. *PLOS ONE*, 16(7), e0254841. <https://doi.org/10.1371/journal.pone.0254841>
- Jurafsky, D., & Martin, J. H. (2009). *Speech and language processing: An introduction to natural language processing, computational linguistics, and speech recognition* (2nd ed). Pearson Prentice Hall.
- Kang, D., Khot, T., Sabharwal, A., & Hovy, E. (2018). AdvEntuRe: Adversarial Training for Textual Entailment with Knowledge-Guided Examples. *ArXiv:1805.04680 [Cs]*. <http://arxiv.org/abs/1805.04680>
- Kim, Y. (2014). Convolutional Neural Networks for Sentence Classification. *ArXiv:1408.5882 [Cs]*. <http://arxiv.org/abs/1408.5882>
- Kobayashi, S. (2018). Contextual Augmentation: Data Augmentation by Words with Paradigmatic Relations. *ArXiv:1805.06201 [Cs]*. <http://arxiv.org/abs/1805.06201>
- Kurata, G., Xiang, B., & Zhou, B. (2016). Labeled Data Generation with Encoder-Decoder LSTM for Semantic Slot Filling. *Interspeech 2016*, 725–729. <https://doi.org/10.21437/Interspeech.2016-727>
- Liu, P., Wang, X., Xiang, C., & Meng, W. (2020). A Survey of Text Data Augmentation. *2020 International Conference on Computer Communication and Network Security (CCNS)*, 191–195. <https://doi.org/10.1109/CCNS50731.2020.00049>
- Liu, X., Chen, Q., Deng, C., Zeng, H., Chen, J., Li, D., & Tang, B. (2018). LCQMC: A Large-scale Chinese Question Matching Corpus. *Proceedings of the 27th International Conference on Computational Linguistics*, 1952–1962. <https://aclanthology.org/C18-1166>
- Manning, C. D., & Schütze, H. (1999). *Foundations of statistical natural language processing*. MIT Press.
- Park, D. S., Chan, W., Zhang, Y., Chiu, C.-C., Zoph, B., Cubuk, E. D., & Le, Q. V. (2019). SpecAugment: A Simple Data Augmentation Method for Automatic Speech Recognition. *Interspeech 2019*, 2613–2617. <https://doi.org/10.21437/Interspeech.2019-2680>
- Qizhe, X., Zihang, D., Eduard, H., Minh-Thang, L., & Quoc, V. L. (2020). Unsupervised Data Augmentation for Consistency Training. *ArXiv 1904.12848*.
- Sennrich, R., Haddow, B., & Birch, A. (2016). Improving Neural Machine Translation Models with Monolingual Data. *ArXiv:1511.06709 [Cs]*. <http://arxiv.org/abs/1511.06709>
- Severyn, A., & Moschitti, A. (2015). Learning to Rank Short Text Pairs with Convolutional Deep Neural Networks. *Proceedings of the 38th International ACM SIGIR Conference on Research and Development in Information Retrieval*, 373–382. <https://doi.org/10.1145/2766462.2767738>
- Shorten, C., & Khoshgoftaar, T. M. (2019). A survey on Image Data Augmentation for Deep Learning. *Journal of Big Data*, 6(1), 60. <https://doi.org/10.1186/s40537-019-0197-0>
- Shorten, C., Khoshgoftaar, T. M., & Furht, B. (2021). Text Data Augmentation for Deep Learning. *Journal of Big Data*, 8(1), 101. <https://doi.org/10.1186/s40537-021-00492-0>
- Singh, J., McCann, B., Keskar, N. S., Xiong, C., & Socher, R. (2019). XLDA: Cross-Lingual Data Augmentation for Natural Language Inference and Question Answering. *ArXiv:1905.11471 [Cs]*. <http://arxiv.org/abs/1905.11471>
- Tai, K. S., Socher, R., & Manning, C. D. (2015). Improved Semantic Representations From Tree-Structured Long Short-Term Memory Networks. *ArXiv:1503.00075 [Cs]*. <http://arxiv.org/abs/1503.00075>

- Tien, H. N., Le, M. N., Tomohiro, Y., & Tatsuya, I. (2018). Sentence Modeling via Multiple Word Embeddings and Multi-level Comparison for Semantic Textual Similarity. *ArXiv:1805.07882 [Cs]*. <http://arxiv.org/abs/1805.07882>
- Wang, W. Y., & Yang, D. (2015). That's So Annoying!!!: A Lexical and Frame-Semantic Embedding Based Data Augmentation Approach to Automatic Categorization of Annoying Behaviors using #petpeeve Tweets. *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, 2557–2563. <https://doi.org/10.18653/v1/D15-1306>
- Wei, J., & Zou, K. (2019). EDA: Easy Data Augmentation Techniques for Boosting Performance on Text Classification Tasks. *ArXiv:1901.11196 [Cs]*. <http://arxiv.org/abs/1901.11196>
- Xiao, D., Li, Y.-K., Zhang, H., Sun, Y., Tian, H., Wu, H., & Wang, H. (2021). ERNIE-Gram: Pre-Training with Explicitly N-Gram Masked Language Modeling for Natural Language Understanding. *ArXiv:2010.12148 [Cs]*. <http://arxiv.org/abs/2010.12148>
- Zhang, X., Zhao, J., & LeCun, Y. (2015). Character-level Convolutional Networks for Text Classification. *ArXiv:1509.01626 [Cs]*. <http://arxiv.org/abs/1509.01626>