

---

# Adversarial Attacks in Cooperative AI

---

**Ted Fujimoto**

Computing and Analytics Division  
Pacific Northwest National Laboratory  
Seattle, WA 98109  
ted.fujimoto@pnnl.gov

**Arthur Paul Pedersen**

Department of Computer Science  
The City College of New York  
Grove School of Engineering  
City University of New York  
New York, NY 10010  
apedersen@cs.cuny.edu

## Abstract

Single-agent reinforcement learning algorithms in a multi-agent environment are inadequate for fostering cooperation. If intelligent agents are to interact and work together to solve complex problems, methods that counter non-cooperative behavior are needed to facilitate the training of multiple agents. This is the goal of cooperative AI. Recent work in adversarial machine learning, however, shows that models (e.g., image classifiers) can be easily deceived into making incorrect decisions. In addition, some past research in cooperative AI has relied on new notions of representations, like public beliefs, to accelerate the learning of optimally cooperative behavior. Hence, cooperative AI might introduce new weaknesses not investigated in previous machine learning research. In this paper, our contributions include: (1) arguing that three algorithms inspired by human-like social intelligence introduce new vulnerabilities, unique to cooperative AI, that adversaries can exploit, and (2) an experiment showing that simple, adversarial perturbations on the agents' beliefs can negatively impact performance. This evidence points to the possibility that formal representations of social behavior are vulnerable to adversarial attacks.

**ATTENTION:** This is a preliminary draft of a working paper on ongoing research. Queries about the latest findings may directed to the authors. Do not cite this manuscript without permission of the authors.

## 1 Introduction

All but assured in the era of ubiquitous AI is the concomitant ubiquity of interaction among intelligent systems and AI applications. This unshakable reality has led to a call for research in multi-agent reinforcement learning (MARL) with a clear emphasis on cooperation [4]. One motivation for this research is remedial: single-agent reinforcement learning methods commonly promote the formation of selfish defectors within groups [14]. To be sure, it would be dangerous to deploy automated cars or planes which train on these methods. If intelligent agents are to interact with each other in the real world — the one we human beings inhabit, no less — cooperative AI is necessary to mitigate these potential dangers.

Discussion on the effect of adversarial attacks in cooperative AI has been limited. In machine learning, however, adversarial attacks are known to severely impair the performance of machine learning models by way of small manipulations to inputs at test time [13]. It has been shown, for example, that applying perturbations to an image can significantly decrease the accuracy of an image classifier, even when images and their perturbations are indistinguishable to the human eye. Aside from negatively affecting the model's performance, adversarial attacks can pose a hidden danger should they be utilized in a way that is not noticeable to the model's maintainer. Some researchers have suggested that there are currently no reliable defenses that cover a wide range of such attacks and

accordingly argue against deploying machine learning solutions in contested, adversarial spaces [20]. If cooperative AI is to improve human cooperation and well-being, a pressing question is whether, and to what extent, do the analogous, and new, problems of adversarial attacks in machine learning subvert that benevolent goal.

We will explore how adversarial attacks might impact the field of cooperative AI. This is important because it examines properties inspired by social intelligence that have not been considered in past methods adversarial supervised and reinforcement learning. That is, attacks on cooperative AI demonstrate that adversarial techniques can exploit social concepts designed to encourage social well-being. In particular, we contribute the following: (1) We introduce possible new vulnerabilities adversaries can exploit that are unique to cooperative AI, and (2) provide the results of an experiment applying one of the adversarial attacks.

We organize the paper as follows. In section 2, we discuss past work related to cooperative AI, multi-agent RL, and adversarial machine learning. In section 3, we present three possible vulnerabilities, exploitable by an adversary, that are unique to cooperative AI. In section 4, we show the results of an experiment that describe the effect of adversarial perturbations on belief representations. In section 5, we end with some discussion and proposals for future work.

## 2 Related Work

Cooperative AI, according to Dafoe et al. [4], is “AI research trying to help individuals, humans and machines, to find ways to improve their joint welfare.” They also discuss some of its downsides to these methods that might not be socially beneficial if left unchecked. They argue that if we do not ensure these methods maximize welfare, things like exclusion, collusion, and coercion of humans or other agents might emerge. We argue that mitigating these potential risks and defending against adversarial attacks in cooperative AI both deserve attention. Although these attacks could produce the same effects as the aforementioned downsides, the difference is that these attacks could also make well-trained cooperative AI systems perform much worse when deployed in the real world. This could cause significant damage in critical applications, like self-driving vehicle coordination.

We will only focus on cooperation in scenarios that use beliefs, mean-field approximations, and sequential social dilemmas. These methods were chosen because they have been inspired by what people believe is necessary to intelligently navigate social interactions. For beliefs in MARL, our work investigates how adversarial attacks affect the public belief MDP ([7], [21]). Reasoning about the beliefs of others helps us anticipate their actions. We also explore the adversarial vulnerabilities inherent in mean-field RL ([3], [24]), which assumes that it is impractical to keep track of every single agent separately. In environments with a large number of agents, taking the average is more manageable. Sequential social dilemmas [14] model how we choose to cooperate or defect over time. These scenarios are interesting because they both capture some of the strengths and weaknesses inherent in human cooperation. We will give a short introduction to each of these methods in the next section.

Adversarial machine learning investigates the scenario where data is actively manipulated by an adversary seeking to make the model less accurate [5]. There has also been some more recent work specific to adversarial deep learning ([9], [13], [22]). Other work assumes an adversary in RL settings. Huang et al. [11] study the effects of white-box and black-box attack on neural network policies. Rakhsha et al. [19] provide a framework for training-time poisoning attacks on RL environments in offline and online settings. Zhang et al. [25] devise a framework and an efficient attack strategy for reward poisoning. While we build upon these previous works, we argue that cooperative AI introduces new vulnerabilities that have not been explored before in adversarial machine learning.

Other research in cooperative AI draws attention to adversarial attacks on cooperative AI that particularly focus on multi-agent communication or consensus-based MARL. Tu et al. [23] explore the setting where RL agents communicate by sharing learned intermediate representations and how adversarial attacks diminish performance. By contrast, the methods we explore do not presume any explicit means of communication. Figura et al. [6] show that a single adversary can lead the other agents to optimize a utility function that it chooses. Our work makes the more general claim that, similar to computer vision [20], cooperative AI as a whole is vulnerable to adversarial attacks and research is needed to defend against such attacks.

### 3 Methods

We now discuss some strategies an adversary might use to subvert cooperative AI. The following attacks are unique to cooperative AI and account for the interactions between agents. This non-exhaustive list of cooperative AI methods discusses possible attacks on beliefs, mean-field approximations, and inequalities in social dilemmas. Similar to how artificial neural networks were inspired by the brain, these cooperative AI methods were chosen because they were inspired by social concepts used to describe the facilitation of human and animal cooperation.

#### 3.1 Attacks on Beliefs

In this paper, our primary focus will be on beliefs in multi-agent environments. In philosophy and game theory, the notion of belief has been explored in a way that coalesces with how we define knowledge and rationality ([1], [17]). It has also been investigated in the field of AI ([8], [16]). Beliefs are useful in MARL because it is a way for agents to infer the private features of the other agents. Here, we will focus on beliefs in terms of the public belief MDP (PuB-MDP) [7]. In the PuB-MDP, beliefs are different from states or observations. Public beliefs are defined as the posterior over all private state features given the public state features:  $\mathcal{B}_t = P(f^{pri} | f_0^{pub} \dots f_t^{pub})$ , where  $f_t^{pub}$  are the public features and  $f_t^{pri}$  are the private features. Such beliefs are update with the following update rule:

$$P(f_t^a | u_t^a, \mathcal{B}_t, f_t^{pub}, \hat{\pi}) = \frac{P(u_t^a | f_t^a, \hat{\pi}) P(f_t^a | \mathcal{B}_t, f_t^{pub})}{P(u_t^a | \mathcal{B}_t, f_t^{pub}, \hat{\pi})} \quad (1)$$

where, at time  $t$ ,  $f_t^a$  are the private features of agent  $a$ ,  $u_t^a$  is the action of agent  $a$ , and  $\hat{\pi} : \{f^a\} \rightarrow \mathcal{U}$  is a partial policy for the acting agent deterministically mapping private observations to environment actions.

The problem that arises is that even though this representation of beliefs can help groups of agents quickly learn to cooperative toward the optimal solution ([7], [21]), it also opens up another vulnerability. Even if the designer of this multi-agent system made sure the states/observations could not be exploited, it is possible for an adversary to attack the belief representations to subvert the group of agents. Hence, the designer will need to account for another possible weakness in the multi-agent system. In the experiments section, we will show that beliefs are vulnerable to some of the same adversarial attacks that affect models trained on image data.

#### 3.2 Attacks on Mean-Field Approximations

In cases where the number of agents is large, it is impractical for an RL algorithm to learn from all the observations and actions of each agent. In these cases, it is more practical to reduce all the observations or actions to a single value. Mean-field RL considers the scenario where the large number of agents prompts the need to reduce observations or actions to mean observation [3] or mean actions [24] respectively. That is, for  $N$  agents, each agent  $i$  at time  $t$  learns from its own observation  $o_t^i$  and the mean observation of all agents  $\frac{1}{N} \sum_{j=1}^N o_t^j$ . For discrete actions, an agent  $i$  can interpret the mean action as an empirical distribution of the actions the other agents take.

Although this method can make scaling a large number of agents more tractable, it can also introduce some vulnerabilities:

- Negligibly small changes to each state of the neighboring agents can affect the mean observation. Typical attacks in single-agent RL make sure the attacks do not raise the attention of the designer so that the attacks do not stop. This is a trade-off since the attacker wants to inflict as much damage as possible. An attack's effect might be so small that it does not affect the victim at all. In large cooperative settings, however, the many small attacks can add up. If many small attacks were coordinated in a way that increases the bias of the sample mean state relative to the true mean state could harm the training of the mean-field RL agents. One possible strategy for the attacker is to apply Fast Gradient Sign Method (FGSM) [9] to  $n \leq N$  agents. If the mean observation with  $n$  many perturbations is not checked, then it might be that the effect becomes worse as  $n$  gets closer to  $N$ .

- Keeping the mean action close to the uniform distribution. In most scenarios, having the policy be the uniform distribution at all states is not desirable. In particular, we assume that cooperation is reached when the group converges to predictable behavior for at least some of the states. An adversary could attack the mean action by modifying its empirical distribution to slightly put more weight on less optimal actions at each state.

Since adversarial attacks are effective when the attacks are not detected, precautions need to be taken so that attacks do not emerge from seemingly insignificant changes to individual observations and actions. Currently, research on adversarial attacks in RL mostly describe the subversion of a single agent. There is a clear need to extend this to a larger, multi-agent setting.

### 3.3 Attacks on Social Dilemma Inequalities

Attacks on social dilemma inequalities are perhaps the most representative of what it means to subvert cooperation. In Macy and Flache [15], a set of inequalities were proposed to represent the social dilemmas of individual and collective interests. If we have variables  $R$  (reward),  $P$  (punishment),  $S$  (sucker), and  $T$  (temptation), then we have the following:

1.  $R > P$ : Players prefer mutual cooperation over mutual defection.
2.  $R > S$ : Players prefer mutual cooperation over unilateral cooperation.
3.  $2R > T + S$ : Players prefer mutual cooperation over an equal probability of unilateral cooperation and defection.
4.  $T > R$ : Players prefer unilateral defection to mutual cooperation (greed).  
or  $P > S$ : Players prefer mutual defection to unilateral cooperation (fear).

Leibo et al. [14] coined the term *sequential social dilemmas* (SSD) that extended these inequalities to a Markov game setting. To put it more clearly for a two player scenario, let  $V_i^{\vec{\pi}}(s)$  be the state-value function for the joint policy of the two players:  $\vec{\pi} = (\pi_1, \pi_2)$ . Then the SSD can be modeled as a matrix game social dilemma (MGSD) for each state  $s$  in the state space  $\mathcal{S}$ :

$$R(s) := V_1^{\pi^C, \pi^C}(s) = V_2^{\pi^C, \pi^C}(s), \quad (2)$$

$$P(s) := V_1^{\pi^D, \pi^D}(s) = V_2^{\pi^D, \pi^D}(s), \quad (3)$$

$$S(s) := V_1^{\pi^C, \pi^D}(s) = V_2^{\pi^D, \pi^C}(s), \quad (4)$$

$$T(s) := V_1^{\pi^D, \pi^C}(s) = V_2^{\pi^C, \pi^D}(s), \quad (5)$$

where  $\pi^C$  and  $\pi^D$  are cooperative and defecting policies. This set of value functions correspond to the variables in the social dilemma inequalities defined above. We also denote  $\Pi^C$  as the set of all cooperative policies, and  $\Pi^D$  as the set of all defecting policies.

Now that we have equations (2) - (5), we can better observe the weaknesses an adversary can exploit. If it is in our interest to cooperate, it is in our adversary's interest to subvert the chances of successful cooperation. One possible adversarial attack would be to affect the policies so that each agent is more likely to perceive unilateral defection from the other agents. In Leibo et al. [14], choosing a cooperative or defecting policy depends on a *social behavior metric*  $\alpha : \Pi \rightarrow \mathbb{R}$ . Let  $\alpha_c$  and  $\alpha_d$  be the threshold values such that  $\alpha(\pi) < \alpha_c \iff \pi \in \Pi^C$ , and  $\alpha(\pi) > \alpha_d \iff \pi \in \Pi^D$ . Hence, the social behavior metric  $\alpha$  can be a vulnerability that allows an adversary to trick the agents into picking policies from  $\Pi^D$  more often. One idealized, white-box attack an adversary could use is to train an RL agent with the reward function  $r = 1$  if the victim agent fails to reach cooperative behavior and  $r = 0$  otherwise at the end of an episode. The attack action space can be the interval  $(-\delta, \delta)$  for some perturbation  $\delta > 0$ . The perturbation chosen by the attacker would then be applied to the victim's neural network policy. The attack's goal would then be to chose the sequence of perturbations that lead the victims to cross the social behavior metric and pick defecting policies as much as possible. This idealized attack draws inspiration from past adversarial RL work on attacks on neural network policies [11] and reward poisoning [25].

## 4 Experimental Results

We have completed an experiment that shows the effect of Gaussian noise attacks on the agents' beliefs.

### 4.1 Experiment Methodology

We trained two pairs of agents using Cooperative Approximate Policy Iteration [21] in the game of Trade Comm<sup>1</sup>. Trade Comm is a communication game with the following rules:

1. Each player is independently dealt one of `num_items` with uniform chance.
2. Player 1 makes one of `num_utterances` utterances, which is observed by player 2.
3. Player 2 makes one of `num_utterances` utterances, which is observed by player 1.
4. Both players privately request one of the `num_items * num_items` possible trades.

The trade is successful if and only if both player 1 asks to trade its item for player 2's item and player 2 asks to trade its item for player 1's item. Both players receive a reward of one if the trade is successful and zero otherwise. We trained with 5 items and 5 utterances. The unperturbed belief representations are the updated belief distributions given the coordinator's prescription and the player's action. Hence, they are vectors with values in the interval  $[0, 1]$ . One group trained normally, and the other group trained with adversarial perturbations applied to the agents' belief representations. The perturbations are sampled from a Gaussian distribution with mean zero and standard deviation of either 0.5, 1, or 2. This attack has been inspired by past work on corruptions in image classification [10], and poisoning rewards or certain features in RL during training as an adversarial attack to produce a harmful policy ([19], [25]). We trained each group over 5 random seeds. Other than the number of items and utterances, we used the same hyperparameters used in Sokota et al. [21]. The experiments were run on a 2.3 GHz Quad-Core Intel Core i7 CPU.

### 4.2 Results

From the plot in Figure 1, it is clear that the perturbations hindered the training of the agents. The groups with adversarially perturbed beliefs with standard deviations 1 and 2 do not converge to the optimally cooperative policy. On average, the normal group was able to converge after around 400 episodes. The group with standard deviation 0.5 perturbations tended to converge to the optimal solution but some in the group did not. Our results show that this simple technique can negatively affect the training of a cooperative group.

### 4.3 Limitations

This is only a toy experiment on one algorithm on a relatively simple game. In the future, we would like to expand this study to include more agents, multi-agent algorithms, sophisticated attack strategies, and complex environments. Including these additions will provide a clearer perspective of the impact of adversarial attacks in cooperative multi-agent scenarios.

## 5 Discussion and Future Directions

We have proposed some possible attacks on cooperative AI and provided an experiment showing that one of the attacks can impact convergence to optimally cooperative behavior. Acknowledging that such attacks exist is the first step. We propose the following future directions:

1. Conduct experiments for the other adversarial attacks mentioned. The most obvious next step is to verify that attacks on mean-field approximations and social dilemma inequalities are harmful to cooperative AI. We would augment our experiments to include more realistic scenarios where the adversary tries to avoid detection in more realistic environments. More sophisticated techniques, like FGSM [9] or adversarial example games [2], should also be considered. Conducting experiments

---

<sup>1</sup>Used the open-source code by Sokota et al. [21] here: <https://github.com/ssokota/capi> (MIT License)

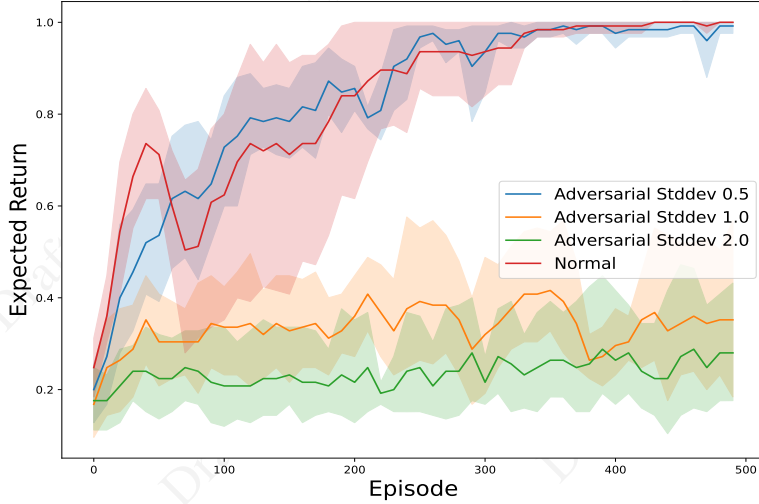


Figure 1: The performance of four separate groups trained using Cooperative Approximate Policy Iteration. This plot shows the mean performance and 95% confidence interval for each group’s expected returns. The adversarial groups with standard deviations 1 and 2 perturbed belief representations (in orange and green) could not converge to the optimal cooperative policy. On average, the group with standard deviation 0.5 converged close to the optimal solution but some samples did not converge as quickly.

using other multi-agent RL algorithms in other cooperative environments will reveal how ubiquitous these effects are.

2. Define a formal framework that provides theoretical guarantees for optimal attacks. There is previous work that provides a theoretical framework for adversarial RL ([19], [25]). The benefit would be to observe the sample efficiency of some adversarial RL techniques under constraints (to avoid detection).

3. Propose defenses for adversarial attacks in cooperative AI. One clear direction would be to see if past methods of adversarial training ([9], [12]) can make cooperative AI more robust to such attacks. In Tu et al. [23], the number of benign agents diminished the effect of adversarial attacks on communication. Hence, another compelling route would be to investigate if the structure of cooperative AI can be manipulated in a way that makes it naturally robust. If a MARL algorithm utilizes public and private beliefs, verifying if the beliefs follow a framework of knowledge-based obligation would be ideal [18]. Endowing agents with this framework aligns with the hope that cooperative agents should be able to “mind-read” and anticipate the actions of others.

The implications of cooperative AI are so complex that even its benevolent goals can be overshadowed by the downsides of turning cooperation into exclusion or coercion [4]. Focusing on these downsides only, however, ignores the problems of adversarial attacks that still diminish current machine learning methods. Like more established methods of machine learning, cooperative AI might introduce new vulnerabilities and downsides along with its advantages. Also, like any other adversarial attack in machine learning, exploring these attacks can provide harmful tools to be used against the unprepared. We believe, however, that acknowledging adversarial attacks in cooperative AI will help mitigate those downsides.

## References

- [1] Robert J Aumann. Agreeing to disagree. *The annals of statistics*, 4(6):1236–1239, 1976.
- [2] Joey Bose, Gauthier Gidel, Hugo Berard, Andre Cianflone, Pascal Vincent, Simon Lacoste-Julien, and Will Hamilton. Adversarial example games. *Advances in Neural Information Processing Systems*, 33, 2020.
- [3] René Carmona, Mathieu Laurière, and Zongjun Tan. Linear-quadratic mean-field reinforcement learning: convergence of policy gradient methods. *arXiv preprint arXiv:1910.04295*, 2019.
- [4] Allan Dafoe, Edward Hughes, Yoram Bachrach, Tantum Collins, Kevin R McKee, Joel Z Leibo, Kate Larson, and Thore Graepel. Open problems in cooperative ai. *arXiv preprint arXiv:2012.08630*, 2020.
- [5] Nilesh Dalvi, Pedro Domingos, Sumit Sanghai, and Deepak Verma. Adversarial classification. In *Proceedings of the tenth ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 99–108, 2004.
- [6] Martin Figura, Krishna Chaitanya Kosaraju, and Vijay Gupta. Adversarial attacks in consensus-based multi-agent reinforcement learning, 2021.
- [7] Jakob Foerster, Francis Song, Edward Hughes, Neil Burch, Iain Dunning, Shimon Whiteson, Matthew Botvinick, and Michael Bowling. Bayesian action decoder for deep multi-agent reinforcement learning. In *International Conference on Machine Learning*, pages 1942–1951. PMLR, 2019.
- [8] Piotr J Gmytrasiewicz and Prashant Doshi. A framework for sequential planning in multi-agent settings. *Journal of Artificial Intelligence Research*, 24:49–79, 2005.
- [9] Ian Goodfellow, Jonathon Shlens, and Christian Szegedy. Explaining and harnessing adversarial examples. In *International Conference on Learning Representations*, 2015. URL <http://arxiv.org/abs/1412.6572>.
- [10] Dan Hendrycks, Steven Basart, Norman Mu, Saurav Kadavath, Frank Wang, Evan Dorundo, Rahul Desai, Tyler Zhu, Samyak Parajuli, Mike Guo, et al. The many faces of robustness: A critical analysis of out-of-distribution generalization. *arXiv preprint arXiv:2006.16241*, 2020.
- [11] Sandy Huang, Nicolas Papernot, Ian Goodfellow, Yan Duan, and Pieter Abbeel. Adversarial attacks on neural network policies. *arXiv preprint arXiv:1702.02284*, 2017.
- [12] Andrew Ilyas, Shibani Santurkar, Dimitris Tsipras, Logan Engstrom, Brandon Tran, and Aleksander Madry. Adversarial examples are not bugs, they are features. *Advances in Neural Information Processing Systems*, 32:125–136, 2019.
- [13] Alexey Kurakin, Ian Goodfellow, and Samy Bengio. Adversarial machine learning at scale. In *International Conference on Learning Representations*, 2017.
- [14] Joel Z Leibo, Vinicius Zambaldi, Marc Lanctot, Janusz Marecki, and Thore Graepel. Multi-agent reinforcement learning in sequential social dilemmas. In *Proceedings of the 16th Conference on Autonomous Agents and MultiAgent Systems*, pages 464–473, 2017.
- [15] Michael W Macy and Andreas Flache. Learning dynamics in social dilemmas. *Proceedings of the National Academy of Sciences*, 99(suppl 3):7229–7236, 2002.
- [16] Ashutosh Nayyar, Aditya Mahajan, and Demosthenis Teneketzis. Decentralized stochastic control with partial history sharing: A common information approach. *IEEE Transactions on Automatic Control*, 58(7): 1644–1658, 2013.
- [17] Eric Pacuit and Olivier Roy. Epistemic foundations of game theory. *Stanford Encyclopedia of Philosophy*, 2015.
- [18] Eric Pacuit, Rohit Parikh, and Eva Cogan. The logic of knowledge based obligation. *Synthese*, 149(2): 311–341, 2006.
- [19] Amin Rakhsha, Goran Radanovic, Rati Devidze, Xiaojin Zhu, and Adish Singla. Policy teaching via environment poisoning: Training-time adversarial attacks against reinforcement learning. In *International Conference on Machine Learning*, pages 7974–7984. PMLR, 2020.
- [20] Austin Short, Trevor La Pay, and Apurva Gandhi. Defending against adversarial examples. Technical report, Sandia National Lab.(SNL-NM), Albuquerque, NM (United States), 2019.

- [21] Samuel Sokota, Edward Lockhart, Finbarr Timbers, Elnaz Davoodi, Ryan D’Orazio, Neil Burch, Martin Schmid, Michael Bowling, and Marc Lanctot. Solving common-payoff games with approximate policy iteration. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 9695–9703, 2021.
- [22] Christian Szegedy, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian Goodfellow, and Rob Fergus. Intriguing properties of neural networks. In *International Conference on Learning Representations*, 2014. URL <http://arxiv.org/abs/1312.6199>.
- [23] James Tu, Tsunhsuan Wang, Jingkang Wang, Sivabalan Manivasagam, Mengye Ren, and Raquel Urtasun. Adversarial attacks on multi-agent communication. *arXiv preprint arXiv:2101.06560*, 2021.
- [24] Yaodong Yang, Rui Luo, Minne Li, Ming Zhou, Weinan Zhang, and Jun Wang. Mean field multi-agent reinforcement learning. In *International Conference on Machine Learning*, pages 5571–5580. PMLR, 2018.
- [25] Xuezhou Zhang, Yuzhe Ma, Adish Singla, and Xiaojin Zhu. Adaptive reward-poisoning attacks against reinforcement learning. In *International Conference on Machine Learning*, pages 11225–11234. PMLR, 2020.