Towards Futuristic Autonomous Experimentation—A Surprise-Reacting Sequential Experiment Policy

Imtiaz Ahmed

Department of Industrial & Management Systems Engineering, West Virginia University, Morgantown, WV 26505, imtiaz.ahmed@mail.wvu.edu

Satish Bukkapatnam

Department of Industrial & Systems Engineering, Texas A&M University, College Station, TX 77840, satish@tamu.edu

Bhaskar Botcha

Department of Industrial & Systems Engineering, Texas A&M University, College Station, TX 77840, bhaskarb94@tamu.edu

Yu Ding

Department of Industrial & Systems Engineering, Texas A&M University, College Station, TX 77840, yuding@tamu.edu

An autonomous experimentation platform in manufacturing is supposedly capable of conducting a sequential search for finding suitable manufacturing conditions for advanced materials by itself or even for discovering new materials with minimal human intervention. The core of the intelligent control of such platforms is the policy directing sequential experiments, namely, to decide where to conduct the next experiment based on what has been done thus far. Such policy inevitably trades off exploitation versus exploration and the current practice uses either pure exploration oriented space-filling designs or some variants of the expected improvement criterion under the Bayesian optimization framework. We discuss whether it is beneficial to trade off exploitation versus exploration by measuring the element and degree of surprise associated with the immediate past observation. We devise a surprise-reacting policy using two existing surprise metrics, known as the Shannon surprise and Bayesian surprise. Our analysis shows that the surprise-reacting policy appears to be better suited for quickly characterizing the overall landscape of a response surface or a design place under resource constraints. We argue that such capability is much needed for futuristic autonomous experimentation platforms. We do not claim that we have a fully autonomous experimentation platform, but believe that our current effort sheds new lights or provides a different view angle as researchers are racing to elevate the autonomy of various primitive autonomous experimentation systems.

Key words: Active learning; autonomous experimentation; Bayesian optimization; exploitation-exploration trade off; Gaussian process; surprise

1. Introduction

In the recent years we witness concerted efforts spent on, and rapid growth in the area of, researching and developing autonomous platforms for material discoveries and advanced manufacturing (Nikolaev et al. 2016, Talapatra et al. 2018, Flores-Leonar et al. 2020, Burger et al. 2020, Deneault et al. 2021, Karimi 2015). Ideally speaking, an autonomous experimentation platform is an intelligent system that can search through, on its own with minimal human intervention, a complex and large design (or parameter) space of process conditions and material elements and look for new properties or manufacturing methods of advanced materials.

Autonomous experimentation platforms are deeply connected with sequential experiment designs and sequential decision making (Lovell et al. 2011). The key is for the system's intelligent control to decide where to take actions in the next steps and then instruct its hardware system to actually carry the actions out. In doing so, it always tries to trade off and balance between two actions: exploration and exploitation. Exploitation refers to follow-up investigations of the current pattern/findings by conducting experiments in a nearby region, whereas exploration is to conduct experiments in different regions in search of new clues, so as not to get stuck in local optima. While delaying the detailed review of the related literature in Section 2, we would like to point out that the dominating paradigm used nowadays by the autonomous platforms is the Bayesian optimization framework (Frazier 2018, BO). However, studies (Bull 2011, Chen et al. 2019) suggest that the BO-driven approach is still greedy, attempting to hone in on optima as fast as possible, and thus overweighs exploitation over exploration.

We want to highlight one important capability needed for a futiristic autonomous system, which is how to handle "surprise observations". There has not been sufficient discussion or research reported on this subject. Simply put, a surprise is an observation disagreeing with one's current working hypothesis. But does a surprise observation mean the hypothesis is wrong or the observation is corrupted by noise? Pertinent to surprise observations, the following questions need to be addressed: (1) how to define and quantify a surprise? This is to say, given an observation, when should a sequential approach treats it as a surprise and when not? (2) how to react when a surprise is observed? (3) what impact, positive or negative, may there be when a surprise-reacting policy is used?

It turns out that there has been research in the field of information and computer science to provide a quantitative definition of surprises (Baldi 2002, Itti and Baldi 2006, Faraji et al. 2018). Two widely used ones are the Shannon surprise (Baldi 2002) and Bayesian surprise (Itti and Baldi 2006). In this work, we do not intend to introduce new surprise definitions but plan to make use of the existing ones for our analysis and discussion. This does not mean that the current surprise definitions are perfect and having no need for improvement (they do need improvement). Rather it just means that as one of the first work on this topic we choose to dedicate more effort in addressing the other two questions posed above.

In this paper, based on these surprise measures, we propose a surprise guided sequential experimentation policy for materials/manufacturing experiments under a resource constrained environment. The target of these experiments is to get a quick idea about the underlying design space using as fewer experiments as possible. It is different from design optimization and falls into the area of "approximating the underlying function". Potentially, it can help the material scientists or manufacturing engineers to have a holistic view of the entire design space and thereby enhance the chance to make a new discovery or a robust decision. It is also in line with the performance qualification step described in the FDA guideline (Food and Administration 2015, Tartal 2015). Note that function approximation is not entirely detached from design optimization, as a good function approximation lays solid ground for further optimizing a design in the next step.

To check the comparative performance of our approach, we use two sets of methods to illustrate the role of exploration and exploitation, and articulate the difference between optimization and function approximation. On one hand, we consider two space-filling designs, the maximin Latin hypercube design (LHD) (Johnson et al. 1990, Morris and Mitchell 1995) and the maximum projection LHD (MaxProLHD) (Joseph et al. 2015) in an active learning setting. These are pure exploration-based methods for function approximation. On the other hand, we also consider expectation improvement (EI)-based BO methods and their variants, which undertake both exploitation and exploration but do not use the surprise mechanism for trading off between them. While the default version of EI-based BO is primarily for optimization without seeking to explore the whole design space, a generalized version of EI, known as ϵ -EI (Bull 2011), gears more towards function approximation especially when ϵ gets close to one.

What insights do we garner through this research? What we learned can be summarized in the following two principal aspects.

First of all, taking advantage of surprise observations helps redirect the effort of balancing exploitation and exploration. Upon observing a surprise, the system spends some extra resources to confirm if the observation is corrupted—an action of exploitation. If yes, then the current working hypothesis is maintained and further exploration ensues. If not, the working hypothesis is seriously challenged and the statistical model incorporating the working hypothesis is then updated, so that subsequent exploration will be guided differently. On the first glance, the extra resources spent on deciding the nature of an observation could be wasteful. Through our empirical analysis, however, it appears that the additional exploitation steps inform and enable better subsequent decisions and thus perform better than the pure exploratory space-filling designs or ϵ -EI under a large ϵ .

Secondly, the introduction of the surprise metric helps to explore the underlying design space differently. While the traditional BO-based policy focuses on finding the optimal design points, the surprise-reacting policy strives for a quick approximation and understanding of the whole underlying landscape. On a high level, we think that the surprised-reacting policy is amounted to an *adaptive* Bayesian optimization, where the adjudication of surprise observations injects adaptivity to the system. It is this adaptivity that helps the learning algorithm escape from local optima and continue searching for new discoveries. The rest of the paper unfolds as follows. Section 2 summarizes the past research relevant to our work. Section 3 describes the statistical model used for the sequential learning framework, elaborates on the concept and measurement of surprise using the statistical model. We also discuss how to react to surprise and how it can guide the sequential algorithm. We conclude this section by providing a simple example to illustrate the working mechanism of the surprise-reacting policy and the advantages it brings. Using two benchmark datasets and a real-life grinding dataset, Section 4 presents the performance evaluation of the proposed surprise-reacting approach compared to the competing approaches. Finally, we summarize the paper in Section 5.

2. Relevance to the Literature

Systematic study of experimental designs, or design of experiments (DOE), was initially started with applications to biology and agriculture areas (Fisher 1935). Later the DOE methodologies are popularized to many different applications and industries (Box et al. 2005, Wu and Hamada 2009). Researchers have long realized the importance of sequential experiments, as it is impossible to understand a complex system fully through a single shot of action. On this regard, the early effort of sequential experiments can be traced back to as early as late 1940s (Wald 1947), the response surface methodology (RSM) (Box and Wilson 1951) and the dual control theory (Feldbaum 1960). RSM, for instance, uses first-order and second-order polynomial models as local approximations of the underlying response surface in a small region in the controllable factor space.

The introduction of Gaussian processes (GP) from geo and spatial statistics (Matheron 1963, Cressie 1991) into the modeling of computer experiment's outputs (Sacks et al. 1989, Santner et al. 2003) brought a paradigm shift. GP models were initially used on modeling responses from the *deterministic* computer experiments, which, when run repeatedly with the same input, would produce the same output. GP, being a perfect interpolator, was a natural choice to be used for modeling such responses. Over the year, however, the use of GP models is not limited to the deterministic computer experiments, but also extended to the modeling of stochastic computer simulations (Kleijnen 2008) as well as to modeling physical experiments which is crucial for autonomous platforms (Noack et al. 2020, Chen et al. 2021, 2022). They become ever more popular when the machine learning era arrives (Rasmussen and Williams 2006).

The underlying function describing the design space in these computer or physical experiments is assumed to be black-box, expensive, difficult to evaluate and ideally derivative free. All of these traits calls for an active learning framework for sequentially unearthing the response surface. Researchers realized that more than the interpolation property, GP models are nonparametric in nature and provide a great degree of flexibility and adaptivity in modeling complex response surfaces. It fits advantageously into the active learning framework as a surrogate of the black-box function and a default choice (Frazier 2018).

Jones et al. (1998) proposed the expected improvement, a criterion to decide where to collect the next data point. The EI criterion tries to balance between sampling the next data point with the highest expected value (exploitation) and sampling the point with the highest uncertainty (exploration) and was proven effective. The effort of finding a GP-driven efficient global optimization (EGO) is evolved into the research of Bayesian optimization. BO decides the next sampled point by optimizing an acquisition function. The EI provides the basis to form one type of acquisition function. Other popular choices of acquisition function include probability of improvement (Kushner 1964) and confidence bounds (Cox and John 1992). BO has been employed widely in hyperparameter tuning problem, combinatorial optimization and reinforcement learning (Greenhill et al. 2020). Recent years have seen new applications in areas such as manufacturing (Gongora et al. 2020), robotics (Cully et al. 2015), neuroscience (Lancaster et al. 2018), and materials discovery (Zhang et al. 2020). Traditional BO acquisition functions are criticized for over-exploiting the fitted model and under-exploring the design space (Bull 2011, Chen et al. 2019). The ϵ -EI (Bull 2011) with a large ϵ does exploration more than exploitation. Nevertheless, balancing exploration and exploitation remains an important consideration for both finding the global optimum of a continuous function and approximating the response surface using limited samples (Bull 2011, Qin et al. 2017, Chen et al. 2019, De Ath et al. 2021).

Another branch research on sequential decision-making, which is less relevant to the sequential experimentation discussed in this paper, is the multi-armed bandit (MAB) problems under the reinforcement learning (RL) framework (Besbes et al. 2019). The RL formulation and BO formulation serve different purposes. BO relies on an empirical data-driven predictive model (most popularly, Gaussian process model) and thus has the limitation for not being able to look too far ahead, known as its myopic nature (Wu and Frazier 2019, Yue and Kontar 2020). This disconnect makes it difficult to formulate a Bellman equation in RL using the evaluation function in BO. Moreover, under MAB, one has a finite number of arms (usually a relatively small number) to choose from, whereas in our setting we have countless arms (infinite) for experimentation, as our input settings lay on a continuous (albeit compact) region. Almost all manufacturing/material experimentations are constrained by limited resources (Lovell et al. 2011).

A number of so-called autonomous platforms (although none is fully autonomous yet) have been proposed over the past decade in the area of genetics (Sparkes et al. 2010), chemical science (Coley et al. 2020, Burger et al. 2020, Epps et al. 2020), material discovery (Nikolaev et al. 2016, Talapatra et al. 2018, Flores-Leonar et al. 2020), and drug discovery (Schneider 2018). However, a lot of challenges (Bukkapatnam 2023) remain unsettled and we are still far away from developing an ideal sequential experimentation strategy for autonomous platforms. Most of these platforms still rely on BO to direct their choices in the sequential experimentation (Talapatra et al. 2018, Burger et al. 2020).

It is in this context of research that we would like to report our work in terms of incorporating the element of surprise into sequential experimentation and consequently propose a surprise-reacting experimentation policy to obtain a balance between exploitation and exploration. By demonstrating the merit of the proposed surprise-reacting policy in function approximation, we intend to argue for their worthiness for continued research investment.

3. Surprise-Reacting Experimentation Policy

This section starts with a description of the statistical model required for the sequential learning framework. Then it discusses how to handle surprise observations, or more specifically, how to measure a surprise and how to react to it utilizing the statistical model. The reaction plays the role of guiding the sequential algorithm to select the next experiment location and update its understanding on the design space or the underlying response function.

3.1. Statistical Model for Sequential Experimentation

For sequential experimentation, we need to introduce a statistical model which will be later used to compute the surprise. We expect this model to hypothesize one's belief over the design space and sequentially update its belief by using the new observations. In this work, we choose to adopt the Gaussian process as the statistical model. Using GP makes our effort better connected with and comparable to the work under the BO framework; for example, the EI criterion and its variants.

A GP is a stochastic process where any point $\mathbf{x} \in \mathbb{R}^{P}$, with P being the number of parameters is assigned a random variable $f(\mathbf{x})$ and the finite collection of these random variables has a multivariate Gaussian distribution as follows:

$$GP \sim p(\mathbf{f} \mid \mathbf{X}) = \mathbf{N}(\mathbf{f} \mid \boldsymbol{\mu}, \mathbf{K}), \tag{1}$$

where $\mathbf{f} = \{f(\mathbf{x}_1), \dots, f(\mathbf{x}_n)\}, \ \mathbf{\mu} = m(\mathbf{X}) = \{m(\mathbf{x}_1), \dots, m(\mathbf{x}_n)\}\$ is the mean function and usually set to zero (i.e., $m(\mathbf{X}) = \mathbf{0}$), and $\mathbf{K} = k(\mathbf{x}_i, \mathbf{x}_j)$ is known as the covariance or kernel function. Some commonly used covariance functions are the squared exponential covariance function, Matérn class covariance function, rational quadratic covariance function, and Ornstein-Uhlenbeck covariance function etc (Rasmussen and Williams 2006).

When we use GP in a sequential learning framework to model physical experiments, the underlying function $f(\mathbf{x})$ is assumed to possess certain characteristics. They are summarized as follows:

• It is continuous.

• It is "expensive to evaluate" in the sense that the number of evaluations is limited. This limitation typically arises because each evaluation takes a substantial amount of time or cost or both.

• It does not have any known special structure and therefore it is known as "black-box" function.

• It is derivative free which means we can only observe $f(\mathbf{x})$ with no first or second order derivative information.

• Actual physical response (y) is noisy and it differs from $f(\mathbf{x})$ by an independent Gaussian noise $(\xi \sim N(0, \sigma^2))$ with a constant variance (σ^2) , i.e., $y = f(\mathbf{x}) + \xi$. We assume covariance isotropy for the noise term.

GP assigns a prior on the function space that the sequential algorithm tries to master using the data from sequential experiments. The covariance function (**K**) plays the most significant role in this prior as it encodes the similarity of each pair of experimental data points. It makes sure that if two points, \mathbf{x}_i and \mathbf{x}_j , are close, then their function evaluations $(f(\mathbf{x}_i), f(\mathbf{x}_j))$ are similar. For example, if the Matérn covariance function is used, the similarity between the two function evaluations is measured as:

$$k(\mathbf{x}_{i}, \mathbf{x}_{j}) = \sigma_{s}^{2} \frac{2^{(1-\nu)}}{\Gamma \nu} (\sqrt{2\nu} \frac{\|\mathbf{x}_{i} - \mathbf{x}_{j}\|_{2}}{l})^{\nu} K_{\nu} (\sqrt{2\nu} \frac{\|\mathbf{x}_{i} - \mathbf{x}_{j}\|_{2}}{l}),$$
(2)

where K_{ν} is the modified Bessel function and ν controls the smoothness of the learned function. We use $\nu = 2.5$ throughout our study. There are two parameters in this function whose values need to be learned during the sequential learning process: l is the length scale parameter controlling the smoothness of the functional representation of the design space and σ_s is the variance parameter determining the magnitude of the function values. These parameters of the chosen covariance function, also known as GP hyperparameters and represented by ϕ , constitute the parameters of the statistical model.

The choice of what goes into the hyperparameter set is part of the modeling effort, and this choice often makes use of domain or expert knowledge. We do not consider any informative prior distribution on these hyperparameters. Instead we use flat priors, i.e., start with arbitrarily selected (or using domain knowledge) hyperparameter values (bounded within a minimum and maximum value), and use data to update (optimized) hyperparameter values after each iteration.

The statistical model works as a surrogate of the actual design space, continuously updated through a probabilistic Bayesian process. The process is intuitive and goes well with the thoughts behind sequential experimentation. At first, before a sequential experimentation begins, some initial experiments are carried out to gain the initial understanding on the design space. Once having done these initial experiments (**X**), the statistical model is trained on these data points. Then, the model hyperparameters (ϕ) are estimated by maximizing the log marginal likelihood as follows:

$$\max\log(p(\mathbf{y} \mid \mathbf{X})) = -\frac{1}{2}(\mathbf{y} - m(\mathbf{X}))^T \mathbf{K}_y^{-1}(\mathbf{y} - m(\mathbf{X})) - \frac{1}{2}\log|\mathbf{K}_y| - \frac{n}{2}\log 2\pi,$$
(3)

where $\mathbf{K}_y = \mathbf{K} + \sigma^2 \mathbf{I}$ with σ^2 being the variance of the noisy response values and $|\mathbf{K}_y|$ represents the determinant of \mathbf{K}_y .

It is important to predict the experimental outcome at new test locations (\mathbf{X}_*) so that the predicted values can be compared with the actual outcomes (\mathbf{y}_*) . This comparison helps to update the sequential policy after each iteration. The prediction is done using the model hyperparameters estimated from the previous round of experimental data. The prediction is made easy, due to the GP formulation, for which, the posterior predictive distribution of the function response at the new locations, \mathbf{f}_* , is well known to be (Rasmussen and Williams 2006)

$$p(\mathbf{f}_* \mid \mathbf{f}, \mathbf{X}_*, \mathbf{X}) \sim \mathbf{N}(\mathbf{f}_* \mid \boldsymbol{\mu}_*, \boldsymbol{\Sigma}_*), \tag{4}$$

where

$$\boldsymbol{\mu}_{*} = \mathbf{K}_{*}^{T} \mathbf{K}_{y}^{-1} \mathbf{f} \quad \text{and} \quad \boldsymbol{\Sigma}_{*} = \mathbf{K}_{**} - \mathbf{K}_{*}^{T} \mathbf{K}_{y}^{-1} \mathbf{K}_{*},$$
(5)

and $\mathbf{K}_* = k(\mathbf{X}, \mathbf{X}_*)$ and $\mathbf{K}_{**} = k(\mathbf{X}_*, \mathbf{X}_*)$. This posterior distribution, $p(\mathbf{f}_* | \mathbf{f}, \mathbf{X}_*, \mathbf{X})$, reflects the current understanding of the design space. It can be sequentially updated with each new experimentation.

3.2. Measures of Surprise

Surprise can be considered as the observations that disagree with the current hypotheses or understanding of the underlying systems. Surprise brings forth puzzlement, and as an immediate reaction, one investigates further to understand the surprise. It may trigger an adjustment to one's current understanding of the systems (or processes) and eventually leads to the sublime knowledge one aspires to reach.

To learn from surprise, a well-defined mathematical measure is needed to quantify the abstract concept. As we explained in the introduction, we intend to use the two existing surprise measures that were introduced in the information and computer science literature. The two surprise definitions are known as Shannon surprise (Baldi 2002) and Bayesian surprise (Itti and Baldi 2006), respectively.

Shannon surprise : Shannon surprise uses a negative log-likelihood of an observation, $\mathbf{D} = \{\mathbf{x}, y\}$, given the current state of mind, where $\mathbf{x} \in \mathbb{R}^{P}$. Let us use $\pi_{n}(\boldsymbol{\theta})$ to represent the current state of mind, i.e., the belief regarding the underlying system captured by a statistical model after observing n data points. This state of mind is parameterized though $\boldsymbol{\theta}$.

Then the Shannon surprise measure is as follows:

$$-\log \int_{\boldsymbol{\theta}} p(\mathbf{D} \mid \boldsymbol{\theta}) \pi_n(\boldsymbol{\theta}) d\boldsymbol{\theta},$$
 (6)

where $p(\mathbf{D} \mid \boldsymbol{\theta})$ measures the probability of a new data point, conditioned on $\boldsymbol{\theta}$. The degree of surprise is proportional to the value of the Shannon surprise measure. Observations with a low probability of occurrence implies a big surprise. But not all low probability events are surprising.

Note that the current state of mind, $\boldsymbol{\theta}$ is equivalent to \mathbf{f} , discussed in the previous subsection and $\pi_n(\boldsymbol{\theta})$ is equivalent to the GP posterior $(p(\mathbf{f}_* | \mathbf{f}, \mathbf{X}_*, \mathbf{X}))$, as in Equation (4), after observing n data points. We can compute the Shannon surprise of a new observation, $\mathbf{D} = {\mathbf{x}_*, y_*}$, by using this posterior predictive distribution.

Bayesian surprise : It captures the change in one's belief brought by the newly observed data point. Bayesian surprise quantifies the change using the Kullback-Leibler (KL) divergence between the distribution of the prior belief and that of the posterior belief, such as:

$$KL(\pi_n(\mathbf{\theta}) \parallel \pi_{n+1}(\mathbf{\theta})), \quad \text{and}$$

$$\tag{7}$$

$$\pi_{n+1}(\boldsymbol{\theta}) = \frac{p(\mathbf{D} \mid \boldsymbol{\theta})\pi_n(\boldsymbol{\theta})}{\int_{\boldsymbol{\theta}} p(\mathbf{D} \mid \boldsymbol{\theta})\pi_n(\boldsymbol{\theta})d\boldsymbol{\theta}}.$$
(8)

Here, $\pi_{n+1}(\boldsymbol{\theta})$ represents the updated belief after observing a new data point (**D**) and is calculated using the Bayes rule. To measure the Bayesian surprise, first, we need to include the new experiment location and its response to our statistical model's training dataset. The model hyperparameters ($\boldsymbol{\phi}$) will be then re-estimated through the optimization formulation in Eq. (3), so that we get an updated posterior distribution through Equation (4)–(5). This updated model ($\pi_{n+1}(\boldsymbol{\theta})$) will be compared with the old model ($\pi_n(\boldsymbol{\theta})$) through their KL divergence. The KL divergence compares the two believes, and the prior belief serves as the anticipation. Events that cause a big change in one's belief, i.e., a big KL divergence, are labeled as surprise.

To label a new observation as surprise, a threshold is needed. We propose to use the credible interval $(\mu_* \pm k_{\text{Shannon}} \Sigma_*)$ for each new test response (y_*) . For instance, when the credible interval is set at 95%, $k_{\text{Shannon}} = 1.96$ for a normal distribution. This credible interval can be easily computed given the GP posterior distribution. To flag a surprise, if the degree of surprise associated with an observation is greater than the degree of surprise associated with the credible band, it implies that the new test response does not agree with the statistical model and then this new experiment will be treated as surprise.

Similarly, Bayesian surprise value will be compared with k_{Bayesian} , which is the counterpart of k_{Shannon} above, for deeming a surprise. When k_{Bayesian} is chosen to be the same as k_{Shannon} , using Bayesian surprise leads to slower reaction, or alternatively, in order for Bayesian surprise to have a

comparable rate of reaction as that using Shannon surprise, k_{Bayesian} generally needs to be smaller than k_{Shannon} .

Compared to the Bayesian one, Shannon surprise is more sensitive and can lead to a faster reaction, because Shannon surprise is about capturing the initial puzzlement, whereas Bayesian surprise is more about updating the belief. It appears that neither of the existing surprise measures are perfect (Faraji et al. 2018). While introducing a new surprise measure is worthy, doing so is not straightforward. We believe the existing measures, however imperfect they may be, are still useful. So we stay with the two definitions and demonstrate their usefulness in this paper.

3.3. How to React to Surprise

Once an observation is flagged as a surprise, the next question is how the model should react to that declaration. To mimic a human scientist, the next action is to investigate the nature of the surprise observation. We understand that the nature of the investigation could vary but given our focus on engineering systems for manufacturing and material discovery, our experience suggests that the first line of action is to confirm whether the surprise is due to data corruption (noise, perturbation) or it is due to a discrepancy between the underlying response surface and the model that is built thus far.

While settling on such question itself also could entail complexity, we choose to conduct a simple test for the time being. The test is for the sequential approach to draw a new observation in the neighborhood of the location where the surprise is declared and see if it is a surprise again. If the response is once again a surprise, it means that the consequent response confirms the earlier finding. Then, both responses are kept in the data collected and they are used to update the model to reflect the new understanding.

If the model is not surprised by the subsequent response, it suggests that the previous surprising observation is more likely a corrupted observation. Then, the previous observation is discarded, i.e., not to use to update the model.

The confirmation process is an act of exploitation, as it is conducted locally, in the neighborhood for the purpose of refining a decision. This action commits additional resources to do double-checking, which on surface might slow down the experiment progress. But we find a simple exploitation action like this actually helps with the overall exploration of the whole design space, in the sense that the surprises serve as wake-up calls to prevent misleading new data to drag the model to wrong places. This is particularly critical in a resource-constrained process (usually due to high costs) such as running experiments in material sciences or manufacturing engineering.

After the confirmation step, additional observations would be taken at the same local neighborhood for model updating, until a new data collection does not return a surprise declaration. What this means is that the model is now consistent with what the data informs the model for that local area. What this entails in reality is just one or two additional data points, not an undue burden for the overall experimentation process.

Once the model is updated to accurately reflect the local area just being exploited, the sequential learning process goes back to the exploration mode, which is to look for new patterns elsewhere in the design space.

Denote by **S** the collection of the candidate locations in sequential experimentation. We would like to note that the choice of candidate locations incorporates design constraints; for example, infeasible designs or designs known to be harmful. The set of **S** is also being updated as the experiment progresses. When a location (**x**) is experimented, it will be removed from the pool of candidate locations, i.e., $\mathbf{S} \leftarrow \mathbf{S} \setminus \mathbf{x}$, where \setminus is the set subtraction operation. The experimented location **x** is then put into the pool of the used locations, **E**. In the experimentation process, there may be a cost associated with dramatically changing a factor from its current setting (location) to some other settings. Such constraints can also be incorporated by updating **S** before the selection of the next experiment location. These are typically done when domain knowledge is available for a specific application. Let us assume that such design constraints are now incorporated in **S**.

For exploration, a new experiment location will be selected from this pool, $\mathbf{x}_{next} = \mathbf{x} \in \mathbf{S}$, following a maximin policy, such as:

$$\mathbf{x}_{\text{next}} = \underset{\mathbf{x} \in \mathbf{S}}{\operatorname{arg\,max}} G(\mathbf{x}), \tag{9}$$

where

$$G(\mathbf{x}) = \min_{\mathbf{e} \in \mathbf{E}} \|\mathbf{x} - \mathbf{e}\|_2, \text{given an } \mathbf{x},$$
(10)

Eq. (10) calculates the minimum distance between a given location, \mathbf{x} , in the candidate set from any of the used locations in \mathbf{E} , and Eq. (9) selects the candidate location that maximizes the smallest distance between the new design location and the used design locations. This is known as the *maximin* design selection policy, widely used in space-filling designs (Johnson et al. 1990, Morris and Mitchell 1995, Joseph et al. 2015).

The degree of surprise associated with the new observation will be evaluated again. In the event of no surprise the exploration will be continued until it is surprised. Upon being surprised, exploitation will begin. This iteration will be repeated until the experimentation budget is exhausted.

Using this surprise-reacting policy, the expected number of surprises decreases rather quickly as the experimentation proceeds, because the underlying response is better understood. The sequential approach is then able to reap the benefit of not being stuck in a local neighborhood, with a fast decreased spending of resources on double-checking. As a result, the surprise-reacting policy approximates the whole design space quickly.

3.4. Steps of the Surprise-Reacting Sequential Experimentation

The surprise-reacting experimentation policy is a closed-loop process where the action depends on one important feedback: surprise or no surprise. The policy is described step wise below:

I. Initial experiments: In order for the sequential experiment to begin, the sequential algorithm must be given a set of initial experimental locations and the corresponding responses, in order to build a statistical model. For the purpose, we follow the traditional wisdom and use a space-filling design such as MaxPro LHD (Joseph et al. 2015). What we propose to do is to create the set of the budget-allowed experimental locations, **S**, using MaxProLHD, and select a small number of initial locations from **S**, i.e., $\mathbf{X}_{initial} \subset \mathbf{S}$. The number of experiments in $\mathbf{X}_{initial}$ are low compared to the total allocated experimentation budget, say less than 30% of the total budget. Responses from these experiments, $\mathbf{y}_{initial}$, are recorded. Then, the statistical model will be trained using these initial experiments, which can then be used to produce the posterior predictive distribution. After the initial experiments, the candidate pool will be updates as $\mathbf{S} = \mathbf{S} \setminus \mathbf{X}_{initial}$.

II. Surprise measure: After the initial experiments, the very next experiment location will be randomly selected, $\mathbf{x}_{\text{first}}$, from S. The experiment will be carried out to get the response of $y(\mathbf{x}_{\text{first}})$. The model posterior predictive distribution as in Eqs. (4)–(5) is used to calculate the Shannon surprise (using Eq. (6)). Then, the statistical model is updated by adding this new location, i.e., $\mathbf{X} = {\mathbf{X}_{\text{initial}}, \mathbf{x}_{\text{first}}}, \mathbf{y} = {\mathbf{y}_{\text{initial}}, y_{\text{first}}}$. The Bayesian surprise is calculated by comparing the old and updated statistical model using Eq. (7).

III. Exploration-Exploitation switching: If the sequential algorithm is not surprised, exploration will be pursued. The next exploration location is chosen according to the maximin criterion, i.e., following Eq. (9). On the other hand, if the sequential algorithm is surprised, the next location will be selected from the neighborhood of the current location to exploit the nature of the surprise. For this purpose, we select the LHD sample in \mathbf{S} closest to the current location as the next experiment location in the neighborhood.

IV. Update: Once the next experiment location is selected, actual physical experiments will be performed. The update to the statistical model will depend on the outcome of the exploitation of a surprise observation. The sequential algorithm then moves back into Step II. This closed-loop process will continue until the allotted experiment budget is reached.

For better understanding, we summarize the steps of the surprise-reacting policy in Fig. 1.

3.5. A Simple Illustrative Example

To highlight the differences between the proposed approach and the existing EI-based BO sequential policy, we would like to walk through a simple function approximation problem.

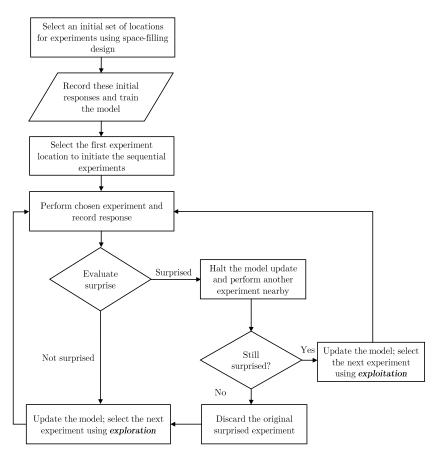



Figure 1 The flowchart of the surprise-reacting experimentation policy.

3.5.1. Problem Description In this example, we consider a simple, univariate function of the form of

$$y = f(\mathbf{x}) + \xi. \tag{11}$$

The specific $f(\cdot)$ used in this simple example is $-\sin(3x) - x^2 + 0.7x$, shown as the solid red curve in Fig. 2. One can observe that the $f(\cdot)$ function has two peaks, one higher than the other. Without knowing the underlying true function, a sequential algorithm would run experiments and take responses. Those are marked as the black crosses in the figure. Once there are a sufficient number of the data pairs, the statistical model can recover the function reasonably well, which is the dotted green curve. For a simple function of a single input as in Fig. 2, one does not need a large number of experiments before recovering the underlying truth function. This example is simply used for illustration purpose.

Specifically in this example, the realization of y is the addition of function $f(\cdot)$ with a zero-mean Gaussian noise with $\sigma = 0.2$. The experimental budget is constrained to 13 physical experiments, including the two initial experiments. Input x takes value in the range of [-1.0, 2.0]. We use both



the lower and upper bound values as the initial experiment location; these are the same for both the surprise-reacting policy and the EI-based BO policy. The sequential experiments start after these two initial experiments and run a total of 11 additional experiments which makes in total 13 experiments. We use a GP with Matérn kernel as the statistical model for all policy options. For the Matérn kernel, we use a pre-determined lengthscale parameter value of 1 and a smoothness parameter value of 2.5.

3.5.2. Surprise-reacting experiment policy The iteration by iteration approximation performance following the surprise-reacting experiment policy are shown in Fig. 3, in which the left panel, i.e., Fig. 3(a), presents the approximation iteration based on the Shannon surprise, whereas the right panel, i.e., Fig. 3(b), presents the approximation iteration based on the Bayesian surprise. The threshold parameter in the Shannon surprise is chosen as $k_{\text{Shannon}} = 1.96$ and that for the Bayesian suprise is chosen to be $k_{\text{Bayesian}} = 0.5$. By using $k_{\text{Bayesian}} = 0.5$, the Bayesian surprise is to flag a distribution change of the magnitude of approximately one standard deviation, which is smaller than that to be flagged in the Shannon surprise. This small magnitude is used to compensate the slowness of the Bayesian surprise.

If we look at Fig. 3(a), at first, using the two initial experiment locations (x = -1.0 and x = 2.0)and their corresponding responses, the statistical model does not have an accurate understanding of the underlying function. Rather its model output is a flat response line as shown in iteration 1. The shaded region is the 95% credible band. Then the sequential algorithm chooses one random location and as the response behaves significantly differently than what the current statistical model anticipates, the sequential algorithm is presumably surprised after assessing the degree of surprise. So, as a reaction the sequential algorithm then selects a nearby location and do experiment there as the next sample. The sequential algorithm is surprised again, which confirms that the surprise observation is a valid response and they are both used to update the statistical model, so that the updated response starts to move away from the flat line and adopt to the underlying function. This whole surprise confirming action is done in a single iteration.

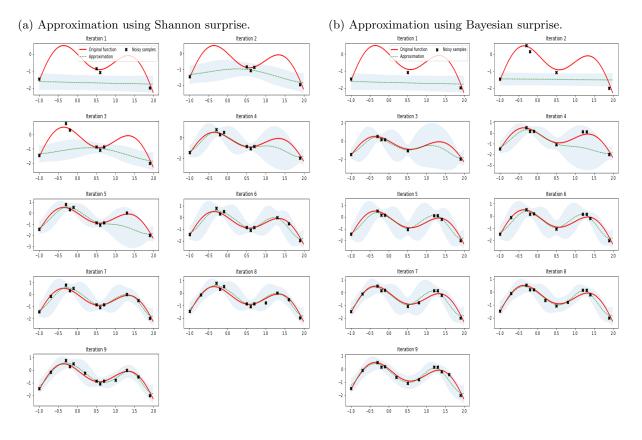


Figure 3 Surprise driven experimentation.

In iteration 2, after the update, to gain more knowledge about the local region it does a follow-up experiment nearby again. However, it will not be surprised anymore and following the proposed policy, the sequential algorithm will go back to exploration and selects a distant sample in iteration 3, at which location, the sequential algorithm is surprised again. The subsequent exploitation confirms again the validity of the response and further adopts the response closer to the underlying true function. This process will continue until the experimentation budget is reached at iteration 9 (consuming 13 experiments). Bayesian surprise measure also worked in a similar manner in Fig. 3(b). Both surprise metrics are able to reach a good approximation of the underlying function at the end of the experiment (experiment 13).

Using Shannon surprise, the number of experiments consumed is $\{2, 4, 5, 7, 8, 9, 10, 11, 12, 13\}$, whereas using Bayesian surprise, the number sequence is $\{2, 3, 5, 6, 8, 9, 10, 11, 12, 13\}$. It is apparent that the difference between the two surprise measures takes place in the earlier iterations. If we look at the first two iterations of these two surprise measures, we can understand the difference between two measures. Shannon surprise, being more sensitive, declares the middle point (x = 0.5, first sequential experiment output) as surprise and carry out confirmatory experiments near this location. On the contrary, Bayesian surprise declares this event as normal and move to carry out exploration in other regions. Using both approaches reaches a reasonable approximation of the

underlying function at the end of iteration 6 and after that, there are not much differences using either surprise measure.

We want to highlight that using the surprise-reacting policy, we successfully identified both the left and right peaks and the valley in between. This is one of the benefits as we consider the surprise-reacting policy, i.e., they may not be the quickest for honing in on the exact optima but they are good for design space or response surface approximation.

3.5.3. EI-based BO experiment policy Let us now discuss the EI-based BO experiment policy and see how the sequential learning policy behaves differently. This BO experiment policy uses the popular EI acquisition function. Bayesian optimization tries to find the optimum of inputs, \mathbf{x}_{opt} , so that we can attain the global maximum (or minimum) (Talapatra et al. 2018) of the design space, i.e.,

$$\mathbf{x}_{\text{opt}} = \operatorname*{arg\,max}_{\mathbf{x} \in \mathbb{R}^{P}} f(\mathbf{x}). \tag{12}$$

The acquisition function is the key in a BO framework for deciding where to conduct the next experiment. The EI acquisition function is expressed as (Jones et al. 1998):

$$\operatorname{EI}_{n}(\boldsymbol{x}) = (\mu_{*}(\boldsymbol{x}) - f(\boldsymbol{x}^{+}))\Phi\left(\frac{\Delta_{n}(\boldsymbol{x})}{\sigma_{*}(\boldsymbol{x})}\right) + \sigma_{*}(\boldsymbol{x})\phi\left(\frac{\Delta_{n}(\boldsymbol{x})}{\sigma_{*}(\boldsymbol{x})}\right), \tag{13}$$

where $\Delta_n(\boldsymbol{x}) = \mu_*(\boldsymbol{x}) - f(\boldsymbol{x}^+)$ and it captures the potential improvement over the current best solution (\boldsymbol{x}^+) if the sequential algorithm chooses \boldsymbol{x} as the new experiment location, $\mu_*(\boldsymbol{x})$ and $\sigma_*(\boldsymbol{x})$ represent the mean and standard deviation of the GP posterior predictive at \boldsymbol{x} , and Φ and ϕ are the cdf and pdf of the standard normal distribution, respectively. The first component of Eq. (13) favors exploitation and the second component favors exploration. A high value of improvement over the current best solution (component 1) and a high uncertainty (component 2) both result in a final high EI. Equation (13) decides the trade-off between the two considerations. To apply the EI-based experiment policy to the same example explained in Section 3.5.1, all settings are kept the same as in the surprise-based policy, including the initial experiment and the GP-based statistical model. The key difference is the mechanism of exploitation-exploration switching and where to select the next experiment.

The experiment process using the EI-based policy is illustrated in Fig. 4. One can find that BO is able to locate the maximum value of the underlying function successfully but in that process the EI-based policy fails to approximate the right half of the functional space. Such outcome is much expected considering the design of the EI acquisition function itself. If one looks at the construction of Eq. (13), we notice that potential improvement (Δ_n) of the candidate locations are weighted by their respective variances. Moreover, the cdf of the variance-corrected improvements is multiplied by the actual improvement to form the exploitation component, while the corresponding pdf is

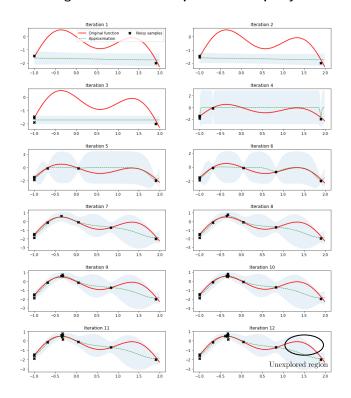


Figure 4 El-based experimentation policy.

multiplied by the variance of the candidate location to form the exploration component. As such, the first component of Eq. (13) often overweighs the second component, so much so that unless the improvement is very minimum in regions with low variability, the EI-based policy hesitates to move towards a high reward, high variability region.

In summary, the EI-based policy is in favor of locations that provide a small improvement with more certainty (low $\sigma_*(\boldsymbol{x})$) over a bigger improvement with less certainty (high $\sigma_*(\boldsymbol{x})$). Such policy tends to over-exploit local peaks and could be trapped in local optima. If we look at iteration 12 of using the EI-based policy, we find that the sequential algorithm is stuck to the neighborhood of the left peak. In order for the EI-based policy to explore the right peak, it could take many more samples.

Of course one may argue that the objective of the EI-based policy is not to fully explore a design space or a response surface. Rather it is to hone in on the optima rapidly. We agree that for that purpose, the EI-based policy is doing a fair job. In the meanwhile, we also want to stress that importance of fully characterizing response surfaces or design spaces, which is a well-established need shared across multiple disciplines such as biological systems (Lovell et al. 2011), energy field (Mäkelä 2017), or machining process (Habib 2009). We hope to convey the message that the surprise-reacting policy provides a better alternative than the EO-based policy.

4. Performance Comparison

In this section, we present the performance of our proposed surprise-reacting approaches compared to two different groups of methods for the task of function approximation. As the representative of pure exploration-based approaches, we consider two popular space filling designs namely maximin LHD (Johnson et al. 1990, Morris and Mitchell 1995) and maximum projection LHD (MaxProLHD) (Joseph et al. 2015). On the other hand, we include EI-based BO approach as a representative of exploitation greedy method. In light of the finding that the pure EI-based Bayesian optimization overweighs exploitation over exploration, we also consider an ϵ -greedy version of the BO framework, which is proposed by Bull (2011) as follows:

- Choose the initial k design points, x_1, \ldots, x_k ,
- With probability 1ϵ , choose the next design point x_{next} by EI; or
- With probability ϵ , choose x_{next} uniformly at random from the input domain.

We refer to this ϵ -greedy version as ϵ -EI. When $\epsilon = 0$, ϵ -EI becomes the pure EI, and when $\epsilon = 1$, ϵ -EI is a pure exploration with no exploitation. Apparently, as ϵ gets bigger, ϵ -EI policy favors more exploration. In implementation, a value of $\epsilon = [0, 1]$ is chosen *a priori* and then used in the subsequent sequential experimentation process.

We use two synthetic benchmark functions and a real-life dataset to test the efficacy of the competing approaches. For a fair comparison, we select the initial and sequential experiments using a maximum projection LHD (MaxProLHD) design for all the competing approaches. They will utilize the same exploration scheme (maximin scheme described in section 3.3) given that an exploration component is present in their design steps. GP-based statistical model under the same resource constrained environment will be used for all of them. Then we compare the prediction performance of the underlying response surface for each of these approaches. We use the root mean squared error (RMSE) as our performance metric, i.e.,

RMSE =
$$\sqrt{\frac{1}{T} \sum_{j=1}^{j=T} (y_j - \widehat{y}_j)^2},$$
 (14)

where T is the size of the test set, \hat{y}_j is the prediction made by the trained statistical model, and y_j is the true response. For the simulated datasets, y_j is generated by the underlying true function, whereas in the real-life dataset, y_j is the actual physical measurements. A lower RMSE corresponds to better function approximation and hence better performance.

4.1. Synthetic Benchmark Functions

We consider two popular benchmark functions which are routinely used for testing the performance of global optimization solvers. They are the six-hump camelback function and the Branin function; both are two dimensional functions. BO approaches are shown in the literature to be able to find the global minimum of these functions successfully. In our study here, we are using them to test which approach can better approximate the underlying response surface based on a limited functional evaluations.

The six-hump camelback function is defined as follows, $x_1 \in [-3,3]$ and $x_2 \in [-2,2]$,

$$f(\mathbf{x}) = \left(4 - 2.1x_1^2 + \frac{x_1^4}{3}\right)x_1^2 + x_1x_2 + (-4 + 4x_2^2)x_2^2.$$
 (15)

The Branin function is defined as follows, with $x_1 \in [-5, 10]$ and $x_2 \in [0, 15]$.

$$f(\mathbf{x}) = a(x_2 - bx_1^2 + cx_1 - r)^2 + s(1 - t)\cos x_1 + s,$$
(16)

where the recommended values of a, b, c, r, s, and t are: a = 1, $b = 5.1/(4\pi^2)$, $c = 5/\pi$, r = 6, s = 10 and $t = 1/(8\pi)$.

We allocate 20 initial experiments and 50 sequential experiments to the competing approaches which makes a total of 70 experiments to learn the function. Both Shannon and Bayesian surprise metrics are used in the surprise-reacting approach. After the experiments have been completed, the trained statistical models from both categories of the approaches are used to perform prediction (\hat{y}_j) on an independent test set of another 50 locations, i.e., T = 50. The RMSEs are calculated for each of the approaches. We repeat this process for a total of 50 times to get a uncertainty quantification of the RMSE.

Table 1 and Table 2 summarize the performance comparison between the competing approaches for the two benchmark functions, respectively. In the table, the second row is the median RMSE and the third row is the interquartile range (IQR) of the RMSE. One can see that the surprisereacting approaches achieve a superior prediction performance and using Shannon surprise comes out a bit better than using Bayesian surprise. Also, the prediction variability is much lower when using the suprise measures, as compared to other competing methods.

Both maximin LHD and MaxProLHD are pure exploration methods and do not perform exploitation. The key difference between the pure space-filling designs and our approach is that we perform exploitation, reacting to surprise observations, in addition to exploration. The degree of surprise decides the trade off actions between exploration and exploitation. The LHD method does not appear competitive but MaxProLHD produces a competitive outcome, about 10% worse, in terms of the median RMSE, than the best performance, which are the Shannon surprise in both cases. Using MaxProLHD produces the third best performance in both benchmark function studies. The problem with using MaxProLHD is the large fluctuation in its performance, as measured by the IQR in RMSE. The same problem happens to other exploration methods like LHD and ϵ -EI at large ϵ values. EI performs poorly compared to the other approaches. These outcomes are not that much unexpected and reflect the over-exploitation nature of the EI-based approach. The EI approaches are more suited for the optimization task and do not perform well for the approximation task. The awareness of such tendency of EI in fact motivates the introduction of ϵ -EI. But the tricky question in using ϵ -EI is which ϵ one should use. There is no easy way yet to decide on this question. For this performance study, we try the full spectrum of ϵ , in the range of [0, 1] with an increment of 0.1. As ϵ -EI combines both exploration and exploitation, they perform considerably better than EI, however, they still fall behind surprise-based approaches, even when $\epsilon = 1$. Again, finding out the best ϵ to use is not a trivial task—at least this is not something researchers have figured out yet, after a decade of the introduction of ϵ -EI.

 Table 1
 Performance of the competing approaches for six-hump camelback function using RMSE values. Bold indicates the best performance.

	EI	$\epsilon = 0.1$	$\epsilon = 0.2$	$\epsilon = 0.3$	$\epsilon{=}0.4$	$\epsilon{=}0.5$	$\epsilon = 0.6$	$\epsilon = 0.7$	$\epsilon = 0.8$	$\epsilon{=}0.9$	$\epsilon = 1.0$	Shannon Surprise	Bayesian Surprise	LHD	MaxPro LHD
Median	7.5	5.73	5.48	4.36	5.15	5.33	5.54	5.78	7.07	6.22	4.33	3.95	4.41	7.05	4.36
IQR	3.97	2.65	2.48	2.24	5.98	4.84	2.66	5.8	15.44	15.84	14.91	1.13	1.24	14.67	18.01

 Table 2
 Performance of the competing approaches for Branin function using RMSE values. Bold indicates the best performance.

	EI	$\epsilon{=}0.1$	$\epsilon = 0.2$	$\epsilon = 0.3$	$\epsilon{=}0.4$	$\epsilon{=}0.5$	$\epsilon = 0.6$	$\epsilon{=}0.7$	$\epsilon = 0.8$	$\epsilon = 0.9$	$\epsilon = 1.0$	~ ·	Bayesian Surprise	LHD	MaxPro LHD
Median	2.77	2.66	2.06	1.24	1	0.8	0.78	0.69	0.68	0.67	0.68	0.61	0.63	0.81	0.68
IQR	2.22	2.24	2.16	1.17	1.59	0.66	3.89	0.64	1.56	0.76	0.32	0.27	0.23	0.8	0.32

4.2. Grinding Dataset

In addition to synthetic benchmark functions we also evaluate the performance of our approach on a real-life grinding data set (Botcha et al. 2021). In this process, finding the minima or maxima is not that important, as a ground surface has plenty of ups and downs. The purpose for this manufacturing process is to quickly characterizing the response surfaces using a limited amount of resources. For the grinding process (Son et al. 2020, Sanjeevi et al. 2021), this is to get the desired surface roughness in different stages of the finishing process by setting the correct process conditions, such as the feed rate and speed. In order to achieve that, one has to attain a good approximation of the underlying response surface using the data from limited experiments. It is part of the 'performance qualification' (PQ) measures stated by the Food & Drug Administration (FDA) guideline (Food and Administration 2015, Tartal 2015).

The dataset is generated using a cylindrical plunge grinding process. Three process parameters (\mathbf{x}) are the work speed, wheel speed, and the in-feed of the grinding wheel. The goal is to establish

a relationship between these process parameters and the surface roughness, so as to characterize the underlying response surface. The actual surface roughness is measured at the end of each experiment and the real physical measurement is treated as y. The anticipated \hat{y} is obtained from the trained statistical model.

Each experimentation goes through four stages starting from roughing and then gradually proceeds into semi-finishing, finishing, and then sparkout at the very end. Surface roughness measurements are taken at the end of these four stages. For this grinding process, the experiments have already carried out before we could apply either the surprise-reacting policy or the competing approaches to it. The existing experiment data are obtained using a central composite design (Botcha et al. 2021). There were a total of 38 experiments, each of which entails four stages. It yielded a total of 152 data samples.

As the experiments involved an expensive Titanium workpiece, it is not easy to repeat it in a brand new experiment. To arrange our test to best reflect a sequential experiment process, we divide the whole dataset of 152 samples into three sets randomly. The first set consists of 20 samples and these are used as initial experiments to train the initial statistical model. A test set of 38 samples have been set aside to test the performance of the competing approaches. The remaining 94 samples provide the possible settings that can be selected in sequential experiments. In other words, as the sequential experimentation policy starts with its process of selecting experiment one at a time, its choices are limited to these 94 samples. We stress that this constraint is equally applied to all the sequential experiment policies. The experimental budget is fixed at 40 sequential experiments, which makes a total of 60 experiments counting the 20 initial experiments.

Similar as in the case of synthetic benchmark functions, we present the comparative performance in Table 3. On this real-life dataset, both versions of the surprise-reacting policy perform more comparably and achieve good performance as compared to the competing approaches, although the margin of improvement is smaller than that in the benchmark function studies. This is due to the nature of sequential experiment setup as we explained earlier—unlike the benchmark functions, we cannot query an arbitrary candidate location as wished, but are rather constrained to those already conducted to candidate locations. Overall, we think the surprise-reacting policy is able to deliver a robust performance in characterizing an unknown, complex response surface quickly.

 Table 3
 Performance of the competing approaches for the grinding dataset using RMSE values. Bold indicates the best performance.

	EI	$\epsilon = 0.1$	$\epsilon = 0.2$	$\epsilon = 0.3$	$\epsilon{=}0.4$	$\epsilon{=}0.5$	$\epsilon = 0.6$	$\epsilon = 0.7$	$\epsilon = 0.8$	$\epsilon = 0.9$	$\epsilon = 1.0$	Shannon Surprise	Bayesian Surprise	LHD	MaxPro LHD
Median	0.27	0.25	0.23	0.22	0.2	0.19	0.18	0.19	0.18	0.18	0.18	0.17	0.17	0.18	0.18
IQR	0.05	0.05	0.06	0.05	0.04	0.05	0.04	0.03	0.04	0.05	0.05	0.04	0.03	0.04	0.04

5. Conclusions

In this work, we propose a surprise-reacting policy for guiding sequential experiments which may be useful in futuristic autonomous experimentation platforms. This policy switches between exploration and exploitation based on the degree of surprise, achieves a natural balance between them, and appears more adaptive. We argue and then demonstrate that the proposed surprise-reacting approach is effective in terms of rapid characterization of an unknown yet complex underlying response surface. We test the surprise-based policy using two existing surprise measures, i.e., the Shannon and Bayesian surprises. It appears that the Shannon surprise produces a fast response at least in our current testing, very much in line with its own design. We could not yet conclude whether such quick response is always desirable or not, but such question is worth further investigation.

The comparison with the space-filling designs and EI reinforces our claim regarding the merit of conducting surprise-reacting exploitations in sequential learning. Under a resource constrained environment, it is not effective to approximate the underlying function using pure exploratory methods; nor is it effective, either, using over-exploitation approaches like EI. The comparison with the ϵ -EI policy appears to support the claim that surprise-reacting policy is more adaptive than an ϵ -EI policy. We have mentioned that one principal difficulty of using the ϵ -EI policy is how to decide the optimal ϵ ahead of the actual use. One can easily envision that another challenge for using the ϵ -EI policy is whether or not one needs to adaptively adjust ϵ as the sequential experiments is progressing, rather than fixing the value of ϵ prior to the start of the experiment. But an adaptive ϵ -EI policy, with ϵ chosen on the fly, is non-trivial. The surprise-reacting policy adjudicates surprise observations as the sequential experiments progresses and that adjudication seems to endow the sequential approach with adaptivity for experimental control.

Acknowledgments

The authors acknowledge the generous support from National Science Foundation under grant no. IIS-1849085 and Texas A&M Office of President's X-grant Program.

References

Baldi P (2002) A computational theory of surprise. Information, Coding and Mathematics, 1–25 (Springer).

- Besbes O, Gur Y, Zeevi A (2019) Optimal exploration–exploitation in a multi-armed bandit problem with non-stationary rewards. *Stochastic Systems* 9(4):319–337.
- Botcha B, Iquebal AS, Bukkapatnam ST (2021) Efficient manufacturing processes and performance qualification via active learning: Application to a cylindrical plunge grinding platform. *Procedia Manufacturing* 53:716–725.

- Box G, Hunter JS, Hunter WG (2005) Statistics for Experimenters: Design, Innovation, and Discovery (Wiley-Interscience New York).
- Box G, Wilson K (1951) On the experimental attainment of optimum conditions. Journal of the Royal Statistical Society. Series B (Methodological) 13(1):1–45.
- Bukkapatnam ST (2023) Autonomous materials discovery and manufacturing (AMDM): A review and perspectives. *IISE Transactions* 55(1):75–93.
- Bull AD (2011) Convergence rates of efficient global optimization algorithms. Journal of Machine Learning Research 12(10):2879–2904.
- Burger B, Maffettone PM, Gusev VV, Aitchison CM, Bai Y, Wang X, Li X, Alston BM, Li B, Clowes R, Rankin N, Harris B, Sprick RS, Cooper AI (2020) A mobile robotic chemist. *Nature* 583(7815):237–241.
- Chen J, Kang L, Lin G (2021) Gaussian process assisted active learning of physical laws. *Technometrics* 63(3):329–342.
- Chen J, Mak S, Joseph VR, Zhang C (2022) Adaptive design for Gaussian process regression under censoring. *The Annals of Applied Statistics* 16(2):744–764.
- Chen Z, Mak S, Wu C (2019) A hierarchical expected improvement method for Bayesian optimization. arXivpreprint arXiv:1911.07285.
- Coley CW, Eyke NS, Jensen KF (2020) Autonomous discovery in the chemical sciences Part I: Progress. Angewandte Chemie International Edition 59(51):22858–22893.
- Cox DD, John S (1992) A statistical method for global optimization. [Proceedings] 1992 IEEE International Conference on Systems, Man, and Cybernetics, 1241–1246 (IEEE).
- Cressie N (1991) Statistics for Spatial Data (John Wiley & Sons, New York).
- Cully A, Clune J, Tarapore D, Mouret JB (2015) Robots that can adapt like animals. *Nature* 521(7553):503–507.
- De Ath G, Everson RM, Rahat AA, Fieldsend JE (2021) Greed is good: Exploration and exploitation trade-offs in Bayesian optimisation. ACM Transactions on Evolutionary Learning and Optimization 1(1):1–22.
- Deneault JR, Chang J, Myung J, Hooper D, Armstrong A, Pitt M, Maruyama B (2021) Toward autonomous additive manufacturing: Bayesian optimization on a 3d printer. *MRS Bulletin* 46(7):566–575.
- Epps RW, Bowen MS, Volk AA, Abdel-Latif K, Han S, Reyes KG, Amassian A, Abolhasani M (2020) Artificial chemist: An autonomous quantum dot synthesis bot. *Advanced Materials* 32(30):2001626.
- Faraji M, Preuschoff K, Gerstner W (2018) Balancing new against old information: The role of puzzlement surprise in learning. *Neural Computation* 30(1):34–83.
- Feldbaum AA (1960) Dual control theory. i. Avtomatika i Telemekhanika 21(9):1240–1249.

Fisher RA (1935) The Design of Experiments (Oliver & Boyd, Edinburgh, UK).

- Flores-Leonar MM, Mejía-Mendoza LM, Aguilar-Granda A, Sanchez-Lengeling B, Tribukait H, Amador-Bedolla C, Aspuru-Guzik A (2020) Materials acceleration platforms: On the way to autonomous experimentation. Current Opinion in Green and Sustainable Chemistry 25:100370.
- Food US, Administration D (2015) Process validation: General principles & practices. URL https://www. fda.gov/files/drugs/published/Process-Validation--General-Principles-and-Practices. pdf, (Date accessed: 11/26/2022).
- Frazier PI (2018) A tutorial on Bayesian optimization. arXiv preprint arXiv:1807.02811.
- Gongora AE, Xu B, Perry W, Okoye C, Riley P, Reyes KG, Morgan EF, Brown KA (2020) A Bayesian experimental autonomous researcher for mechanical design. *Science Advances* 6(15):eaaz1708.
- Greenhill S, Rana S, Gupta S, Vellanki P, Venkatesh S (2020) Bayesian optimization for adaptive experimental design: A review. *IEEE Access* 8:13937–13948.
- Habib SS (2009) Study of the parameters in electrical discharge machining through response surface methodology approach. Applied Mathematical Modelling 33(12):4397–4407.
- Itti L, Baldi PF (2006) Bayesian surprise attracts human attention. Advances in Neural Information Processing Systems, 547–554.
- Johnson ME, Moore LM, Ylvisaker D (1990) Minimax and maximin distance designs. *Journal of statistical* planning and inference 26(2):131–148.
- Jones DR, Schonlau M, Welch WJ (1998) Efficient global optimization of expensive black-box functions. Journal of Global Optimization 13(4):455–492.
- Joseph VR, Gul E, Ba S (2015) Maximum projection designs for computer experiments. *Biometrika* 102(2):371–380.
- Karimi K (2015) Rp platform rebrands as amfg as it launches new ai software platform for 3d printing. URL https://amfg.ai/press/rp-platform-rebrands-as-amfg/, (Date accessed: 11/27/2022).
- Kleijnen JPC (2008) Design and Analysis of Simulation Experiments (Springer New York, NY).
- Kushner HJ (1964) A new method of locating the maximum point of an arbitrary multipeak curve in the presence of noise. *Journal of Basic Engineering* 86(1):97–106.
- Lancaster J, Lorenz R, Leech R, Cole JH (2018) Bayesian optimization for neuroimaging pre-processing in brain age classification and prediction. Frontiers in Aging Neuroscience 10:28.
- Lovell C, Jones G, Gunn SR, Zauner KP (2011) Autonomous experimentation: Active learning for enzyme response characterisation. Active Learning and Experimental Design Workshop In Conjunction with AISTATS 2010, 141–155 (JMLR Workshop and Conference Proceedings).
- Mäkelä M (2017) Experimental design and response surface methodology in energy applications: A tutorial review. *Energy Conversion and Management* 151:630–640.

Matheron G (1963) Principles of geostatistics. Economic Geology 58(8):1246–1266.

- Morris MD, Mitchell TJ (1995) Exploratory designs for computational experiments. *Journal of Statistical Planning and Inference* 43(3):381–402.
- Nikolaev P, Hooper D, Webber F, Rao R, Decker K, Krein M, Poleski J, Barto R, Maruyama B (2016) Autonomy in materials research: A case study in carbon nanotube growth. *npj Computational Materials* 2(1):1–6.
- Noack MM, Doerk GS, Li R, Streit JK, Vaia RA, Yager KG, Fukuto M (2020) Autonomous materials discovery driven by gaussian process regression with inhomogeneous measurement noise and anisotropic kernels. *Scientific Reports* 10(1):1–16.
- Qin C, Klabjan D, Russo D (2017) Improving the expected improvement algorithm. Advances in Neural Information Processing Systems 2017:5382–5392.
- Rasmussen CE, Williams CK (2006) Gaussian Processes for Machine Learning (MIT press Cambridge, MA).
- Sacks J, Schiller SB, Welch WJ (1989) Designs for computer experiments. Technometrics 31(1):41–47.
- Sanjeevi R, Kumar GA, Krishnan BR (2021) Optimization of machining parameters in plane surface grinding process by response surface methodology. *Materials Today: Proceedings* 37:85–87.
- Santner TJ, Williams BJ, Notz WI, Williams BJ (2003) The Design and Analysis of Computer Experiments (Springer).
- Schneider G (2018) Automating drug discovery. Nature Reviews Drug Discovery 17(2):97–113.
- Son NH, Trung DD, Nguyen NT (2020) Surface roughness prediction in grinding process of the SKD11 steel by using response surface method. *IOP Conference Series: Materials Science and Engineering*, volume 758, 012029 (IOP Publishing).
- Sparkes A, Aubrey W, Byrne E, Clare A, Khan MN, Liakata M, Markham M, Rowland J, Soldatova LN, Whelan KE, Young M, King RD (2010) Towards robot scientists for autonomous scientific discovery. *Automated Experimentation* 2(1):1–11.
- Talapatra A, Boluki S, Duong T, Qian X, Dougherty E, Arróyave R (2018) Autonomous efficient experiment design for materials discovery with Bayesian model averaging. *Physical Review Materials* 2(11):113803.
- Tartal J (2015) Quality system regulation: Process validation. URL https://www.fda.gov/media/94074/ download, (Date accessed: 11/01/2021).
- Wald A (1947) Sequential Analysis. (John Wiley & Sons, New York).
- Wu CJ, Hamada MS (2009) Experiments: Planning, Analysis, and Optimization (John Wiley & Sons).
- Wu J, Frazier P (2019) Practical two-step lookahead Bayesian optimization. Advances in Neural Information Processing Systems 32.
- Yue X, Kontar RA (2020) Why non-myopic bayesian optimization is promising and how far should we lookahead? a study via rollout. International Conference on Artificial Intelligence and Statistics, 2808–2818 (PMLR).

Zhang Y, Apley DW, Chen W (2020) Bayesian optimization for materials design with mixed quantitative and qualitative variables. *Scientific Reports* 10(1):1–13.