

GRAPHCODE2VEC: Generic Code Embedding via Lexical and Program Dependence Analyses

Wei Ma^{1*}, Mengjie Zhao^{2*}, Ezekiel Soremekun¹, Qiang Hu¹, Jie Zhang³, Mike Papadakis¹, Maxime Cordy¹, Xiaofei Xie⁴, Yves Le Traon¹

¹SnT, Luxembourg, ²LMU Munich, ³University College London

⁴Nanyang Technological University

ABSTRACT

Code embedding is a keystone in the application of machine learning on several Software Engineering (SE) tasks, e.g., method name prediction and code clone detection. To be effective, the embedding needs to capture program semantics in a way that is effective and generic, in a sense being able to effectively support a plethora of SE tasks. To this end, we propose an approach (called GRAPHCODE2VEC) that *captures program semantics* through lexical and program dependence features via an effective combination of *code analysis* and *Graph Neural Networks*. GRAPHCODE2VEC is *generic*, i.e., it *allows pre-training*, and it is *effectively applicable to several SE downstream tasks*. We evaluate the effectiveness of GRAPHCODE2VEC on three (3) tasks (method name prediction, solution classification and code clone detection), and compare it with four (4) similarly *generic* code embedding baselines (Code2Seq, Code2Vec, CodeBERT, GraphCodeBERT) and seven (7) *task-specific*, learning-based methods. In particular, GRAPHCODE2VEC is more effective than both generic and task-specific learning-based baselines for all three tasks, with the exception of one task where it is slightly less effective than GraphCodeBERT. We also demonstrate through a purposely designed probing and ablation study that GRAPHCODE2VEC effectively learns lexical and program dependence features and that pre-training improves its effectiveness.

ACM Reference Format:

Wei Ma^{1*}, Mengjie Zhao^{2*}, Ezekiel Soremekun¹, Qiang Hu¹, Jie Zhang³, Mike Papadakis¹, Maxime Cordy¹, Xiaofei Xie⁴, Yves Le Traon¹, ¹SnT, Luxembourg, ²LMU Munich, ³University College London, ⁴Nanyang Technological University. 2023. GRAPHCODE2VEC: Generic Code Embedding via Lexical and Program Dependence Analyses. In *Proceedings of ACM Conference (Conference'17)*. ACM, New York, NY, USA, 12 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 INTRODUCTION

Applying machine learning to address software engineering (SE) problems often requires a vector representation of the program

code, especially for deep learning systems. A naïve representation, used in many SE applications, is one-hot encoding that represents every feature with a dedicated binary variable (a vector including binary values) [49]. However, this type of embedding is usually a high-dimensional sparse vector because the size of vocabulary is very large in practice, which results in the notorious *curse of dimensionality* problem [4]. Besides, one-hot encoding has *out-of-vocabulary* (OOV) problem, which decreases model generalization capability such that it cannot handle new type of data [54].

To deal with these issues, researchers employ dense and reasonably concise vectors to encode code features for specific SE tasks, since they generalise better [27, 58, 60, 66]. More recently, researchers apply natural language processing (NLP) techniques to learn the universal code embedding vector for general SE tasks [1–3, 5–7, 9, 15, 21, 24, 29, 43, 45, 57, 59]. The resulting code embedding represents a mapping from the “program space” to the “latent space” that captures the different code-used semantics, i.e., the semantic similarities between program snippets. The aim is that similar programs should have similar representations in the latent space.

State-of-the-art code embedding approaches focus either on *syntactic features* (i.e., tokens/AST), or on *semantic features* (i.e., program dependencies) ignoring the importance of combining both features together. For example, Code2Vec [3] and CodeBERT [15]) focus on syntactic features, while PROGRAML [9] and NCC [5]) focus on program semantics. There are few studies using both program semantics and syntax, e.g., GraphCodeBERT [21]. However, these approaches are not *precise*, they do not obtain or embed the entire program dependence graph. Instead, they estimate program dependence via string matching (instead of static program analysis), then augment AST trees with sequential data flow edges.

We thus propose a novel code embedding approach (called GRAPHCODE2VEC) that captures both syntax and program semantics via combined *lexical embedding* and *dependence embedding*, respectively. The *main idea* of our approach is to use static program analysis and graph neural networks to effectively represent programs in the latent space. The *key insight* is that a combination of lexical and program dependence analysis is important to effectively determine the similarity among program snippets. During lexical embedding, GRAPHCODE2VEC embeds the syntactic features in the latent space via *tokenization*. In addition, it performs dependence embedding to capture program semantics via static program analysis, it derives the program dependence graph (PDG) and represent it in the latent space using Graph Neural Networks (GNN). It then concatenates both lexical embedding and dependence embedding in the program’s vector space. This allows GRAPHCODE2VEC to be effectively applicable on several downstream tasks.

*these authors contributed equally, ¹first_name.last_name@uni.lu, ²mzhao@cis.lmu.de, ³jie.zhang@ucl.ac.uk, ⁴xfxie@ntu.edu.sg.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

Conference’17, July 2017, Washington, DC, USA

© 2023 Association for Computing Machinery.

ACM ISBN 978-x-xxxx-xxxx-x/YY/MM...\$15.00

<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

Figure 1: Motivating example showing (a) an original method (LowerBound), and two behaviorally equivalent clones of the original method, namely (b) a renamed method (findLowerBound), and (c) a refactored method (getLowerBound).

```
public static int lowerBound(int[] array,
    int length, int value) {
    int low = 0;
    int high = length;
    while (low < high) {
        final int mid = (low + high) / 2;
        if (value <= array[mid]) {
            high = mid;
        } else {
            low = mid + 1;
        }
    }
    return low;
}
```

(a) Original Method

```
public static int findLowerBound(int[] inputs,
    int size, int v) {
    int bounder = 0;
    int l = size;
    int minindex = 0;
    while (bounder < l) {
        minindex = (bounder + l) / 2;
        if (v <= inputs[minindex]) {
            l = minindex;
        } else {
            bounder = minindex + 1;
        }
    }
    return bounder;
}
```

(b) Renamed Method

```
public static int getLowerBound(int v,
    int size, int[] inputs) {
    int h = size;
    int minindex = 0;
    int check = 0;
    while (check < h) {
        minindex = (check + h) / 2;
        if (v > inputs[minindex]) {
            check = minindex + 1;
        } else {
            h = minindex;
        }
    }
    return check;
}
```

(c) Refactored Method

To demonstrate the importance of semantic embedding, we compare the similarity of three pairs of programs using our approach, in comparison to a syntax-only embedding approach – CodeBERT, and GraphCodeBERT, which embeds both syntax and semantic, albeit without program dependence analysis. Consider the example of three program clones in Figure 1. This example includes three behaviorally or semantically equivalent programs, that have low syntactic similarity (i.e., different tokens), but with similar semantic features, i.e., program dependence graphs (PDGs). To measure the similarity distance in the latent space, in addition to the example code clones (Figure 1), we randomly select 10 other different code methods (from GitHub) without any change to establish a baseline for comparing all approaches. To this end, we compute the average cosine similarity distance for all 91 program pairs ($\frac{14 \times 13}{2}$) for reference to show that all approaches report similar scores for all 91 pairs (Table 1). For all three approaches, the similarity between the “original program” and a direct copy of the program with only method name renaming to “searchLowerBound”, is well captured with an almost perfect cosine similarity score for all approaches (1 or 0.99). Likewise, the cosine similarity of the original program and the “renamed” program (findLowerBound) is mostly well captured by all approaches, since they all embed program syntax, albeit with lower cosine similarity scores for CodeBERT (0.61) and GraphCodeBERT (0.70), in comparison to our approach (0.99).

Meanwhile, CodeBERT fails to capture the semantic similarity between the “original program” and the “refactored program” (getLowerBound), even though they are behaviorally similar and share similar program dependence. This is evidenced by the low cosine similarity score (0.51), because it does not account for semantic information in its embedding, especially the similar program dependence graph shared by both programs. Lastly, GraphCodeBERT performs slightly better than CodeBERT (0.70 vs. 0.51), but lower than our approach (0.99). This is due to lack of actual static program analysis in the embedding of GraphCodeBERT, since it only applies a heuristic (string matching) to estimate program dependence, it is *imprecise*. This example demonstrates the importance and necessity of embedding precise dependence information.

To evaluate GRAPHCODE2VEC we compare it with four generic code embedding approaches, and seven task-specific learning-based applications. We also investigate the stability and learning ability of our approach through sensitivity, ablation and probing analyses.

Overall, we make the following *contributions*:

Generic Code embedding. We propose a novel and generic code embedding learning approach (i.e., GRAPHCODE2VEC) that captures

Table 1: Cosine Similarity of three behaviorally/semantically similar program pairs from our motivating example, using GraphCodeBERT, CodeBERT and GRAPHCODE2VEC

Program Pairs	Graph-CodeBERT	CodeBERT	GRAPHCODE2VEC
searchLowerBound & lowerBound	1	0.99	1
findLowerBound & lowerBound	0.70	0.61	0.99
getLowerBound & lowerBound	0.70	0.51	0.99
Average of 91 pairs	-0.05	-0.06	-0.03

the lexical, control flow and data flow features of programs through a novel combination of *tokenization*, *static code analysis* and *graph neural networks* (GNNs). To the best of our knowledge, GRAPHCODE2VEC is the first code embedding approach that uses GNNs derived from *precise* program dependencies. We demonstrate that GRAPHCODE2VEC is *effective* (RQ1 in Section 5): *It outperforms all baseline generic code embedding approaches*. We provide our (pre-)trained models and generic embedding for public use and scrutiny.¹

Task-specific learning-based applications. We introduce the automatic application of GRAPHCODE2VEC to solve specific downstream SE tasks, without extensive human intervention to adapt model architecture. In comparison to the state-of-the-art task-specific learning-based approaches (e.g., ProgramGraph [1]), our approach does not require any effort to tune the hyper-parameters to be applicable to a downstream task (Section 3). Our evaluation on two downstream tasks, code clone detection and solution classification, showed that GRAPHCODE2VEC outperforms the state-of-the-art task-specific learning-based applications: For both tasks it outperforms all task-specific applications (RQ2 in Section 5).

Further Analyses. We extensively evaluate the *stability* and *interpretability* of our approach by conducting *sensitivity*, *probing* and *ablation* analyses. We also investigate the impact of configuration choices (i.e., pre-training strategies and GNN architectures) on the effectiveness of our approach on downstream tasks. Our evaluation results show that GRAPHCODE2VEC *effectively learns lexical and program dependence features*, it is *stable* and insensitive to the choice of GNN architecture or pre-training strategy (RQ3 in Section 5).

In the rest of this work, we interchangeably use the terms “lexical” and “syntactic” interchangeably, as well as “(program) dependence” and “semantic”. Such that the terms “lexical embedding” and “syntactic embedding” refer to the embedding of program syntax, and the terms “dependency embedding” and “semantic embedding” refer to the embedding of program dependence information.

¹<https://github.com/graphcode2vec/graphcode2vec>

2 BACKGROUND

2.1 Generic code embedding

This refers to methods that learn general-purpose code representations to support several downstream tasks. These approaches are not designed for a specific task, but are applicable to several downstream (SE) tasks. There are two major types of generic code embedding approaches, namely *syntax-based* and *semantic-based* approaches.

Syntax-based Generic Approaches: These approaches encode program snippets, either by dividing the program into *strings*, lexicalizing them into *tokens* or parsing the program into a *parse tree* or *abstract syntax tree (AST)*. Syntax-only generic embedding approaches include Code2Vec [3], Code2Seq [2], CodeBERT [15], C-BERT [7], InferCode [6], CC2Vec [24], AST-based NN [65] and ProgHeteroGraph [59] (see Table 2). Notably, these approaches use neural models for representing code (snippets), *e.g.*, via code vector (*e.g.*, Code2Vec [3]), machine translation (*e.g.*, Code2Seq [2]) or transformers (*e.g.*, CodeBERT [15]). Code2Vec [3] is an AST-based code representation learning model that represents code snippets as single fixed-length code vector. It decomposes a program into a collection of paths using an AST and learns the atomic representation of each path while simultaneously learning how to aggregate the set of paths. Code2Seq [2] is an alternative code embedding approach that uses Sequence-to-sequence (seq2seq) models, adopted from neural machine translation (NMT), to encode code snippets. It leverages the syntactic structure of programming languages to encode source code by representing code snippets as the set of paths in the program’s AST, then uses attention to select the relevant paths while decoding. Besides, CodeBERT [15], C-BERT [7] and Cu-BERT [29] are BERT-inspired approaches, these methods adopt similar methodologies to learn code representations as BERT [11]. CodeBERT [15] is a bimodal pre-trained model for programming language (PL) and natural language (NL) tasks, which uses transformer-based neural architecture to encode code snippets. Meanwhile, C-BERT [7] pre-trains a large transformer-model on raw source code, then tests if the model can discover AST features. Cu-BERT [29] is similar to C-BERT, but it focuses on embedding programs written in the Python programming language.

GRAPHCode2Vec is similar to the aforementioned generic code embedding methods, it is also a general-purpose code embedding approach that captures syntax by lexicalizing the program into tokens (see Table 2). However, all of the aforementioned generic approaches are syntax-based (*i.e.*, based on ASTs, strings or tokens), none of these approaches account for program semantics (*i.e.*, data and control flow). Unlike these approaches, GRAPHCode2Vec additionally captures program semantics, it extracts and encodes program dependencies via static analysis. In this paper, we compare our approach (GRAPHCode2Vec) to the three (3) most popular and recent syntax-based generic code embedding approaches, namely Code2Vec [3], Code2Seq [2] and CodeBERT [15] (see section 5).

Semantic-based Generic Approaches: This refers to code embedding methods that capture semantic information such as control and data flow dependencies in the program. *Semantic-only generic approaches* include NCC [5] and PROGRAML [9]. On one hand, NCC [5] extracts the contextual flow graph of a program by building an LLVM intermediate representation (IR) of the program. It then

Table 2: Details of the state-of-the-art Code Embedding approaches. “Semantic” = program dependence (control and/or data flow), and “Syntactic” = strings, tokens, parse tree or AST-tree. Symbol “✓” means the approach supports a feature, and “×” means it does not support the feature.

	Approaches	Syntactic	Semantic	Granularity	
				Method	Class
Task-specific	DECKARD [27]	✓	×	×	✓
	RtvNN [60]	✓	×	✓	✓
	DeepSim [66]	✓	✓	✓	×
	FA-AST [58]	✓	✓	✓	✓
	CNNSentence [41]	✓	×	×	✓
	OneCNNA Layer [44]	✓	×	×	✓
	SequentialCNN [19]	✓	×	×	✓
Generic	CodeBERT [15]	✓	×	✓	×
	Code2Vec [3]	✓	×	✓	×
	Code2Seq [2]	✓	×	✓	×
	C-BERT [7]	✓	×	✓	✓
	InferCode [6]	✓	×	✓	✓
	CC2Vec [24]	✓	×	✓	✓
	AST-based NN [65]	✓	×	×	✓
	ProgHeteroGraph [59]	✓	×	✓	×
	NCC [5]	×	✓	✓	✓
	PROGRAML [9]	×	✓	✓	✓
	IR2Vec [5]	✓	✓	✓	✓
	OSCAR [43]	✓	✓	✓	✓
	ProgramGraph [1]	✓	✓	✓	✓
	ProjectCodeNet [45]	✓	✓	×	✓
	GraphCodeBERT [21]	✓	✓	✓	×
	GRAPHCode2Vec	✓	✓	✓	✓

applies word2vec [39] to learn code representations. On the other hand, PROGRAML [9] is a language-independent, portable representation of whole-program semantics for deep learning, which is designed for data flow analysis in compiler optimization. It adopts message passing neural networks (MPNN) [20] to learn LLVM IR representations. In contrast to these approaches, GRAPHCode2Vec captures both semantics and syntax.

Besides, there are generic approaches that capture both syntactic and semantic features such as IR2Vec [5], OSCAR [43], ProgramGraph [1], ProjectCodeNet [45] and GraphCodeBERT [21]. IR2Vec [5] and OSCAR [43] use LLVM IR representation of a program to capture program semantics. In particular, IR2Vec [57] learns LLVM IR hierarchical code representation and OSCAR [43] learns LLVM IR representations using a transformer architecture. Meanwhile, ProgramGraph [1] uses GNN to learn syntactic and semantic representations of code from ASTs augmented with data and control edges. ProgHeteroGraph leverages abstract syntax description language (ASDL) grammar to learn code representations via heterogeneous graphs [59]. Finally, GraphCodeBERT [21] is built upon CodeBERT [15], but in addition to capturing syntactic features it also accounts for semantics by employing data flow information in the pre-training stage.

Similar to these approaches, our approach (GRAPHCode2Vec) learns both syntactic and semantic features. In this work, we compare GRAPHCode2Vec to GraphCodeBERT because it is the most recent state-of-the-art and closely related approach to ours, since it captures both syntax and semantics (see RQ1 section 5).

2.2 Task-specific learning-based applications

Let us discuss task-specific learning-based methods, *i.e.*, specialised ML-based techniques that are developed to address specific (SE)

downstream task. Notably, researchers have proposed learning-based techniques to tackle the challenges of *code clone detection* [27, 58, 60] and *solution classification* [19, 41, 44]. In our experiments, we consider specialised learning approaches for both tasks. This is because these tasks have several software engineering applications, especially during software maintenance and evolution [27, 51, 60]. Table 2 highlights details of our task-specific learning methods.

Code Clone Detection: DECKARD [27] and RtvNN[60] are learning-based *syntactic clone detection* approaches that represent a program as an AST tree and tokens, respectively. DECKARD characterizes AST sub-trees with numerical vectors in the euclidean space, then cluster these vectors using the Euclidean distance metric, such that sub-trees with vectors in one cluster are considered similar. Similarly, RtvNN [60] is a learning-based clone detection technique which relies on deep learning to link patterns mined at lexical and syntactic levels.

DeepSim [66] and FA-AST [58] are the most comparable specialised approaches to GRAPHCODE2VEC, especially because they also capture syntactic and semantic information. On one hand, DeepSim [66] measures code similarity by employing feature representation to capture semantic information, it encodes both control flow and data flow into a compact semantic feature matrix. In this encoding, each element is a high dimensional sparse binary feature vector, which reduces the code similarity measuring problem to identifying similar patterns in matrices. On the other hand, FA-AST [58] is a more recent learning-based code clone detection approach. It captures program semantics by augmenting the programs's AST with explicit control and data flow edges. It measures the similarity of code pairs using two GNNs, namely Gated Graph Neural Network (GGNN) [36] and Graph Matching Network (GMN) [35], denoted by FA-AST¹ and FA-AST², respectively.

Solution classification: Let us describe the state-of-the-art learning-based approaches for solution classification. Most of these approaches are syntax-based and employ convolution neural networks (CNNs) to classify programming tasks. SequentialCNN [19] applies a CNN to predict the language/tasks from code snippets using lexicalized tokens represented as a matrix of word embeddings. CNNSentence [41] is similar to SequentialCNN since it also uses CNNs, except that it classifies source code without relying on keywords, e.g., variable and function names. It instead considers the structural features of the program in terms of tokens that characterize the process of arithmetic processing, loop processing, and conditional branch processing. Finally, OneCNLayer [44] also uses CNN for solution classification. It firstly pre-processes the program to remove unwanted entities (e.g., comments, spaces, tabs and new lines), then tokenizes the program to generate the code embedding using word2vec. The resulting embedding includes the token connections and their underlying meaning in the vector space.

In this work, we compare our approach (GRAPHCODE2VEC) to the aforementioned seven (7) learning-based methods for code clone detection and solution classification (see Section 5).

3 APPROACH

3.1 Overview

Figure 2 illustrates the steps and components of our approach. First, GRAPHCODE2VEC takes as input a Java program (i.e. a set of class

files) that is converted to a Jimple intermediate representation. Secondly, GRAPHCODE2VEC employs Soot [55] to obtain the program dependence graph (PDG) by feeding the class files as input. From the resulting Jimple representation and PDG, GRAPHCODE2VEC learns two program embeddings, namely a lexical embedding and a dependence embedding. These two embeddings are ultimately concatenated to form the final code embedding.

To achieve *lexical embedding*, our approach first tokenizes the Jimple instructions obtained from our pre-processing step into sub-words. Next, given the sub-words, our approach learns sub-word embedding using word2vec [38]. Then, it learns the instruction embedding by representing every Jimple instruction as a sequence of subwords embeddings using a bi-directional LSTM (BiLSTM, Section 3.2). The forward and backward hidden states of this BiLSTM allows to build the instruction embeddings. GRAPHCODE2VEC employs a BiLSTM since it learns context better: BiLSTM can learn both past and future information while LSTM only learns past information. Finally, it aggregates multiple instruction embeddings using element-wise addition, in order to obtain the overall lexical program embedding.

To learn the *dependence embedding*, GRAPHCODE2VEC applies a Graph Neural Network (GNN) [48] to embed Jimple instructions and their dependencies. Each node in the graph corresponds to a Jimple instruction and contains the (dependence) embedding of this instruction. Node attributes are from lexical embeddings. The edges of the graph represent the dependencies between instructions. Our approach considers the following program dependencies: data flow, control flow and method call graphs. GRAPHCODE2VEC uses intra-procedural analysis [16] to extract data-flow and control-flow dependencies by invoking Soot [55]. Then, it builds method call graphs via class hierarchy analysis [10].


The training of GNNs is an iterative process where, at each iteration, the embedding of each node n is updated based on the embedding of the neighboring nodes (i.e., nodes connected to n) and the type of n 's edges [63, 69]. The *message passing function* determines how to combine the embedding of the neighbors – also based on the edge types – and how to update the embedding n based on its current embedding and the combined neighbors' embedding. The dependence embedding of an instruction is the embedding of the corresponding node at the end of the training process.

Finally, after obtaining lexical embedding and dependence embedding, our approach concatenates both embeddings to obtain the overall program representation.

3.2 Lexical embedding

Step 1 - Jimple code tokenization: The first crucial step of GRAPHCODE2VEC is to properly tokenize Jimple code into meaningful “tokens”, to learn the vector representations. The traditional way to tokenize code is to split it on whitespaces. However, this manner is inappropriate for two reasons. First, whitespace-based tokenization often results in long tokens such as long method names (e.g., “getFunctionalInterfaceMethodSignature”). Long sequences often have a low frequency in a given corpus, which subsequently leads to an embedding of inferior quality. Second, whitespace-based tokenization is not able to process new words that do not occur in the training data – these out-of-vocabulary words are typically replaced by a dedicated “unknown” token. This is an obvious disadvantage

Figure 2: Overview of GRAPHCODE2VEC

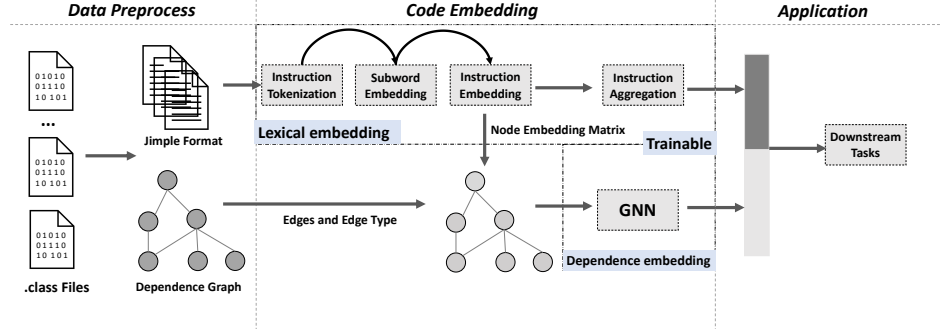

for our approach, whose goal is to support practitioners to analyze diverse programs – which may then include words that did not occur in the programs used to learn the embedding.

To address this challenge, we tokenize the Jimple code into *subwords* [33, 50, 61], which are units shorter than words, e.g., morphemes. Subwords have been widely adopted in representation learning systems for texts [12, 23, 46, 68] as they solve the problem of overly long tokens and out-of-vocabulary words. New code programs can be smoothly handled using short tokens representation, by limiting the amount of long, but different tokens. Subwords get rid of the almost-infinite character combinations that are common in many program codes. For example, this is the reason why BERT uses wordpiece subwords [61], and XLNet [64] and T5 [46] use sentence-piece subwords. Similarly, GRAPHCODE2VEC uses sentence-piece subwords. When using subwords, the long token “getFunctionalInterfaceMethodSignature” is split into “get”, “Functional”, “Interface”, “Method” and “Signature”. It is worth noting that most of the subwords are in fact words, e.g., “get” [28].

Step 2 - Subword embedding with word2vec: Given a subword-tokenized Jimple code corpus C with vocabulary size $|C|$, our approach learns a subword embedding matrix $E \in \mathbb{R}^{|C| \times d}$ where d is a hyperparameter referring to the embedding dimension (d is usually set to 100). It uses the popular Skip-gram with negative sampling (SGNS) method in word2vec [38] to produce E . And E is utilized as the subword embedding matrix [38].

Step 3 - Instruction embedding: After forming the subword embeddings, GRAPHCODE2VEC represents every Jimple instruction as a sequence of subword embeddings (w_0, w_1, \dots, w_n) , by using a bidirectional LSTM (BiLSTM). The role of BiLSTM is to learn the embedding of the instruction from the subword sequence of the instruction. Let \vec{h}_t and \overleftarrow{h}_t be the forward hidden state and backward hidden state of LSTM after feeding the final subword. Then, it forms the instruction embedding by concatenating \vec{h}_t and \overleftarrow{h}_t , denoted as $x = (\vec{h}_t, \overleftarrow{h}_t)$.

Step 4 - Instruction embedding aggregation: The last step in the process of forming lexical embedding is the aggregation of the instruction embeddings in order to form the overall program lexical embedding. The reason why we aggregate instruction-level embedding as opposed to learning an embedding for the whole program is that LSTMs work with sequences of limited length and thus, truncate the instructions into small sequences (not exceeding

the maximal length). After tokenization, a program can have many subwords and if one directly consider all subwords in the program, one needs to cut these subwords into the limited sequence length for LSTM and result in information loss.

Our approach uses element-wise addition as the token aggregation function. This operation allows the aggregation of multiple instruction embeddings while keeping a limited vector length.

3.3 Dependence embedding

Step 1 - Building method graphs: A method graph is a tuple $G = (V, E, X, K)$, where V is the set of nodes (i.e. Jimple instructions), E is the set of edges (dependence relations between the instructions), X is the node embedding matrix (which contains the embedding of the instructions) and K is the edge attribute matrix (which encodes the dependencies that exist between instructions). For each node n there is a column vector x_n in X such that $x_n = (\vec{h}_t, \overleftarrow{h}_t)$ (instruction embedding).

To define E and K , our approach extracts data-flow and control-flow dependencies by invoking Soot [16, 55]. Then, GRAPHCODE2VEC introduces an edge between two nodes if and only if the two corresponding instructions share some dependence.

Step 2 - Building program graphs: A program graph consists of a pair $\mathcal{P} = (\mathcal{G}, \mathcal{R})$ where $\mathcal{G} = \{G_0, G_1, \dots, G_m\}$ is a set of method graphs and where $\mathcal{R} \subseteq \mathcal{G}^2$ is the call relation between the methods, that is, $(G_i, G_j) \in \mathcal{R}$ if and only if the method that G_i represents calls the method that G_j represents. To represent this relation in the GNN, GRAPHCODE2VEC introduces an entry node and an exit node for each method and edges linking those nodes with caller instructions.

Step 3 - Message passing function: The exact definition of the message passing function depends on the used GNN architecture. We choose the widely-used GNN architectures with linear complexity [62] that has been successfully applied in various application domains. GRAPHCODE2VEC employs four GNN architectures, namely Graph Convolutional Network (GCN; Kipf and Welling [31]), GraphSAGE [22], Graph Attention Network (GAN; Veličković et al. [56]), Graph Isomorphism Network (GIN; Xu et al. [63]).

Step 4 - Learning the dependence embedding: The dependence embedding of each instruction is obtained by running the message passing function on all nodes for a pre-defined number of iterations, i.e., the number of GNN layers. Once these instruction embeddings have been produced, GRAPHCODE2VEC aggregates them

using the global attention pool operation [36] in order to produce the program-level dependence embedding. Attention mechanism can make program-level dependence embedding consider more important nodes (instructions).

The dependence embeddings that GNN produces depend on the learnable parameters of (a) the message passing function and (b) bidirectional LSTM. These parameters can be automatically set to optimize the effectiveness of GRAPHCODE2VEC either directly on the downstream task or on some pre-training objectives, as described hereafter.

In the end, our approach uses a concatenation operator to get the program embedding vector. Concatenation has been shown to be an effective method to fuse features without information loss when using DNN [18, 26, 34, 42, 52, 53]. Although the dependence embedding inherently encodes the lexical embedding, the importance of lexical inherently fades away as the semantic representation is learnt. Our ablation study (see RQ3 in Section 5) later reveals the benefits of concatenating an explicit lexical embedding with the dependence embedding.

3.4 Pre-training

Self-supervised learning has been applied with success for pre-training deep learning models [14, 37, 47]. It allows a model to learn how to perform tasks without human supervision [40, 70] by learning a universal embedding that can be fine-tuned to solve multiple downstream tasks. In this work, we employed three (3) self-supervised learning strategies to pre-train the BiLSTM and GNN in GRAPHCODE2VEC, namely *node classification*, *context prediction* [25], and *variational graph encoding* (VGAE) [32]. Node (or Instruction) classification trains the model to infer the type of an instruction, given its embedding. Context prediction requires the model to predict a masked node representation, given its surrounding context. Variational graph encoding (VGAE) learns to encode and decode the code dependence graph structure. Note that these pretraining procedures *do not* require any human-labeled datasets. The model learns from the raw datasets without any human supervision. We provide more pre-training details in the supplementary material.

4 EXPERIMENTAL SETUP

Research Questions: Our research questions (RQs) are designed to evaluate the *effectiveness* of GRAPHCODE2VEC. In particular, we compare the *effectiveness* of GRAPHCODE2VEC to the state-of-the-art in *generic* and *task-specific* code embedding methods (see RQ1 and RQ2). This is to demonstrate the utility of GRAPHCODE2VEC in solving downstream tasks, in comparison to other general-purpose code embedding approaches (RQ1), as well as specialised learning-based approaches tailored towards solving specific SE tasks (RQ2). We also examine if GRAPHCODE2VEC effectively embeds lexical and program dependence features in the latent space, and how this impacts its effectiveness on downstream tasks (see RQ3). The first goal of RQ3 is to demonstrate the validity of our approach, i.e., analyse that it indeed embeds lexical and dependence features as intended via *probing analysis*. In addition, we analyse the contribution of lexical embedding and dependence embedding to its effectiveness on downstream tasks by conducting an *ablation study*. We also investigate the *sensitivity* of our approach to the choices in

GRAPHCODE2VEC's framework, e.g., *model pre-training (strategy)* and *GNN configuration*. These experiments allow to evaluate the influence of these choices on the effectiveness of GRAPHCODE2VEC.

Specifically, we ask the following research questions (RQs):

RQ1 Generic Code embedding: How effective is our approach (GRAPHCODE2VEC), in comparison to the state-of-the-art *generic* code embedding approaches?

RQ2 Task-specific learning-based applications: Is our approach (GRAPHCODE2VEC) effective in comparison to the state-of-the-art *task-specific* learning-based applications?

RQ3 Further Analyses: Does our approach (GRAPHCODE2VEC) effectively capture lexical and program dependence features? What is the contribution of lexical embedding or dependence embedding to the effectiveness of our approach on downstream tasks? Is our approach *sensitive* to the choice of GNN and pre-training strategy, and how do they impact its effectiveness on downstream SE tasks?

Baselines: We compare the effectiveness of GRAPHCODE2VEC to several state-of-the-art code embedding approaches (aka *generic baselines*), and specialised or *task-specific learning-based applications*. On one hand, *generic baselines* refers to code embedding approaches that are designed to be general-purpose, i.e., they provide a code embedding that is amenable to address several downstream tasks. On the other hand, *task-specific baselines* refers to learning-based approaches that address a specific downstream SE task, e.g., code clone detection. Table 2 provides details about these baselines for code clone detection and solution classification tasks. Specifically, we evaluated GRAPHCODE2VEC in comparison to four (4) generic code embedding approaches, namely Code2Seq [2], Code2Vec [3], CodeBERT [15] and GraphCodeBERT [21] (see RQ1 in section 5). We have selected these generic baselines because they have been evaluated against several well-known state-of-the-art code embedding methods and demonstrated considerable improvement over them. Besides, these approaches are recent, popularly used and have been applied on many downstream (SE) tasks.

For task-specific learning-based approaches, we consider solution classification and code clone detection tasks because they are popular SE downstream tasks that have been well investigated in the community, especially using learning-based approaches. For code clone detection, we employed four code clone detection approaches, namely DECKARD [27], RtvNN [60], DeepSim [66] and FA-AST [58] (see RQ2 in section 5). Meanwhile, for solution classification task, we employed three (3) specialised learning-based baseline, namely CNNSentence [41], OneCNNSentence [44] and Sequential-CNN [19]. These task-specific baselines have been selected because they have been shown to outperform other proposed learning-based approaches for these tasks. For instance, FA-AST [58] has been shown to outperform four well-known state of the art baselines including ASTNN, DECKARD and RTvNN. Likewise, Sequential-CNN [19] has been evaluated against five other learning-based approaches and demonstrated to be more effective.

Subject Programs: In our experiments, we employed seven (7) subject programs written in Java. Table 3 provides details about each of our subject programs and their experimental usage. Notably, we employ three (3) publicly available programs for the downstream tasks, namely Java-Small [3], Java250 [45] and GCJ [66]. These

Table 3: Details of Subject Programs

Subject Program	#Progs.	Tasks/Analyses
Java-Small	11	Method Name Prediction and Ablation Studies
Java250	75000	Solution Classification and Ablation Studies
GCJ	1665	Code Clone Detection
LeetCode-10	100	Probing Analysis
M-LeetCode	100	Probing Analysis
Concurrency	46	Probing Analysis
Jimple-Graph	1976	Model Pre-training

datasets were employed for our comparative evaluation (see RQ1 and RQ2). We chose these datasets because they are popular and have been employed in the evaluation of our downstream tasks in previous studies [2, 45, 66]. Besides, we employed Java-Small and Java250 in our ablation study where we evaluate the contribution of lexical and dependence embedding to the effectiveness of GRAPHCODE2VEC (RQ3). We chose these two datasets for this task because they correspond to tasks that require lexical and semantic information to be effectively addressed. To further analyze GRAPHCODE2VEC (see RQ3), we employed the Concurrency dataset [13, 17] and collected two (2) subject programs (named LeetCode-10 and M-LeetCode) from LeetCode². We use these programs to investigate the difference between capturing lexical and dependence information. In particular, the Concurrency dataset contains different concurrent code types, which have similar syntactic/lexical features but different structure information. We mutated LeetCode-10 to create M-LeetCode dataset. Our mutation preserves lexical features, but modifies semantic or program dependence features such that LeetCode-10 and M-LeetCode have the same lexical features, but different semantics. For example, a simple dependence mutant involves switching outer and inner loops. We utilize LeetCode-10, M-LeetCode and Concurrency for the probing analysis of our approach (GRAPHCODE2VEC).

Downstream Tasks: In our evaluation, we considered three major software engineering tasks, namely, *method name prediction*, *solution classification* and *code clone detection*. These are popular downstream SE tasks that have been investigated in the community for decades. For these three tasks, we evaluated GRAPHCODE2VEC in comparison to four *generic baselines*, namely Code2Seq [2], Code2Vec [3], CodeBERT [15] and GraphCodeBERT [21]. Table 3 provides details on the subject programs employed for each downstream tasks. In the following, we provide further details about the experimental setup for each task evaluated in this paper.

Method Name Prediction: This refers to the task of predicting the method name of a function in a program, given only the body of the function as input [6]. This task is useful for automatic code completion during programming. In our experiment, all four generic baselines were evaluated for this task. In addition, we evaluated this task using the Java-Small dataset, since it was designed specifically for this task in previous studies [3] (see Table 3).

Solution Classification: This refers to the classification of source code into a predefined number of classes, e.g., based on the task it solves [44], or programming languages [19]. This is useful to assist or assess programming tasks and manage code warehouse. We evaluated all four generic baselines on this task, as well as three specialised learning-based approaches for this task, namely

CNNSentence [41], OneCNNSLayer [44], SequentialCNN [19] (Table 2). We evaluated this task using the Java250 dataset, which was designed for this task in previous studies [45] (see Table 3).

Code clone detection: The goal of software clone detection is to identify similar code fragments within a program or among program pairs, this is useful for identifying code plagiarism or reuse. In addition to the four generic baselines, we also compared GRAPHCODE2VEC to specialised learning-based baselines for code clone detection, this includes DeepSim [66], Flow-Augmented Abstract Syntax Tree (FA-AST) [58], DECKARD [27] and RtvNN [60] (Table 2). In our experiment, we employed the Google Code JAM (GCJ)³ dataset for this task (see Table 3). We have chosen GCJ because it has been deployed/evaluated for this task in previous studies [66].

Pre-training Setup: For model pre-training, we curated the Jimple-Graph dataset from the Maven repository⁴, it contains 1,976 Java libraries with about 3.5 millions methods in total. These Java libraries are from 42 application domains, this ensures a reasonable program diversity, these domains include math and image processing libraries. For the BiLSTM component (Section 3.2), we use one layer with hidden dimension size 150. We pre-train sub-tokens using the Jimple text for each program, the sub-token embedding dimension is set to 100 (see Section 3). We fine-tune the downstream tasks using the obtained pre-trained weights after one epoch. All GNNs use five (5) layers with dropout ratio 0.2. We use Adam [30] optimizer with 0.001 learning rate. In our experiment, we evaluated all three (3) pre-training strategies (Section 3.4).

Metrics and Measures: For all tasks, we report F1-score, precision and recall. We discuss most of our results using F1-score since it is the harmonic mean of precision and recall. Besides, it is a better measurement metric than accuracy, especially when the dataset is imbalanced (e.g., Java-Small and GCJ). Hence, we do not report the accuracy for imbalanced datasets, e.g., GCJ is imbalanced with about 20% similar code pair and 80% non-similar code pair. However, for solution classification, we report the model accuracy for this task since the employed dataset (Java250) is balanced, i.e., the class distribution is similar. We provide more evaluation details and results in the supplementary material and Github repository⁵.

Probing Analysis: The goal of our probing analysis is to ensure that lexical and dependence features are indeed learned by GRAPHCODE2VEC’s code embedding. Probing is a widely used technique to examine an embedding for desired properties [8, 47, 67]. To this end, we trained diagnostic classifiers to probe GRAPHCODE2VEC’s code embedding for our desired properties (i.e., lexical and/or program dependence features). Concretely, we train a simple classifier with one MLP layer fed with the learned code embedding (e.g. lexical) to examine if our code embedding encodes the desired property. To achieve this, we curated a dedicated dataset for training and evaluating our probing classifiers. Specifically, we employ three probing datasets, namely LeetCode-10, M-LeetCode and Concurrency (Table 3). We have employed these datasets because they require lexical or dependence embedding to address their corresponding tasks.

²<https://leetcode.com/>

³See <https://github.com/parasol-aser/deepsim/issues/9>, GCJ has 1665 programs in the public source code dataset.

⁴<https://mvnrepository.com/>

⁵<https://github.com/graphcode2vec/graphcode2vec>

Table 4: Effectiveness of GRAPHCODE2VEC vs. Generic Code embedding approaches (best results are in bold text).

Generic Code Embedding	Method Name Prediction			Solution Classification			Code Clone Detection		
	F1-Score	Precision	Recall	F1-Score	Precision	Recall	F1-Score	Precision	Recall
Code2Seq	0.4920	0.5963	0.4187	0.7542	0.7678	0.7536	0.9883	0.9886	0.9882
Code2Vec	0.3309	0.3779	0.2943	0.8034	0.8081	0.8028	0.9947	0.9940	0.9948
CodeBERT	0.3963	0.3295	0.4969	0.8783	0.8747	0.8878	0.7142	0.6436	0.8022
GraphCodeBERT	0.5761	0.7261	0.4775	0.9850	0.9868	0.9843	0.8025	0.7972	0.8120
GRAPHCODE2VEC	0.5807	0.6150	0.5502	0.9746	0.9753	0.9746	0.9971	0.9971	0.9971

Probing Task Design: We design four probing tasks. The first three (Task-1, Task-2 and Task-3) use LeetCode-10 and M-LeetCode, and the last one (Task-4) uses Concurrency. *Task-1* classifies what problem the solution code solves on LeetCode-10. LeetCode-10 shares lexical token similarities within one problem group, and some solutions from the different problem groups may have the same semantic structure, e.g., using one for-loop. Therefore, we hypothesize that the lexical embedding is more informative than the semantic embedding for Task-1. *Task-2* mixes LeetCode-10 and M-LeetCode, and then judges which dataset the input code is from (binary classification). LeetCode-10 and M-LeetCode share lots of similar lexical tokens but the code semantic structures are different. Hence, the semantic embedding should be more informative than the code lexical syntactic embedding. *Task-3* also mixes the two datasets but uses all the 20 labels instead of a binary classification. Task-3 integrates Task-1 and Task-2, requiring both lexical and semantic information. *Task-4* is a concurrency bug classification task. The code with same label can have the high lexical similarity but the code semantic structure should be different.

GRAPHCODE2VEC's Configuration: We employ three (3) pre-training strategies, namely node classification, context prediction and VGAE. Our approach supports four (4) GNN architectures for dependence embedding (see Section 3), namely GCN [31], GraphSAGE [22], GAN [56] and GIN [63]. In total, we have 12 possible configurations. However, the *default configuration is context prediction for pre-training and dependence embedding with GAT architecture*. In our experiments, we evaluate the effect of each configuration on the effectiveness of our approach (see Section 5).

Implementation Details and Platform: GRAPHCODE2VEC was implemented in about 4.8 KLOC of Python code, using the Pytorch ML framework. Our data processing and evaluation code is about 3 KLOC of Java code. We use Soot [55] to extract the program dependence graph (PDG). We reuse the code from the public repository of each baseline in our experiments.⁶ However, we adapt each baseline to our downstream tasks, e.g., by replacing the classifier but using the same performance metrics. For all approaches, we use one multilayer perceptron layer as the decision layer. All experiments were conducted on a Tesla V100 GPU server, with 40 CPUs (2.20 GHz) and 256G of main memory. The implementation of GRAPHCODE2VEC is available online⁷.

5 EXPERIMENTAL RESULTS

RQ1 Generic Code embedding: The goal of this experiment is to demonstrate how GRAPHCODE2VEC compares to the state-of-the-art generic code embedding approaches. In particular, we compare

Table 5: Code Clone detection: Effectiveness of GRAPHCODE2VEC vs. specialised ML methods. Best results are bold.

Task-specific learning-based approaches	Code Clone Detection		
	F1-Score	Recall	Precision
DECKARD	0.450	0.440	0.440
RTvNN	0.200	0.900	0.330
DeepSim	0.710	0.820	0.760
FA-AST ¹	0.960	1.00	0.970
FA-AST ²	0.990	0.970	0.980
GRAPHCODE2VEC	0.997	0.997	0.997

the effectiveness of GRAPHCODE2VEC to that of four generic baselines CodeBERT, Code2Seq, Code2Vec and GraphCodeBERT. These baselines represent the major classes of generic code embedding, specifically, syntax-only approaches (i.e., CodeBERT, Code2Seq and Code2Vec) as well as approaches that capture both syntax and semantics (i.e., GraphCodeBERT). In this experiment, we used three different downstream tasks namely method name prediction, solution classification and code clone detection. In our evaluation of method name prediction task, we employ the Code2Vec and Code2Seq models provided by the original papers. For all other approaches and tasks, we employed their pre-trained models, then fine-tuned for the downstream task at hand. We used the default GNN and pre-training configurations for our approach, i.e., GRAPHCODE2VEC's graph neural network GAT with context pre-training.

In our evaluation, we found that *our approach (GRAPHCODE2VEC) outperforms all generic baselines for most (two out of three) downstream SE tasks*. Table 4 highlights the effectiveness of GRAPHCODE2VEC in comparison to the baselines. GRAPHCODE2VEC performed better than all evaluated baselines for method name prediction and code clone detection tasks. Our approach performed better than all baselines for code clone detection, for all evaluated metrics. It also has a better F1-score and recall for method name prediction. However, GraphCodeBERT has a higher precision but lower F1-score than our approach, for this task. For instance, for method name prediction, in terms of recall, GRAPHCODE2VEC was 11% more effective than CodeBERT – the best-performing syntax based approach in our evaluation (see Table 4). Meanwhile, GraphCodeBERT is the best-performing semantic baseline in our method name prediction experiments, and our approach is 15% more effective than GraphCodeBERT (see Table 4). GRAPHCODE2VEC is also comparable to GraphCodeBERT for solution classification task. In our evaluation, GraphCodeBERT is the most effective technique for this task, however, it only slightly outperforms GRAPHCODE2VEC by less than 1% for all evaluated metrics (see Table 4). Overall, this result demonstrates that our approach is more effective than the state-of-the-art generic approaches on method name prediction and code clone detection tasks, and it is comparable to the best performance for solution classification – GraphCodeBERT.

GRAPHCODE2VEC is more effective than the generic baselines for (2/3) tasks; and it slightly less effective for one task.

⁶<https://github.com/tech-srl/code2vec>, <https://github.com/tech-srl/code2seq>, <https://github.com/microsoft/CodeBERT>, <https://github.com/hukuda222/code2seq>
⁷<https://github.com/graphcode2vec/graphcode2vec>

Table 6: Solution Classification: Effectiveness of GRAPHCODE2VEC vs. specialised ML methods. Best results are bold.

Task-specific learning-based approaches	Solution Classification			
	Accuracy	F1-Score	Recall	Precision
CNNSentence	0.69	0.69	0.69	0.70
OneCNNSLayer	0.54	0.54	0.54	0.55
SequentialCNN	0.47	0.47	0.47	0.48
GRAPHCODE2VEC	0.98	0.97	0.97	0.97

RQ2 Task-specific learning-based applications: This experiment examines how GRAPHCODE2VEC compares to state-of-the-art task-specific learning-based applications for *code clone detection* and *solution classification*. We selected solution classification and code clone detection for this experiment due to their popularity and application to many other software engineering tasks, e.g., code evolution, code search, code warehousing, refactoring and reuse. In this experiment, we employ all four task-specific baselines for code clone detection highlighted in Table 2, namely DECKARD, FA-AST, DeepSim and RTvNN. Meanwhile, for solution classification, we evaluated against all three task-specific baselines for solution classification in Table 2, namely CNNSentence [41], OneCNNSLayer [44], SequentialCNN [19]. For this experiment, we employ the default configuration for our approach (GRAPHCODE2VEC), i.e., GRAPHCODE2VEC’s GAT graph neural network with context pre-training.

Our evaluation results show that GRAPHCODE2VEC outperforms the state-of-the-art task-specific learning based approaches for code clone detection and solution classification. Table 5 and Table 6 highlight the effectiveness of GRAPHCODE2VEC in comparison to learning-based approaches for code clone detection and solution classification, respectively. In particular, GRAPHCODE2VEC outperforms all eight task-specific baselines in our evaluation. Specifically, our approach is between two to three times more effective than DECKARD and RTvNN (see Table 5). In addition, it slightly outperforms FA-AST across all tested measures. Besides our approach, FA-AST is the best performing learning-based baseline in our code clone detection evaluation. Likewise, GRAPHCODE2VEC outperforms all three baselines for solution classification, it is almost twice as effective as SequentialCNN and OneCNNSLayer, and 40% more effective than CNNSentence (see Table 6). These results demonstrate the utility of our approach in solving these downstream tasks, and further shows that GRAPHCODE2VEC outperforms specialised learning applications for both code clone detection and solution classification.

GRAPHCODE2VEC is up to three times more effective than all eight tested task-specific learning-based approaches.

RQ3 Further Analyses: The goal of this research question is to examine if GRAPHCODE2VEC effectively captures lexical and/or semantic program feature(s). Firstly, we employ *probing analysis* to analyze if pre-trained GRAPHCODE2VEC models learn the lexical and semantic features required for feature-specific tasks, i.e., that require capturing either or both features to be well-addressed. For instance, Task-4 is the concurrency classification task requiring semantic features. Secondly, we conduct an *ablation study* to investigate how the syntactic and semantic information captured by GRAPHCODE2VEC influence its effectiveness on downstream tasks. Finally, we evaluate the *sensitivity of our approach* to the selected GNN, and the impact of *model pre-training* on improving GRAPHCODE2VEC’s effectiveness on downstream tasks.

Probing Analysis: Let us examine if our pre-trained code embedding indeed encodes the desired lexical and semantic program features. To achieve this, we use the lexical embedding and semantic embedding from GRAPHCODE2VEC’s pre-training as inputs for probing. In this probing analysis, only the classifier is trainable and GRAPHCODE2VEC is frozen and non-trainable. We use one MLP-layer classifier to evaluate these models on four tasks, Task-1 requires only lexical/syntactic information. However, Task-2 and Task-4 require only semantic information (program dependence). Finally, Task-3 subsumes tasks one and two, such that it requires both syntactic and semantic information. Section 4 provides details of the probing experiments.

Our evaluation results show that GRAPHCODE2VEC’s pre-trained code embedding mostly captures the desired lexical and semantic program features for all tested tasks, regardless of the pre-training strategy or GNN configuration. Table 7 highlights the effectiveness of each frozen pre-trained model for each task, configuration and pre-training strategy. Notably, the frozen pre-trained model performed best for the desired embedding for each task in three-quarters (36/48=75%) of all tested configurations. As an example, for tasks requiring semantic information (Task-2 and Task-4), our pre-trained model encoding only semantic information performed best for 88% of all configurations (21/24 cases). Meanwhile, for tasks requiring syntax only (Task-1), our pre-trained model encoding only syntactic information outperformed all other models for most (8/12=67%) configurations. This result demonstrates that GRAPHCODE2VEC effectively encodes either or both syntactic and semantic features, this is evidenced by the effectiveness of models encoding desired feature(s) for feature-specific tasks.

GRAPHCODE2VEC effectively encodes the desired syntactic and/or semantic features, models encoding desired features performed best in 75% of tested cases across all feature-specific tasks.

Ablation Study: To investigate the impact of syntactic/lexical embedding and semantic/dependence embedding on addressing downstream tasks, we used two tasks, namely method name prediction and solution classification. We examine how removing lexical embedding or dependence embedding during the fine-tuning of GRAPHCODE2VEC’s pre-trained model impacts the effectiveness of the approach. This experiment shows the importance of lexical and dependence features on the effectiveness of GRAPHCODE2VEC.

Our results show that GRAPHCODE2VEC’s dependence embedding is important to effectively address our downstream SE tasks. Table 9 presents the ablation study results. In particular, results show that models fine-tuned with only semantic information outperformed those fine-tuned with syntactic features in almost all (23/24 = 96% of) cases. This result demonstrates the effectiveness of dependence embedding in addressing downstream SE tasks.

Results show that dependence/semantic embedding is vital to the effectiveness of GRAPHCODE2VEC on downstream SE tasks.

GNN Sensitivity: This experiment evaluates the sensitivity of our approach to the choice of GNN. In this experiment, we employ all three downstream tasks, and four GNN configurations, namely GAT, GIN, GCN and GraphSAGE (see Section 3). Table 8 provides details of the GNN sensitivity analysis. To evaluate this, we compute

Table 7: Probing Analysis results showing the accuracy for all pre-training strategies and GNN configurations. Best results for each sub-category are in bold, and the better results between syntactic (lexical) embedding and semantic embedding is in italics. “syn+sem” refers to GRAPHCODE2VEC’s models capturing both syntactic and semantic features.

Pre-training Strategy	Captured Feature	Task-1 (syntax-only)				Task-2 (semantic-only)				Task-3 (syntax and semantic)				Task-4 (semantic-only)			
		GCN	GIN	GSAGE	GAT	GCN	GIN	GSAGE	GAT	GCN	GIN	GSAGE	GAT	GCN	GIN	GSAGE	GAT
Context	semantic	0.822	0.674	0.842	0.886	0.684	0.614	0.704	0.741	0.513	0.381	0.543	0.612	0.654	0.666	0.657	0.594
	syntactic	0.934	0.938	0.942	0.928	0.615	0.602	0.617	0.602	0.529	0.527	0.528	0.527	0.580	0.525	0.524	0.449
	syn+sem	0.918	0.928	0.95	0.942	0.641	0.641	0.688	0.797	0.559	0.546	0.587	0.6	0.605	0.592	0.608	0.592
Node	semantic	0.758	0.820	0.802	0.840	0.651	0.667	0.741	0.686	0.426	0.514	0.625	0.563	0.647	0.664	0.659	0.670
	syntactic	0.904	0.884	0.876	0.916	0.584	0.587	0.606	0.593	0.516	0.504	0.490	0.513	0.484	0.476	0.420	0.550
	syn+sem	0.872	0.9	0.876	0.902	0.624	0.618	0.691	0.67	0.522	0.508	0.572	0.545	0.519	0.522	0.451	0.57
VGAE	semantic	0.856	0.812	0.868	0.866	0.594	0.653	0.583	0.617	0.403	0.532	0.407	0.477	0.673	0.680	0.674	0.656
	syntactic	0.916	0.932	0.928	0.950	0.591	0.572	0.594	0.599	0.485	0.494	0.492	0.495	0.523	0.617	0.584	0.591
	syn+sem	0.92	0.926	0.928	0.938	0.59	0.63	0.591	0.596	0.498	0.548	0.508	0.492	0.627	0.658	0.531	0.586
Best Config.		Syntactic = 8/12				Semantic = 9/12				Syntactic + Semantic = 7/12				Semantic = 12/12			

Table 8: Effectiveness (F1-Score) of GRAPHCODE2VEC on all GNN configurations and Pre-training Strategies, for all downstream tasks. For each subcategory, the best results for each category are in bold text.

GNN	No Pre-training	Method Name Prediction				No Pre-training	Solution Classification				No Pre-training	Code Clone Detection			
		Context	Node	VGAE	Average		Context	Node	VGAE	Average		Context	Node	VGAE	Average
GCN	0.4494	0.5018	0.4859	0.5337	0.4930	0.9679	0.9710	0.9710	0.9751	0.9712	0.9995	0.9995	0.9993	0.9990	0.9991
GIN	0.4347	0.4684	0.4037	0.5266	0.4584	0.9645	0.9711	0.9700	0.9710	0.9692	0.9984	0.9962	0.9974	0.9940	0.9965
GraphSage	0.3998	0.5006	0.4531	0.5412	0.4736	0.9675	0.9712	0.9721	0.9727	0.9709	0.9970	0.9993	0.9971	0.9986	0.9869
GAT	0.4246	0.5807	0.6194	0.5890	0.5534	0.9647	0.9746	0.9703	0.9735	0.9708	0.9732	0.9971	0.9956	0.9925	0.9869
Average	0.4271	0.5129	0.4905	0.5476		0.9662	0.9720	0.9718	0.9731		0.9920	0.9951	0.9973	0.9960	
Variance	0.0003	0.0017	0.0064	0.0006		2.2e-6	2.2e-6	7.1e-7	2.3e-6		0.0001	2.6e-5	1.7e-6	7.2e-6	
SD	0.0180	0.0413	0.0800	0.0244		0.0015	0.0015	0.0008	0.0015		0.0109	0.0051	0.0013	0.0027	

Table 9: Ablation Study results showing the F1-Score of GRAPHCODE2VEC. Best results are bold.

Pre-training Strategy	Captured Feature	Method Name Prediction				Solution Classification			
		GCN	GIN	GSAGE	GAT	GCN	GIN	GSAGE	GAT
Context	semantic	0.5454	0.4674	0.5038	0.6082	0.9698	0.9649	0.9682	0.9740
	syntactic	0.4575	0.4500	0.4644	0.4381	0.9614	0.9560	0.9588	0.9610
Node	semantic	0.4843	0.4136	0.4404	0.5888	0.9738	0.9711	0.9696	0.9704
	syntactic	0.3800	0.3845	0.3660	0.3560	0.9563	0.9562	0.9572	0.9595
VGAE	semantic	0.5988	0.4786	0.3675	0.5464	0.9725	0.9663	0.9671	0.9711
	syntactic	0.3922	0.4053	0.3936	0.4058	0.9711	0.9659	0.9626	0.9705
Best config.		Semantic = 11/12				Semantic = 12/12			

the variance and standard deviation (SD) of the effectiveness of GRAPHCODE2VEC when employing different GNNs.

Our evaluation results show that GRAPHCODE2VEC is stable, it is not sensitive to the choice of GNN. Table 8 shows the details of the SD and variance of our approach for each GNN configuration. Across all tasks, the variance and SD of the GRAPHCODE2VEC is mostly low, it is maximum 0.0064 and 0.0413, respectively (see Table 8). This result implies that GRAPHCODE2VEC is very stable, i.e., it is not highly sensitive to the choice of GNN.

GRAPHCODE2VEC is stable across GNN configurations, the variance and SD of its effectiveness are very low for all configurations.

Model Pre-training: Let us evaluate the impact of pre-training on the effectiveness of our approach. We examine if the three pre-training strategies of our approach improve the effectiveness of GRAPHCODE2VEC on downstream tasks. We employ all three downstream tasks and all three pre-training strategies (node, context and VGAE) for this experiment, results are shown in Table 8.

We found that model pre-training improves the effectiveness of GRAPHCODE2VEC across all tasks. Pre-training improves its effectiveness by up to 28%, on average. For instance, consider model pre-training with VGAE strategy for method name prediction (see Table 8). This result implies that model pre-training improves the effectiveness of GRAPHCODE2VEC on downstream SE tasks.

Model pre-training improved the effectiveness of GRAPHCODE2VEC (by up to 28%, on average) across all tasks.

6 THREATS TO VALIDITY

External Validity: This refers to the generalizability of our approach and results, especially beyond our data sets, tasks and models. For instance, there is a threat that GRAPHCODE2VEC does not generalize to other (SE) tasks and other Java programs. To mitigate this threat, we have evaluated GRAPHCODE2VEC using mature Java programs with varying sizes and complexity (see Table 3), as well as downstream tasks with varying complexities and requirements.

Internal Validity: This threat refers to the correctness of our implementation, if we have correctly represented lexical and semantic features in our code embedding. We mitigate this threat by evaluating the validity of our implementation with probing analysis and ablation studies (see Section 5). We have also compared GRAPHCODE2VEC to eleven (11) baselines using three major downstream tasks. In addition, we have conducted further analysis to test our implementation using different pre-training strategies and GNN configurations. We also provide our implementation, (pre-trained) models and experimental data for scrutiny, replication and reuse.

Construct Validity: This is the threat posed by our design/implementation choices and their implications on our findings. Notably, our choice of intermediate code representation (i.e., Jimple) instead of source code implies that our approach lacks natural language text (such as code comments) in the (pre-)training dataset. Indeed, GRAPHCODE2VEC would not capture this information as it is. However, it is possible to extend GRAPHCODE2VEC to also capture natural language text. This can be achieved by performing lexical and program dependence analysis at the source code level.

7 CONCLUSION

In this paper, we have proposed GRAPHCODE2VEC, a novel and generic code embedding approach that captures both syntactic and semantic program features. We have evaluated it in comparison to the state-of-the-art generic code embedding approaches, as well as specialised, task-specific learning based applications. Using 11 baselines and three (3) major downstream SE tasks, we show that GRAPHCODE2VEC is stable and effectively applicable to several downstream SE tasks, e.g., code clone detection and solution classification. Moreover, we show that it indeed embeds both lexical and dependency features, and we demonstrate the importance of embedding both features to solve downstream SE tasks.

REFERENCES

- [1] Miltiadis Allamanis, Marc Brockschmidt, and Mahmoud Khademi. 2017. Learning to represent programs with graphs. *arXiv preprint arXiv:1711.00740* (2017).
- [2] Uri Alon, Shaked Brody, Omer Levy, and Eran Yahav. 2019. code2seq: Generating Sequences from Structured Representations of Code. *arXiv:1808.01400 [cs.LG]*
- [3] Uri Alon, Meital Zilberstein, Omer Levy, and Eran Yahav. 2019. code2vec: Learning distributed representations of code. *Proceedings of the ACM on Programming Languages* 3, POPL (2019), 1–29.
- [4] Richard E Bellman. 2015. *Adaptive control processes*. Princeton university press.
- [5] Tal Ben-Nun, Alice Shoshana Jakobovits, and Torsten Hoefer. 2018. Neural code comprehension: A learnable representation of code semantics. *arXiv preprint arXiv:1806.07336* (2018).
- [6] Nghi DQ Bui, Yijun Yu, and Lingxiao Jiang. 2021. InferCode: Self-Supervised Learning of Code Representations by Predicting Subtrees. In *2021 IEEE/ACM 43rd International Conference on Software Engineering (ICSE)*. IEEE, 1186–1197.
- [7] Luca Buratti, Saurabh Pujar, Mihaela Bornea, Scott McCarley, Yunhui Zheng, Gaetano Rossiello, Alessandro Morari, Jim Laredo, Veronika Thost, Yufan Zhuang, et al. 2020. Exploring software naturalness through neural language models. *arXiv preprint arXiv:2006.12641* (2020).
- [8] Alexis Conneau, German Kruszewski, Guillaume Lample, Loïc Barrault, and Marco Baroni. 2018. What you can cram into a single $\&\#x2192$ vector: Probing sentence embeddings for linguistic properties. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Association for Computational Linguistics, Melbourne, Australia, 2126–2136. <https://doi.org/10.18653/v1/P18-1198>
- [9] Chris Cummins, Hugh Leather, Zacharias Fisches, Tal Ben-Nun, Torsten Hoefer, and Michael O’Boyle. 2020. Deep Data Flow Analysis. *arXiv preprint arXiv:2012.01470* (2020).
- [10] Jeffrey Dean, David Grove, and Craig Chambers. 1995. Optimization of Object-Oriented Programs Using Static Class Hierarchy Analysis. In *Proceedings of the 9th European Conference on Object-Oriented Programming (ECOOP ’95)*. Springer-Verlag, Berlin, Heidelberg, 77–101.
- [11] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805* (2018).
- [12] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*. Association for Computational Linguistics, Minneapolis, Minnesota, 4171–4186. <https://doi.org/10.18653/v1/N19-1423>
- [13] Hyunsook Do, Sebastian Elbaum, and Gregg Rothermel. 2005. Supporting controlled experimentation with testing techniques: An infrastructure and its potential impact. *Empirical Software Engineering* 10, 4 (2005), 405–435.
- [14] Dumitru Erhan, Aaron Courville, Yoshua Bengio, and Pascal Vincent. 2010. Why does unsupervised pre-training help deep learning?. In *Proceedings of the thirteenth international conference on artificial intelligence and statistics. JMLR Workshop and Conference Proceedings*, 201–208.
- [15] Zhangyin Feng, Daya Guo, Duyu Tang, Nan Duan, Xiaocheng Feng, Ming Gong, Linjun Shou, Bing Qin, Ting Liu, Daxin Jiang, et al. 2020. Codebert: A pre-trained model for programming and natural languages. *arXiv preprint arXiv:2002.08155* (2020).
- [16] Jeanne Ferrante, Karl J. Ottenstein, and Joe D. Warren. 1987. The Program Dependence Graph and Its Use in Optimization. *ACM Trans. Program. Lang. Syst.* 9, 3 (July 1987), 319–349. <https://doi.org/10.1145/24039.24041>
- [17] Abel Garcia and Cosimo Laneve. 2017. JaDA—the Java deadlock analyser. *Behavioural Types: from Theories to Tools* (2017), 169–192.
- [18] Sahar Ghannay, Benoit Favre, Yannick Esteve, and Nathalie Camelin. 2016. Word embedding evaluation and combination. In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC’16)*. 300–305.
- [19] Shlok Gilda. 2017. Source code classification using Neural Networks. In *2017 14th International Joint Conference on Computer Science and Software Engineering (JCSSE)*. IEEE, 1–6.
- [20] Justin Gilmer, Samuel S. Schoenholz, Patrick F. Riley, Oriol Vinyals, and George E. Dahl. 2017. Neural Message Passing for Quantum Chemistry. *CoRR* abs/1704.01212 (2017). *arXiv:1704.01212* <http://arxiv.org/abs/1704.01212>
- [21] Daya Guo, Shuo Ren, Shuai Lu, Zhangyin Feng, Duyu Tang, Shujie Liu, Long Zhou, Nan Duan, Alexey Svyatkovskiy, Shengyu Fu, et al. 2020. Graphcodebert: Pre-training code representations with data flow. *arXiv preprint arXiv:2009.08366* (2020).
- [22] William L Hamilton, Rex Ying, and Jure Leskovec. 2017. Inductive representation learning on large graphs. In *Proceedings of the 31st International Conference on Neural Information Processing Systems*. 1025–1035.
- [23] Benjamin Heinzerling and Michael Strube. 2018. BPEmb: Tokenization-free Pre-trained Subword Embeddings in 275 Languages. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*. European Language Resources Association (ELRA), Miyazaki, Japan. <https://aclanthology.org/L18-1473>
- [24] Thong Hoang, Hong Jin Kang, David Lo, and Julia Lawall. 2020. CC2Vec: Distributed Representations of Code Changes. In *Proceedings of the ACM/IEEE 42nd International Conference on Software Engineering (Seoul, South Korea) (ICSE ’20)*. Association for Computing Machinery, New York, NY, USA, 518–529. <https://doi.org/10.1145/3377811.3380361>
- [25] Weihua Hu, Bowen Liu, Joseph Gomes, Marinka Zitnik, Percy Liang, Vijay Pande, and Jure Leskovec. 2019. Strategies for pre-training graph neural networks. *arXiv preprint arXiv:1905.12265* (2019).
- [26] Gao Huang, Zhuang Liu, Laurens Van Der Maaten, and Kilian Q Weinberger. 2017. Densely connected convolutional networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 4700–4708.
- [27] Lingxiao Jiang, Ghassan Misherghi, Zhendong Su, and Stephane Glondou. 2007. Deckard: Scalable and accurate tree-based detection of code clones. In *29th International Conference on Software Engineering (ICSE’07)*. IEEE, 96–105.
- [28] Dan Jurafsky and James H. Martin. 2021. *Speech & language processing*.
- [29] Aditya Kanade, Petros Maniatis, Gogul Balakrishnan, and Kensen Shi. 2020. Learning and evaluating contextual embedding of source code. In *International Conference on Machine Learning*. PMLR, 5110–5121.
- [30] Diederik P Kingma and Jimmy Ba. 2014. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980* (2014).
- [31] Thomas N Kipf and Max Welling. 2016. Semi-supervised classification with graph convolutional networks. *arXiv preprint arXiv:1609.02907* (2016).
- [32] Thomas N Kipf and Max Welling. 2016. Variational graph auto-encoders. *arXiv preprint arXiv:1611.07308* (2016).
- [33] Taku Kudo and John Richardson. 2018. SentencePiece: A simple and language independent subword tokenizer and detokenizer for Neural Text Processing. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*. Association for Computational Linguistics, Brussels, Belgium, 66–71. <https://doi.org/10.18653/v1/D18-2012>
- [34] Gustav Larsson, Michael Maire, and Gregory Shakhnarovich. 2016. Fractalnet: Ultra-deep neural networks without residuals. *arXiv preprint arXiv:1605.07648* (2016).
- [35] Yujia Li, Chenjie Gu, Thomas Dullien, Oriol Vinyals, and Pushmeet Kohli. 2019. Graph matching networks for learning the similarity of graph structured objects. In *International conference on machine learning*. PMLR, 3835–3845.
- [36] Yujia Li, Daniel Tarlow, Marc Brockschmidt, and Richard Zemel. 2015. Gated graph sequence neural networks. *arXiv preprint arXiv:1511.05493* (2015).
- [37] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692* (2019).
- [38] Tomás Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. 2013. Efficient Estimation of Word Representations in Vector Space. In *1st International Conference on Learning Representations, ICLR 2013, Scottsdale, Arizona, USA, May 2-4, 2013, Workshop Track Proceedings*, Yoshua Bengio and Yann LeCun (Eds.). <http://arxiv.org/abs/1301.3781>
- [39] Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. 2013. Distributed representations of words and phrases and their compositionality. In *Advances in neural information processing systems*. 3111–3119.
- [40] T Nathan Mundhenk, Daniel Ho, and Barry Y Chen. 2018. Improvements to context based self-supervised learning. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*. 9339–9348.
- [41] Hiroki Ohashi and Yutaka Watanobe. 2019. Convolutional neural network for classification of source codes. In *2019 IEEE 13th International Symposium on Embedded Multicore/Many-core Systems-on-Chip (MCSoc)*. IEEE, 194–200.
- [42] Oyeade K Oyedotun and Djamila Aouada. 2020. Why do Deep Neural Networks with Skip Connections and Concatenated Hidden Representations Work?. In *International Conference on Neural Information Processing*. Springer, 380–392.
- [43] Dinglan Peng, Shuxin Zheng, Yatao Li, Guolin Ke, Di He, and Tie-Yan Liu. 2021. How could Neural Networks understand Programs? *arXiv preprint*

- arXiv:2105.04297* (2021).
- [44] Ádám Pintér and Sándor Szénási. 2018. Classification of source code solutions based on the solved programming tasks. In *2018 IEEE 18th International Symposium on Computational Intelligence and Informatics (CINTI)*. IEEE, 000277–000282.
 - [45] Ruchir Puri, David S Kung, Geert Janssen, Wei Zhang, Giacomo Domeniconi, Vladimir Zolotov, Julian Dolby, Jie Chen, Mihir Choudhury, Lindsey Decker, et al. 2021. Project CodeNet: A Large-Scale AI for Code Dataset for Learning a Diversity of Coding Tasks. *arXiv preprint arXiv:2105.12655* (2021).
 - [46] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. Exploring the Limits of Transfer Learning with a Unified Text-to-Text Transformer. *Journal of Machine Learning Research* 21, 140 (2020), 1–67. <http://jmlr.org/papers/v21/20-074.html>
 - [47] Anna Rogers, Olga Kovaleva, and Anna Rumshisky. 2020. A Primer in BERTology: What We Know About How BERT Works. *Transactions of the Association for Computational Linguistics* 8 (2020), 842–866. https://doi.org/10.1162/tacl_a_00349
 - [48] Franco Scarselli, Marco Gori, Ah Chung Tsoi, Markus Hagenbuchner, and Gabriele Monfardini. 2008. The graph neural network model. *IEEE transactions on neural networks* 20, 1 (2008), 61–80.
 - [49] Cedric Seger. 2018. An investigation of categorical variable encoding techniques in machine learning: binary versus one-hot and feature hashing.
 - [50] Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. Neural Machine Translation of Rare Words with Subword Units. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Association for Computational Linguistics, Berlin, Germany, 1715–1725. <https://doi.org/10.18653/v1/P16-1162>
 - [51] Abdullah Sheneamer and Jugal Kalita. 2016. A survey of software clone detection techniques. *International Journal of Computer Applications* 137, 10 (2016), 1–21.
 - [52] Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich. 2015. Going deeper with convolutions. In *2015 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. 1–9. <https://doi.org/10.1109/CVPR.2015.7298594>
 - [53] Christian Szegedy, Vincent Vanhoucke, Sergey Ioffe, Jon Shlens, and Zbigniew Wojna. 2016. Rethinking the inception architecture for computer vision. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 2818–2826.
 - [54] Siddhaling Urolagin, KV Prema, and NV Subba Reddy. 2011. Generalization capability of artificial neural network incorporated with pruning method. In *International Conference on Advanced Computing, Networking and Security*. Springer, 171–178.
 - [55] Raja Vallée-Rai, Phong Co, Etienne Gagnon, Laurie Hendren, Patrick Lam, and Vijay Sundaresan. 2010. Soot: A Java bytecode optimization framework. In *CASCON First Decade High Impact Papers*. 214–224.
 - [56] Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Lio, and Yoshua Bengio. 2017. Graph attention networks. *arXiv preprint arXiv:1710.10903* (2017).
 - [57] S VenkataKeerthy, Rohit Aggarwal, Shalini Jain, Maunendra Sankar Desarkar, Ramakrishna Upadrasta, and YN Srikanth. 2020. Ir2vec: Llvm ir based scalable program embeddings. *ACM Transactions on Architecture and Code Optimization (TACO)* 17, 4 (2020), 1–27.
 - [58] Wenhan Wang, Ge Li, Bo Ma, Xin Xia, and Zhi Jin. 2020. Detecting code clones with graph neural network and flow-augmented abstract syntax tree. In *2020 IEEE 27th International Conference on Software Analysis, Evolution and Reengineering (SANER)*. IEEE, 261–271.
 - [59] Wenhan Wang, Kechi Zhang, Ge Li, and Zhi Jin. 2020. Learning to Represent Programs with Heterogeneous Graphs. *arXiv preprint arXiv:2012.04188* (2020).
 - [60] Martin White, Michele Tufano, Christopher Vendome, and Denys Poshyvanyk. 2016. Deep learning code fragments for code clone detection. In *2016 31st IEEE/ACM International Conference on Automated Software Engineering (ASE)*. 87–98.
 - [61] Yonghui Wu, Mike Schuster, Zhifeng Chen, Quoc V Le, Mohammad Norouzi, Wolfgang Macherey, Maxim Krikun, Yuan Cao, Qin Gao, Klaus Macherey, et al. 2016. Google’s neural machine translation system: Bridging the gap between human and machine translation. *arXiv preprint arXiv:1609.08144* (2016).
 - [62] Zonghan Wu, Shirui Pan, Fengwen Chen, Guodong Long, Chengqi Zhang, and S Yu Philip. 2020. A comprehensive survey on graph neural networks. *IEEE transactions on neural networks and learning systems* 32, 1 (2020), 4–24.
 - [63] Keyulu Xu, Weihua Hu, Jure Leskovec, and Stefanie Jegelka. 2018. How powerful are graph neural networks? *arXiv preprint arXiv:1810.00826* (2018).
 - [64] Zhilin Yang, Zihang Dai, Yiming Yang, Jaime Carbonell, Russ R Salakhutdinov, and Quoc V Le. 2019. XLNet: Generalized Autoregressive Pretraining for Language Understanding. In *Advances in Neural Information Processing Systems*, H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché-Buc, E. Fox, and R. Garnett (Eds.), Vol. 32. Curran Associates, Inc. <https://proceedings.neurips.cc/paper/2019/file/dc6a7e655d7e5840e66733e9ee67cc69-Paper.pdf>
 - [65] Jian Zhang, Xu Wang, Hongyu Zhang, Hailong Sun, Kaixuan Wang, and Xudong Liu. 2019. A novel neural source code representation based on abstract syntax tree. In *2019 IEEE/ACM 41st International Conference on Software Engineering (ICSE)*. IEEE, 783–794.
 - [66] Gang Zhao and Jeff Huang. 2018. DeepSim: Deep Learning Code Functional Similarity. In *Proceedings of the 2018 26th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering (Lake Buena Vista, FL, USA) (ESEC/FSE 2018)*. Association for Computing Machinery, New York, NY, USA, 141–151. <https://doi.org/10.1145/3236024.3236068>
 - [67] Mengjie Zhao, Philipp Dufter, Yadollah Yaghoobzadeh, and Hinrich Schütze. 2020. Quantifying the Contextualization of Word Representations with Semantic Class Probing. In *Findings of the Association for Computational Linguistics: EMNLP 2020*. Association for Computational Linguistics, Online, 1219–1234. <https://doi.org/10.18653/v1/2020.findings-emnlp.109>
 - [68] Mengjie Zhao and Hinrich Schütze. 2019. A Multilingual BPE Embedding Space for Universal Sentiment Lexicon Induction. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, Florence, Italy, 3506–3517. <https://doi.org/10.18653/v1/P19-1341>
 - [69] Jie Zhou, Ganqu Cui, Shengding Hu, Zhengyan Zhang, Cheng Yang, Zhiyuan Liu, Lifeng Wang, Changcheng Li, and Maosong Sun. 2020. Graph neural networks: A review of methods and applications. *AI Open* 1 (2020), 57–81.
 - [70] Andrew Zisserman. 2018. Self-Supervised Learning. <https://project.inria.fr/paiss/files/2018/07/zisserman-self-supervised.pdf>.