

KPDROP: An Approach to Improving Absent Keyphrase Generation

Seoyeon Park*, Jishnu Ray Chowdhury*, Tuhin Kundu*, Cornelia Caragea

Computer Science, University of Illinois at Chicago

{spark313,jraych2,tkundu2,cornelia}@uic.edu

Abstract

Keyphrase generation is the task of generating phrases (keyphrases) that summarize the main topics of a given document. The generated keyphrases can be either present or absent from the text of the given document. While the extraction of present keyphrases has received much attention in the past, only recently a stronger focus has been placed on the generation of absent keyphrases. However, generating absent keyphrases is very challenging; even the best methods show only a modest degree of success. In this paper, we propose an approach, called keyphrase dropout (or KP-DROP), to improve absent keyphrase generation. We randomly drop present keyphrases from the document and turn them into artificial absent keyphrases during training. We test our approach extensively and show that it consistently improves the absent performance of strong baselines in keyphrase generation.

1 Introduction

Keyphrase generation (KG) is the task of producing a set of words and phrases that best summarize a document. It can be leveraged for various applications such as text summarization (Zhang et al., 2017), recommendation (Bai et al., 2018), and opinion mining (Meng et al., 2012). Accurate identification of keyphrases especially on scientific papers can improve efficiency in paper indexing and paper retrieval (Chen et al., 2019a; Boudin et al., 2020).

Keyphrases can be divided into two types: (1) *present* keyphrases and (2) *absent* keyphrases. Present keyphrases appear in the document (e.g., “hearing loss” in Figure 1), whereas absent keyphrases are topically-relevant but missing from the document (e.g., “intelligibility index” in Figure 1). Many prior works (Hasan and Ng, 2014; Ünlü and Çetin, 2019) focused on present keyphrase *extraction* exclusively. As such, they are not suitable

for generating any absent keyphrases. To overcome this limitation, recent approaches (Meng et al., 2017; Yuan et al., 2020; Chen et al., 2020; Ye et al., 2021b) use sequence-to-sequence (seq2seq) models to generate both present and absent keyphrases.

As shown by Boudin and Gallina (2021), absent keyphrases that are substantially different from present ones can significantly improve the effectiveness of document-retrieval. Boudin and Gallina (2021) suggested that absent keyphrases can improve document-retrieval by expanding the query terms to alleviate the vocabulary mismatch problem between the query terms and relevant documents (Furnas et al., 1987). Thus, there is a strong motivation for improving absent keyphrase performance. However, generating absent keyphrases can be very challenging. Even the best KG models (Chen et al., 2020; Ye et al., 2021a,b) still only achieve a modest performance in absent keyphrases.

In this work, we propose keyphrase dropout or KPDROP—a simple and effective technique to improve the performance of *absent* keyphrases. Unlike the traditional dropout method that focuses on dropping neurons (Srivastava et al., 2014), we propose a novel dropout method where, instead of neurons, whole phrases (specifically, present keyphrases) are randomly dropped from a given document during training with a dropout probability. Thus, the dropped present keyphrases are turned into (artificial) absent keyphrases. As a result, KPDROP has the following two effects: (1) the model is forced to utilize the context information more deeply to infer dropped keyphrases which could have been otherwise simply extracted from the text. Thereby, the capability to infer missing keyphrases in general is increased; (2) the method also doubles as a dynamic data augmentation strategy for absent keyphrases because it can change given samples by dropping different present keyphrases from the input and creating different absent keyphrases in the target sequence.

* Equal contribution

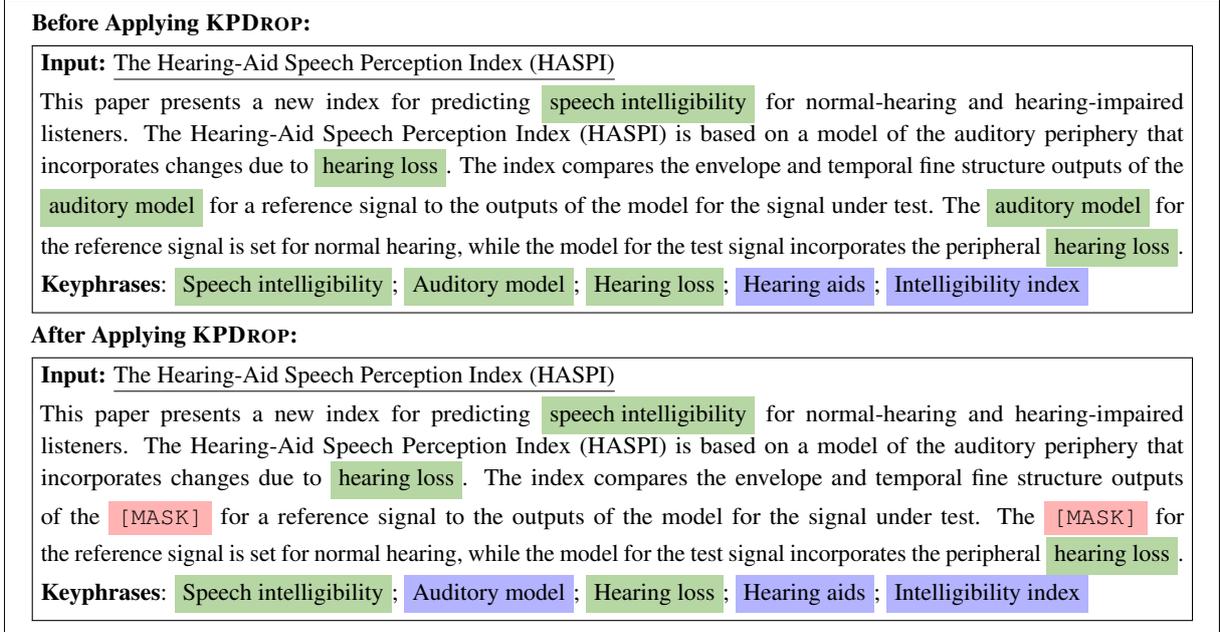


Figure 1: An example of how the input document (Kates and Arehart, 2014), and the present and absent keyphrases change after applying KPDROP. Here, KPDROP drops the present keyphrase “auditory model”. Green highlighting indicates present keyphrases, blue highlighting indicates absent keyphrases, and red highlighting indicates mask tokens.

By applying KPDROP into two distinct neural models, we observe consistent and substantial improvement in absent keyphrase performance.

2 Keyphrase Dropout (KPDROP)

In this section, we formally describe the technique of KPDROP. In the task of keyphrase generation (KG), we generally have a document D as an input sequence of tokens, and a set of n keyphrases, $Y = \{y_1, y_2, \dots, y_n\}$, as the target output. Within Y , there is a subset of s ($0 \leq s \leq n$) present keyphrases as $P = \{p_1, p_2, p_3, \dots, p_s\}$ ($P \subseteq Y$) and a subset of t ($0 \leq t \leq n$) absent keyphrases as $A = \{a_1, a_2, a_3, \dots, a_t\}$ ($A \subseteq Y$). It also holds true that $A \cap P = \emptyset$ and $s + t = n$. Similar to Meng et al. (2017), we separate absent and present keyphrases by checking if the stemmed version of a keyphrase appears in the stemmed version of the input document (in which case it is present) or does not appear (in which case it is absent).

When KPDROP is applied, any present keyphrase $p_k \in P$ can be randomly dropped with a probability of r (sampled from binomial distribution). r is the dropout rate (or KPDROP rate); r is a hyperparameter. Let us say some subset O of P ($O \subseteq P$) is randomly chosen to be dropped due to the application of KPDROP. In this case, for every keyphrase $p_k \in O$, we remove *any and all* substrings in document D that, when stemmed,

matches with the stemmed version of the phrase p_k and replace each removed substring with a special mask token $[MASK]$. The set of present keyphrases and absent keyphrases are also modified. The new set of present keyphrases becomes $P' = P \setminus O$ and the new set of absent keyphrases becomes $A' = A \cup O$. Thus, the keyphrases in O , which were originally present, become artificially absent after applying KPDROP. An example of applying KPDROP is shown in Figure 1.

3 Characteristics of KPDROP

In this section, we highlight some notable characteristics of KPDROP.

1. KPDROP and Masked Language Modeling: Superficially, KPDROP is similar to a standard masked language modeling (MLM) (Devlin et al., 2019; Raffel et al., 2020) strategy insofar that both involve the reconstruction of some masked out text-spans. However, there are several crucial differences between KPDROP and vanilla MLM. First, KPDROP masks only *present keyphrases*, not random subspans or phrases. Second, KPDROP masks *all instances* of the selected present keyphrases in the document to make them truly absent. MLM does not mask *all instances* of the masked token or phrase. Third, masking (replacing a subspan with a mask token) is only an engineering choice for KPDROP; not an essential ingredient. We can sim-

ply drop the selected present keyphrases without replacing them with a mask token. Fourth, KP-DROP respects the standard format (Chan et al., 2019) of concatenated keyphrases as the ground truth sequence for KG. In KP-DROP, predictions of artificial absent keyphrases (masked present) are not *explicitly* associated with any mask position.

2. KP-DROP as Structured Dropout: KP-DROP is a unique kind of *structured dropout* where all instances of some randomly chosen present keyphrases are dropped. There are other examples of structured dropout in prior works. For example, Iyyer et al. (2015) proposed word dropout where whole word embeddings are dropped instead of just random neurons. Huang et al. (2016); Fan et al. (2020) used another form of structured dropout that stochastically drops whole layers.

3. Model-Agnosticism of KP-DROP: One important feature of KP-DROP is that it is fairly model-agnostic. KP-DROP only requires changing the input and output without making internal architectural changes. As such, it is compatible with any model that is suitable for KG. KP-DROP can also be easily stacked with other techniques that help absent keyphrase generation. Later (in §4.1), we demonstrate that KP-DROP works just as well for very different architectures: (1) a pre-trained Transformer - T5 (Raffel et al., 2020) and (2) an RNN-based model with structured decoding without any pretraining - ExHiRD (Chen et al., 2020).

4. KP-DROP and present keyphrases: High KP-DROP rate can further improve absent keyphrase performance but at the cost of present keyphrase performance by making the models focus more on generating missing (but semantically related) keyphrases. However, this can be easily resolved by simply using separate modules for present keyphrase extraction (without KP-DROP) and absent keyphrase generation (with KP-DROP) in a hybrid setup. This can be analogous to how implementations of dialogue systems sometimes combine both a retrieval mechanism and a generative mechanism (Yang et al., 2019). In the simplest implementation of the hybrid setup, we can just keep two separate models, one trained with KP-DROP and another without. Then we can use only the model trained without KP-DROP for present keyphrases and only the model trained with KP-DROP for absent keyphrases. In such a hybrid setup, the present performance will not be in-

fluenced (negatively or positively) by KP-DROP. With more sophisticated integrations of present-keyphrase predictor (without KP-DROP) and absent-keyphrase predictor (with KP-DROP), we may even get better present performance. We leave this investigation as future work.

4 Experiments

For our experiments, we choose ExHiRD (Chen et al., 2020) as a representative of a strong RNN-based (non-pretrained) model and we choose T5 (t5-base) (Raffel et al., 2020) as a representative of a pretrained Transformer-based (Vaswani et al., 2017) seq2seq model. We evaluate our models on four scientific article benchmark datasets, KP20k (Meng et al., 2017), Inspec (Hulth, 2003), Krapivin (Krapivin et al., 2009), and SemEval (Kim et al., 2010). Following previous works, we use the training set of KP20k to train all models. We adopt $F_1@5$ and $F_1@M$ as the evaluation metrics following the implementations of Chen et al. (2020). Hyperparameters are detailed in Appendix A.1.

4.1 Results

In Table 1, we investigate the effect of different rates of KP-DROP on our baselines (T5 and ExHiRD). The results demonstrate *consistent* absent keyphrase performance gain on all four datasets when using KP-DROP for both T5 and ExHiRD. KP-DROP at a higher rate r (≥ 0.7) achieves better performance which makes sense because the higher the rate the more artificial absent keyphrases there will be for the models to gain experience from.

In Table 1, the “+Absent Only” setting shows the result of training *exclusively* on natural absent keyphrases (by discarding all present keyphrases from the ground truth) for a given model. As can be seen from the table, this setting does not substantially improve the baseline performance (but on the contrary, it even decreases the baseline performance); and it performs much worse than KP-DROP with rates r such that $0.7 \leq r \leq 0.9$. Thus, we conclude that having a more exclusive focus on absent keyphrases is not sufficient for better performance. The experience from the task of predicting new absent keyphrases (even if artificially created from KP-DROP) is important. That is, KP-DROP better encourages the model to exploit the global context in the input sequence by teaching it to “correct” the dropped/missing keyphrases, beyond just enabling more exclusive focus on absent keyphrases.

Models	Inspec		Krapivin		SemEval		KP20k	
	F1@M	F1@5	F1@M	F1@5	F1@M	F1@5	F1@M	F1@5
ExHiRD	0.022	0.011	0.043	0.022	0.025	0.017	0.032	0.016
+Absent Only	0.024	0.011	0.040	0.021	0.021	0.015	0.034	0.017
+KPDROP 0.1	0.021	0.010	0.038	0.019	0.021	0.014	0.032	0.016
+KPDROP 0.2	0.016	0.008	0.053	0.028	0.026	0.018	0.040	0.020
+KPDROP 0.3	0.017	0.010	0.049	0.025	0.032	0.022	0.043	0.022
+KPDROP 0.4	0.022	0.012	0.060	0.031	0.039	0.027	0.045	0.023
+KPDROP 0.5	0.021	0.012	0.058	0.032	0.028	0.020	0.046	0.023
+KPDROP 0.6	0.023	0.014	0.064	0.034	0.042	0.031	0.053	0.027
+KPDROP 0.7	0.035	0.020	0.068	0.037	0.051	0.037	0.053	0.027
+KPDROP 0.8	0.033	0.020	0.057	0.031	0.034	0.025	0.054	0.029
+KPDROP 0.9	0.026	0.019	0.061	0.034	0.036	0.026	0.054	0.030
T5	0.025	0.014	0.053	0.028	0.023	0.016	0.036	0.018
+Absent Only	0.021	0.010	0.041	0.021	0.016	0.011	0.034	0.016
+KPDROP 0.1	0.034	0.018	0.061	0.031	0.023	0.016	0.039	0.020
+KPDROP 0.2	0.029	0.016	0.071	0.036	0.023	0.016	0.043	0.022
+KPDROP 0.3	0.022	0.013	0.066	0.037	0.031	0.023	0.044	0.023
+KPDROP 0.4	0.041	0.022	0.058	0.032	0.030	0.022	0.046	0.024
+KPDROP 0.5	0.037	0.021	0.076	0.044	0.036	0.026	0.052	0.028
+KPDROP 0.6	0.034	0.019	0.071	0.042	0.032	0.024	0.054	0.030
+KPDROP 0.7	0.032	0.018	0.070	0.042	0.038	0.029	0.057	0.031
+KPDROP 0.8	0.040	0.026	0.072	0.044	0.039	0.029	0.058	0.033
+KPDROP 0.9	0.035	0.024	0.068	0.043	0.024	0.029	0.056	0.035

Table 1: Absent keyphrase performance on for different KPDROP rates. “Absent Only” indicates that the model is trained exclusively with absent keyphrases as ground truth. We bold the best scores per block.

5 Related Works

There is a wide variety of approaches (Hasan and Ng, 2014; Gollapalli and Li, 2016; Florescu and Caragea, 2017; Zhang et al., 2017; Boudin, 2018; Mahata et al., 2018; Sun et al., 2019; Campos et al., 2020; Santosh et al., 2020; Sahrawat et al., 2020) for keyphrase extraction exclusively (capable of only obtaining present keyphrases). Meng et al. (2017) diverged from pure extractive methods by introducing a seq2seq model (CopyRNN) for generation (keyphrase generation) of both present and absent keyphrases. Chen et al. (2018) extended CopyRNN with keyphrase correlation constraints and Zhao and Zhang (2019) extended it with linguistic constraints. Ye and Wang (2018) introduced semi-supervised strategies for keyphrase generation (KG). Chen et al. (2019b) used a title-guided encoding method for better KG. Wang et al. (2019) incorporated a topic-model to enhance KG. Yuan et al. (2020) extended CopyRNN by introducing the CatSeq model that can generate a concatenation of dynamically determined variable number of keyphrases. Chan et al. (2019); Luo et al. (2021) improved KG using reinforcement learning whereas Swaminathan et al. (2020a,b); Lancioni et al. (2020) do so using

GANs. A few approaches (Chen et al., 2019a; Diao et al., 2020; Ye et al., 2021a) augmented KG with information from retrieved documents. Multiple approaches (Chen et al., 2019a; Liu et al., 2020; Ahmad et al., 2021; Zhao et al., 2021; Wu et al., 2021) took a joint-training or multi-tasking approach to do both present keyphrase extraction and absent keyphrase generation. Chen et al. (2020) and Ye et al. (2021b) changed the decoder architecture to better respect the structure of concatenated sequence of keyphrases to be generated whereas Luo et al. (2020) changed the encoder to more explicitly respect the input document structure. Huang et al. (2021) proposed a new beam-search-based adaptive decoding method to improve KG.

6 Conclusion

In this paper, we propose KPDROP, an approach that randomly drops present keyphrases from a document to encourage the model to better exploit the global context in the input sequence and to develop an enhanced understanding of the text to produce high-quality keyphrases that are absent from the text, but otherwise are semantically related and very summative of the document. The results show that our proposed strategy KPDROP serves as a

simple model-agnostic method to substantially improve absent keyphrase performance of different models with completely different architectures.

References

- Wasi Ahmad, Xiao Bai, Soomin Lee, and Kai-Wei Chang. 2021. Select, extract and generate: Neural keyphrase generation with layer-wise coverage attention. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1389–1404.
- Rohan Anil, Vineet Gupta, Tomer Koren, and Yoram Singer. 2019. Memory efficient adaptive optimization. *Advances in Neural Information Processing Systems*, 32:9749–9758.
- Haoli Bai, Zhuangbin Chen, Michael R. Lyu, Irwin King, and Zenglin Xu. 2018. [Neural relational topic models for scientific article analysis](#). In *Proceedings of the 27th ACM International Conference on Information and Knowledge Management, CIKM '18*, page 27–36, New York, NY, USA. Association for Computing Machinery.
- Florian Boudin. 2018. [Unsupervised keyphrase extraction with multipartite graphs](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 667–672, New Orleans, Louisiana. Association for Computational Linguistics.
- Florian Boudin and Ygor Gallina. 2021. [Redefining absent keyphrases and their effect on retrieval effectiveness](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4185–4193, Online. Association for Computational Linguistics.
- Florian Boudin, Ygor Gallina, and Akiko Aizawa. 2020. [Keyphrase generation for scientific document retrieval](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1118–1126, Online. Association for Computational Linguistics.
- Ricardo Campos, Vítor Mangaravite, Arian Pasquali, Alípio Jorge, Célia Nunes, and Adam Jatowt. 2020. [Yake! keyword extraction from single documents using multiple local features](#). *Information Sciences*, 509:257–289.
- Hou Pong Chan, Wang Chen, Lu Wang, and Irwin King. 2019. [Neural keyphrase generation via reinforcement learning with adaptive rewards](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2163–2174, Florence, Italy. Association for Computational Linguistics.
- Jun Chen, Xiaoming Zhang, Yu Wu, Zhao Yan, and Zhoujun Li. 2018. [Keyphrase generation with correlation constraints](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language*

- Processing*, pages 4057–4066, Brussels, Belgium. Association for Computational Linguistics.
- Wang Chen, Hou Pong Chan, Piji Li, Lidong Bing, and Irwin King. 2019a. [An integrated approach for keyphrase generation via exploring the power of retrieval and extraction](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2846–2856, Minneapolis, Minnesota. Association for Computational Linguistics.
- Wang Chen, Hou Pong Chan, Piji Li, and Irwin King. 2020. [Exclusive hierarchical decoding for deep keyphrase generation](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1095–1105, Online. Association for Computational Linguistics.
- Wang Chen, Yifan Gao, Jiani Zhang, Irwin King, and Michael R Lyu. 2019b. Title-guided encoding for keyphrase generation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 6268–6275.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186.
- Shizhe Diao, Yan Song, and Tong Zhang. 2020. [Keyphrase generation with cross-document attention](#). *ArXiv*.
- Angela Fan, Edouard Grave, and Armand Joulin. 2020. [Reducing transformer depth on demand with structured dropout](#). In *International Conference on Learning Representations*.
- Corina Florescu and Cornelia Caragea. 2017. [Position-Rank: An unsupervised approach to keyphrase extraction from scholarly documents](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1105–1115, Vancouver, Canada. Association for Computational Linguistics.
- George W. Furnas, Thomas K. Landauer, Louis M. Gomez, and Susan T. Dumais. 1987. The vocabulary problem in human-system communication. *Communications of the ACM*, 30(11):964–971.
- Sujatha Das Gollapalli and Xiaoli Li. 2016. [Keyphrase extraction using sequential labeling](#). *ArXiv*, abs/1608.00329.
- Kazi Saidul Hasan and Vincent Ng. 2014. [Automatic keyphrase extraction: A survey of the state of the art](#). In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1262–1273, Baltimore, Maryland. Association for Computational Linguistics.
- Gao Huang, Yu Sun, Zhuang Liu, Daniel Sedra, and Kilian Q. Weinberger. 2016. Deep networks with stochastic depth. In *Computer Vision – ECCV 2016*, pages 646–661, Cham. Springer International Publishing.
- Xiaoli Huang, Tongge Xu, Lvan Jiao, Yueran Zu, and Youmin Zhang. 2021. [Adaptive beam search decoding for discrete keyphrase generation](#). *Proceedings of the AAAI Conference on Artificial Intelligence*, 35(14):13082–13089.
- Anette Hulth. 2003. [Improved automatic keyword extraction given more linguistic knowledge](#). In *Proceedings of the 2003 Conference on Empirical Methods in Natural Language Processing*, pages 216–223.
- Mohit Iyyer, Varun Manjunatha, Jordan Boyd-Graber, and Hal Daumé III. 2015. [Deep unordered composition rivals syntactic methods for text classification](#). In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1681–1691, Beijing, China. Association for Computational Linguistics.
- James M. Kates and Kathryn H. Arehart. 2014. [The hearing-aid speech perception index \(haspi\)](#). *Speech Communication*, 65:75–93.
- Su Nam Kim, Olena Medelyan, Min-Yen Kan, and Timothy Baldwin. 2010. [SemEval-2010 task 5 : Automatic keyphrase extraction from scientific articles](#). In *Proceedings of the 5th International Workshop on Semantic Evaluation*, pages 21–26, Uppsala, Sweden. Association for Computational Linguistics.
- Mikalai Krapivin, Aliaksandr Autaeu, and Maurizio Marchese. 2009. Large dataset for keyphrases extraction. *University of Trento*.
- Giuseppe Lancioni, Saida S.Mohamed, Beatrice Portelli, Giuseppe Serra, and Carlo Tasso. 2020. [Keyphrase generation with GANs in low-resources scenarios](#). In *Proceedings of SustaiNLP: Workshop on Simple and Efficient Natural Language Processing*, pages 89–96, Online. Association for Computational Linguistics.
- Rui Liu, Zheng Lin, and Weiping Wang. 2020. [Keyphrase prediction with pre-trained language model](#). *ArXiv*, abs/2004.10462.
- Yichao Luo, Zhengyan Li, Bingning Wang, Xiaoyu Xing, Qi Zhang, and Xuanjing Huang. 2020. [Sensenet: Neural keyphrase generation with document structure](#). *ArXiv*, abs/2012.06754.
- Yichao Luo, Yige Xu, Jiacheng Ye, Xipeng Qiu, and Qi Zhang. 2021. Keyphrase generation with fine-grained evaluation-guided reinforcement learning. In *Proceedings of EMNLP findings*.

- Debanjan Mahata, John Kuriakose, Rajiv Ratn Shah, and Roger Zimmermann. 2018. [Key2Vec: Automatic ranked keyphrase extraction from scientific articles using phrase embeddings](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 634–639, New Orleans, Louisiana. Association for Computational Linguistics.
- Rui Meng, Sanqiang Zhao, Shuguang Han, Daqing He, Peter Brusilovsky, and Yu Chi. 2017. Deep keyphrase generation. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 582–592.
- Xinfan Meng, Furu Wei, Xiaohua Liu, Ming Zhou, Sujian Li, and Houfeng Wang. 2012. Entity-centric topic-oriented opinion summarization in twitter. In *Proceedings of the 18th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 379–387.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21:1–67.
- Dhruva Sahrawat, Debanjan Mahata, Haimin Zhang, Mayank Kulkarni, Agniv Sharma, Rakesh Gosangi, Amanda Stent, Yaman Kumar Singla, Rajiv Ratn Shah, and Roger Zimmermann. 2020. Keyphrase extraction as sequence labeling using contextualized embeddings. *Information Retrieval, ECIR 2020*, 12036:328–335.
- T.y.s Santosh, Debarshi Kumar Sanyal, Plaban Kumar Bhowmick, and Partha Pratim Das. 2020. [SaSAKE: Syntax and semantics aware keyphrase extraction from research papers](#). In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 5372–5383, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Nitish Srivastava, Geoffrey Hinton, Alex Krizhevsky, Ilya Sutskever, and Ruslan Salakhutdinov. 2014. [Dropout: A simple way to prevent neural networks from overfitting](#). *Journal of Machine Learning Research*, 15(56):1929–1958.
- Zhiqing Sun, Jian Tang, Pan Du, Zhi-Hong Deng, and Jian-Yun Nie. 2019. [Divgraphpointer: A graph pointer network for extracting diverse keyphrases](#). In *Proceedings of the 42nd International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR’19*, page 755–764, New York, NY, USA. Association for Computing Machinery.
- Avinash Swaminathan, Raj Kuwar Gupta, Haimin Zhang, Debanjan Mahata, Rakesh Gosangi, and Rajiv Ratn Shah. 2020a. [Keyphrase generation for scientific articles using gans \(student abstract\)](#). *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(10):13931–13932.
- Avinash Swaminathan, Haimin Zhang, Debanjan Mahata, Rakesh Gosangi, Rajiv Ratn Shah, and Amanda Stent. 2020b. [A preliminary exploration of GANs for keyphrase generation](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 8021–8030, Online. Association for Computational Linguistics.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Proceedings of the 31st International Conference on Neural Information Processing Systems*, pages 6000–6010.
- Yue Wang, Jing Li, Hou Pong Chan, Irwin King, Michael R. Lyu, and Shuming Shi. 2019. [Topic-aware neural keyphrase generation for social media language](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2516–2526, Florence, Italy. Association for Computational Linguistics.
- Thomas Wolf, Julien Chaumond, Lysandre Debut, Victor Sanh, Clement Delangue, Anthony Moi, Pierric Cistac, Morgan Funtowicz, Joe Davison, Sam Shleifer, et al. 2020. Transformers: State-of-the-art natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45.
- Huanqin Wu, Wei Liu, Lei Li, Dan Nie, Tao Chen, Feng Zhang, and Di Wang. 2021. [UniKeyphrase: A unified extraction and generation framework for keyphrase prediction](#). In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 825–835, Online. Association for Computational Linguistics.
- Liu Yang, Junjie Hu, Minghui Qiu, Chen Qu, Jianfeng Gao, W. Bruce Croft, Xiaodong Liu, Yelong Shen, and Jingjing Liu. 2019. [A hybrid retrieval-generation neural conversation model](#). In *Proceedings of the 28th ACM International Conference on Information and Knowledge Management, CIKM ’19*, page 1341–1350, New York, NY, USA. Association for Computing Machinery.
- Hai Ye and Lu Wang. 2018. [Semi-supervised learning for neural keyphrase generation](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 4142–4153, Brussels, Belgium. Association for Computational Linguistics.

Jiacheng Ye, Ruijian Cai, Tao Gui, and Qi Zhang. 2021a. [Heterogeneous graph neural networks for keyphrase generation](#).

Jiacheng Ye, Tao Gui, Yichao Luo, Yige Xu, and Qi Zhang. 2021b. [One2Set: Generating diverse keyphrases as a set](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4598–4608, Online. Association for Computational Linguistics.

Xingdi Yuan, Tong Wang, Rui Meng, Khushboo Thaker, Peter Brusilovsky, Daqing He, and Adam Trischler. 2020. One size does not fit all: Generating and evaluating variable number of keyphrases. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7961–7975.

Yuxiang Zhang, Yaocheng Chang, Xiaoqing Liu, Sujatha Das Gollapalli, Xiaoli Li, and Chunjing Xiao. 2017. [Mike: Keyphrase extraction by integrating multidimensional information](#). In *Proceedings of the 2017 ACM on Conference on Information and Knowledge Management, CIKM '17*, page 1349–1358, New York, NY, USA. Association for Computing Machinery.

Jing Zhao, Junwei Bao, Yifan Wang, Youzheng Wu, Xiaodong He, and Bowen Zhou. 2021. [SGG: Learning to select, guide, and generate for keyphrase generation](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5717–5726, Online. Association for Computational Linguistics.

Jing Zhao and Yuxiang Zhang. 2019. [Incorporating linguistic constraints into keyphrase generation](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 5224–5233, Florence, Italy. Association for Computational Linguistics.

Özlem Ünlü and Aydın Çetin. 2019. [A survey on keyword and key phrase extraction with deep learning](#). In *2019 3rd International Symposium on Multidisciplinary Studies and Innovative Technologies (ISM-SIT)*, pages 1–6.

A Supplementary Materials

A.1 Implementation Details

For ExHiRD, we use the same hyperparameters as in the original paper (Chen et al., 2020)¹. For T5, we use a maximum of 10 epochs, early stopping with a patience of 2 (the training is terminated if validation loss does not improve for 2 consecutive epochs), a batch size as 64, a maximum gradient norm clipping as 5, and SM3 (Anil et al., 2019) as the optimizer. The initial learning rate for T5 was set to be 0.1. We apply learning rate (lr) warmup as follows²:

$$lr_s = lr_0 \cdot \min(1, (s/w)^2) \quad (1)$$

lr_s indicates the learning rate at step s . lr_0 is the initial learning rate (0.1). s indicates the current update step number. w indicates total warmup steps (set as 2000). The initial learning rate (0.1) was tuned using grid search based on validation loss among the following choices: {0.1, 0.01, 0.001}. For each trail during hyperparameter optimization we use a maximum of 1 epoch. We only tune the baselines (where KPDRIP is unapplied). We do not separately tune other hyperparameters when KPDRIP is applied.

We use the T5 implementation as provided by (Wolf et al., 2020). Both ExHiRD and T5 models are trained using teacher forcing mechanism. During inference, we set the maximum phrase length as 50 for both. Keyphrase tokens are greedily generated during inference. The pad token is used as the mask token for both models.

A.2 Case Study

We display a prediction example in Table 2. KPDRIP generates more accurate absent keyphrases on both HR and T5 models comparing to the baselines. For instance, baseline models fail to produce “vehicular ad hoc networks” absent keyphrase whereas models with KPDRIP successfully generate it. In particular, T5 with KPDRIP generates all absent keyphrases. This demonstrates that our proposed method is more powerful in language understanding of the overall semantic of the documents and hence, generates absent keyphrases accurately.

¹<https://github.com/Chen-Wang-CUHK/ExHiRD-DKG>

²based on the recommended procedure for SM3 (<https://github.com/google-research/google-research/tree/master/sm3>).

Example Source Document Input (Title, Abstract) :

Wevan a mechanism for evidence creation and verification in vanets. There are traffic situations (e.g. incorrect speeding tickets) in which a given vehicles driving behavior at some point in time has to be proved to a third party. ... In this paper, a vanet enabled data exchange mechanism called wevan is presented. The goal of this mechanism is to build and verify evidences based on surrounding vehicles(called witnesses) testimonies. Due to the short range nature of vanets , the connectivity to witnesses may be reduced with time the later their testimonies are requested, the lower the amount of witnesses may be. Simulation results show that if testimonies are ordered <digit>later, an average of <digit>testimonies may be collected in highway scenarios . Other intervals and road settings are studied as well .

Target: digital evidence;vehicular ad hoc networks; driving behavior; witnesses

HR : wevan;verification;vanets;**witnessess**;evidence based systems

HR with KPDROP (0.8) : evidence creation; **vehicular ad hoc networks**; evidence based verification

T5 : evidence creation;verification;evidence sharing

T5 with KPDROP (0.8) : evidence creation;verification; **vehicular ad hoc networks**;**digital evidence**

Table 2: An example of generated keyphrases by baseline and our KPDROP. The corrected predictions are bold and the present keyphrases are underlined.