

Cooperation, Retaliation and Forgiveness in Revision Games

Dong Hao¹ Qi Shi¹ Jinyan Su¹ Bo An²

¹University of Electronic Science and Technology of China

²Nanyang Technological University

Abstract

Revision game is a very new model formulating the situation where players can prepare and revise their actions in advance before a deadline when payoffs are realized. We identify the Limited Retaliation (LR) strategy for revision games which sustains a high level of mutual cooperation and is robust to players' occasional mistakes. The LR strategy stipulates that, (i) players first follow a recommended cooperative plan; (ii) if anyone deviates from the plan, the LR player retaliates by using the defection action for a limited duration; (iii) after the retaliation, the LR player returns to the cooperative plan. The LR strategy has two good features. First, it is vengeful, in the sense that it deters the opponent from non-cooperative action by threatening a retaliation. Second, it is forgiving, because it returns to cooperation after a proper retaliation. The vengeful feature makes it constitute a subgame perfect equilibrium, while the forgiving feature makes it tolerate occasional mistakes. These are in clear contrast to the existing strategies for revision games which all assume players are extremely grim and never forgive. Besides its contribution as a new robust and welfare-optimizing equilibrium strategy, our results about LR strategy can also be used to explain how easy cooperation can happen, and why forgiveness emerges in real-world multi-agent interactions.

1 Introduction

1.1 Background

In many multi-agent systems, agents often prepare their actions in advance before a deadline when their payoffs are realized. Such systems can be captured by revision games Kamada and Kandori [2020a]. In a revision game, at the initial time, agents choose actions and wait for the deadline. Between the initial time and the deadline, they may have opportunities to revise actions. The revision opportunities arrive stochastically and the probability to get another revision opportunity vanishes as time approaches the deadline. A player's only payoff is obtained at the deadline, depending on all agents' final actions.

Many real-world scenarios can be modeled as revision games. A well-studied case is the pre-opening phase in stock markets such as Nasdaq or Euronext. Traders can submit orders before the opening of the market, which can be changed until the opening time. The online auction websites like eBay hold auctions which have a deadline and bidders actually play a revision game. The eBay auctions usually have a deadline, before which bidders can revise their bids many times. Bidders' opportunities to use eBay and to change bids are following a stochastic process (many human activities can be characterized by a Poisson process). Electoral campaign is also a good example. During the 2020 U.S. presidential election, the COVID-19 pandemic brings about a series of political agenda shifts and campaign tactic adjustments for the major presidential candidates. AI game playing problems can also be modeled as revision games. Many recent multiplayer video games (such as *Need for Speed* series and *Call of Duty* series) involve some form of time limit on their online servers. Whichever team/player holds the lead at the expiration of the time limit is declared the winner. Another example is federated learning. Large companies may ask individuals to submit their data to train a model before some fixed deadline. The relation between different individuals can be modeled as a Prisoner's Dilemma. Moreover,

*Emails: haodong@uestc.edu.cn, qishi@std.uestc.edu.cn; huizhang@std.uestc.edu.cn; boan@ntu.edu.sg

*Dong Hao is the corresponding author.

crowdsourcing competitions or contests on Github or TopCoder usually have a deadline; participants modify their submissions many times before the deadline.

The general framework of revision games is formally published in Kamada and Kandori [2020b]. But the original idea can be traced back to the authors' online working draft before 2014. They identify the very first strategy for revision games, which is based on the grim trigger mechanism, and constitutes equilibrium. Following Kamada and Kanrodi, all the existing strategies of revision games follow a grim trigger style. Strategies of this style has a very fierce punishment and is never forgiving; it only proves cooperation is possible but does not answer how easy it is in revision games. It also excludes the possibility of resuming cooperation. A few works study the grim trigger equilibrium in games where the revision process is player-specific Calcagno et al. [2014], Kamada and Sugaya [2014], Gensbittel et al. [2018]. A later work examines the trembling hand equilibrium for revision games with imperfect information Moroni [2015]. Another work goes even further and extends the solution concept to Markov perfect equilibrium Lovo and Tomala [2015]. Besides these theoretical achievements, researches also investigate different applications Ambrus and Lu [2015], Kamada and Kandori [2020a] and even conduct laboratory experiments for revision games Roy [2017].

1.2 Contribution

How to sustain cooperation is a central challenge in game theory. In conventional games such as prisoner's dilemma and the tragedy of the commons game, the only Nash equilibrium strategy is non-cooperative. But why cooperation is commonly seen in the real world? One reason is real-world games are more complex than theoretic models. Real-world games could be dynamic or repeated; players may convey information to one another, etc. Our problem is about how to sustain mutual cooperation and how to improve the social welfare in revision games. Revision game are dynamic. It lasts for a certain duration (i.e., time interval $[-T, 0]$). When players are engaged in a revision game, mutual cooperation could be achieved due to the fact that agents must consider not only the immediate best response but also the long-term expected payoffs. Thus one player has the ability to deter the opponent from non-cooperative immediate action by threatening retaliation that reduces the opponent's expected payoff.

We identify the Limited Retaliation (LR) strategies for revision games. LR strategies consist of two components: One is the recommended *collusive plan* which achieves an optimal social welfare for players; The other is the *retaliation phase* in which the defection action is used for a limited period. The LR strategy stipulates that, if anyone fails to follow the collusive plan, players switch to the retaliation phase. LR strategies work in a "carrot-and-stick" style, where the collusive plan is the carrot and retaliation phase is the stick. Specifically, our contributions are:

1. We derive a necessary and sufficient condition for a collusive plan to be sustained in revision games. The conditions are captured by an incentive constraint which is the difference between the gain for current deviation and the loss for future retaliation.
2. By satisfying the incentive constraint using backward induction, we find a class of collusive plans for LR strategies. The collusive plans are given in a simple piecewise constant (PWC) form and are easy to implement. We also obtain the social welfare maximizing PWC plans.
3. The retaliation phase of LR strategies is designed to have a limited and controllable fierceness. It not only can exert enough threat on the opponent to ensure him not to deviate, but also allows players to forgive the deviator once his deviation has been sufficiently retaliated. Thus players can resume collusion after this retaliation phase.
4. We also implement the optimal LR strategies in both the revision versions of Prisoner's Dilemma and the Cournot games. Empirical results show that LR strategies show a significant robustness than grim trigger strategies.

The LR strategies have two good features. The first one is they are vengeful. It can deter the opponent from non-cooperative action at any time by threatening a sufficient retaliation that reduces the opponent's expected payoff in the remaining time. By using this vengeful feature, LR strategies can constitute cooperative subgame perfect equilibrium. The other feature is they are forgiving. Since the retaliation phase has a controllable

length, even when there is an intentional or unintentional deviation, LR players can return back to mutual cooperation after the retaliation. This forgiving feature makes LR strategies especially suitable for real-world games where players confront observation or action errors Gilpin and Sandholm [2007], Fudenberg and Maskin [1990], or where players have limited rationality Doyle [1992]. LR strategies are in contrast to existing strategies for revision games which assumes players are extremely grim and never forgive. The forgiveness in LR strategies is of great importance. This is because in realistic games, due to agents' observation/action errors or bounded rationality, deviation occasionally happens either intentionally or unintentionally. If players play a non-forgiving strategy, they can never return back to mutual cooperation and the social welfare would be significantly harmed. Moreover, forgiveness widely exists in the real world, our LR strategy is the first attempt to explain the incentive and mechanism for cooperation and forgiveness in multi-agent games with deadline.

2 Revision Game Model

Consider two-player symmetric games with the following properties:

- There exists a unique pure symmetric Nash equilibrium action profile (a^N, a^N) , where both players use the defection action, and their payoffs $\pi^N := \pi(a^N, a^N)$; There is also an optimal symmetric action profile (a^*, a^*) and $a^* = \arg \max_a \pi(a, a)$; a^N and a^* are distinct. The action space A is a convex subset (interval) in \mathbb{R} .
- Assume player i 's payoff π_i is continuous. Denote the **payoff for a symmetric action profile** (a, a) as $\pi(a)$. Assume it is strictly increasing for $a \in [a^N, a^*]$ and non-decreasing for $a > a^*$, if $a^N < a^*$ (symmetric conditions hold if $a^N > a^*$).

Such games widely exist. For example, the well-known Prisoner's Dilemma with continuous actions and Cournot duopoly both have these features. When such a game happens only once, we call it the **stage game**.

A revision game is an extension of the above stage game. It starts at a beginning time $-T$ ($T > 0$) and ends at a deadline time 0. At time $-T$, players choose their actions simultaneously. At any time $-t \in [-T, 0]$, they may have **revision opportunities** to play the stage game again, and the opportunities arrive according to a Poisson process with arrival rate $\lambda > 0$. They can revise their actions only when they have a revision opportunity. Players' payoffs $\pi_i(a'_i, a'_j)$ and $\pi_j(a'_i, a'_j)$ are realized at the deadline, where (a'_i, a'_j) is the profile of players' revised actions at the final revision opportunity. After the final revision opportunity, their actions stay the same till the deadline.

In Revision games, the value t is the remaining time length until the deadline, which can be regarded as a payoff-relevant state variable for the players. A player's behavior in the revision game is captured by a mapping $\sigma(t) : [-T, 0] \rightarrow A$, which specifies an action a for every remaining time length t . Note that when there is a revision opportunity at time point $-t$, a player may or may not adjust her action a . We formally call this mapping $\sigma(t)$ the **strategy** of a player. A strategy decides an action a for each time point $-t$. We say that a is **cooperative** or a sustains a certain level of **cooperation**, if it provides a **higher payoff than the Nash equilibrium payoff of the stage game**. That is, when both players use a , then $\pi(a) = \pi_i(a, a) > \pi^N$. One can see there are different levels of cooperation.

Let λ be the arrival rate of a Poisson process. Then $e^{-\lambda t}$ is the probability of no Poisson arrival in the remaining time length t and $\lambda e^{-\lambda t}$ is the probability density of the last revision opportunity. The expected payoff to each player associated with strategy $\sigma(t)$ over time span $(-T, 0]$ can be written as:

$$V(x) = \pi(\sigma(T))e^{-\lambda T} + \int_0^T \pi(\sigma(t))\lambda e^{-\lambda t} dt. \quad (1)$$

Note that $\pi(\sigma(t))$ is the **payoff for a symmetric action profile**. The reason of using symmetric action profiles is that, later we will analyze symmetric equilibria. Eq.(1) is constructed as follows: $\sigma(T)$ specifies a player's initial action at time $-T$. Payoff $\pi(\sigma(T))$ can be realized only when there is no revision opportunities arising during time span $(-T, 0]$. This happens with a probability $e^{-\lambda T}$. If the last revision opportunity arises at time $-t$, then player's payoff is $\pi(\sigma(t))$, which happens with a probability density $\lambda e^{-\lambda t}$. Thus the integral is the expected payoff when the last revision opportunity arrives in time span $(-T, 0]$.

3 Limited Retaliation Strategies

In this section, we propose Limited Retaliation (LR) strategies which can constitute a subgame perfect equilibrium. LR strategies have a simple form and achieve a high level of cooperation. More importantly, they allow both players to resume collusion even after some of them deviated.

3.1 Formalization of Limited Retaliation

The principle for designing LR strategies is: Firstly, it should recommend a collusive plan. If both players follow this plan, they will have high expected payoffs; Secondly, to ensure players not to deviate from the collusive plan, the strategy should also provide a proper retaliation which is used to threaten the opponent not to deviate; Finally, if a retaliation is too soft, it cannot have enough threatening; if it is too strong, it will be hard to return to collusion. Thus the retaliation should be limited to a proper degree.

Definition 1 (LR Strategy). *A Limited Retaliation strategy is a tuple $\sigma = \{x, k\}$. Function x is a recommended collusive plan specifying actions $a = x(t)$ for different $-t$. Constant k characterizes the length of the retaliation phase, in which players use the defection action a^N to retaliate.*

We first clarify what is a collusive plan. Recall that in stage games (e.g., Prisoner’s Dilemma), the defection action a^N leads to the lowest social welfare. A fundamental objective in revision games is to incentivize the players to avoid taking this defection action a^N for a long enough time. With this objective, the collusive plan is defined as follows.

Definition 2 (Collusive Plan). *A plan $x(\cdot)$ recommended by the LR strategy is called a collusive plan, iff $\forall -t, x(t) \geq a^N$. That is, a collusive plan specifies a cooperative action at each time instance.*

Thus the intuition of an LR strategy in Definition 1 is: it wants both players to follow the collusive plan. This objective is guaranteed by threatening the opponent by a k -degree retaliation. An LR strategy runs as follows:

- If both players follow the recommended collusive plan x at the previous revision opportunity, then still follow this plan at the next revision opportunity.
- As long as any player deviates from x at any time point $-t$, then start the retaliation phase by using the defection action a^N at any future revision opportunities arriving during time span $[-t, -t + kt]$, where $k \in (0, 1)$.
- After retaliation, revert to the collusive plan x no matter what the opponent did during $[-t, -t + kt]$.

If the retaliation is never triggered, then both players perfectly follow the recommended collusive plan x (i.e., players’ strategies are identical to the collusive plan $\sigma = x$). This indicates that with LR strategies, **cooperation can emerge**. If there is any deviation from any player, then the retaliation phase is triggered. This is a threat to the opponent not to deviate, indicating that **cooperation can be secured**. LR strategies are “forgiving” and the fierceness of retaliation is controlled. After the limited retaliation, an LR strategy returns to cooperation. This indicates **cooperation can be restored**. The LR strategy can be computed by Algorithm 1 in the Appendix-A.

3.2 Deviation Gain and Retaliation Loss

Now the problems are: how to find $x(\cdot)$ and k such that a pair of $\sigma = \{x(\cdot), k\}$ can constitute an equilibrium, and to what extent they can sustain cooperation? To tackle these problems, in this subsection we will analyze players’ incentives for LR strategies. First define the following terminologies.

Definition 3 (Deviation Gain). *For the stage games, denote i ’s maximum deviation gain at a symmetric action profile (a, a) by $G(a) := \max_{a_i} \pi_i(a_i, a) - \pi_i(a, a)$.*

Definition 4 (Retaliation Loss). *For the stage games, denote i ’s retaliation loss at a symmetric action profile (a, a) by $L(a) := \pi_i(a, a) - \pi_i(a^N, a^N)$.*

In any stage game at time $-t$, if j follows the action specified by collusive plan $x(t)$ but i unilaterally deviates to her payoff maximizing action $\arg \max_{a_i} \pi_i(a_i, a)$, then i has an immediate deviation gain which is quantified in Definition 3. After i deviates, both i and j will switch to the defection action a^N , thus i may also suffer from a retaliation loss which is quantified in Definition 4. Without loss of generality, we assume $G(a)$ is strictly increasing on $a \in [a^N, a^*]$ and non-decreasing for $a > a^*$ Kamada and Kandori [2020b].

Next we extend the deviation gain and the retaliation loss of stage games into the whole revision game. Assume there is a recommended collusive plan x for all players and the players are using an LR strategy $\sigma = \{x(\cdot), k\}$. At the very beginning $-T$, all players use action $x(T)$. If a player deviates from x at time $-t$, then according to Definition 3, her gain from deviation will be $G(x(t))$. This deviation gain can only materialize if there is no revision opportunity in the remaining time t , which happens with probability $e^{-\lambda t}$, so the **expected deviation gain** at time $-t$ is $G(x(t))e^{-\lambda t}$.

According to the definition of LR strategy, this deviation is followed by a mutual retaliation with duration kt . During the following duration kt , at any time $-s$, if there is any revision opportunity, both players will use the defection action a^N instead of the planned action $x(s)$. This means that if the last revision opportunity s arrives during time span $[-t, -t + kt]$, the realized payoff is decreased from $\pi(x(s))$ to the Nash payoff π^N . As explained above, the density of the last revision opportunity at time $-s$ is $\lambda e^{-\lambda s}$, and therefore, the **expected retaliation loss** is given as an integral $\int_{-t}^{-t+kt} (\pi(x(s)) - \pi^N) \lambda e^{-\lambda s} ds = \int_{t-kt}^t L(x(s)) \lambda e^{-\lambda s} ds$.

In a word, the condition for any player not to deviate from plan x is that *at any time instance $-t \in [-T, 0]$, the expected deviation gain should be not larger than the expected retaliation loss*, which is formally written as the following incentive constraint: for each $-t \in [-T, 0]$,

$$\underbrace{G(x(t))e^{-\lambda t}}_{\text{expected deviation gain}} \leq \underbrace{\int_{t-kt}^t L(x(s)) \lambda e^{-\lambda s} ds}_{\text{expected retaliation loss}}. \quad (2)$$

The incentive constraint (2) is the **necessary and sufficient condition for a subgame perfect equilibrium**: it shows at any time $-t$, a player cannot increase her payoff by deviating from the collusive plan now and possibly obtaining the Nash payoff in the subgames after the deviation. In the following sections, we will derive a branch of collusive plans x which have a simple form and satisfy this constraint.

4 Equilibrium Reasoning

There could be infinitely many collusive plan x which can satisfy Eq.(2). Our goal is to find a function that is simple and achieves high degree of cooperation. In this section, we consider the monotone and piecewise constant (MPC) plan.

4.1 Monotone and Piecewise Constant (MPC) Plan

To derive an MPC plan, we first segment the whole time span $(-T, 0]$ into small slots, and then assign a constant action for each slot. We calculate the constant actions by recurrence relation and mathematical induction. Finally, all these constant actions together compose an MPC plan x .

First, divide the whole time span $(-T, 0]$ into many small slots: $(-T, -(1-k)T]$, $(-(1-k)T, -(1-k)^2T]$, \dots , $(-(1-k)^{n-1}T, -(1-k)^nT]$, \dots . For ease of notation, define $\kappa = 1-k$, these slots are rewritten as $(-T, -\kappa T]$, $(-\kappa T, -\kappa^2 T]$, \dots , $(-\kappa^{n-1}T, -\kappa^n T]$, \dots . For the n -th slot, assign a constant action a_n . Then the MPC plan x is

$$x(t) = \begin{cases} a_1, & -t \in (-T, -\kappa T] \\ a_2, & -t \in (-\kappa T, -\kappa^2 T] \\ \vdots & \\ a_n, & -t \in (-\kappa^{n-1}T, -\kappa^n T] \\ a_{n+1}, & -t \in (-\kappa^n T, -\kappa^{n+1} T] \\ \vdots & \end{cases} \quad (3)$$

We focus on action sequences $x = \{a_1, a_2, \dots, a_n, \dots\}$ which are monotonically decreasing. The n -th action a_n starts at time $-\kappa^{n-1}T$ and ends at time $-\kappa^n T$, lasting for a duration $\tau(n) = k\kappa^{n-1}T$. We call it the *length of*

a_n . This length shrinks as n increases, meaning the actions change more frequently as the deadline approaches. We show an illustration of such an MPC plan in Figure 1.

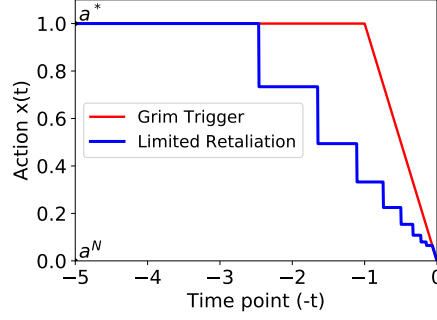


Figure 1: An MPC collusive plan $x(t)$ for LR strategies in Prisoner's Dilemma revision game. $x(t)$ is characterized by a piecewise constant function, which is different from the plan for the existing grim trigger strategy.

The next step is to derive the value of each constant a_n governed by the incentive constraint Eq.(2) for LR strategies. We will do this by induction. According to Eq.(3), if there is any deviation from the n -th action a_n , it must be that the deviation happens at a time $-t \in (-\kappa^{n-1}T, -\kappa^n T]$. After this deviation, there is a mutual retaliation with duration kt . This indicates the ending time of retaliation $-t + kt = -\kappa t$ will surpass the ending time of a_n , i.e., $-\kappa t \geq -\kappa^n T$. Therefore at time $-t$, the incentive constraint for using a_n is:

$$G(a_n)e^{-\lambda t} \leq \int_{\kappa^n T}^t L(a_n)\lambda e^{-\lambda s} ds + \int_{\kappa t}^{\kappa^n T} L(a_{n+1})\lambda e^{-\lambda s} ds. \quad (4)$$

Similar as Eq.(2), the LHS is the expected deviation gain for deviating at time $-t$. The RHS is the expected retaliation loss from $-t$ to $-\kappa t$, which is decomposed into two parts:

(i) From $-t$ to $-\kappa^n T$, the retaliation is still against the planned action a_n and the retaliation loss is $L(a_n) = \pi(a_n) - \pi^N$, which takes place with probability $e^{-\lambda s}$ at each time instance $-s \in [-t, -\kappa^n T]$. The expected retaliation loss for $[-t, -\kappa^n T]$ is given by the first integral.

(ii) From $-\kappa^n T$ to $-t + \kappa t$, the planned action already becomes a_{n+1} , thus the retaliation loss is $L(a_{n+1}) = \pi(a_{n+1}) - \pi^N$, which takes place with probability $e^{-\lambda s}$ at each time instance $-s \in [-\kappa^n T, -\kappa t]$. The expected retaliation loss for $[-\kappa^n T, -\kappa t]$ is the second integral. The sum of these two integrals is the total expected retaliation loss for deviating from collusive plan x at $-t$.

4.2 Equilibrium Constraint Satisfaction

The above incentive constraint Eq.(4) for action a_n should hold for any time $-t$ in slot $(-\kappa^{n-1}T, -\kappa^n T]$. Thus it should hold for both the lower-bound $-t \rightarrow -\kappa^{n-1}T$ and the upper-bound $-t = -\kappa^n T$.

4.2.1 RECURRENCE RELATION

In Eq.(4), we replace variable $-t$ with its upper-bound $-\kappa^n T$. This gives us

$$G(a_n)e^{-\lambda \kappa^n T} \leq \int_{\kappa^{n+1}T}^{\kappa^n T} L(a_{n+1})\lambda e^{-\lambda s} ds, \quad (5)$$

Let $\tau(n) = \kappa \kappa^n T$, which is the length of the $(n+1)$ -th slot. By calculation of the integral in Eq.(5), we can get the recurrence relation between a_n and a_{n+1} as follows:

$$G(a_n)e^{-\lambda \tau(n)} \leq L(a_{n+1})(1 - e^{-\lambda \tau(n)}). \quad (6)$$

On the LHS, $e^{-\lambda \tau(n)}$ is the probability that no revision opportunity arrives in the $(n+1)$ -th slot. Thus the LHS is the expected deviation gain in this slot. On the RHS, $1 - e^{-\lambda \tau}$ is the probability that there arrive some

revision opportunities in the $(n + 1)$ -th slot. If there is a revision in this slot, retaliation will happen. Since the deviation time is $-\kappa^n T$, the retaliation must be against the new action a_{n+1} . Thus the RHS is the expected retaliation loss in the $(n + 1)$ -th slot.

Based on the recurrence relation in Eq.(6), we can generate each a_n inductively. Now the only problem to find the MPC plan is about how to choose the terminal term of a_n .

4.2.2 TERMINAL CONDITION

For the terminal action, consider when time approaches the deadline, i.e., $n = c$ where c is a large enough number. We call $(-\kappa^c T, 0]$ the ultimate slot, and call $(-\kappa^{c-1} T, -\kappa^c T]$ the penultimate slot. According to Eq.(3), for the penultimate slot, the planned constant action is a_c , which should still satisfy the constraint Eq.(4). Substituting the lower-bound of the penultimate slot $-\kappa^{c-1} T$ into it, we have

$$G(a_c)e^{-\lambda t} \leq \int_{\kappa^c T}^{\kappa^{c-1} T} L(a_c)\lambda e^{-\lambda s} ds. \quad (7)$$

Let $\tau(c - 1) = k\kappa^{c-1} T$, which indicates the length of the penultimate slot. Basic calculation of this simple integral gives us the constraint on a_c :

$$G(a_c)e^{-\lambda\tau(c-1)} \leq L(a_c)(1 - e^{-\lambda\tau(c-1)}). \quad (8)$$

This inequality is similar to Eq.(6). But the difference here is that on both sides, the variables are a_c . Then the feasible range of a_c can be obtained by solving this inequality.

4.3 Limited Retaliation Strategies in Equilibrium

Taking the recurrence relation and the terminal action together into consideration, we directly have the following theorem which is a major result of this paper.

Theorem 1. *A profile of Limited Retaliation strategies $\sigma = \{x(\cdot), k\}$ is a subgame perfect equilibrium (SPE), if*

- (1) *Plan x has the piecewise constant form as Eq.(3);*
- (2) *The actions given by x follow recurrence relation Eq.(6);*
- (3) *There exists an action given by x satisfying Eq.(8).*

This theorem is just from the principle of mathematical induction such that when the recurrence relation and the initial term (terminal condition, in our case) are given, every member in the sequence can be generated inductively. This theorem can be used to construct subgame perfect equilibrium LR strategies. We call them SPE-LR strategies.

When time is extremely close to the deadline, the terminal condition Eq.(8) becomes more difficult to satisfy, and it degenerates to a limit problem. To see this, divide both sides by $e^{-\lambda\tau(c-1)}$, then the RHS is decreasing in c . To tackle this limit problem and also to make it convenient for algorithm design, we can use the *approximate* equilibrium solution. The constraint for the approximate SPE is

$$G(a_c)e^{-\lambda\tau(c-1)} \leq L(a_c)(1 - e^{-\lambda\tau(c-1)}) + \Delta. \quad (9)$$

where Δ is a small positive constant, but c is not necessarily extremely large. Since the RHS is larger than that of Eq.(8), it is easier to be satisfied. This leads to Corollary 1.

Corollary 1. *A profile of LR strategies strictly satisfying conditions (1) and (2) but approximately satisfying condition (3) in Theorem 1 is an approximate SPE.*

With a given k , if a plan x can make a profile of LR strategies constitute SPE, we say plan x **supports SPE**. It is worth noting that a plan such that $\forall t, x(t) = a^N$ trivially satisfies Eq.(6) and Eq.(8). Thus an LR strategy using this trivial plan can support SPE. However, this one cannot sustain any level of cooperation. For LR strategies to constitute a cooperative SPE, we have the following requirements.

Corollary 2. A collusive plan x in the form of Eq.(3) supports SPE, only if for all n , $a_n \geq a^N$.

Proof. Recall that Eq.(6) is the equilibrium constraint for the n -th slot. Divide both sides by $e^{-\lambda\tau(n)}$, we have $G(a_n) \leq L(a_{n+1})(e^{\lambda\tau(n)} - 1)$. On the RHS, $L(a)$ is monotonically increasing for $a < a^*$, and if $a < a^N$, $L(a) < L(a^N) = 0$. On the LHS, $G(a) \geq 0$ for any a . In order to make Eq.(6) hold, it is required that $a_n \geq a^N$ for any $n \geq 1$. \square

Corollary 3. A collusive plan x in the form of Eq.(3) supports cooperative SPE, only if there exists a constant c , such that $a_c > a^N$.

Proof. Prove by contrapositive. Divide both sides of Eq.(6) by $e^{-\lambda\tau(n)}$, we have $G(a_n) \leq L(a_{n+1})(e^{\lambda\tau(n)} - 1)$. Let $a_c = a^N$, then $L(a_c) = 0$. Then the inequality holds only when $G(a_{c-1}) = 0$. By the same recurrence relation, this further requires $a_{c-1} = a^N$. Repeat this for all a_n , we can see that if $a_c = a^N$, then the only plan satisfying Eq.(6) is that $a_n = a^N$ for all n , which is not cooperative. The SPE induced by this trivial plan is also not cooperative. \square

In summary, Theorem 1 presents the condition for LR strategies to constitute SPE, while Corollaries 2 and 3 show basic requirements for a collusive plan to be a good choice for LR strategies and for cooperative LR strategies, respectively. Any LR strategy satisfying Theorem 1 can guarantee cooperation and also can return to cooperation even after occasional deviation occurs. In the next section, we will quantify to what extent LR strategies can sustain cooperation.

5 Social Welfare Maximization

In this section, we will show that among all piecewise constant plans, those which are monotonically decreasing with time and have upperbound a^* and lowerbound a^N lead to maximum social welfare. Moreover, based on this principle, we devise an inductive optimization method for calculating the social welfare maximizing LR strategies.

5.1 Reducing Search Space of Plan Optimization

In what follows, we will show that MPC plans have the highest social welfare among all piecewise constant plans. The following analysis allows us to ignore any MPC plan x which contains action $x(t) < a^N$ or $x(t) > a^*$, but only focus on **bounded plans** which have upper-bound action a^* and lower-bound action a^N .

5.1.1 BOUNDING

According Corollary 2, we know that if a plan x supports SPE, it must satisfy that $\forall t, x(t) \geq a^N$. Now based on x , we construct an outer function \bar{x} as follows.

$$\forall t, \bar{x}(t) = \begin{cases} a^*, & x(t) > a^*, \\ x(t), & \text{otherwise.} \end{cases} \quad (10)$$

Obviously, \bar{x} is still piecewise constant. Moreover, since it replaces all actions larger than a^* by a^* , it must be that $\forall t, x(t) \in [a^N, a^*]$, meaning \bar{x} is bounded. The bounded plans have the following property which allows us to only concentrate on them.

Lemma 1. For every piecewise constant plan x that supports SPE, there always exists a bounded piecewise constant plan \bar{x} which also supports SPE, and has higher social welfare than x .

Proof. A player's expected payoff during $(-T, 0]$ is given by $V(x)$ in Eq.(1). Given a piecewise constant plan x , we construct \bar{x} following Eq.(10).

First, we prove $V(\bar{x}) \geq V(x)$. Recall a^* results in the maximum stage game payoff. Since \bar{x} always chooses the same or a better action at any time, according to the monotonicity of $\pi(a)$, it must be that $\forall t, \pi(\bar{x}(t)) \geq \pi(x(t))$. The expected payoff V is adding up $\pi(t)$ over all t . Therefore, $V(\bar{x}) \geq V(x)$. The social welfare is the sum of all players' expected payoffs, thus \bar{x} leads to a higher social welfare.

Then, we prove that \bar{x} supports SPE. On the one hand, by Eq.(10), at any time t , the two actions $\bar{x}(t) \leq x(t)$. Since $G(a)$ is strictly increasing on $[a^N, a^*]$, we have $G(\bar{x}(t)) \leq G(x(t))$ for any t . On the other hand, $L(a)$ is maximized by a^* , then by Eq.(10) we know $L(x(t)) \leq L(\bar{x}(t))$ for any t . The premise indicates that $x(t)$ satisfies equilibrium constraint Eq.(2), where the LHS is decreasing as G decreases and the RHS is increasing as L increases. Replacing x by \bar{x} still satisfies Eq.(2), which means \bar{x} also supports SPE. \square

Lemma 1 shows that, in equilibrium, bounded piecewise constant plans have the highest social welfare among all piecewise constant plans. Based on this fact, we only need to concentrate on a special subset of bounded piecewise constant plans and optimize the player's payoff on this set.

5.1.2 MONOTONIZATION

The second step will further refine the above result and show that, among all the bounded PWC plans, we can focus on the bounded monotone and piecewise constant (bounded MPC) plans.

Consider a bounded piecewise constant plan \bar{x} which supports SPE but is not monotonically decreasing over $(-T, 0]$. Assume two numbers $i < j$. Assume in the action sequence of plan \bar{x} , a_j is the first action which is larger than some actions before it. This means \bar{x} is not monotonically decreasing. Specifically, assume all actions after a_i and before a_j are smaller than a_j . According to Eq.(3), the planned slots for a_i and a_j are $(-\kappa^{i-1}T, -\kappa^i T]$ and $(-\kappa^{j-1}T, -\kappa^j T]$, respectively. Thus the time-span after a_i and before a_j is $(-\kappa^i T, -\kappa^{j-1}T]$. Based on the above introduction of the non-monotone \bar{x} , we construct another plan \hat{x} as follows.

$$\hat{x}(t) = \begin{cases} a_j, & -t \in (-\kappa^i T, -\kappa^{j-1}T] \\ \bar{x}(t), & \text{otherwise} \end{cases} \quad (11)$$

All actions in \hat{x} are from \bar{x} which is bounded, then \hat{x} is also bounded. Moreover, \hat{x} replaces all the 'non-monotone' actions $\bar{x}(t)$ for $t \in (-\kappa^i T, -\kappa^{j-1}T]$ with a constant a_j , hence it is an amendment of \bar{x} and restores the monotonicity. In Lemma 2 we use \bar{x} and \hat{x} to find that, it suffices to only consider the bounded MPC plans.

Lemma 2. *For every bounded piecewise constant plan \bar{x} which supports SPE, there always exists a bounded monotone piecewise constant (bounded MPC) plan \hat{x} , which also supports SPE and leads to higher social welfare than \bar{x} .*

Proof Sketch. Given a bounded piecewise constant plan \bar{x} , construct \hat{x} following Eq.(11). We need to prove that \hat{x} supports SPE and has higher expected payoff than \bar{x} . The whole time interval $(-T, 0]$ can be segmented into four parts: (i) time before $-\kappa^{i-1}$; (ii) time between $-\kappa^{i-1}$ and $-\kappa^i$; (iii) time between $-\kappa^i$ and $-\kappa^{j-1}$; and (iv) time after $-\kappa^{j-1}$. In each segment, we can compare the expected deviation gain and expected retaliation loss for \bar{x} and \hat{x} . For a formal proof, please see Supplementary Information Part-III. \square

With Lemma 1 and Lemma 2, we have the following result which can reduce the search space as much as possible.

Theorem 2. *Among all piecewise constant plans which support SPE, a bounded MPC plan leads to the maximum social welfare.*

Theorem 2 indicates that the bounded MPC plan following the form of Eq.(3) is optimal among all piecewise constant plans. To maximize the social welfare, now we only need to search in the domain of all bounded MPC plans.

5.2 Social Welfare Maximizing MPC Plan

The previous subsection shows the bounded MPC plans have the highest social welfare among all piecewise constant plans. In this subsection, we will finally find the social welfare maximizing plan within this domain.

5.2.1 KKT CONDITIONS

From Theorem 1 and Theorem 2 we know that, given a fixed constant number c , the collusive plan $x = \{a_1, \dots, a_n, \dots, a_c\}$ can maximize the social welfare $V(x)$ if and only if it satisfies Eq.(6) and Eq.(7), and is bounded and monotone. Thus the social welfare maximizing problem is formally represented as follows.

$$\begin{aligned} \arg \max_{x=\{a_1, \dots, a_c\}} \quad & V(x) = \sum_{n=1}^c \pi(a_n) \lambda e^{-\lambda n} \\ \text{subject to} \quad & G(a_n) \leq L(a_{n+1})(e^{\lambda\tau(n)} - 1), \\ & G(a_c) \leq L(a_c)(e^{\lambda\tau(c-1)} - 1), \\ & a_{n+1} \leq a_n \leq a^*. \end{aligned} \quad (12)$$

This is a typical non-linear optimizations problem which has Karush-Kuhn-Tucker (KKT) optimality conditions. In general, the optimal solution can be obtained by the Lagrange multiplier method. This means, with a given c , an optimal plan among all piecewise constant plans can be obtained by the Lagrange multiplier method.

5.2.2 INDUCTIVE PAYOFF MAXIMIZATION

From the analytical results in Theorem 2, the optimization space has been reduced to bounded MPC plans. Eq.(12) can be transformed into many sub-problems. To see this, let x^* and \hat{x} be solutions of Eq.(12) and a series of sub-problems, respectively. We prove $x^* = \hat{x}$ by contradiction. Suppose $n = \operatorname{argmax}\{a_n^* \neq \hat{a}_n\}$. Since $a_{n+1}^* = \hat{a}_{n+1}$, a_n^* and \hat{a}_n have the same constraints. $\pi(a)$ is strictly increasing, thus $a_n^* < \hat{a}_n$. Moreover, since $L(a)$ is strictly increasing, we have

$$G(a_{n-1}^*) \leq L(a_n^*)(e^{\lambda\tau(n)} - 1) < L(\hat{a}_n)(e^{\lambda\tau(n)} - 1)$$

. This means, another plan $\bar{x} = \{a_1^*, \dots, a_{n-1}^*, \hat{a}_n, a_{n+1}^*, \dots, a_c^*\}$ is also a feasible plan for Eq.(12) and $V(\bar{x}) > V(x^*)$ by monotonicity of $\pi(a)$, which contradicts the fact that x^* is the optimal plan.

This allow us to even further simplify the above maximization problem. We transform it into many sub-problems for each a_n :

$$\begin{aligned} \arg \max_{a_n} \quad & \pi(a_n) \\ \text{subject to} \quad & G(a_n) \leq L(a_{n+1}^*)(e^{\lambda\tau(n)} - 1), \\ & a_{n+1}^* = \arg \max \pi(a_{n+1}), \\ & a_{n+1}^* \leq a_n \leq a^*, \end{aligned} \quad (13)$$

where a_{n+1}^* is already obtained in the previous sub-problem. This means the maximization in Eq.(12) can be done inductively. For the ultimate slot $n = c$, the optimal action a_c^* should be the largest one from those a_c satisfying Eq.(8). Introducing this a_c^* into the maximization problem in Eq.(13), we can obtain a_{c-1}^* . Generally, after obtaining a_{n+1}^* , we can solve the optimization for a_n^* according to Eq.(13). Then for each slot, the payoff is maximized inductively. With this obtained optimal plan $x^* = \{a_1^*, \dots, a_n^*, \dots, a_c^*\}$, by Theorem 2, the maximum value of the expected payoff for the whole time span $(-T, 0]$ is just $V(x^*) = \sum_{n=1}^c \pi(a_n^*)$.

6 Numerical Results

The existing methods of revision games are all based on the grim trigger (GT) strategy Kamada and Kandori [2020b], where as long as there is any deviation (either by unintentional action error or intentional deviation), both players will never forgive, and retaliate to the deadline. In this section, we examine the performance of LR strategies, and compare them with GT strategy in Prisoner's Dilemma where players may make occasional mistakes.

Consider in a continuous Prisoner's Dilemma, player- i 's payoff is $\pi_i(a_i, a_{-i}) = B(a_{-i}) - C(a_i)$, where $B(a) > C(a)$ and $B(a)$ and $C(a)$ denote the player's benefit and cost, respectively Killingback et al. [1999].

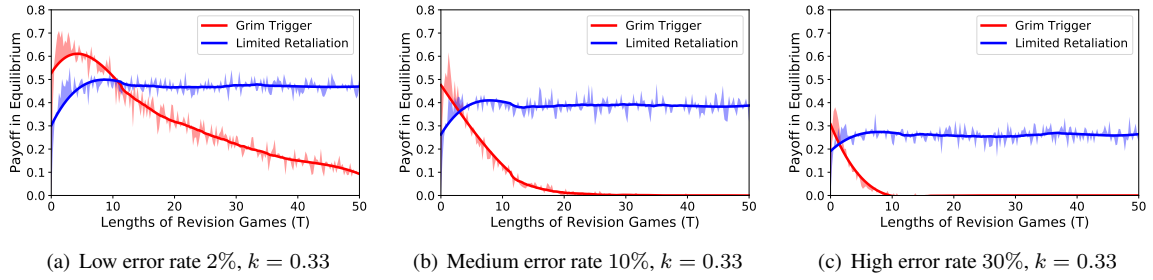


Figure 2: Equilibrium Payoffs of LR and GT in the Prisoner’s Dilemma revision games with different error rates.

Without loss of generality, we use $B(a) = 2a$, $C(a) = a^2$ and $a_i \in A = [0, 1]$. Then the payoff of i is: $\pi_i = 2a_{-i} - a_i^2$. The Nash action is $a^N = 0$ while the fully cooperative action is $a^* = 1$. For the revision version of this stage game, we set $\lambda = 1$ for the Poisson arrival rate. For the LR strategy, we set the retaliation fierceness $k = 0.33$ as an example. The collusive plan for this LR strategy has been shown in Figure 1. Now we set different lengths and different error rates of the revision games and show the simulation results in Figure 3. Players’ action error rates in the subfigures (a), (b) and (c) are low (2%), medium (10%) and high (30%), respectively.

In each subfigure, each value of T on the x -axis represents a total length of a simulated revision game. That is, in each subfigure, 50 different revision games are simulated, with game lengths varying from $T = 0^+$ to $T = 50$. The y -axis is the expected equilibrium payoff. There are two colored curves in each subfigure, one is for LR strategy equilibrium and the other is for GT strategy equilibrium. The payoff for each strategy in each simulated game is depicted by a colored dot, and all the dots compose a colored curve. For each simulated game (i.e., each dot), we sample players’ actions according to the error rate. For example, in subfigure (a), players follow the plan x of LR (or the plan of GT) with a probability 98%, but has a probability 2% to make a mistake at *any* revision opportunity. We have two observations from the simulations.

1. By comparing the two curves in all three subfigures, we can see that, as the error rate increases, LR becomes better and better than GT. Thus in a noisy environment, forgiveness is a crucial component to correct agents’ errors and LR can help agents to obtain high payoffs. Evidence of forgiveness has commonly been seen in the real world. Real people are usually not extremely grim. A society in which people are cooperative, vengeful but also forgiving usually have higher social welfare.
2. In each subfigure, the payoff of LR is relatively stable for different game lengths (different values on the x -axis), while the payoff for GT decreases drastically as the game length increases. Thus for a revision game with a longer duration, LR performs better than GT. Such an observation is coincident with real-world scenarios that in people’s long-run interactions, forgiveness plays a more important role for people to go to a win-win outcome. A longer future interaction confers upon people more incentive to forgive a mistake, as long as this mistake can be properly punished.

In Appendix-E, we show more simulations regarding different values of k . We also show results for LR strategies in the Cournot game. From all numerical results, we can see that the novel LR strategies provide an effective scheme to correct agents’ errors in revision games. With LR strategies, cooperation not only can be sustained but also can be restored. As long as error exists, players with LR strategies can reap a stable and high payoff, which is in a sharp contrast to the GT strategy. This makes LR strategies more realistic than GT for real-world revision games.

7 Conclusions

We analyze the incentive constraint for cooperation and forgiveness in revision games and identify the strategy of limited retaliation with retaliation duration limited to k (LR strategies). We prove that LR strategies can

sustain cooperation in subgame perfect equilibrium. We also design an algorithm to find the optimal piecewise constant plan for LR strategies. We finally implement this algorithm in both the continuous prisoner’s dilemma and the Cournot revision games. Our derivation of SPE is following a backward induction style.

Before LR strategies, the existing Grim Trigger strategies are never forgiving, which excludes the possibility of resuming cooperation. These strategies are extremely fierce, which are not like realistic human behavior. More importantly, if players have any observation or action error, or imperfect rationality, the strategy players will soon go to a loss-loss situation and can never escape. This makes the social welfare become low. LR strategies can return back to mutual cooperation, even when there is an intentional or unintentional deviation by any player. They are cooperative, vengeful, and also forgiving. These properties make them especially suitable for real-world games where players confront observation or action errors. They well capture the mechanism of forgiveness, which has not yet been discussed in revision games. By the theory, GT is better than LR in revision games if there is no error, this is because it provides the strongest threat. But the real world is noisy. As long as there is any action mistake, imperfect information or bounded rationality, a proper LR is better. To conquer the problems of GT, famous strategies including Tit-for-Tat, Win-Stay Loss-Shift have been identified. But LR is the first strategy better than GT in noisy revision games. Our immediate future work is to find other collusive plans and investigate their relationship with piecewise constant plans. Moreover, for AI community, it is an interesting topic to design a game simulation or tournament for revision games under uncertainty. Researches on counterfactual regret minimization Zinkevich et al. [2007], Celli et al. [2020] and dynamic games cooperation Martinez-Vaquero et al. [2015] could have underlying relationships with limited retaliation and forgiveness. Finally, applications of LR in various realistic games are also challenging but valuable topics.

References

- Yuichiro Kamada and Michihiro Kandori. Cooperation in revision games and some applications. *Global Economic Review*, 49(4):329–348, 2020a.
- Yuichiro Kamada and Michihiro Kandori. Revision games. *Econometrica*, 88(4):1599–1630, 2020b.
- Riccardo Calcagno, Yuichiro Kamada, Stefano Lovo, and Takuo Sugaya. Asynchronicity and coordination in common and opposing interest games. *Theoretical Economics*, 9(2):409–434, 2014.
- Yuichiro Kamada and Takuo Sugaya. Valence candidates and ambiguous platforms in policy announcement games. *University of California Berkeley, mimeo*, 2014.
- Fabien Gensbittel, Stefano Lovo, Jérôme Renault, and Tristan Tomala. Zero-sum revision games. *Games and Economic Behavior*, 108:504–522, 2018.
- Sofia Moroni. Existence of trembling hand equilibrium in revision games with imperfect information. *Department of Economics, University of Pittsburgh*, <https://EconPapers.repec.org/RePEc:pit:wpaper:5874>, 2015.
- Stefano Lovo and Tristan Tomala. Markov perfect equilibria in stochastic revision games. *HEC Paris Research Paper No. ECO SCD-2015-1093*, <https://ssrn.com/abstract=2622084>, 2015.
- Attila Ambrus and Shih En Lu. A continuous-time model of multilateral bargaining. *American Economic Journal: Microeconomics*, 7(1):208–49, 2015.
- Nilanjan Roy. Revision and cooperation: Evidence from cournot duopoly experiments. *Manuscript*. <http://www.hss.caltech.edu/royn>, 2017.
- Andrew Gilpin and Tuomas Sandholm. Lossless abstraction of imperfect information games. *Journal of the ACM (JACM)*, 54(5):25–es, 2007.
- Drew Fudenberg and Eric Maskin. Evolution and cooperation in noisy repeated games. *The American Economic Review*, 80(2):274–279, 1990.
- Jon Doyle. Rationality and its roles in reasoning. *Computational Intelligence*, 8(2):376–409, 1992.

- Timothy Killingback, Michael Doebeli, and Nancy Knowlton. Variable investment, the continuous prisoner's dilemma, and the origin of cooperation. *Proceedings of the Royal Society of London. Series B: Biological Sciences*, 266(1430):1723–1728, 1999.
- Martin Zinkevich, Michael Johanson, Michael Bowling, and Carmelo Piccione. Regret minimization in games with incomplete information. *Advances in Neural Information Processing Systems*, 20:1729–1736, 2007.
- Andrea Celli, Alberto Marchesi, Gabriele Farina, and Nicola Gatti. No-regret learning dynamics for extensive-form correlated equilibrium. *Annual Conference on Neural Information Processing Systems (NeurIPS)*, 2020.
- Luis A Martinez-Vaquero, The Anh Han, Luís Moniz Pereira, and Tom Lenaerts. Apology and forgiveness evolve to resolve failures in cooperative agreements. *Scientific Reports*, 5(1):1–12, 2015.

Appendix

A Algorithm for generating LR strategies

The following algorithm can be used to generate an LR strategy. To run this algorithm, one needs to decide the collusive plan x , retaliation fierceness k in advance. These issues have been thoroughly discussed in the main text section ‘Equilibrium Reasoning’ and section ‘Social Welfare Maximization’.

Algorithm 1: LR strategy for an arbitrary player i

Input: collusive plan $x(\cdot)$, defection action a^N ,
retaliation degree k , initial time $-T$
Output: LR strategy $\sigma_i(t)$ for all $t \in [0, T]$

- 1 **Initialize:** set $\sigma(T) = x(T)$
- 2 **for** $-T < -t < 0$ **do**
- 3 **if** $\sigma_i(t-1) = \sigma_j(t-1) = x(t-1)$ **then**
- 4 **if** *revision opportunity arrives at $-t$* **then**
- 5 set $\sigma_i(t) = x(t)$
- 6 **else**
- 7 set $\sigma_i(t) = \sigma_i(t-1)$
- 8 $-t = -t + 1$
- 9 **else**
- 10 set $-\tau = -t + kt$
- 11 **while** $-t \leq -\tau$ **do**
- 12 **if** *revision opportunity arrives at $-t$* **then**
- 13 set $\sigma_i(t) = a^N$
- 14 **else**
- 15 set $\sigma_i(t) = \sigma_i(t-1)$
- 16 $-t = -t + 1$

In this algorithm, $\sigma_i(t)$ (or $\sigma_j(t)$) is player i 's (or j 's) action specified by the LR strategy at time $-t$. Function x is the recommended collusive plan specifying an action at each $-t$. Line 3-8 shows if both players followed the recommend action at time $-t + 1$, then the LR strategy player still follow the collusive plan at time $-t$. Otherwise, as it is shown in line 9-16, the LR player will set a retaliation length, and then use the defection action for this length. In addition, any adjustment of $\sigma_i(t)$ requires there should arrive a revision opportunity at time $-t$, which is captured by line 6-7 and line 14-15.

B An alternative approach for calculating LR strategy when time is extremely close to the deadline

When time t is extremely close to the deadline, the calculation of an LR strategy becomes a limit problem. In the main text, we use the approximate equilibrium concept to calculate the plan $x(t)$ for this very short slot. Here we discuss about another approach for the incentive constraint satisfaction in the time limit.

If c is large enough, this period is very close to the limit and its length is a very small quantity where the PWC plan degenerate to a time-continuous differential plan. Thus we can borrow the grim trigger plan for this very short slot. According to (Kamada and Kandori 2020b), the gradient of this plan x_g is given as

$$\frac{dx_g}{dt} = \frac{\lambda(G(x_g) - L(x_g))}{D'(x_g)}, \quad \forall -t \in (-\kappa^c T, 0]. \quad (14)$$

Therefore, as long as the grim trigger strategy contains an action $a_c = x_g(\kappa^{c-1}T)$ satisfying the constraint in Eq.(8), we can use this a_c as the terminal action and construct a piecewise constant plan. Thereby, the LR strategy can be obtained.

C Formal proof of Lemma 2

Recall that Lemma 2 in the main text is as follows.

Lemma 2 *For every bounded piecewise constant plan \bar{x} which supports SPE, there always exists a bounded monotone piecewise constant (bounded MPC) plan \hat{x} , which also support SPE and leads to higher social welfare than \bar{x} .*

Proof. Given a bounded piecewise constant plan \bar{x} , construct \hat{x} following Eq.(11). This construction already shows \hat{x} is monotone. Now we prove that \hat{x} supports SPE and has higher social welfare than \bar{x} . We prove Lemma 2 by comparing the expected deviation gain and the expected retaliation loss in different time intervals.

Case 1: $-t \in (-\kappa^{j-1}T, 0]$. According to Eq.(11), $\hat{x}(t) = \bar{x}(t)$ in this period. Since \bar{x} leads to SPE, it is straightforward that \hat{x} satisfies the equilibrium constraint.

Case 2: $-t \in (-\kappa^i T, -\kappa^{j-1}T]$. According to Eq.(11), $\hat{x}(t) = a_j$. A deviation from this action at any time $-t$ in this slot acquires an expected deviation gain $G(a_j)e^{-\lambda t}$. After this deviation, a retaliation is taken until $-t + kt$, and $-t + kt \leq -\kappa^j T$, meaning that the end of the retaliation can not surpass that of a_j . Therefore, the retaliation is always against a_j and the expected retaliation loss is

$$\int_{(1-k)t}^t L(a_j)\lambda e^{-\lambda s} ds = L(a_j)(e^{\lambda kt} - 1)e^{-\lambda t}. \quad (15)$$

On the other hand, consider plan \bar{x} in slot $(-\kappa^{j-1}T, -\kappa^j T]$. Since \bar{x} leads to SPE, it should satisfy Eq.(4) for this slot. Substituting the upper-bound $-\kappa^j T$ into it and multiplying both sides by a factor $e^{-\lambda t}$, we get

$$G(a_j)e^{-\lambda t} \leq L(a_j)(e^{\lambda \kappa^j T} - 1)e^{-\lambda t}. \quad (16)$$

Since we are considering slot $(-\kappa^i T, -\kappa^{j-1}T]$, it must be that any t in this slot is larger than κ^j . Therefore, for plan \hat{x} in slot $(-\kappa^i T, -\kappa^{j-1}T]$, the expected deviation gain $G(a_j)e^{-\lambda t}$ is less than the retaliation loss in Eq.(15). The incentive constraint is satisfied in this slot.

Case 3: $-t \in (-\kappa^{i-1}T, -\kappa^i T]$. Since \bar{x} results in SPE, it should satisfy Eq.(4), which is

$$G(a_i)e^{-\lambda t} \leq \int_{\kappa^i T}^t L(a_i)\lambda e^{-\lambda s} ds + \int_{\kappa t}^{\kappa^i T} L(a_{i+1})\lambda e^{-\lambda s} ds. \quad (17)$$

By Eq.(11), we know $\hat{x}(t) = a_i = \bar{x}(t) \geq a_j > a_{i+1}$. Together with this ordering, Eq.(17) leads to

$$\begin{aligned} G(a_i)e^{-\lambda t} &< \int_{\kappa^i T}^t L(a_i)\lambda e^{-\lambda s} ds + \int_{\kappa t}^{\kappa^i T} L(a_j)\lambda e^{-\lambda s} ds. \\ &= \int_{\kappa^i T}^t L(a_i)\lambda e^{-\lambda s} ds + \int_{\kappa t}^{\kappa^i T} L(a_{i+1})\lambda e^{-\lambda s} ds. \end{aligned} \quad (18)$$

The second line is just the retaliation loss of \hat{x} , thus it satisfies equilibrium constraint on this interval.

Case 4: $-t \in (-T, -\kappa^{i-1}T]$. During this period, it is always that $\hat{x}(t) = \bar{x}(t)$. Also, at the ending time of retaliation, it is still that $\hat{x}(t) = \bar{x}(t) = a_i$. Thus $\hat{x}(t)$ satisfies the equilibrium constraint as $\bar{x}(t)$ does.

The above four cases cover all possible deviations. In each case, \hat{x} satisfies the equilibrium constraint, thus \hat{x} leads to SPE. Moreover, we also know that $\forall t \geq 0, \hat{x}(t) \geq \bar{x}(t)$, thus $V(\hat{x}) \succeq V(\bar{x})$. \square

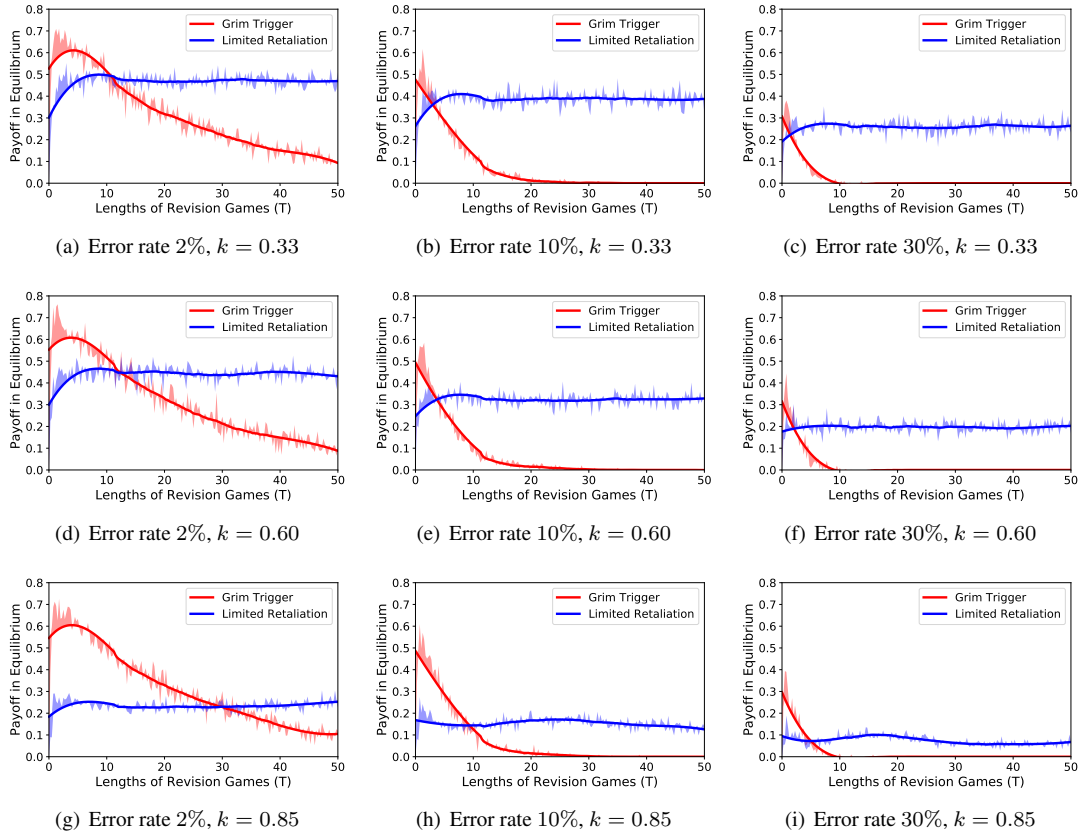


Figure 3: Equilibrium Payoffs in the Prisoner's Dilemma revision games with different error rates. GT strategy is the same in all subfigures while LR strategies have different retaliation fierceness k .

D Maximization Problem in Eq.(12) can be transformed into a series of sub-problems in Eq.(13)

We specifically explain the reason why Eq.(12) can be reduced to a series of Eq.(13) without any further assumption by showing that the solution plan x^* in Eq.(12) is identical to the solution plan \hat{x} in inductive Eq.(13).

From the constraints of Eq.(12) and Eq.(13), both x^* and \hat{x} are bounded MPC, and \hat{x} is a feasible solution to Eq.(12). We now show $x^* = \hat{x}$ by contradiction.

Suppose $n = \operatorname{argmax}\{a_n^* \neq \hat{a}_n\}$, where $1 \leq n < c$. Since $a_{n+1}^* = \hat{a}_{n+1}$, a_n^* and \hat{a}_n have the same constraints. Recall that $\pi(a)$ is strictly increasing, we easily induce $a_n^* < \hat{a}_n$. Moreover, since $L(a)$ is strictly increasing, $G(a_{n-1}^*) \leq L(a_n^*)(e^{\lambda\tau(n)} - 1) < L(\hat{a}_n)(e^{\lambda\tau(n)} - 1)$. This means, another plan $\bar{x} = \{a_1^*, \dots, a_{n-1}^*, \hat{a}_n, a_{n+1}^*, \dots, a_c^*\}$ is also a feasible plan for Eq.(12) and $V(\bar{x}) > V(x^*)$ by monotonicity of $\pi(a)$, which contradicts the fact that x^* is the optimal plan in Eq.(12). Therefore, $x^* = \hat{x}$, and reducing Eq.(12) to inductive Eq.(13) requires no more assumption.

E Simulation of LR strategies with different k

In this part, we show more simulations of LR strategies in Prisoner's Dilemma revision games. The results are in Figure 3. In the first row, the retaliation fierceness is set as $k = 0.33$, which represents a mild retaliation. In the second row, players' retaliations are in a middle level $k = 0.6$. In the last row, players are very vengeful, their retaliation fierceness are set to $k = 0.85$. The grim trigger strategies is identical in each subfigure. The

error rates in the first, the second and the last columns are 2%, 10% and 30%, respectively.

Within each row, comparing with grim trigger, the LR strategies show a clear advantage, which has been carefully discussed in the main text. In each column, the performances of different LR strategies are different. Within the three candidate k , the LR strategy with $k = 0.33$ performs the best under every error rate. It is worth noting that, given a certain error rate, one can search over the whole space of k , and generate different LR strategies and compute their payoffs in equilibrium. By numerically comparing the payoffs, a good k against the given error rate can be obtained. Generally, higher error rate makes both grim trigger and LR perform worse. But LR strategies are more robust than the grim trigger strategy. Another observation is, as k increases, the performance of LR strategy is more close to that of grim trigger strategy. This is intuitive, since an LR strategy with a full retaliation (i.e., $k = 1$) simply degenerates to the grim trigger strategy, while an LR strategy with no retaliation (i.e., $k = 0$) is the other extreme case where the player *always* follows the collusive plan, even when there is a deviation. A larger k makes the LR strategy more like a grim trigger.

F Simulation of LR strategies in Cournot competition game

Consider two firms $i = 1, 2$ producing homogeneous products. Firms have market power, i.e., each firm's output decision affects the product's price. They compete in quantities, and choose quantities simultaneously, seeking to maximize profits.

Denote q_i the quantity of firm i . The demand curve of the market is

$$P = p_0 - b(q_i + q_{-i}),$$

where $p_0 > c$ and $b > 0$. The payoff function for firm i is

$$\pi_i(q_i, q_{-i}) = [(p_0 - b(q_i + q_{-i}) - c)q_i].$$

To find i 's optimal quantity, we can set the partial derivative as

$$\frac{\partial \pi_i}{\partial q_i} = p_0 - 2bq_i - bq_{-i} - c = 0,$$

whereby the Nash quantity for this game is obtained as $q^N = \frac{p_0 - c}{3b}$ and its Nash payoff is:

$$\pi^N = (p_0 - 2bq^N - c)q^N = \frac{(p_0 - c)^2}{9b}.$$

For the revision version of this Cournot competition, we still consider the symmetric equilibrium. Thus for any quantity q , the payoff for a symmetric quantity profile is $\pi(q) = (p_0 - 2bq - c)q$, and according to Definition 3, the deviation gain for firm-1 is

$$\begin{aligned} G(q) &= \max_{q_1} \pi_1(q_1, q) - \pi_1(q, q) \\ &= \max_{q_1} [p_0 - b(q_1 + q) - c]q_1 - (p_0 - 2bq - c)q \\ &= \max_{q_1} \{-bq_1^2 + (p_0 - bq - c)q_1 + [(c - p_0)q + 2bq^2]\} \\ &= \frac{(p_0 - c - 3bq)^2}{4b}. \end{aligned} \tag{19}$$

With the above information, we can generate LR strategies based on the method in the main text. Then, with these obtained LR strategies, we can evaluate their performances in the Cournot competition revision game with error rates. For simulations, we set parameters as $p_0 = 10$, $c = 5$, $b = 1$ and $\lambda = 1$. For the LR strategies, we set k to 0.35, 0.5 and 0.65, respectively.

The generated collusive plans are shown in Figure 4. Due to the Cournot game structure, the collusive plan x monotonically increases in time. The simulation results of LR strategies using these collusive plans and the responding k are shown in Figure 5. Each row is for simulations of an LR strategy with a fixed k . We can see that the performance of LR strategies in Cournot competition revision game is in a same pattern as that for Prisoner's Dilemma revision game.

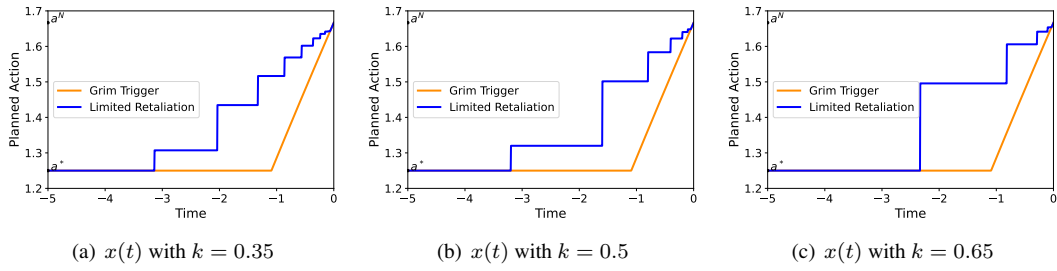


Figure 4: Collusive plans x for different retaliation fierceness k in a Cournot competition revision game.

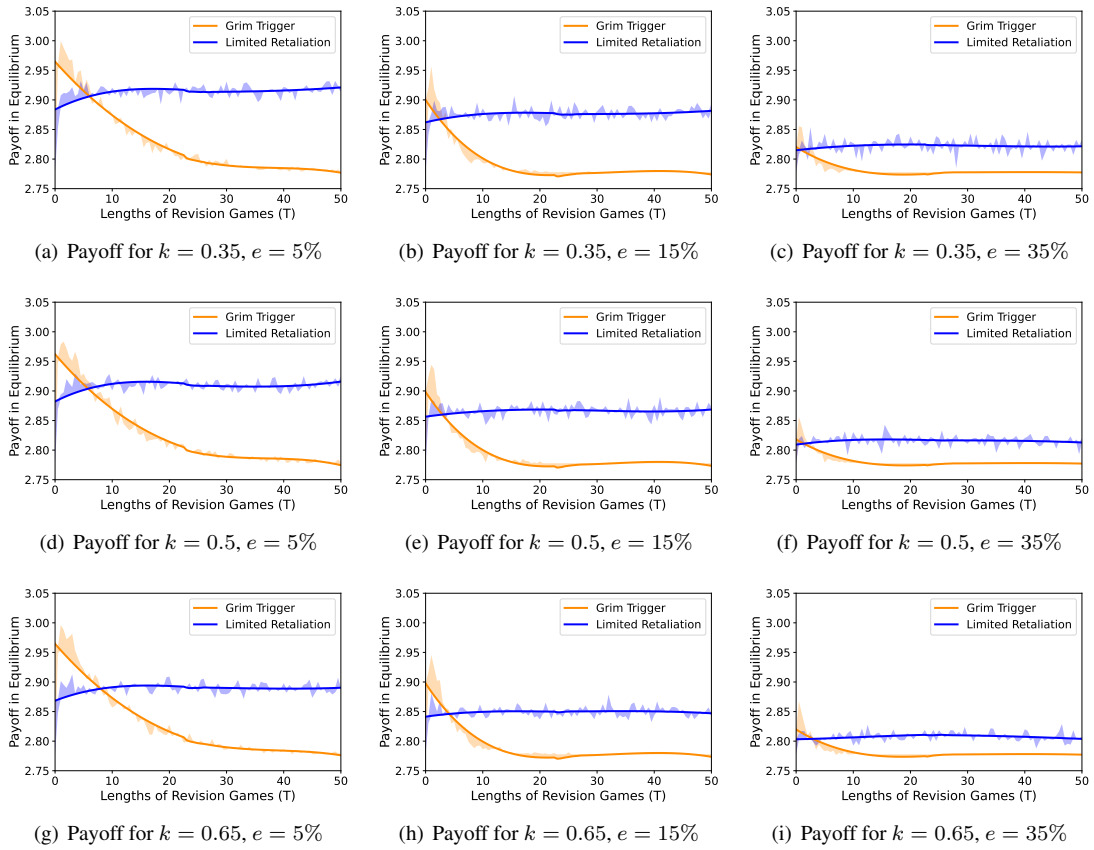


Figure 5: Equilibrium Payoffs of LR strategies in the Cournot competition revision game.