

Optimal No-Regret Learning in Strongly Monotone Games with Bandit Feedback

Tianyi Lin[◊] Zhengyuan Zhou[†] Wenjia Ba[‡] Jiawei Zhang[†]

Department of Electrical Engineering and Computer Sciences[◊]
 University of California, Berkeley
 Stern School of Business, New York University[†]
 Stanford Graduate School of Business, Stanford University[‡]

December 9, 2021

Abstract

We consider online no-regret learning in unknown games with bandit feedback, where each agent only observes its reward at each time – determined by all players’ current joint action – rather than its gradient. We focus on the class of smooth and strongly monotone games and study optimal no-regret learning therein. Leveraging self-concordant barrier functions, we first construct an online bandit convex optimization algorithm and show that it achieves the single-agent optimal regret of $\tilde{O}(\sqrt{T})$ under smooth and strongly-concave payoff functions. We then show that if each agent applies this no-regret learning algorithm in strongly monotone games, the joint action converges in *last iterate* to the unique Nash equilibrium at a rate of $\tilde{O}(1/\sqrt{T})$. Prior to our work, the best known convergence rate in the same class of games is $O(1/T^{1/3})$ (achieved by a different algorithm), thus leaving open the problem of optimal no-regret learning algorithms (since the known lower bound is $\Omega(1/\sqrt{T})$). Our results thus settle this open problem and contribute to the broad landscape of bandit game-theoretical learning by identifying the first doubly optimal bandit learning algorithm, in that it achieves (up to log factors) both optimal regret in the single-agent learning and optimal last-iterate convergence rate in the multi-agent learning. We also present results on several simulation studies – Cournot competition, Kelly auctions and distributed regularized logistic regression – to demonstrate the efficacy of our algorithm.

1 Introduction

In the multi-agent online learning [[Cesa-Bianchi and Lugosi, 2006b](#), [Shoham and Leyton-Brown, 2008](#), [Busoniu et al., 2010](#)], a set of agents are repeatedly making decisions and accumulating rewards over time, where each agent’s action impacts not only its own reward, but that of the others. However, the mechanism of this interaction – the underlying game that specifies how an agent’s reward depends on the joint action of all – is unknown to agents, and agents may not even be aware that there is such a game. As such, from each agent’s own perspective, it is simply engaged in an online decision making process, where the environment consists of all other agents who are simultaneously making such sequential decisions, which are of consequence to all agents.

In the past two decades, the above problem has actively engaged researchers from two fields: machine learning (and online learning in particular), which aims to develop single-agent online learning algorithms that are no-regret in an arbitrarily time-varying and/or adversarial environment [[Blum, 1998](#), [Shalev-Shwartz, 2007](#), [Shalev-Shwartz et al., 2012](#), [Arora et al., 2012](#), [Hazan, 2016](#)]; and game theory, which aims to develop (ideally distributed) algorithms (see [Fudenberg and Levine \[1998b\]](#) and

references therein) that efficiently compute a Nash equilibrium (a joint optimal outcome where no one can do better by deviating unilaterally) for games with special structures¹. Although these two research threads initially developed separately, they have subsequently merged and formed the core of multi-agent/game-theoretical online learning, whose main research agenda can be phrased as follows: *Will joint no-regret learning lead to a Nash equilibrium*, thereby reaping both the transient benefits (conferred by low finite-time regret) and the long-run benefits (conferred by Nash equilibria)?

More specifically, through the online learning lens, the agent i 's reward function at t – viewed as a function solely of its own action – is $u_i^t(\cdot)$, and it needs to select an action $x_i^t \in \mathcal{X}_i \subseteq \mathbb{R}^{n_i}$ before $u_i^t(\cdot)$ – or other feedback associated with it – is revealed. In this context, no-regret algorithms ensure that the difference between the cumulative performance of the best fixed action and that of the learning algorithm, a widely adopted metric known as regret ($\text{Reg}_T^{\text{Alg}} = \max_{x \in \mathcal{X}_i} \sum_{t=1}^T (u_i^t(x) - u_i^t(x_i^t))$), grows sublinearly in T . This problem has been extensively studied; in particular, when gradient feedback is available – $\nabla_{x_i} u_i^t(x_i^t)$ can be observed after x_i^t is selected – the minimax optimal regret is $\Theta(\sqrt{T})$ for convex $u_i^t(\cdot)$ and $\Theta(\log T)$ for strongly convex $u_i^t(\cdot)$. Further, several algorithms have been developed that achieve these optimal regret bounds, including “follow-the-regularized-leader” [Kalai and Vempala, 2005], online gradient descent [Zinkevich, 2003b], multiplicative/exponential weights [Arora et al., 2012] and online mirror descent [Shalev-Shwartz and Singer, 2007]. As these algorithms provide optimal regret bounds and hence naturally raise high expectations in terms of performance guarantees, a recent line of work has investigated when all the agents apply a no-regret learning algorithm, what the evolution of the joint action would be, and in particular, whether the joint action would converge *in last iterate* to a Nash equilibrium (if one exists).

These questions turn out to be difficult and had remained open until a few years ago, mainly because the traditional Nash-seeking algorithms in the economics literature are mostly either not no-regret or only exhibit convergence in time-average (ergodic convergence), or both. Despite the challenging landscape, in the past five years, affirmative answers have emerged from a fruitful line of work and the new analysis tools developed therein, first on the qualitative last-iterate convergence [Krichene et al., 2015, Balandat et al., 2016, Zhou et al., 2017, 2018, Mertikopoulos et al., 2019, Mertikopoulos and Zhou, 2019, Golowich et al., 2020b,a] in different classes of continuous games (such as variationally stable games), and then on the quantitative last-iterate convergence rates in more specially structured games such as co-coercive games or strongly monotone games [Lin et al., 2020, Zhou et al., 2021]. In particular, very recently, Zhou et al. [2021] has shown that if each agent applies a version of online gradient descent, then the joint action converges in last iterate to the unique Nash equilibrium in a strongly monotone game at an optimal rate of $O(1/T)$.

Despite this remarkably pioneering line of work, which has elegantly bridged no-regret learning with convergence to Nash in continuous games and thus renewed the excitement of game-theoretical learning, a significant impediment still exists and limits their practical impact. Specifically, in the multi-agent learning setting, an agent is rarely able to observe gradient feedback. Instead, in most cases, only bandit feedback is available: each agent observes only its own reward after choosing an action each time (rather than the gradient at the chosen action). This consideration of practical feasible algorithms then brings us to a more challenging and less explored desideratum in multi-agent learning: if each agent applies a no-regret online bandit convex optimization algorithm, would the joint action still converge to a Nash equilibrium? At what rate and in what class of games?

¹Computing a Nash equilibrium is in general computationally intractable; indeed, this problem is in fact PPAD-complete [Daskalakis et al., 2009]

Related work. To appreciate the difficulty and the broad scope of this research agenda, we start by describing the existing related literature. First of all, we note that single-agent bandit convex optimization algorithms – and their theoretical regret characterizations – are not as well-developed as their gradient counterparts. More specifically, [Flaxman et al. \[2005\]](#) and [Kleinberg \[2004\]](#) provided the first bandit convex optimization algorithm – known as FKM – that achieved the regret bound of $O(T^{3/4})$ for convex and Lipschitz loss functions. However, it was unclear whether $O(T^{3/4})$ is optimal. Subsequently, [Saha and Tewari \[2011\]](#) developed a barrier-based online convex bandit optimization algorithm and established a $\tilde{O}(T^{2/3})$ regret bound for convex and smooth cost functions, a result that has further been improved to $\tilde{O}(T^{5/8})$ [[Dekel et al., 2015](#)] via a variant on the algorithm and new analysis. More recently, progress has been made on developing algorithms that achieve minimax-optimal regret. In particular, [Bubeck et al. \[2015\]](#) and [Bubeck and Eldan \[2016\]](#) provided non-constructive arguments showing that the minimax regret bound of $\tilde{\Theta}(\sqrt{T})$ in one and high dimension are achievable respectively, without providing any algorithm. Later, [Bubeck et al. \[2017\]](#) developed a kernel method based bandit convex optimization algorithm which attains the bound of $\tilde{O}(\sqrt{T})$. Independently, [Hazan and Li \[2016\]](#) considered an ellipsoid method for bandit convex optimization that also achieves $\tilde{O}(\sqrt{T})$.

When the cost function is strongly convex and smooth, [Agarwal et al. \[2010\]](#) showed that the FKM algorithm achieves an improved regret bound of $\tilde{O}(T^{2/3})$. Later, [Hazan and Levy \[2014\]](#) established that another variant of the barrier based online bandit algorithm given in [Saha and Tewari \[2011\]](#) achieves the minimax-optimal regret of $\tilde{O}(\sqrt{T})$. For an overview of the relevant theory and applications, we refer to the recent survey [[Bubeck and Cesa-Bianchi, 2012](#), [Lattimore and Szepesvári, 2020](#)].

However, much remains unknown in understanding the convergence of these no-regret bandit convex optimization algorithms to Nash equilibria. [Bervoets et al. \[2020\]](#) developed a specialized distributed payoff based algorithm that asymptotically converges to the unique Nash equilibrium in the class of strictly monotone games. However, the algorithm is not known to be no-regret and no rate is given. [Héliou et al. \[2020\]](#) considered a variant of the FKM algorithm and showed that it is no-regret even under delays; further, provided the delays are not too large, joint FKM learning would converge to the unique Nash equilibrium in strictly monotone games (again without rates). At this writing, the most relevant and the-state-of-the-art result on this topic is presented in [Bravo et al. \[2018\]](#), which showed that if each agent applies the FKM algorithm in strongly monotone games, then last-iterate convergence to the unique Nash equilibrium is guaranteed at a rate of $O(1/T^{1/3})$. Per [Bravo et al. \[2018\]](#), the analysis itself is unlikely to be improved to yield any tighter rate. However, a sizable gap still exists between this bound and the best known lower bound given in [Shamir \[2013\]](#), which established that in optimization problems with strongly convex and smooth objectives (which is a one-player Nash-seeking problem), no algorithm that uses only bandit feedback (i.e. zeroth-order oracle) can compute the unique optimal solution at a rate faster than $\Omega(1/T^{1/2})$. Consequently, it remains unknown as to whether other algorithms can improve the rate of $O(1/T^{1/3})$ as well as what the true optimal convergence rate is. In particular, since the $\Omega(1/T^{1/2})$ lower bound is established for the special case of optimization problems, it is plausible that in the multi-agent setting – where a natural potential function such as the cost in optimization does not exist – the problem is inherently more difficult, and hence the convergence intrinsically slower. Further, note that the lower bound in [Shamir \[2013\]](#) is established against the class of all bandit optimization algorithms, not necessarily no-regret; essentially, a priori, that could mean a larger lower bound when the algorithms are further restricted to be no-regret. As such, it has been a challenging open problem to close the gap.

Our contributions. We tackle the problem of no-regret learning in strongly monotone games with bandit feedback and settle the above open problem by establishing that the convergence rate of $\tilde{O}(1/T^{1/2})$ – and hence minimax optimal (up to log factors) – is achievable. More specifically, we start by studying (in Section 2) single-agent learning with bandit feedback – in particular bandit convex optimization – and develop an eager variant of the barrier based family of online convex bandit optimization algorithms [Saha and Tewari, 2011, Hazan and Levy, 2014, Dekel et al., 2015]. We establish that the algorithm achieves the minimax optimal regret bound of $\tilde{O}(\sqrt{T})$. Next, extending to multi-agent learning settings, we show that if all agents employ this optimal no-regret learning algorithm (see Algorithm 2 in Section 4), then the joint action converges in last iterate to the unique Nash equilibrium at a rate of $\tilde{O}(1/T^{1/2})$. As such, we provide the first online convex bandit learning algorithm (with continuous action) that is doubly optimal (up to log factors): it achieves optimal regret in single-agent settings under strongly convex cost functions and optimal convergence rate to Nash in multi-agent settings under strongly monotone games. Finally, we conduct extensive experiments on Cournot competition, Kelly auction and distributed regularized logistic regression in Section 5. The numerical results demonstrate that our algorithm outperforms the-state-of-the-art multi-agent FKM algorithm.

Organization. The remainder of the paper is organized as follows. In Section 3, we provide the basic setup for multi-agent bandit learning in strongly monotone games and review the background materials on regret minimization and Nash equilibria. In Section 2, we develop a single-agent bandit learning algorithm with eager projection and prove a near-optimal regret minimization when the reward function is smooth and strongly concave. In Section 4, we extend the algorithm to multi-agent setting and prove a near-optimal last-iterate convergence rate for smooth and strongly monotone games. We also consider the multi-agent setting in which the bandit feedback is noisy but bounded and prove the same convergence result. We conduct extensive experiments on Cournot competition, Kelly auction and distributed regularized logistic regression in Section 5. The numerical results demonstrate that our algorithm outperforms the-state-of-the-art multi-agent FKM algorithm. Finally, we conclude this paper in Section 6. For the ease of presentation, we defer all the proof details to the appendix.

2 Single-Agent Learning with Bandit Feedback

In this section, we provide a simple single-agent bandit learning algorithm that players could employ to increase their individual rewards in an online manner and prove that it achieves the near-optimal regret minimization property for bandit concave optimization (BCO)².

In BCO, an adversary first chooses a sequence of concave reward functions $f_1, f_2, \dots, f_T : \mathcal{X} \mapsto \mathbb{R}$, where \mathcal{X} is a closed convex subset of \mathbb{R}^n . At each round $t = 1, 2, \dots, T$, a (randomized) decision maker has to choose a point $x^t \in \mathcal{X}$ and incurs a reward of $f_t(x^t)$ after committing to her decision. Her expected reward (where the expectation is taken with respect to her random choice) is $\mathbb{E}[\sum_{t=1}^T f_t(x^t)]$ and the corresponding *regret* is defined by $\text{Reg}_T = \max_{x \in \mathcal{X}} \{\sum_{t=1}^T f_t(x) - \mathbb{E}[\sum_{t=1}^T f_t(x^t)]\}$. In the bandit setting, the feedback is limited to the reward at the point that she has chosen, i.e., $f_t(x^t)$.

Algorithm 1 is inspired by the existing online learning algorithms developed in Saha and Tewari [2011] and Hazan and Levy [2014]: the main difference lies in eager projection (ours) v.s. lazy projection for updating x^{t+1} . This modification is crucial to last-iterate convergence analysis when we extend

²This setting is the same as bandit convex optimization in the literature and we consider maximization and concave reward functions instead of minimization and convex loss functions.

Algorithm 1 Eager Self-Concordant Barrier Bandit Learning

- 1: **Input:** step size $\eta_t > 0$, module $\beta > 0$ and barrier $R : \text{int}(\mathcal{X}) \mapsto \mathbb{R}$.
 - 2: **Initialization:** $x^1 = \text{argmin}_{x \in \mathcal{X}} R(x)$.
 - 3: **for** $t = 1, 2, \dots$ **do**
 - 4: set $A^t \leftarrow (\nabla^2 R(x^t) + \eta_t \beta (t+1) I_n)^{-1/2}$. # SCALING MATRIX
 - 5: draw $z^t \sim \mathbb{S}^n$. # PERTURBATION DIRECTION
 - 6: play $\hat{x}^t \leftarrow x^t + A^t z^t$. # CHOOSE ACTION
 - 7: receive $\hat{f}^t \leftarrow f_t(\hat{x}^t)$. # GET PAYOFF
 - 8: set $\hat{v}^t \leftarrow n \hat{f}^t (A^t)^{-1} z^t$. # ESTIMATE GRADIENT
 - 9: update $x^{t+1} \leftarrow \mathcal{P}_R(x^t, \hat{v}^t, \eta_t)$. # UPDATE PIVOT
-

Algorithm 1 to the multi-agent setting. In what follows, we present the individual algorithm components.

2.1 Self-Concordant Barrier

Existing bandit learning algorithms can be interpreted under the framework of mirror descent [Cesa-Bianchi and Lu 2006a] and the common choice of regularization is self-concordant barrier, which is a key ingredient in regret-optimal bandit algorithms when the loss function is linear [Abernethy et al., 2008] or smooth and strongly convex [Hazan and Levy, 2014]. Here we provide an overview and refer to Nesterov and Nemirovskii [1994] for details.

Definition 2.1 A function $R : \text{int}(\mathcal{X}) \mapsto \mathbb{R}$ is called a ν -self concordant barrier for a closed convex set $\mathcal{X} \subseteq \mathbb{R}^n$ if (i) R is three times continuously differentiable, (ii) $R(x) \rightarrow \infty$ if $x \rightarrow \partial\mathcal{X}$, and (iii) for $\forall x \in \text{int}(\mathcal{X})$ and $\forall h \in \mathbb{R}^n$, we have $|\nabla^3 R(x)[h, h, h]| \leq 2(h^\top \nabla^2 R(x) h)^{3/2}$ and $|\nabla R(x)^\top h| \leq \sqrt{\nu} (h^\top \nabla^2 R(x) h)^{1/2}$ where $\nabla^3 R(x)[h_1, h_2, h_3] = \frac{\partial^3}{\partial t_1 \partial t_2 \partial t_3} R(x + t_1 h_1 + t_2 h_2 + t_3 h_3)|_{t_1=t_2=t_3=0}$.

Similar to the existing online bandit learning algorithms [Abernethy et al., 2008, Saha and Tewari, 2011, Hazan and Levy, 2014, Dekel et al., 2015], our algorithm requires ν_i -self-concordant barriers over \mathcal{X}_i for all $i \in \mathcal{N}$; see Algorithm 1. However, this does not weaken its generality. Indeed, it is known that any convex and compact set in \mathbb{R}^n admits a non-degenerate ν -self-concordant barrier [Nesterov and Nemirovskii, 1994] with $\nu = O(n)$, and such barrier can be efficiently represented and evaluated for various choices of \mathcal{X}_i in game-theoretical setting. For example, $-\log(b - a^\top x)$ is 1-self-concordant barrier for linear constraints $a^\top x \leq b$ and similar function is n -self-concordant barrier for n -dimensional simplex or a cube. For n -dimensional ball, $-\log(1 - \|x\|^2)$ is 1-self-concordant barrier and ν is even independent of the dimension.

The above definition is only given for the sake of completeness and our analysis relies on some useful facts about self-concordant barriers. In particular, the Hessian of a self-concordant barrier R induces a local norm at $\forall x \in \text{int}(\mathcal{X})$; that is, $\|h\|_x = \sqrt{h^\top \nabla^2 R(x) h}$ and $\|h\|_{x,\star} = \sqrt{h^\top (\nabla^2 R(x))^{-1} h}$ for all $h \in \mathbb{R}^n$. The nondegeneracy of R implies that $\|\cdot\|_x$ and $\|\cdot\|_{x,\star}$ are both norms. To this end, we define the *Dikin ellipsoid* at any $x \in \text{int}(\mathcal{X})$ as

$$W(x) = \{x' \in \mathbb{R}^n : \|x' - x\|_x \leq 1\},$$

and present some nontrivial facts (see Nesterov and Nemirovskii [1994, Theorem 2.1.1] for a proof):

Lemma 2.2 Let $W(x)$ be the Dikin ellipsoid at any $x \in \text{int}(\mathcal{X})$, the following statements hold true:

1. $W(x) \subseteq \mathcal{X}$ for every $x \in \text{int}(\mathcal{X})$;
2. For $\forall x' \in W(x)$, we have $(1 - \|x' - x\|_x) \nabla^2 R(x) \preceq \nabla^2 R(x') \preceq (1 - \|x' - x\|_x)^{-2} \nabla^2 R(x)$.

Remark 2.3 Based on Lemma 2.2, the update of f^t in Algorithm 1 is well-posed since we have $\|\hat{x}^t - x^t\|_{x^t} \leq \|z^t\| \leq 1$, which implies that $\hat{x}^t \in W(x^t) \subseteq \mathcal{X}$.

Second, we define the Minkowsky function [Nesterov and Nemirovskii, 1994, Page 34] on \mathcal{X} , parametrized by a point x as

$$\pi_x(y) = \inf \left\{ t \geq 0 : x + \frac{1}{t}(y - x) \in \mathcal{X} \right\}.$$

and a scaled version of \mathcal{X} by

$$\mathcal{X}_\epsilon = \left\{ x \in \mathbb{R}^n : \pi_{\bar{x}}(x) \leq \frac{1}{1 + \epsilon} \right\}, \quad \forall \epsilon \in (0, 1],$$

where \bar{x} be a ‘‘center’’ of \mathcal{X} satisfying that $\bar{x} = \text{argmin}_{x \in \mathcal{X}} R(x)$, and R is a ν -self-concordant barrier function for \mathcal{X} . The following lemma shows that R is quite flat at points that are far from the boundary (see Nesterov and Nemirovskii [1994, Proposition 2.3.2 and 2.3.3] for a proof):

Lemma 2.4 Suppose that \mathcal{X} is a closed convex set, R is a ν -self-concordant barrier function R for \mathcal{X} , and $\bar{x} = \text{argmin}_{x \in \mathcal{X}} R(x)$ is a center of \mathcal{X} . Then, we have

$$R(x) - R(\bar{x}) \leq \nu \log \left(\frac{1}{1 - \pi_{\bar{x}}(x)} \right).$$

For any $\epsilon \in (0, 1]$ and $x \in \mathcal{X}_\epsilon$, we have $\pi_{\bar{x}}(x) \leq \frac{1}{1 + \epsilon}$ and $R(x) - R(\bar{x}) \leq \nu \log(1 + \frac{1}{\epsilon})$.

Finally, we define the *Newton decrement* for a self-concordant function g (not necessarily a barrier function) as: (recall that $\|\cdot\|_x$ and $\|\cdot\|_{x,\star}$ are a local norm and its dual norm)

$$\lambda(x, g) := \|\nabla g(x)\|_{x,\star} = \|(\nabla^2 g(x))^{-1} \nabla g(x)\|_x,$$

which can be used to measure roughly how far a point is from a global optimum of g . Formally, we summarize the results in the following lemma (see Nemirovski and Todd [2008] for a proof):

Lemma 2.5 For any self-concordant function g , whenever $\lambda(x, g) \leq \frac{1}{2}$, we have

$$\|x - \text{argmin}_{x' \in \mathcal{X}} g(x')\|_x \leq 2\lambda(x, g),$$

where the local norm $\|\cdot\|_x$ is defined with respect to g , i.e., $\|h\|_x := \sqrt{h^\top \nabla^2 g(x) h}$.

2.2 Single-Shot Ellipsoidal Estimator

It was [Flaxman et al. \[2005\]](#) that introduced a single-shot spherical estimator in the BCO literature and cleverly combined it with online gradient descent learning [[Zinkevich, 2003a](#)]. In particular, let $f : \mathbb{R}^n \mapsto \mathbb{R}$ be a function, $\delta > 0$ and $z \sim \mathbb{S}^n$, a single-shot spherical estimator is defined by

$$\hat{v} = (n/\delta)f(x + \delta z)z. \quad (1)$$

This estimator is an unbiased prediction for the gradient of a smoothed version; that is, $\mathbb{E}[\hat{v}] = \nabla \hat{f}(x)$ where $\hat{f}(x) = \mathbb{E}_{w \sim \mathbb{B}^n}[f(x + \delta w)]$. As $\delta \rightarrow 0^+$, the bias caused by the difference between f and \hat{f} vanishes while the variability of \hat{v}_i explodes. This manifestation of the bias-variance dilemma plays a key role in designing bandit learning algorithms and a single-shot spherical estimator is known to be suboptimal in terms of bias-variance trade-off and hence regret minimization. This gap is closed by using a more sophisticated single-shot ellipsoidal estimator based on the self-concordant barrier function of \mathcal{X} [[Saha and Tewari, 2011](#), [Hazan and Levy, 2014](#)]. Comparing to the spherical estimator in Eq. (1) based on the uniform sampling, [Saha and Tewari \[2011\]](#) and [Hazan and Levy \[2014\]](#) proposed to sample f nonuniformly over all directions and create an unbiased gradient estimate of the scaled smooth version. In particular, a single-shot ellipsoidal estimator with respect to an invertible matrix A is defined by

$$\hat{v} = nf(x + Az)A^{-1}z. \quad (2)$$

The following lemma is a simple modification of [[Hazan and Levy, 2014](#), Corollary 6 and Lemma 7].

Lemma 2.6 *Suppose that f is a continuous and concave function, $A \in \mathbb{R}^{n \times n}$ is an invertible matrix, $z \in \mathbb{S}^n$ and $w \in \mathbb{B}^n$, we define the smoothed version of f with respect to A by $\hat{f}(x) = \mathbb{E}[f(x + Aw)]$. Then, the following holds:*

1. $\nabla \hat{f}(x) = \mathbb{E}[nf(x + Az)A^{-1}z]$.
2. If f is β -strongly concave, then so is \hat{f} .
3. If ∇f is Lipschitz continuous with parameter ℓ and $\sigma_{\max}(A)$ is the largest eigenvalue of A , then we have

$$0 \leq f(x) - \hat{f}(x) \leq \frac{\ell(\|A\|_2)^2}{2} = \frac{\ell(\sigma_{\max}(A))^2}{2}.$$

Remark 2.7 *Lemma 2.6 shows that $\mathbb{E}[\hat{v}] = \nabla \hat{f}(x)$ where $\hat{f}(x) = \mathbb{E}_{w \sim \mathbb{B}^n}[f(x + Aw)]$. In Algorithm 1, we set A using self-concordant barrier function R for \mathcal{X} and perform shrinking sampling [[Hazan and Levy, 2014](#)], which makes the setup of $\delta \rightarrow 0^+$ unnecessary in the update, leading to a better bias-variance trade-off and a near-optimal regret minimization.*

2.3 Eager Mirror Descent

The idea of eager mirror descent³ [[Nemirovskij and Yudin, 1983](#)] is to generate a new feasible point x^+ by taking a “mirror step” from a starting point x along an “approximate gradient” direction \hat{v} . By abuse of notation, we let $R : \text{int}(\mathcal{X}) \mapsto \mathbb{R}$ be a continuous and strictly convex *distance-generating* (or

³In utility maximization, we shall use mirror *ascent* instead of mirror descent because players seek to *maximize* their rewards (as opposed to *minimizing* their losses). Nonetheless, we keep the term “descent” throughout because, despite the role reversal, it is the standard name associated with the method.

regularizer) function, i.e., $R(tx + (1-t)x') \leq tR(x) + (1-t)R(x')$ with equality if and only if $x = x'$ for all $x, x' \in \mathcal{X}$ and all $t \in [0, 1]$. We also assume that R is continuously differentiable, i.e., $\nabla R : \text{int}(\mathcal{X}) \mapsto \mathbb{R}^n$ is continuous. Then, we get a *Bregman divergence* on \mathcal{X} via the relation

$$D_R(x', x) = R(x') - R(x) - \langle \nabla R(x), x' - x \rangle, \quad (3)$$

for all $x' \in \mathcal{X}$ and $x \in \text{int}(\mathcal{X})$, which can fail to be symmetric and/or satisfy the triangle inequality. Nevertheless, $D_R(x', x) \geq 0$ with equality if and only if $x' = x$, so the asymptotic convergence of a sequence x^t to p can be checked by showing that $D_R(p, x^t) \rightarrow 0$. For technical reasons, it will be convenient to assume the converse, i.e., $D_R(p, x^t) \rightarrow 0$ when $x^t \rightarrow p$. This condition is known in the literature as “Bregman reciprocity” [Chen and Teboulle, 1993]. We continue with some basic relations connecting the Bregman divergence relative to a target point before and after a prox-map. The key ingredient is “three-point identity” [Chen and Teboulle, 1993] which generalizes the law of cosines, and widely used in the literature [Beck and Teboulle, 2003, Nemirovski, 2004].

Lemma 2.8 *Let R be a regularizer on \mathcal{X} . Then, for all $p \in \mathcal{X}$ and all $x, x' \in \text{dom}(R)$, we have*

$$D_R(p, x') = D_R(p, x) + D_R(x, x') + \langle \nabla R(x') - \nabla R(x), x - p \rangle.$$

Remark 2.9 *In Algorithm 1, we set R as a self-concordant barrier function for \mathcal{X} and it is easy to check that D_R satisfies the aforementioned Bregman reciprocity for various constraint sets, e.g., n -dimensional simplex, a cube or n -dimensional ball.*

The key notion for Bregman divergence $D_R(x', x)$ is the induced prox-mapping given by

$$\hat{\mathcal{P}}_R(x, \hat{v}, \eta) = \underset{x' \in \mathcal{X}}{\text{argmin}} \eta \langle \hat{v}, x - x' \rangle + D_R(x', x), \quad (4)$$

for all $x \in \text{int}(\mathcal{X})$ and all $\hat{v} \in \mathbb{R}^n$, which reflects the intuition behind eager mirror descent. Indeed, it starts with a point $x \in \text{int}(\mathcal{X})$ and steps along the dual (gradient-like) vector $\hat{v} \in \mathbb{R}^n$ to generate a new feasible point $x^+ = \hat{\mathcal{P}}_r(x, \hat{v}, \eta)$. However, the prox-mapping in Eq. (4) considers general Bregman divergence which does not exploit the structure of strong concave payoff function or constraint sets. In response to the above issues, we propose to use the prox-mapping given by

$$\mathcal{P}_R(x, \hat{v}, \eta) = \underset{x' \in \mathcal{X}}{\text{argmin}} \eta \langle \hat{v}, x - x' \rangle + \underbrace{\frac{\eta\beta(t+1)}{2} \|x - x'\|^2 + D_R(x', x)}_{\text{mixed Bregman divergence}}, \quad (5)$$

for all $x \in \text{int}(\mathcal{X})$ and all $\hat{v} \in \mathbb{R}^n$. We remark that the above prox-mapping explicitly incorporates the problem structure information by considering a mixed Bregman divergence: the first term $\frac{\eta\beta(t+1)}{2} \|x - x'\|^2$ is Euclidean distance with the coefficient proportional to strong concavity parameter $\beta > 0$ and the second term is Bregman divergence defined with the self-concordant barrier function R for the constraint set \mathcal{X} . It is also worth noting that we consider eager projection in Eq. (5), making our prox-mapping different from the one used in Hazan and Levy [2014] that also exploits the structure of strong concave payoff function and constraint sets but is with lazy projection.

With all these in mind, the *eager self-concordant barrier bandit learning* algorithm is given by the recursion $x^{t+1} \leftarrow \mathcal{P}_R(x^t, \hat{v}^t, \eta_t)$ in which η_t is a step-size and \hat{v}^t is a feedback of estimated gradient. In Algorithm 1, we generate \hat{v}^t by a single-shot ellipsoidal estimator as mentioned before.

2.4 Regret Bound

We consider the single-agent setting where the adversary is limited to choosing smooth and strongly concave functions. The following theorem shows that Algorithm 1 achieves the $\tilde{O}(\sqrt{T})$ regret bound, matching the lower bound in Shamir [2013].

Theorem 2.10 *Suppose that the adversary is limited to choosing smooth and β -strongly concave functions f_1, f_2, \dots, f_T . Each function f_t is Lipschitz continuous and satisfies that $|f_t(x)| \leq L$ for all $x \in \mathcal{X}$. If a horizon $T \geq 1$ is fixed and each player follows Algorithm 1 with parameters $\eta_t = \frac{1}{2nL\sqrt{T}}$, we have*

$$\text{Reg}_T = \max_{x \in \mathcal{X}} \left\{ \sum_{t=1}^T f_t(x) - \mathbb{E} \left[\sum_{t=1}^T f_t(x^t) \right] \right\} = \tilde{O}(\sqrt{T}).$$

Remark 2.11 *Theorem 2.10 shows that Algorithm 1 is a near-regret-optimal bandit learning algorithm when the adversary is limited to choosing smooth and strongly concave functions. The algorithmic scheme is based on the eager mirror descent and thus appears to be different from the existing one presented in Hazan and Levy [2014].*

To prove Theorem 2.10, we present our main descent lemma for the iterates generated by Algorithm 1.

Lemma 2.12 *Suppose that the iterate $\{x^t\}_{t \geq 1}$ is generated by Algorithm 1 and each function f_t satisfies that $|f_t(x)| \leq L$ for all $x \in \mathcal{X}$, we have*

$$D_R(p, x^{t+1}) + \frac{\eta_t \beta (t+1)}{2} \|x^{t+1} - p\|^2 \leq D_R(p, x^t) + \frac{\eta_t \beta (t+1)}{2} \|x^t - p\|^2 + 2\eta_t^2 \|A^t \hat{v}^t\|^2 + \eta_t \langle \hat{v}^t, x^t - p \rangle.$$

where $p \in \mathcal{X}$ and $\{\eta_t\}_{t \geq 1}$ is a nonincreasing sequence satisfying that $0 < \eta_t \leq \frac{1}{2nL}$.

See the proofs of Lemma 2.12 and Theorem 2.10 in Appendix A and B.

3 Multi-Agent Learning with Bandit Feedback

In this section, we consider multi-agent learning with bandit feedback and characterize the behavior of the system when each agent applies the eager self-concordant barrier bandit learning algorithm. We first present basic definitions, and discuss a few important classes of games that are strongly monotone and finally discuss the multi-agent version of the learning algorithm.

3.1 Basic Definition and Notation

We focus on games played by a finite set of players $i \in \mathcal{N} = \{1, 2, \dots, N\}$. At each iteration of the game, each player selects an *action* x_i from a convex subset \mathcal{X}_i of a finite-dimensional vector space \mathbb{R}^{n_i} and their reward is determined by the profile $x = (x_i; x_{-i}) = (x_1, x_2, \dots, x_N)$ of the action of all players; subsequently, each player receives the *reward*, and repeats this process. We denote $\|\cdot\|$ as the Euclidean norm (in the corresponding vector space): other norms can be easily accommodated in our framework (and different \mathcal{X}_i 's can in general have different norms), although we will not bother with all of these since we do not play with (and benefit from) complicated geometries.

Definition 3.1 A smooth concave game is a tuple $\mathcal{G} = (\mathcal{N}, \mathcal{X} = \prod_{i=1}^N \mathcal{X}_i, \{u_i\}_{i=1}^N)$, where \mathcal{N} is the set of N players, \mathcal{X}_i is a convex and compact set of finite-dimensional vector space \mathbb{R}^{n_i} representing the action space of player i , and $u_i : \mathcal{X} \mapsto \mathbb{R}$ is the i -th player’s payoff function satisfying: (i) $u_i(x_i; x_{-i})$ is continuous in x and concave in x_i for all fixed x_{-i} ; (ii) $u_i(x_i; x_{-i})$ is continuously differentiable in x_i and the individual payoff gradient $v_i(x) = \nabla_{x_i} u_i(x_i; x_{-i})$ is Lipschitz continuous.

A commonly used solution concept for non-cooperative games is *Nash equilibrium* (NE). For the smooth concave games considered in this paper, we are interested in the pure-strategy Nash equilibria. Indeed, for finite games, the mixed strategy NE is a probability distribution over the pure strategy NE. Our setting assumes continuous and convex action sets, where each action already lives in a continuum, and pursuing pure-strategy Nash equilibria is sufficient.

Definition 3.2 An action profile $x^* \in \mathcal{X}$ is called a (pure-strategy) Nash equilibrium of a game G if it is resilient to unilateral deviations; that is, $u_i(x_i^*; x_{-i}^*) \geq u_i(x_i; x_{-i}^*)$ for all $x_i \in \mathcal{X}_i$ and $i \in \mathcal{N}$.

It is known that every smooth concave game admits at least one Nash equilibrium when all action sets are compact [Debreu, 1952] and Nash equilibria admit a variational characterization. We summarize this result in the following proposition.

Proposition 3.3 In a smooth concave game \mathcal{G} , the action profile $x^* \in \mathcal{X}$ is a Nash equilibrium if and only if $(x_i - x_i^*)^\top v_i(x^*) \leq 0$ for all $x_i \in \mathcal{X}_i$ and $i \in \mathcal{N}$.

Proposition 3.3 shows that Nash equilibria of a smooth concave game can be precisely characterized as the solution set of a variational inequality (VI), so the existence results also follow from the standard results in VI literature [Facchinei and Pang, 2007]. We omit the proof here and refer to Mertikopoulos and Zhou [2019] for the details.

3.2 Strongly Monotone Games

The study of (strongly) monotone games dates to Rosen [1965], with many subsequent developments; see, e.g., Facchinei and Pang [2007]. Specifically, Rosen [1965] considered a class of games that satisfy the *diagonal strict concavity* (DSC) condition and prove that they admit a unique Nash equilibrium. Further work in this vein appeared in Sandholm [2015] and Sorin and Wan [2016], where games that satisfy DSC are referred to as “contractive” and “dissipative”. These conditions are equivalent to (strict) monotonicity in convex analysis [Bauschke and Combettes, 2011]. To avoid confusion, we provide the formal definition of strongly monotone games considered in this paper.

Definition 3.4 A smooth concave game \mathcal{G} is called β -strongly monotone if there exist positive constants $\lambda_i > 0$ such that $\sum_{i \in \mathcal{N}} \lambda_i \langle x'_i - x_i, v_i(x') - v_i(x) \rangle \leq -\beta \|x - x'\|^2$ for any $x, x' \in \mathcal{X}$.

The notion of (strong) monotonicity, which will play a crucial role in the subsequent analysis, is not necessarily theoretically artificial but encompasses a very rich class of games. We present three typical examples which satisfy the conditions in Definition 3.4 (see the references [Bravo et al., 2018, Mertikopoulos and Zhou, 2019] for more details).

Example 3.1 (Cournot Competition) In the Cournot oligopoly model, there is a finite set $\mathcal{N} = \{1, 2, \dots, N\}$ of firms, each supplying the market with a quantity $x_i \in [0, B_i]$ of some good (or service) up to the firm’s production capacity, given here by a positive scalar $B_i > 0$. This good is then priced as

a decreasing function $P(x)$ of the total supply to the market, as determined by each firm's production; for concreteness, we focus on the standard linear model $P(x) = a - b \sum_{i \in \mathcal{N}} x_i$ where a and b are positive constants. In this model, the utility of firm i (considered here as a player) is given by

$$u_i(x) = x_i P(x) - c_i(x_i),$$

where $c_i(\cdot)$ represents the marginal production cost function of firm i and is assumed to be strongly convex, i.e., as the income obtained by producing x_i units of the good in question minus the corresponding production cost. Letting $\mathcal{X}_i = [0, B_i]$ denote the space of possible production values for each firm, the resulting game $\mathcal{G} \equiv \mathcal{G}(\mathcal{N}, \mathcal{X}, u)$ is strongly monotone.

Example 3.2 (Strongly Concave Potential Games) A game $\mathcal{G} = (\mathcal{N}, \mathcal{X} = \prod_{i=1}^N \mathcal{X}_i, \{u_i\}_{i=1}^N)$ is called a potential game [Monderer and Shapley, 1996, Sandholm, 2001] if there exists a potential function $f : \mathcal{X} \mapsto \mathbb{R}$ such that

$$u_i(x_i; x_{-i}) - u_i(\tilde{x}_i; x_{-i}) = f(x_i; x_{-i}) - f(\tilde{x}_i; x_{-i}),$$

for all $i \in \mathcal{N}$, all $x \in \mathcal{X}$ and all $\tilde{x}_i \in \mathcal{X}_i$. A potential game is called a strongly concave potential game if the potential function f is strongly concave. Since the gradient of a strongly concave function is strongly monotone [Bauschke and Combettes, 2011], a strongly concave potential game is a strongly monotone game.

Example 3.3 (Kelly Auctions) Consider a service provider with a number of splittable resources $s \in \mathcal{S} = \{1, 2, \dots, S\}$ (representing, e.g., bandwidth, server time, ad space on a website, etc.). These resources can be leased to a set of N bidders (players) who can place monetary bids $x_{is} \geq 0$ for the utilization of each resource $s \in \mathcal{S}$ up to each player's total budget B_i , i.e., $\sum_{s \in \mathcal{S}} x_{is} \leq B_i$. A popular and widely used mechanism to allocate resources in this case is the so-called Kelly mechanism [Kelly et al., 1998] whereby resources are allocated proportionally to each player's bid, i.e., player i gets

$$\rho_{is} = \frac{q_s x_{is}}{d_s + \sum_{j \in \mathcal{N}} x_{js}}$$

units of the s -th resource (in the above, q_s denotes the available units of said resource and $d_s \geq 0$ is the "entry barrier" for bidding on it). A simple model for the utility of player i is then given by

$$u_i(x_i; x_{-i}) = \sum_{s \in \mathcal{S}} (g_i \rho_{is} - c_i(x_{is})),$$

where g_i denotes the player's marginal gain from acquiring a unit slice of resources and $c_i(x_{is})$ denotes the cost if player i place one unit monetary bid for the utilization of resource s (the function $c_i(\cdot)$ is assumed to be strongly convex). If we write $\mathcal{X}_i = \{x_i \in \mathbb{R}_+^{\mathcal{S}} : \sum_{s \in \mathcal{S}} x_{is} \leq b_i\}$ for the space of possible bids of player i on the set of resources \mathcal{S} , we obtain a strongly monotone game.

There are many other application problems that can be cast into strongly monotone games [Orda et al., 1993, Cesa-Bianchi and Lugosi, 2006a, Sandholm, 2015, Sorin and Wan, 2016, Mertikopoulos et al., 2017]. Typical examples include strongly-convex-strongly-concave zero-sum games, congestion games [Mertikopoulos et al., 2019], wireless network games [Weeraddana et al., 2012, Tan, 2014, Zhou et al., 2021] and a wide range of online decision-making problems [Cesa-Bianchi and Lugosi, 2006a]. From an economic point of view, one appealing feature of strongly monotone games is that the last-iterate convergence can be achieved

by some standard learning algorithms [Zhou et al., 2021], which is more natural than time-average-iterate convergence [Fudenberg and Levine, 1998a, Cesa-Bianchi and Lugosi, 2006a, Lin et al., 2020]. The finite-time convergence rate is derived in terms of the distance between x^t and x^* , where x^t is the realized action and x^* is the unique Nash equilibrium (under convex and compact action sets). In view of all this (and unless explicitly stated otherwise), we will focus throughout on strongly monotone games.

3.3 Multi-Agent Bandit Learning

In multi-agent learning with bandit feedback, at each round $t = 1, 2, \dots, T$, each (possibly randomized⁴) decision maker $i \in \mathcal{N}$ selects an action $x_i^t \in \mathcal{X}_i$. The reward $u_i(x^t)$ is realized after all decision makers have chosen their actions. In addition to regret minimization, the convergence to Nash equilibria is an important criterion for measuring the performance of learning algorithms. In multi-agent bandit learning, the feedback is limited to the reward at the point that she has chosen, i.e., $u_i(x^t)$. Here, we propose a simple multi-agent bandit learning algorithm (see Algorithm 2) in which each player chooses her action using Algorithm 1. Algorithm 2 is a straightforward extension of Algorithm 1 from single-agent setting to multi-agent setting. It differs from Bravo et al. [2018, Algorithm 1] in two aspects: the ellipsoidal SPSA estimator v.s. spherical SPSA estimator and self-concordant Bregman divergence v.s. general Bregman divergence. We discuss these two crucial components next.

Single-shot ellipsoidal SPSA estimator. Recently, Bravo et al. [2018] have extended the spherical estimator in Eq. (1) to multi-agent setting by positing instead that players rely on a simultaneous perturbation stochastic approximation (SPSA) approach [Spall, 1997] that allows them to estimate their individual payoff gradients \hat{v}_i based off a single function evaluation. In particular, let $u_i : \mathbb{R}^n \mapsto \mathbb{R}$ be a payoff function, $\delta > 0$ and the query directions $z_i \sim \mathbb{S}^{n_i}$ be drawn independently across players, a single-shot spherical SPSA estimator is defined by

$$\hat{v}_i = (n_i/\delta)u_i(x_i + \delta z_i; x_{-i} + \delta z_{-i})z_i. \quad (6)$$

This estimator is an unbiased prediction for the partial gradient of a smoothed version of u_i ; that is $\mathbb{E}[\hat{v}_i] = \nabla_i \hat{u}_i(x)$ where $\hat{u}_i(x) = \mathbb{E}_{w_i \sim \mathbb{B}^{n_i}} \mathbb{E}_{z_{-i} \sim \prod_{j \neq i} \mathbb{S}^{n_j}} [u_i(x_i + \delta w_i; x_{-i} + \delta z_{-i})]$. We can easily see the bias-variance dilemma here: as $\delta \rightarrow 0^+$, \hat{v}_i becomes more accurate since $\|\nabla_i \hat{u}_i(x) - \nabla_i u_i(x)\| = O(\delta)$, while the variability of \hat{v}_i grows unbounded since the second moment of \hat{v}_i grows as $O(1/\delta^2)$. By carefully choosing $\delta > 0$, Bravo et al. [2018] provided the best-known last-iterate convergence rate of $O(T^{-1/3})$ which almost matches the lower bound in Shamir [2013]. However, a gap still remains and they believe it can be closed by using a more sophisticated single-shot estimator.

We now provide a single-shot ellipsoidal SPSA estimator by extending the estimator in Eq. (2) to the multi-agent setting. Using the SPSA approach, we let $\hat{x}_i = x_i + A_i z_i$ and have

$$\hat{v}_i = n_i u_i(\hat{x}_i; \hat{x}_{-i})(A_i)^{-1} z_i. \quad (7)$$

The following lemma provides some results for a single-shot ellipsoidal SPSA estimator and the proof is given in Appendix C.

⁴Randomization plays an important role in the online game playing literature. For example, the classical FOLLOW THE LEADER (FTL) algorithm does not attain any non-trivial regret guarantee for linear cost functions (in the worst case it can be $\Omega(T)$ if the cost functions are chosen adversarially). However, Hannan [1957] proposed a randomized variant of FTL, called perturbed-follow-the-leader, which could attain an optimal regret of $O(\sqrt{T})$ for linear functions over the simplex.

Algorithm 2 Multi-Agent Eager Self-Concordant Barrier Bandit Learning

```

1: Input: step size  $\eta_t > 0$ , weight  $\lambda_i > 0$ , module  $\beta > 0$ , and barrier  $R_i : \text{int}(\mathcal{X}_i) \mapsto \mathbb{R}$ .
2: Initialization:  $x_i^1 = \text{argmin}_{x_i \in \mathcal{X}_i} R_i(x_i)$ .
3: for  $t = 1, 2, \dots$  do
4:   for  $i \in \mathcal{N}$  do
5:     set  $A_i^t \leftarrow (\nabla^2 R_i(x_i^t) + \frac{\eta_t \beta (t+1)}{\lambda_i} I_{n_i})^{-1/2}$ . # SCALING MATRIX
6:     draw  $z_i^t \sim \mathbb{S}^{n_i}$ . # PERTURBATION DIRECTION
7:     play  $\hat{x}_i^t \leftarrow x_i^t + A_i^t z_i^t$ . # CHOOSE ACTION
8:     receive  $\hat{u}_i^t \leftarrow u_i(\hat{x}_i^t) + \xi_{i,t}$  for all  $i \in \mathcal{N}$ . # GET PAYOFF
9:     for  $i \in \mathcal{N}$  do
10:      set  $\hat{v}_i^t \leftarrow n_i \hat{u}_i^t (A_i^t)^{-1} z_i^t$ . # ESTIMATE GRADIENT
11:      update  $x_i^{t+1} \leftarrow \mathcal{P}_{R_i}(x_i^t, \hat{v}_i^t, \eta_t, \lambda_i, \beta)$ . # UPDATE PIVOT

```

Lemma 3.5 *The single-shot ellipsoidal SPSA estimator $(\hat{v}_i)_{i \in \mathcal{N}}$ given by Eq. (7) satisfies*

$$\mathbb{E}[\hat{v}_i \mid x] = \nabla_i \hat{u}_i(x)$$

with $\hat{u}_i(x) = \mathbb{E}_{w_i \sim \mathbb{B}^{n_i}} \mathbb{E}_{z_{-i} \sim \prod_{j \neq i} \mathbb{S}^{n_j}} [u_i(x_i + A_i w_i; \hat{x}_{-i})]$ where $\hat{x}_i = x_i + A_i z_i$ for all $i \in \mathcal{N}$. Moreover, if $v_i(x)$ is ℓ_i -Lipschitz continuous and $\sigma_{\max}(A)$ is the largest eigenvalue of A , we have

$$\|\nabla_i \hat{u}_i(x) - \nabla_i u_i(x)\| \leq \ell_i \sqrt{\sum_{j \in \mathcal{N}} \|A_j\|_2^2} = \ell_i \sqrt{\sum_{j \in \mathcal{N}} (\sigma_{\max}(A_j))^2}.$$

Remark 3.6 *Lemma 3.5 generalizes Bravo et al. [2018, Lemma C.1] which is proved for a single-shot spherical SPSA estimator. It shows that $\mathbb{E}[\hat{v}_i] = \nabla_i \hat{u}_i(x)$ where $\hat{u}_i(x) = \mathbb{E}_{w_i \sim \mathbb{B}^{n_i}} \mathbb{E}_{z_{-i} \sim \prod_{j \neq i} \mathbb{S}^{n_j}} [u_i(x_i + A_i w_i; \hat{x}_{-i})]$. In Algorithm 2, we use self-concordant barrier function R_i for \mathcal{X}_i and perform shrinking sampling, leading to an optimal last-iterate convergence rate up to a log factor.*

Eager mirror descent. The prox-mapping in Eq. (4) has been used in Bravo et al. [2018] to construct their multi-agent bandit learning algorithm, which achieves the suboptimal regret minimization and last-iterate convergence. One possible reason for such suboptimal guarantee is that the prox-mapping defined in Eq. (4) considers general Bregman divergence and takes care of neither strong monotone payoff gradient nor constraint sets. In Algorithm 2, we let each player update x_i^{t+1} using the prox-mapping in Eq. (5) and the rule is given by

$$\mathcal{P}_{R_i}(x_i, \hat{v}_i, \eta, \lambda_i, \beta) = \text{argmin}_{x'_i \in \mathcal{X}_i} \eta \langle \hat{v}_i, x_i - x'_i \rangle + \frac{\eta \beta (t+1)}{2\lambda_i} \|x_i - x'_i\|^2 + D_{R_i}(x'_i, x_i), \quad (8)$$

for all $x_i \in \text{int}(\mathcal{X}_i)$ and all $\hat{v}_i \in \mathbb{R}^{n_i}$. With all these in mind, the main step of Algorithm 2 is given by the recursion $x_i^{t+1} \leftarrow \mathcal{P}_{R_i}(x_i^t, \hat{v}_i^t, \eta_t)$ in which η_t is a step-size and \hat{v}_i^t is a feedback of estimated gradients for player i (we generate \hat{v}_i^t by a single-shot ellipsoidal SPSA estimator).

4 Finite-Time Convergence Rate

In this section, we establish that Algorithm 2 achieves the near-optimal last-iterate convergence rate for smooth and strongly monotone games if the perfect bandit feedback is available, improving the

best-known last-iterate convergence rate in Bravo et al. [2018]. The following theorem shows that Algorithm 2 achieves the $\tilde{O}(1/\sqrt{T})$ rate of last-iterate convergence to a unique Nash equilibrium if the perfect bandit feedback is available ($\xi_{i,t} \equiv 0$), improving the best-known rate of $O(1/T^{1/3})$ [Bravo et al., 2018] and matching the lower bound [Shamir, 2013].

Theorem 4.1 *Suppose that $x^* \in \mathcal{X}$ is a unique Nash equilibrium of a smooth and β -strongly monotone game. Each payoff function u_i satisfies that $|u_i(x)| \leq L$ for all $x \in \mathcal{X}$. If each player follows Algorithm 2 with parameters $\eta_t = \frac{1}{2nL\sqrt{t}}$, we have*

$$\mathbb{E} \left[\sum_{i \in \mathcal{N}} \|\hat{x}_i^T - x_i^*\|^2 \right] = \tilde{O} \left(\frac{1}{\sqrt{T}} \right).$$

Remark 4.2 *Theorem 4.1 shows that Algorithm 2 attains a near-optimal rate of last-iterate convergence in smooth and strongly monotone games. It extends Algorithm 1 from the single-agent setting to multi-agent setting, providing the first doubly optimal bandit learning algorithm, in that it achieves (up to log factors) both optimal regret in the single-agent learning and optimal last-iterate convergence rate in the multi-agent learning. In contrast, it remains unclear whether the multi-agent extension of Hazan and Levy [2014, Algorithm 1] can achieve the near-optimal last-iterate convergence rate or not.*

To prove Theorem 4.1, we present our main descent lemma for the iterates generated by Algorithm 2.

Lemma 4.3 *Suppose that the iterate $\{x^t\}_{t \geq 1}$ is generated by Algorithm 2 and each function u_i satisfies that $|u_i(x)| \leq L$ for all $x \in \mathcal{X}$, we have*

$$\begin{aligned} & \sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^{t+1}) + \frac{\eta_{t+1} \beta(t+1)}{2} \left(\sum_{i \in \mathcal{N}} \|x_i^{t+1} - p_i\|^2 \right) \\ & \leq \sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^t) + \frac{\eta_t \beta(t+1)}{2} \left(\sum_{i \in \mathcal{N}} \|x_i^t - p_i\|^2 \right) + 2\eta_t^2 \left(\sum_{i \in \mathcal{N}} \lambda_i \|A_i^t \hat{v}_i^t\|^2 \right) + \eta_t \left(\sum_{i \in \mathcal{N}} \lambda_i \langle \hat{v}_i^t, x_i^t - p_i \rangle \right). \end{aligned}$$

where $p_i \in \mathcal{X}_i$ and $\{\eta_t\}_{t \geq 1}$ is a nonincreasing sequence satisfying that $0 < \eta_t \leq \frac{1}{2nL}$.

See the proofs of Lemma 4.3 and Theorem 4.1 in Appendix D and E. We also provide the convergence results under the imperfect bandit feedback setting in Appendix F.

5 Numerical Experiments

In this section, we conduct the experiments using three different tasks: Cournot competition, Kelly auction, and distributed regularized logistic regression. We compare Algorithm 2 with Bravo et al. [2018, Algorithm 1]. The implementation is done with MATLAB R2020b on a MacBook Pro with a Intel Core i9 2.4GHz (8 cores and 16 threads) and 16GB memory.

Table 1: Numerical results on Cournot competition problem.

(N, a, b)	Bravo et al. [2018, Algorithm 1]	Our Algorithm
(10, 10, 0.05)	1.9e-01 \pm 4.1e-02	1.3e-03 \pm 3.6e-04
(10, 10, 0.10)	9.1e-02 \pm 3.9e-02	1.4e-03 \pm 3.3e-04
(10, 20, 0.05)	3.0e-01 \pm 4.9e-02	8.9e-04 \pm 5.7e-04
(10, 20, 0.10)	1.5e-01 \pm 5.0e-02	7.0e-04 \pm 2.2e-04
(20, 10, 0.05)	2.1e-01 \pm 4.1e-02	1.7e-03 \pm 2.7e-04
(20, 10, 0.10)	9.6e-02 \pm 1.7e-02	1.9e-03 \pm 4.1e-04
(20, 20, 0.05)	3.4e-01 \pm 7.4e-02	9.4e-04 \pm 2.4e-04
(20, 20, 0.10)	1.9e-01 \pm 5.1e-02	9.4e-04 \pm 2.4e-04
(50, 10, 0.05)	2.1e-01 \pm 2.7e-02	2.4e-03 \pm 1.7e-04
(50, 10, 0.10)	7.7e-02 \pm 1.7e-02	4.1e-03 \pm 2.0e-04
(50, 20, 0.05)	3.5e-01 \pm 4.1e-02	1.1e-03 \pm 1.7e-04
(50, 20, 0.10)	2.0e-01 \pm 1.8e-02	1.1e-03 \pm 2.0e-04
(100, 10, 0.05)	1.9e-01 \pm 2.8e-02	2.5e-02 \pm 4.6e-04
(100, 10, 0.10)	1.2e-02 \pm 1.1e-03	4.4e-03 \pm 1.0e-04
(100, 20, 0.05)	3.8e-01 \pm 3.3e-02	1.2e-03 \pm 1.2e-04
(100, 20, 0.10)	2.0e-01 \pm 1.5e-02	1.5e-03 \pm 8.9e-05

5.1 Cournot Competition

We show that Cournot competition is strongly monotone in the sense of Definition 3.4. In particular, each players' payoff function is given by

$$u_i(x) = x_i \left(a - b \left(\sum_{j \in \mathcal{N}} x_j \right) \right) - c_i x_i, \quad \text{for some } a, b, c_i > 0.$$

Taking the derivative of $u_i(x)$ with respect to x_i , we have

$$v_i(x) = a - c_i - b \left(\sum_{j \in \mathcal{N}} x_j \right) - b x_i.$$

This implies that

$$\sum_{i \in \mathcal{N}} \langle x'_i - x_i, v_i(x') - v_i(x) \rangle = -b \left(\sum_{i \in \mathcal{N}} x_i \right)^2 - b \|x' - x\|^2 \leq -b \|x' - x\|^2, \quad \text{for all } x, x' \in \mathcal{X}.$$

Therefore, we conclude that Cournot competition is strongly monotone with the module $b > 0$.

Experimental setup. For all $i \in \mathcal{N}$, the production capacity is fixed as $B_i = 1$ and each c_i is drawn independently from an uniform distribution on the interval $[0, 1]$. We evaluate the algorithms with $N \in \{10, 20, 50, 100\}$, $a \in \{10, 20\}$ and $b \in \{0.05, 0.1\}$. For Algorithm 2, we set the parameters $\lambda_i = 1$, $\beta = b$, $\eta_t = \frac{1}{20\sqrt{t}}$ and define the barrier function as $R_i = -\log(x_i) - \log(B_i - x_i)$. For Bravo et al.

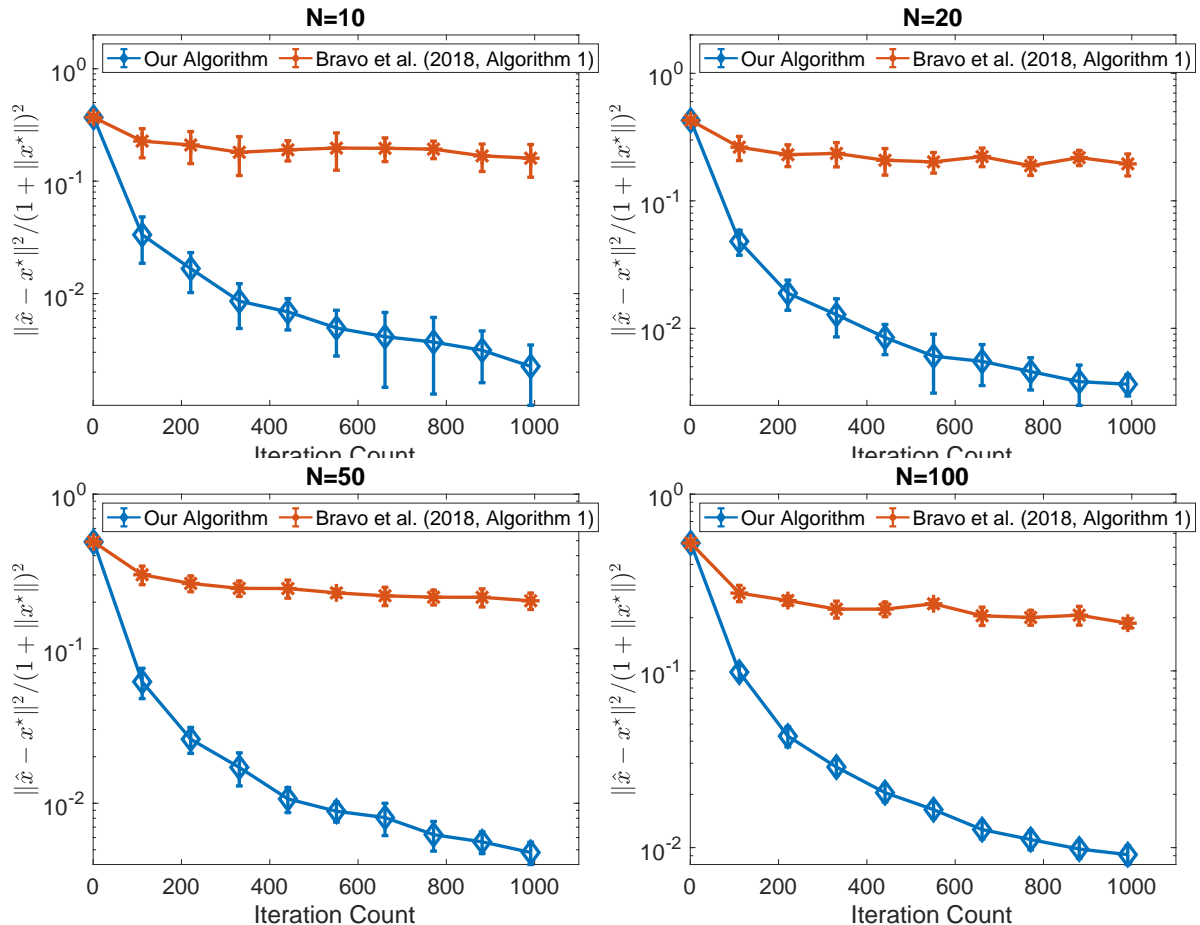


Figure 1: The average distance between the Nash equilibrium and the iterates generated by Algorithm 2 with Bravo et al. [2018, Algorithm 1] from 10 independent trials when $(a, b) = (10, 0.05)$ is fixed.

[2018, Algorithm 1], we use the default setting in Bravo et al. [2018, Theorem 5.2] in which we apply Euclidean projections with the parameters $r_i = p_i = \frac{B_i}{2}$, $\delta_t = \min\{\min_{i \in \mathcal{N}} r_i, \frac{1}{t^{1/3}}\}$, $\beta = b$ and $\gamma_t = \frac{1}{5\beta t}$. Moreover, it is known that Cournot competition in the above form is a concave potential game and can be solved by minimizing a quadratic function as follows,

$$\min_{(x_1, x_2, \dots, x_N) \in \mathbb{R}^N} \frac{b}{2} \left(\sum_{j \in \mathcal{N}} x_j \right)^2 + \frac{b}{2} \left(\sum_{j \in \mathcal{N}} x_j^2 \right) + \sum_{j \in \mathcal{N}} c_j x_j - a \left(\sum_{j \in \mathcal{N}} x_j \right).$$

The unique Nash equilibrium can be achieved by the interior-point method with high accuracy, and we compute it by deploying QUADPROG in Matlab. This point will be a benchmark for evaluating the quality of the solution obtained by our algorithm and Bravo et al. [2018, Algorithm 1].

Experimental results. Fixing $(a, b) = (10, 0.05)$, we study the convergence behavior of both algorithms with an increasing number of agents $N \in \{10, 20, 50, 100\}$. As indicated in Figure 1, our algorithm consistently outperforms Bravo et al. [2018, Algorithm 1] as it returns iterates that are closer

to an unique Nash equilibrium in less iteration counts. To further facilitate the readers, we present the averaged results from 10 independent trials in Table 1.

5.2 Kelly Auction

We show that Kelly auction is strongly monotone in the sense of Definition 3.4. In particular, each players' payoff function is given by

$$u_i(x) = \left(\sum_{s \in \mathcal{S}} \frac{g_i q_s x_{is}}{d_s + \sum_{j \in \mathcal{N}} x_{js}} \right) - \sum_{s \in \mathcal{S}} x_{is}, \quad \text{for some } g_i, d_s, q_s > 0.$$

Define $v_i(x) = \nabla_i u_i(x)$ for all $i \in \mathcal{N}$, it suffices to prove that there exists positive constants $\lambda_i > 0$ such that $\sum_{i \in \mathcal{N}} \lambda_i \langle x'_i - x_i, v_i(x') - v_i(x) \rangle \leq -\beta \|x' - x\|^2$ for all $x, x' \in \mathcal{X}$. The following proposition is a restatement of Rosen [1965, Theorem 6] and plays an important role in the subsequent analysis.

Proposition 5.1 *Given a continuous game $\mathcal{G} = (\mathcal{N}, \mathcal{X} = \prod_{i=1}^N \mathcal{X}_i, \{u_i\}_{i=1}^N)$, where each u_i is twice continuously differentiable. For each $x \in \mathcal{X}$, define the λ -weighted Hessian matrix $H^\lambda(x)$ as follows:*

$$H_{ij}^\lambda(x) = \frac{1}{2} \lambda_i \nabla_j v_i(x) + \frac{1}{2} \lambda_j (\nabla_i v_j(x))^\top.$$

If $H^\lambda(x)$ is negative-definite for every $x \in \mathcal{X}$, we have

$$\sum_{i \in \mathcal{N}} \lambda_i \langle x'_i - x_i, v_i(x') - v_i(x) \rangle \leq 0 \quad \text{for all } x, x' \in \mathcal{X},$$

where the equality holds true if and only if $x = x'$.

As a consequence of Proposition 5.1, we have $\sum_{i \in \mathcal{N}} \lambda_i \langle x'_i - x_i, v_i(x') - v_i(x) \rangle \leq -\beta \|x' - x\|^2$ for all $x, x' \in \mathcal{X}$ if $H^\lambda(x) \preceq -\beta I_n$ for all $x \in \mathcal{X}$. To show this, we consider the following weighted social welfare function which is given by

$$U(x) = \sum_{i \in \mathcal{N}} g_i^{-1} u_i(x) = \sum_{i \in \mathcal{N}} \sum_{s \in \mathcal{S}} \frac{q_s x_{is}}{d_s + \sum_{j \in \mathcal{N}} x_{js}} - \sum_{i \in \mathcal{N}} \sum_{s \in \mathcal{S}} x_{is} = \sum_{s \in \mathcal{S}} q_s \left(\frac{\sum_{i \in \mathcal{N}} x_{is}}{d_s + \sum_{i \in \mathcal{N}} x_{is}} \right) - \sum_{i \in \mathcal{N}} \sum_{s \in \mathcal{S}} x_{is}.$$

Since the $f(x) = \frac{x}{c+x}$ is concave for all $c > 0$, it readily follows that

- (a) Each payoff function $u_i(x_i; x_{-i})$ is concave in x_i and convex in x_{-i} ;
- (b) The welfare function $U(x)$ is concave in x .

Moreover, by appeal to the special structure of Kelly auction problems, we prove that the payoff function $\nabla_{ii}^2 u_i(x_i; x_{-i}) \preceq -\beta g_i I_{n_i}$ for all $x \in \mathcal{X}$ for some $\beta > 0$. Indeed, $u_i(x)$ is the sum of S functions in which the s -th one only depends on $(x_{1s}, x_{2s}, \dots, x_{Ns})$. This implies that

$$\nabla_{ii}^2 u_i(x_i; x_{-i}) = \begin{pmatrix} -\frac{2g_i q_1 (d_1 + \sum_{j \neq i} x_{j1})}{(d_1 + \sum_{j \in \mathcal{N}} x_{j1})^3} & & & & \\ & -\frac{2g_i q_2 (d_2 + \sum_{j \neq i} x_{j2})}{(d_2 + \sum_{j \in \mathcal{N}} x_{j2})^3} & & & \\ & & \ddots & & \\ & & & \ddots & \\ & & & & -\frac{2g_i q_S (d_S + \sum_{j \neq i} x_{jS})}{(d_S + \sum_{j \in \mathcal{N}} x_{jS})^3} \end{pmatrix}$$

Since $0 < d_s + \sum_{j \neq i} x_{js} \leq d_s + \sum_{j \in \mathcal{N}} x_{js} \leq \sum_{s \in \mathcal{S}} d_s + \sum_{i \in \mathcal{N}} B_i$, we have

$$\nabla_{ii}^2 u_i(x_i; x_{-i}) \preceq -\frac{2g_i \min_{s \in \mathcal{S}} \{q_s d_s\}}{(\sum_{s \in \mathcal{S}} d_s + \sum_{i \in \mathcal{N}} B_i)^3} I_{n_i}. \quad (9)$$

With these properties in mind, let $\lambda_i = 1/g_i$ and note that

$$\nabla_{ii}^2 U(x) = \sum_{k \in \mathcal{N}} \lambda_k \nabla_{ii}^2 u_k(x) = 2H_{ii}^\lambda(x) - g_i^{-1} \nabla_{ii}^2 u_i(x) + \sum_{k \neq i} \lambda_k \nabla_{ii}^2 u_k(x).$$

and

$$\nabla_{ij}^2 U(x) = \sum_{k \in \mathcal{N}} \lambda_k \nabla_{ij}^2 u_k(x) = 2H_{ij}^\lambda(x) + \sum_{k \neq i, j} \lambda_k \nabla_{ij}^2 u_k(x).$$

Proceeding a further step, we write the terms in the expressions above as $M_{ij}(x) = \nabla_{ij}^2 U(x)$, $D_{ij}(x) = \delta_{ij} g_i^{-1} \nabla_{ij}^2 u_i(x)$ and $B_{ij}^k(x) = (1 - \delta_{ik})(1 - \delta_{jk}) \nabla_{ij}^2 u_k(x)$. Therefore, we have

$$2H^\lambda(x) = M(x) + D(x) - \sum_{i \in \mathcal{N}} \lambda_i B^i(x). \quad (10)$$

Since $U(x)$ is concave in x , we have $M(x) \preceq 0$ for all $x \in \mathcal{X}$; by the definition of $D(x)$ and Eq. (9), we get $D(x) \preceq -\frac{2 \min_{s \in \mathcal{S}} \{q_s d_s\}}{(\sum_{s \in \mathcal{S}} d_s + \sum_{i \in \mathcal{N}} B_i)^3} I_n$ for all $x \in \mathcal{X}$; finally, since each u_i is convex in x_{-i} , it follows that $B^i(x) \succeq 0$ for all $i \in \mathcal{N}$ and all $x \in \mathcal{X}$ (simply note that $B^i(x)$ is the Hessian of $u_i(x_i; x_{-i})$ with the variable x_i omitted). Putting all these pieces together with Eq. (10), we have

$$H^\lambda(x) \preceq -\frac{\min_{s \in \mathcal{S}} \{q_s d_s\}}{(\sum_{s \in \mathcal{S}} d_s + \sum_{i \in \mathcal{N}} B_i)^3} I_n.$$

Therefore, the Kelly auction is strongly monotone with the module $\beta = \frac{\min_{s \in \mathcal{S}} \{q_s d_s\}}{(\sum_{s \in \mathcal{S}} d_s + \sum_{i \in \mathcal{N}} B_i)^3} > 0$.

Experimental setup. For all $i \in \mathcal{N}$, the total budget is fixed as $B_i = 1$ and each of g_i is independently drawn from an uniform distribution on the rectangular $[0, 1]$. For all $s \in \mathcal{S}$, each of q_s is independently drawn from an uniform distribution on the interval $[0, 1]$ and d_s is independently drawn from an uniform distribution on the interval $[0, \bar{d}]$ for some constants $\bar{d} > 0$. We evaluate the algorithms with $N \in \{10, 20, 50, 100\}$, $S \in \{2, 5\}$ and $\bar{d} \in \{0.5, 1\}$. For Algorithm 2, we set the parameters $\lambda_i = \frac{1}{g_i}$, $\eta_t = \frac{1}{2\sqrt{NS(1 + \min_{s \in \mathcal{S}} d_s/q_s)t}}$ and define the barrier function as $R_i = -\sum_{s \in \mathcal{S}} \log(x_{is}) - \log(B_i - \sum_{s \in \mathcal{S}} x_{is})$. For Bravo et al. [2018, Algorithm 1], we use the default setting of Bravo et al. [2018, Theorem 5.2] in which we apply Euclidean projection with the parameters $r_i = \frac{B_i}{S(S+1)}$, $p_i = \frac{B_i}{S} \mathbf{1}_S$, $\delta_t = \min\{\min_{i \in \mathcal{N}} r_i, \frac{1}{t^{1/3}}\}$ and $\gamma_t = \frac{1}{5\beta t}$ where $\mathbf{1}_S$ refers to a S -dimensional vector whose entries are all 1. Moreover, it is known that Kelly auction in the above form has a variational inequality (VI) reformulation [Mertikopoulos and Zhou, 2019, Proposition 2.1] and can be solved by finding a point $x^* \in \mathcal{X}$ such that

$$\langle v(x^*), x - x^* \rangle \leq 0 \quad \text{for all } x \in \mathcal{X}.$$

The unique Nash equilibrium can be achieved by a few linearly convergent VI algorithms with high accuracy, and we compute it by deploying an operator extrapolation algorithm (see [Kotsalis et al., 2020, Algorithm 1] for the scheme). This point will be a benchmark for evaluating the quality of the solution obtained by our algorithm and Bravo et al. [2018, Algorithm 1].

Table 2: Numerical results on Kelly auction problem.

(N, S, \bar{d})	Bravo et al. [2018, Algorithm 1]	Our Algorithm
(10, 2, 0.5)	9.4e-01 \pm 2.7e-01	1.7e-01 \pm 5.0e-02
(10, 2, 1.0)	1.2e+00 \pm 2.2e-01	1.4e-01 \pm 2.0e-02
(10, 5, 0.5)	8.4e-01 \pm 8.8e-02	1.9e-01 \pm 4.6e-02
(10, 5, 1.0)	9.5e-01 \pm 1.1e-01	1.6e-01 \pm 4.7e-02
(20, 2, 0.5)	1.6e+00 \pm 3.3e-01	2.2e-01 \pm 1.7e-02
(20, 2, 1.0)	1.9e+00 \pm 2.3e-01	2.0e-01 \pm 3.6e-02
(20, 5, 0.5)	1.3e+00 \pm 1.2e-01	2.1e-01 \pm 2.7e-02
(20, 5, 1.0)	1.4e+00 \pm 1.5e-01	1.9e-01 \pm 2.6e-02
(50, 2, 0.5)	2.8e+00 \pm 3.9e-01	3.2e-01 \pm 3.2e-02
(50, 2, 1.0)	3.1e+00 \pm 3.5e-01	3.5e-01 \pm 2.8e-02
(50, 5, 0.5)	2.1e+00 \pm 1.8e-01	2.3e-01 \pm 1.7e-02
(50, 5, 1.0)	2.2e+00 \pm 9.2e-02	2.2e-01 \pm 1.2e-02
(100, 2, 0.5)	4.2e+00 \pm 5.5e-01	4.6e-01 \pm 4.7e-02
(100, 2, 1.0)	4.5e+00 \pm 4.4e-01	5.0e-01 \pm 5.3e-02
(100, 5, 0.5)	3.2e+00 \pm 7.6e-02	2.6e-01 \pm 1.4e-02
(100, 5, 1.0)	3.3e+00 \pm 7.6e-02	2.7e-01 \pm 1.5e-02

Experimental results. Fixing $(S, \bar{d}) = (5, 0.5)$, we study the convergence behavior of both algorithms with an increasing number of agents $N \in \{10, 20, 50, 100\}$. As indicated in Figure 2, our algorithm still outperforms Bravo et al. [2018, Algorithm 1] as it returns iterates that are closer to a unique Nash equilibrium in less iteration counts. Compared to Figure 1, the quality of the solutions obtained by both algorithms is lower. Indeed, the simplex constraint set is more complicated than the box constraint set and we make the conservative choice for parameters, e.g., $r = \frac{B_i}{S(S+1)}$, such that the algorithm works from a theoretical viewpoint. Bravo et al. [2018, Algorithm 1] is very sensitive to the parameters and unfortunately gets stuck after a few iterations, while our algorithm approaches the Nash equilibrium slowly but steadily as the iteration count increases. To further facilitate the readers, we present the averaged results from 10 independent trials in Table 2.

5.3 Distributed Regularized Logistic Regression

We provide a game-theoretical formulation of distributed ℓ_2 -regularized logistic regression problem and show that the resulting game is strongly monotone in the sense of Definition 3.4.

The problem of ℓ_2 -regularized logistic regression aims at minimizing the sum of a logistic loss function and a squared ℓ_2 -norm-based regularization given by,

$$\min_{x \in \mathbb{R}^n} f(x) = \frac{1}{m} \left(\sum_{j=1}^m \log \left(1 + \exp(-b_j \cdot a_j^\top x) \right) \right) + \mu \|x\|^2, \quad (11)$$

where $(a_i, b_i)_{i=1}^m$ is a set of data samples with the binary label $b_i \in \{-1, 1\}$ and $\mu > 0$ is the regularization parameter. The term $\|\cdot\|^2$ prevents overfitting and the parameter $\mu > 0$ balances goodness-of-fit and generalization. In real applications, the dimension $n > 0$ can be very large and the key challenge is its

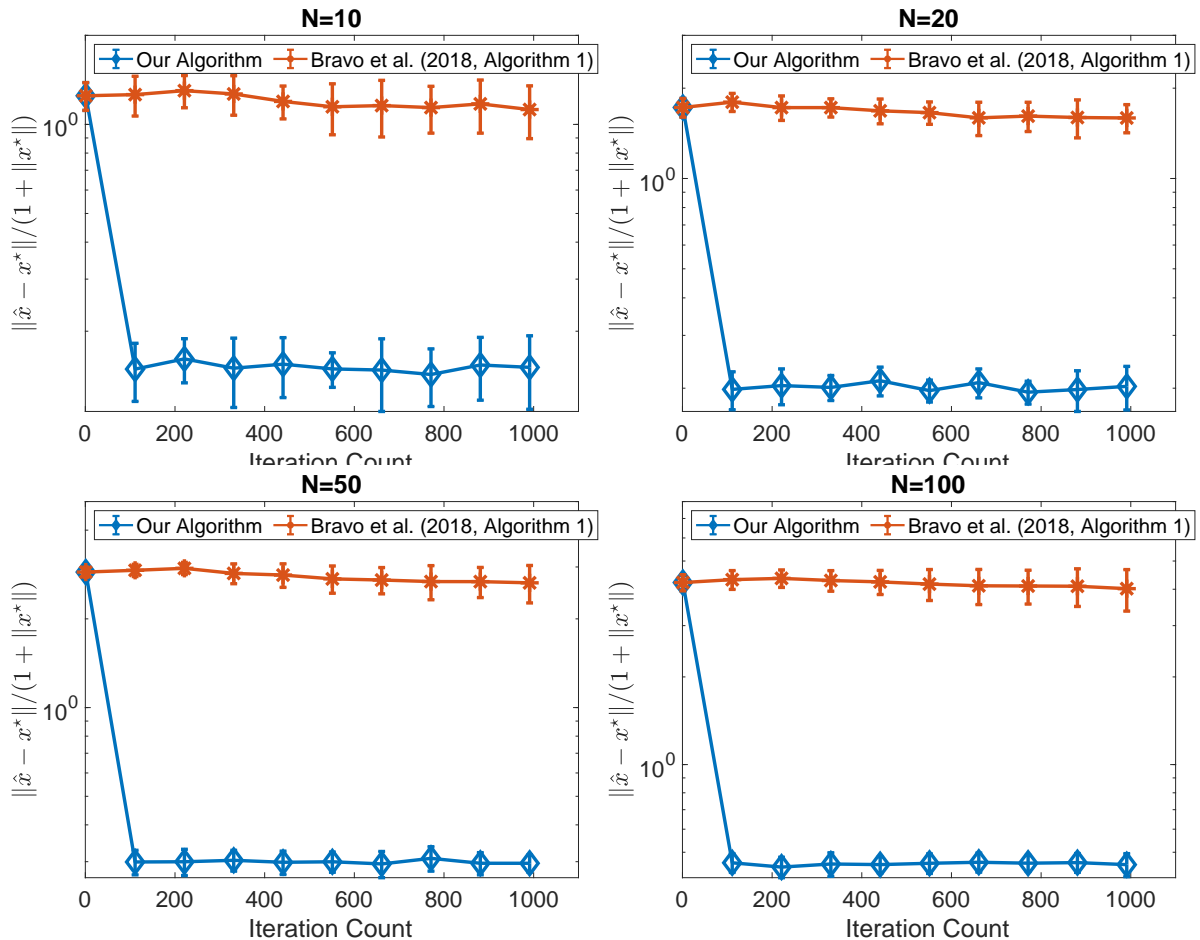


Figure 2: The average distance between the Nash equilibrium and the iterates generated by Algorithm 2 with Bravo et al. [2018, Algorithm 1] from 10 independent trials when $(S, \bar{d}) = (2, 0.5)$ is fixed.

Table 3: Statistics of datasets.

Dataset	Number of Samples (m)	Dimension (n)
a9a	32561	123
mushrooms	8124	112
news20	16242	100
splice	1000	60
svmguid3	1243	21
w8a	64700	300

computation. Practitioners tend to resolve this issue by solving the problem in a distributed computing environment.

While there is a vast literature on this topic [Wei and Ozdaglar, 2012, Gopal and Yang, 2013, Zhang and Kwok, 2014, Liu et al., 2015, Mahajan et al., 2017, Aybat et al., 2017], the idea is similar and can be summarized in two aspects: (i) the reformulation based on consensus optimization; (ii)

the algorithm based on either block coordinate gradient descent (BCD) [Wright, 2015] or alternating direction method of multipliers (ADMM) [Boyd et al., 2011]. In contrast, we take another perspective by reformulating Eq. (11) using the multi-agent learning framework. Thus, the unique Nash equilibrium produced by Algorithm 2 is equivalent to the optimal solution of Eq. (11).

More specifically, there is a finite set $\mathcal{N} = \{1, 2, \dots, n\}$ of blocks (players) and each one stands for the i -th block $x_i \in \mathbb{R}$. Suppose we have a shared memory such that all players can access a set of data samples $(a_i, b_i)_{i=1}^m$. A simple model for the utility of player i is then given by

$$u_i(x) = -f(x).$$

Let $\mathcal{X}_i = \mathbb{R}$ be the space of possible values of player i , the resulting game $\mathcal{G} \equiv \mathcal{G}(\mathcal{N}, \mathcal{X}, u)$ is strongly monotone the module $2\mu > 0$. Indeed, note that \mathcal{G} is a potential game with a 2μ -strongly concave potential function $-f$, hence the desired argument follows.

Experimental setup. We conduct the experiments on 5 binary classification datasets from LIBSVM collection⁵ and 20 newsgroup dataset⁶: a9a, mushroom, news20, splice, svmguide3, w8a, and set parameter $\mu = 0.001$ and $\ell = \frac{1}{4}(\max_{1 \leq j \leq m} \|a_j\|^2)$ for each dataset. For Algorithm 2, we set the parameters $\lambda_i = 2\mu$, $\beta = 2\mu$, $\eta_t = \frac{1}{\ell + 2\sqrt{nt}}$ and define the barrier function $R_i = 0$. For Bravo et al. [2018, Algorithm 1], we use the default setting of Bravo et al. [2018, Theorem 5.2] in which we apply Euclidean projection with the parameters $r_i = +\infty$, $p_i = 0$, $\delta_t = \frac{1}{t^{1/3}}$ and $\gamma_t = \frac{1}{\ell + 10t}$. Note that the scheme of Algorithm 2 is simplified for unconstrained setting and $A_i^t = \frac{\sqrt{\ell + 2\sqrt{nt}}}{\sqrt{t+1}} \propto \frac{1}{t^{1/4}}$ is analogue to δ_t in Bravo et al. [2018, Algorithm 1]. Moreover, the unique Nash equilibrium is equivalent to the optimal solution of Eq. (11) and can be achieved by a few linearly convergent optimization algorithms with high accuracy, and we compute it by deploying an accelerated gradient descent algorithm (see [Nesterov, 2018, Section 2.2] for example). This point will be a benchmark for evaluating the quality of the solution obtained by our algorithm and Bravo et al. [2018, Algorithm 1].

Experimental results. As indicated in Figure 3, our algorithm outperforms Bravo et al. [2018, Algorithm 1] as it exhibits a faster convergence to Nash equilibrium. Compared to the performance on Cournot competition and Kelly auction with synthetic data, the quality of the solutions obtained by both algorithms are lower, which is possibly caused by the ill-conditioning of real data.

6 Concluding Remarks and Future Direction

In a multi-agent online environment with bandit feedback, the most sensible choice for an agent who is oblivious to the presence of others (or who are conservative), is to deploy an optimal no-regret learning algorithm. With this in mind, we investigate the long-run behavior of individual optimal regularized no-regret learning policies. We show that, in strongly monotone games, the joint actions of all players converge to a (necessarily) unique Nash equilibrium, and the rate of convergence matches the optimal rates of *single-agent*, stochastic convex optimization up to log factors. We conduct extensive experiments using Cournot competition, Kelly auction, and distributed regularized logistic regression problems, the results demonstrate the superiority of our algorithm in practice. Our work thus settles an open problem

⁵<https://www.csie.ntu.edu.tw/~cjlin/libsvm/>

⁶<https://www.cs.nyu.edu/roweis/data.html>

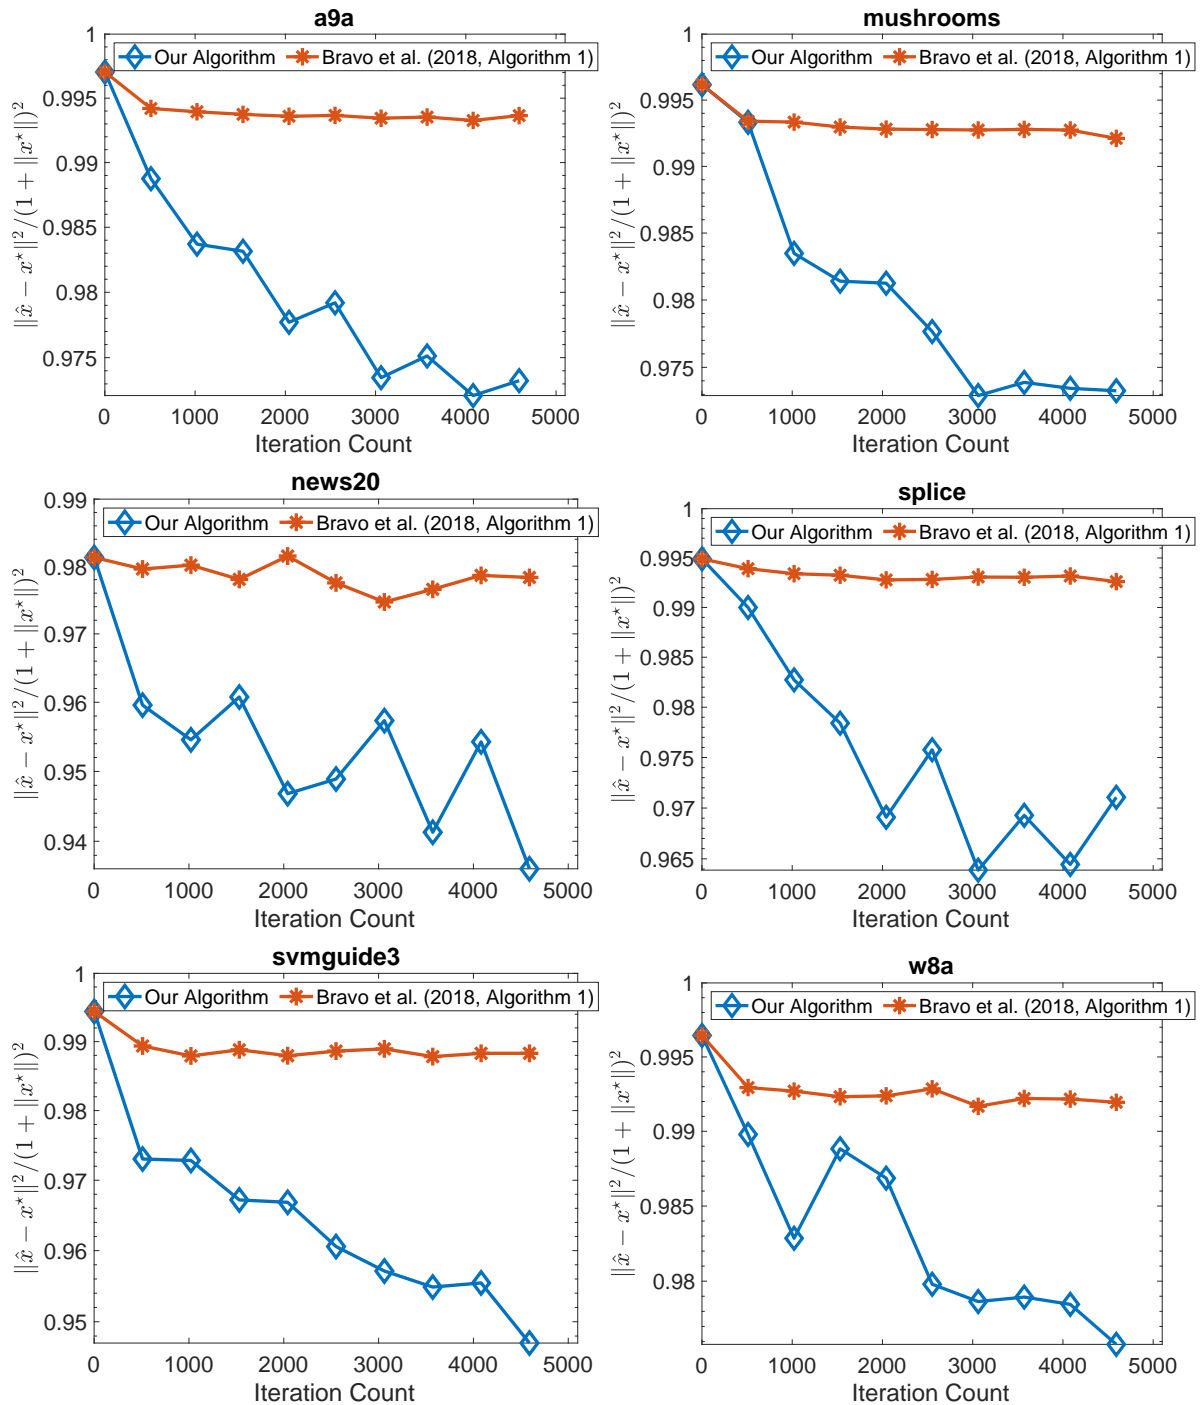


Figure 3: The average distance between the Nash equilibrium and the iterates generated by Algorithm 2 and Bravo et al. [2018, Algorithm 1], for real datasets when $\mu = 0.001$.

and contributes to the broad landscape of bandit game-theoretical learning by identifying the first doubly optimal bandit learning algorithm, in that it achieves (up to log factors) both optimal regret in

the single-agent learning and optimal last-iterate convergence rate in the multi-agent learning. Future work includes the extension to a fully decentralized setting where the players' updates need not be synchronous and applications of our algorithms to online decision-making problems in practice.

References

- J. Abernethy, E. Hazan, and A. Rakhlin. Competing in the dark: An efficient algorithm for bandit linear optimization. In *COLT*, pages 263–273, 2008. (Cited on page 5.)
- A. Agarwal, O. Dekel, and L. Xiao. Optimal algorithms for online convex optimization with multi-point bandit feedback. In *COLT*, pages 28–40, 2010. (Cited on page 3.)
- Sanjeev Arora, Elad Hazan, and Satyen Kale. The multiplicative weights update method: a meta-algorithm and applications. *Theory of Computing*, 8(1):121–164, 2012. (Cited on pages 1 and 2.)
- N. S. Aybat, Z. Wang, T. Lin, and S. Ma. Distributed linearized alternating direction method of multipliers for composite convex consensus optimization. *IEEE Transactions on Automatic Control*, 63(1):5–20, 2017. (Cited on page 20.)
- M. Balandat, W. Krichene, C. Tomlin, and A. Bayen. Minimizing regret on reflexive Banach spaces and Nash equilibria in continuous zero-sum games. In *NIPS*, pages 154–162, 2016. (Cited on page 2.)
- H. H. Bauschke and P. L. Combettes. *Convex Analysis and Monotone Operator Theory in Hilbert Spaces*, volume 408. Springer, 2011. (Cited on pages 10 and 11.)
- A. Beck and M. Teboulle. Mirror descent and nonlinear projected subgradient methods for convex optimization. *Operations Research Letters*, 31(3):167–175, 2003. (Cited on page 8.)
- S. Bervoets, M. Bravo, and M. Faure. Learning with minimal information in continuous games. *Theoretical Economics*, 15(4):1471–1508, 2020. (Cited on page 3.)
- Avrim Blum. On-line algorithms in machine learning. In *Online algorithms*, pages 306–325. Springer, 1998. (Cited on page 1.)
- S. Boyd, N. Parikh, E. Chu, B. Peleato, and J. Eckstein. Distributed optimization and statistical learning via the alternating direction method of multipliers. *Foundations and Trends® in Machine Learning*, 3(1):1–122, 2011. (Cited on page 21.)
- M. Bravo, D. Leslie, and P. Mertikopoulos. Bandit learning in concave N-person games. In *NIPS*, pages 5666–5676, 2018. (Cited on pages 3, 10, 12, 13, 14, 15, 16, 18, 19, 20, 21, 22, and 31.)
- S. Bubeck and N. Cesa-Bianchi. Regret analysis of stochastic and nonstochastic multi-armed bandit problems. *Machine Learning*, 5(1):1–122, 2012. (Cited on page 3.)
- S. Bubeck and R. Eldan. Multi-scale exploration of convex functions and bandit convex optimization. In *COLT*, pages 583–589. PMLR, 2016. (Cited on page 3.)
- S. Bubeck, O. Dekel, T. Koren, and Y. Peres. Bandit convex optimization: \sqrt{t} regret in one dimension. In *COLT*, pages 266–278. PMLR, 2015. (Cited on page 3.)

- S. Bubeck, Y. T. Lee, and R. Eldan. Kernel-based methods for bandit convex optimization. In *SOTC*, pages 72–85, 2017. (Cited on page 3.)
- Lucian Busoniu, Robert Babuska, and Bart De Schutter. Multi-agent reinforcement learning: An overview. In *Innovations in multi-agent systems and applications-1*, pages 183–221. Springer, 2010. (Cited on page 1.)
- N. Cesa-Bianchi and G. Lugosi. *Prediction, Learning, and Games*. Cambridge University Press, 2006a. (Cited on pages 5, 11, and 12.)
- Nicolo Cesa-Bianchi and Gábor Lugosi. *Prediction, learning, and games*. Cambridge university press, 2006b. (Cited on page 1.)
- G. Chen and M. Teboulle. Convergence analysis of a proximal-like minimization algorithm using Bregman functions. *SIAM Journal on Optimization*, 3(3):538–543, 1993. (Cited on page 8.)
- Constantinos Daskalakis, Paul W Goldberg, and Christos H Papadimitriou. The complexity of computing a nash equilibrium. *SIAM Journal on Computing*, 39(1):195–259, 2009. (Cited on page 2.)
- G. Debreu. A social equilibrium existence theorem. *Proceedings of the National Academy of Sciences*, 38(10):886–893, 1952. (Cited on page 10.)
- O. Dekel, R. Eldan, and T. Koren. Bandit smooth convex optimization: Improving the bias-variance tradeoff. In *NIPS*, pages 2926–2934, 2015. (Cited on pages 3, 4, and 5.)
- F. Facchinei and J-S. Pang. *Finite-dimensional Variational Inequalities and Complementarity Problems*. Springer Science & Business Media, 2007. (Cited on page 10.)
- A. D. Flaxman, A. T. Kalai, and H. B. McMahan. Online convex optimization in the bandit setting: gradient descent without a gradient. In *SODA*, pages 385–394, 2005. (Cited on pages 3 and 7.)
- D. Fudenberg and D. K. Levine. *The Theory of Learning in Games*, volume 2. MIT Press, 1998a. (Cited on page 12.)
- Drew Fudenberg and David K. Levine. *The Theory of Learning in Games*, volume 2 of *Economic learning and social evolution*. MIT Press, Cambridge, MA, 1998b. (Cited on page 1.)
- N. Golowich, S. Pattathil, and C. Daskalakis. Tight last-iterate convergence rates for no-regret learning in multi-player games. In *NeurIPS*, volume 33, pages 20766–20778, 2020a. (Cited on page 2.)
- N. Golowich, S. Pattathil, C. Daskalakis, and A. Ozdaglar. Last iterate is slower than averaged iterate in smooth convex-concave saddle point problems. In *COLT*, pages 1758–1784. PMLR, 2020b. (Cited on page 2.)
- S. Gopal and Y. Yang. Distributed training of large-scale logistic models. In *ICML*, pages 289–297. PMLR, 2013. (Cited on page 20.)
- J. Hannan. Approximation to Bayes risk in repeated play. *Contributions to the Theory of Games*, 21(39):97–139, 1957. (Cited on page 12.)

- E. Hazan. *Introduction to Online Convex Optimization*. Foundations and Trends(r) in Optimization Series. Now Publishers, 2016. ISBN 9781680831702. URL <https://books.google.com/books?id=IFxLvqAACAAJ>. (Cited on page 1.)
- E. Hazan and K. Y. Levy. Bandit convex optimization: Towards tight bounds. In *NIPS*, pages 784–792, 2014. (Cited on pages 3, 4, 5, 7, 8, 9, and 14.)
- E. Hazan and Y. Li. An optimal algorithm for bandit convex optimization. *ArXiv Preprint: 1603.04350*, 2016. (Cited on page 3.)
- A. Héliou, P. Mertikopoulos, and Z. Zhou. Gradient-free online learning in continuous games with delayed rewards. In *ICML*, pages 4172–4181. PMLR, 2020. (Cited on page 3.)
- Adam Kalai and Santosh Vempala. Efficient algorithms for online decision problems. *Journal of Computer and System Sciences*, 71(3):291–307, 2005. (Cited on page 2.)
- F. P. Kelly, A. K. Maulloo, and D. K. H. Tan. Rate control for communication networks: Shadow prices, proportional fairness and stability. *Journal of the Operational Research society*, 49(3):237–252, 1998. (Cited on page 11.)
- R. Kleinberg. Nearly tight bounds for the continuum-armed bandit problem. In *NIPS*, pages 697–704, 2004. (Cited on page 3.)
- G. Kotsalis, G. Lan, and T. Li. Simple and optimal methods for stochastic variational inequalities, I: operator extrapolation. *ArXiv Preprint: 2011.02987*, 2020. (Cited on page 18.)
- S. Krichene, W. Krichene, R. Dong, and A. Bayen. Convergence of heterogeneous distributed learning in stochastic routing games. In *Allerton*, pages 480–487. IEEE, 2015. (Cited on page 2.)
- T. Lattimore and C. Szepesvári. *Bandit Algorithms*. Cambridge University Press, 2020. (Cited on page 3.)
- T. Lin, Z. Zhou, P. Mertikopoulos, and M. I. Jordan. Finite-time last-iterate convergence for multi-agent learning in games. In *ICML*, pages 6161–6171. PMLR, 2020. (Cited on pages 2 and 12.)
- J. Liu, S. J. Wright, C. Ré, V. Bittorf, and S. Sridhar. An asynchronous parallel stochastic coordinate descent algorithm. *Journal of Machine Learning Research*, 16:285–322, 2015. (Cited on page 20.)
- D. Mahajan, S. S. Keerthi, and S. Sundararajan. A distributed block coordinate descent method for training l_1 -regularized linear classifiers. *The Journal of Machine Learning Research*, 18(1):3167–3201, 2017. (Cited on page 20.)
- P. Mertikopoulos and Z. Zhou. Learning in games with continuous action sets and unknown payoff functions. *Mathematical Programming*, 173(1):465–507, 2019. (Cited on pages 2, 10, 11, and 18.)
- P. Mertikopoulos, E. V. Belmega, R. Negrel, and L. Sanguinetti. Distributed stochastic optimization via matrix exponential learning. *IEEE Transactions on Signal Processing*, 65(9):2277–2290, 2017. (Cited on page 11.)
- P. Mertikopoulos, B. Lecouat, H. Zenati, C-S. Foo, V. Chandrasekhar, and G. Piliouras. Optimistic mirror descent in saddle-point problems: Going the extra(-gradient) mile. In *ICLR*, pages 1–23, 2019. URL <https://openreview.net/forum?id=Bkg8jjC9KQ>. (Cited on page 2.)

- D. Monderer and L. S. Shapley. Potential games. *Games and Economic Behavior*, 14(1):124–143, 1996. (Cited on page 11.)
- A. Nemirovski. Prox-method with rate of convergence $o(1/t)$ for variational inequalities with lipschitz continuous monotone operators and smooth convex-concave saddle point problems. *SIAM Journal on Optimization*, 15(1):229–251, 2004. (Cited on page 8.)
- A. S. Nemirovski and M. J. Todd. Interior-point methods for optimization. *Acta Numerica*, 17:191–234, 2008. (Cited on page 6.)
- A. S. Nemirovskij and D. B. Yudin. *Problem Complexity and Method Efficiency in Optimization*. Wiley-Interscience, 1983. (Cited on page 7.)
- Y. Nesterov. *Lectures on Convex Optimization*, volume 137. Springer, 2018. (Cited on page 21.)
- Y. Nesterov and A. Nemirovskii. *Interior-Point Polynomial Algorithms in Convex Programming*. SIAM, 1994. (Cited on pages 5 and 6.)
- A. Orda, R. Rom, and N. Shimkin. Competitive routing in multiuser communication networks. *IEEE/ACM Transactions on Networking*, 1(5):510–521, 1993. (Cited on page 11.)
- J. B. Rosen. Existence and uniqueness of equilibrium points for concave n-person games. *Econometrica: Journal of the Econometric Society*, pages 520–534, 1965. (Cited on pages 10 and 17.)
- A. Saha and A. Tewari. Improved regret guarantees for online smooth convex optimization with bandit feedback. In *AISTATS*, pages 636–642, 2011. (Cited on pages 3, 4, 5, and 7.)
- W. H. Sandholm. Potential games with continuous player sets. *Journal of Economic Theory*, 97(1): 81–108, 2001. (Cited on page 11.)
- W. H. Sandholm. Population games and deterministic evolutionary dynamics. In *Handbook of Game Theory with Economic Applications*, volume 4, pages 703–778. Elsevier, 2015. (Cited on pages 10 and 11.)
- Shai Shalev-Shwartz. *Online learning: Theory, algorithms, and applications*. PhD thesis, Hebrew University of Jerusalem, 2007. (Cited on page 1.)
- Shai Shalev-Shwartz and Yoram Singer. Convex repeated games and Fenchel duality. In *Advances in Neural Information Processing Systems 19*, pages 1265–1272. MIT Press, 2007. (Cited on page 2.)
- Shai Shalev-Shwartz et al. Online learning and online convex optimization. *Foundations and Trends® in Machine Learning*, 4(2):107–194, 2012. (Cited on page 1.)
- O. Shamir. On the complexity of bandit and derivative-free stochastic convex optimization. In *COLT*, pages 3–24. PMLR, 2013. (Cited on pages 3, 9, 12, and 14.)
- Yoav Shoham and Kevin Leyton-Brown. *Multiagent systems: Algorithmic, game-theoretic, and logical foundations*. Cambridge University Press, 2008. (Cited on page 1.)
- S. Sorin and C. Wan. Finite composite games: Equilibria and dynamics. *Journal of Dynamics and Games*, 3(1):101–120, 2016. (Cited on pages 10 and 11.)

- J. C. Spall. A one-measurement form of simultaneous perturbation stochastic approximation. *Automatica*, 33(1):109–112, 1997. (Cited on page 12.)
- C. W. Tan. Wireless network optimization by Perron-Frobenius theory. In *CISS*, pages 1–6. IEEE, 2014. (Cited on page 11.)
- P. C. Weeraddana, M. Codreanu, M. Latva-aho, A. Ephremides, and C. Fischione. *Weighted Sum-Rate Maximization in Wireless Networks: A Review*. Now Foundations and Trends, 2012. (Cited on page 11.)
- E. Wei and A. Ozdaglar. Distributed alternating direction method of multipliers. In *CDC*, pages 5445–5450. IEEE, 2012. (Cited on page 20.)
- S. J. Wright. Coordinate descent algorithms. *Mathematical Programming*, 151(1):3–34, 2015. (Cited on page 21.)
- R. Zhang and J. Kwok. Asynchronous distributed ADMM for consensus optimization. In *ICML*, pages 1701–1709. PMLR, 2014. (Cited on page 20.)
- Z. Zhou, P. Mertikopoulos, A. L. Moustakas, N. Bambos, and P. Glynn. Mirror descent learning in continuous games. In *CDC*, pages 5776–5783. IEEE, 2017. (Cited on page 2.)
- Z. Zhou, P. Mertikopoulos, S. Athey, N. Bambos, P. Glynn, and Y. Ye. Learning in games with lossy feedback. In *NIPS*, pages 1–11, 2018. (Cited on page 2.)
- Z. Zhou, P. Mertikopoulos, A. L. Moustakas, N. Bambos, and P. Glynn. Robust power management via learning and game design. *Operations Research*, 69(1):331–345, 2021. (Cited on pages 2, 11, and 12.)
- M. Zinkevich. Online convex programming and generalized infinitesimal gradient ascent. In *ICML*, pages 928–936, 2003a. (Cited on page 7.)
- Martin Zinkevich. Online convex programming and generalized infinitesimal gradient ascent. In *ICML '03: Proceedings of the 20th International Conference on Machine Learning*, pages 928–936, 2003b. (Cited on page 2.)

A Proof of Lemma 2.12

By the definition of $\mathcal{P}_R(\cdot, \cdot, \cdot)$ in Eq. (5), the iterate $x^{t+1} = \mathcal{P}_R(x^t, \hat{v}^t, \eta_t)$ satisfies that

$$-\eta_t \hat{v}^t + \eta_t \beta(t+1)(x^{t+1} - x^t) + \nabla R(x^{t+1}) - \nabla R(x^t) = 0.$$

Using Lemma 2.8 with $x = x^{t+1}$ and $x' = x^t$, we have

$$\begin{aligned} D_R(p, x^t) &= D_R(p, x^{t+1}) + D_R(x^{t+1}, x^t) + \langle \nabla R(x^t) - \nabla R(x^{t+1}), x^{t+1} - p \rangle \\ &= D_R(p, x^{t+1}) + D_R(x^{t+1}, x^t) - \eta_t \langle \hat{v}^t, x^{t+1} - p \rangle + \eta_t \beta(t+1) \langle x^{t+1} - x^t, x^{t+1} - p \rangle \\ &= D_R(p, x^{t+1}) - \eta_t \langle \hat{v}^t, x^{t+1} - x^t \rangle - \eta_t \langle \hat{v}^t, x^t - p \rangle + \left(D_R(x^{t+1}, x^t) + \frac{\eta_t \beta(t+1)}{2} \|x^{t+1} - x^t\|^2 \right) \\ &\quad + \frac{\eta_t \beta(t+1)}{2} \|x^{t+1} - p\|^2 - \frac{\eta_t \beta(t+1)}{2} \|x^t - p\|^2. \end{aligned}$$

By the definition of Bregman divergence, we have $D_R(x^{t+1}, x^t) \geq 0$. Putting these pieces together yields that

$$\begin{aligned} & D_R(p, x^{t+1}) + \frac{\eta_t \beta(t+1)}{2} \|x^{t+1} - p\|^2 \\ & \leq D_R(p, x^t) + \frac{\eta_t \beta(t+1)}{2} \|x^t - p\|^2 + \eta_t \langle \hat{v}^t, x^{t+1} - x^t \rangle + \eta_t \langle \hat{v}^t, x^t - p \rangle. \end{aligned} \quad (12)$$

Then we bound the term $\langle \hat{v}^t, x^{t+1} - x^t \rangle$ by Lemma 2.5. Indeed, we let the function g be defined as

$$g(x) = \eta_t \langle \hat{v}^t, x^t - x \rangle + \frac{\eta_t \beta(t+1)}{2} \|x^t - x\|^2 + D_R(x, x^t)$$

Since g is the sum of a self-concordant barrier function R and a quadratic function, we can easily verify that g is also a self-concordant function and have

$$\nabla g(x^t) = -\eta_t \hat{v}^t, \quad \nabla^2 g(x^t) = \eta_t \beta(t+1) I_n + \nabla^2 R(x^t). \quad (13)$$

By definition of A^t , we have $A^t = (\nabla^2 g(x^t))^{-1/2}$. Using Eq. (13), we have

$$\lambda(x^t, g) = \|(\nabla^2 g(x^t))^{-1} \nabla g(x^t)\|_{x^t} = \eta_t \|\hat{v}^t\|_{x^t, \star}. \quad (14)$$

To apply Lemma 2.5, we need to guarantee that $\lambda(x^t, g) \leq \frac{1}{2}$. Indeed, by the definition of \hat{v}^t and using the fact that $A^t = (\nabla^2 g(x^t))^{-1/2}$, we have

$$\lambda(x^t, g) = \eta_t \|\hat{v}^t\|_{x^t, \star} = \eta_t \|A^t \hat{v}^t\| = n \eta_t |f_t(x^t + A^t z^t)| \|z^t\| \leq n \eta_t |f_t(x^t + A^t z^t)|.$$

Since $x^t + A^t z^t \in \mathcal{X}$ and each function f_t satisfies that $|f_t(x)| \leq L$ for all $x \in \mathcal{X}$, we have $\lambda(x^t, g) \leq nL\eta_t$. Combining it with the fact that $0 < \eta_t \leq \frac{1}{2nL}$ yields that $\lambda(x^t, g) \leq \frac{1}{2}$. Therefore, by Lemma 2.5, we have

$$\|x^{t+1} - x^t\|_{x^t} = \|x^t - \operatorname{argmin}_{x' \in \mathcal{X}} g(x')\| \leq 2\lambda(x^t, g) \stackrel{\text{Eq. (14)}}{\leq} 2\eta_t \|\hat{v}^t\|_{x^t, \star}.$$

This together with the Hölder's inequality yields that

$$\langle \hat{v}^t, x^{t+1} - x^t \rangle \leq \|\hat{v}^t\|_{x^t, \star} \|x^{t+1} - x^t\|_{x^t} \leq 2\eta_t \|\hat{v}^t\|_{x^t, \star}^2.$$

Using the fact that $A^t = (\nabla^2 g(x^t))^{-1/2}$ again, we have

$$\langle \hat{v}^t, x^{t+1} - x^t \rangle \leq 2\eta_t \|A^t \hat{v}^t\|^2. \quad (15)$$

Plugging Eq. (15) into Eq. (12) yields the desired inequality.

B Proof of Theorem 2.10

We are in a position to prove Theorem 2.10 regarding the regret bound of Algorithm 1. For simplicity, we assume that $\max_{x, x' \in \mathcal{X}} \|x - x'\| \leq B$ for some $B > 0$. Fixing a point $p \in \mathcal{X}$, we have

$$\begin{aligned} & \sum_{t=1}^T f_t(p) - \mathbb{E} \left[\sum_{t=1}^T f_t(\hat{x}^t) \right] = \underbrace{\sum_{t=1}^T [f_t(p) - \hat{f}_t(p)]}_{\text{I}} \\ & + \underbrace{\sum_{t=1}^T \mathbb{E}[\hat{f}_t(p) - \hat{f}_t(x^t)]}_{\text{II}} + \underbrace{\sum_{t=1}^T \mathbb{E}[\hat{f}_t(x^t) - f_t(x^t)]}_{\text{III}} + \underbrace{\sum_{t=1}^T \mathbb{E}[f_t(x^t) - f_t(\hat{x}^t)]}_{\text{IV}}, \end{aligned} \quad (16)$$

where \hat{f}_t is a smoothed version given by $\hat{f}_t(x) = \mathbb{E}_{w \sim \mathbb{B}^n} [f_t(x + A^t w)]$. Since $\nabla^2 R(x)$ is positive definite and $\eta_t = \frac{1}{2nL\sqrt{T}}$, we have

$$(\sigma_{\max}(A^t))^2 \leq \frac{1}{\eta_t \beta(t+1)} = \frac{2nL\sqrt{T}}{\beta(t+1)}. \quad (17)$$

By Lemma 2.6 and Eq. (17), we have

$$\mathbf{I} \leq \frac{\ell(\sigma_{\max}(A^t))^2}{2} \leq \frac{n\ell L\sqrt{T}}{\beta(t+1)}, \quad (18)$$

and

$$\mathbf{III} = \mathbb{E}[\mathbb{E}[\hat{f}_t(x^t) - f_t(x^t) \mid x^t]] \leq 0. \quad (19)$$

By the definition of \hat{f} , we have

$$\mathbf{IV} = \sum_{t=1}^T \mathbb{E}[f_t(x^t) - f_t(\hat{x}^t)] = \sum_{t=1}^T \mathbb{E}[\mathbb{E}[f_t(x^t) - f_t(x^t + A^t z^t) \mid x^t]].$$

By Lemma 2.6 and Eq. (17) again, we have

$$\mathbf{IV} \leq \frac{\ell(\sigma_{\max}(A^t))^2}{2} \leq \frac{n\ell L\sqrt{T}}{\beta(t+1)}. \quad (20)$$

It remains to bound the second term. Indeed, since $\eta_t = \frac{1}{2nL\sqrt{T}} \leq \frac{1}{2nL}$, Lemma 2.12 implies that

$$D_R(p, x^{t+1}) + \frac{\eta_t \beta(t+1)}{2} \|x^{t+1} - p\|^2 \leq D_R(p, x^t) + \frac{\eta_t \beta(t+1)}{2} \|x^t - p\|^2 + 2\eta_t^2 \|A^t \hat{v}^t\|^2 + \eta_t \langle \hat{v}^t, x^t - p \rangle.$$

Taking the expectation of both sides conditioned on \mathcal{F}_t and dividing both sides by η_t , we have

$$\begin{aligned} & \frac{\mathbb{E}[D_R(p, x^{t+1}) \mid \mathcal{F}_t]}{\eta_t} + \frac{\beta(t+1)}{2} \mathbb{E}[\|x^{t+1} - p\|^2 \mid \mathcal{F}_t] \\ & \leq \frac{D_R(p, x^t)}{\eta_t} + \frac{\beta(t+1)}{2} \|x^t - p\|^2 + 2\eta_t \mathbb{E}[\|A^t \hat{v}^t\|^2 \mid \mathcal{F}_t] + \mathbb{E}[\langle \hat{v}^t, x^t - p \rangle \mid \mathcal{F}_t]. \end{aligned}$$

By the definition of \hat{v}^t , we have

$$\|A^t \hat{v}^t\|^2 = n^2 |f_t(x^t + A^t z^t)|^2 \|z^t\|^2 \leq n^2 L^2,$$

and

$$\mathbb{E}[\langle \hat{v}^t, x^t - p \rangle \mid \mathcal{F}_t] = \langle \nabla \hat{f}_t(x^t), x^t - p \rangle.$$

By Lemma 2.6 and the fact that f is β -strongly concave, we have \hat{f} is also β -strongly concave. This implies that

$$\mathbb{E}[\langle \hat{v}^t, x^t - p \rangle \mid \mathcal{F}_t] \leq \hat{f}_t(x^t) - \hat{f}_t(p) - \frac{\beta}{2} \|x^t - p\|^2.$$

Putting these pieces together yields that

$$\begin{aligned} & \frac{\mathbb{E}[D_R(p, x^{t+1}) \mid \mathcal{F}_t]}{\eta_t} + \frac{\beta(t+1)}{2} \mathbb{E}[\|x^{t+1} - p\|^2 \mid \mathcal{F}_t] \\ & \leq \frac{D_R(p, x^t)}{\eta_t} + \frac{\beta t}{2} \|x^t - p\|^2 + 2\eta_t n^2 L^2 + (\hat{f}_t(x^t) - \hat{f}_t(p)). \end{aligned}$$

Rearranging the above inequality and take the expectation of both sides, we have

$$\mathbb{E}[\hat{f}_t(p) - \hat{f}_t(x^t)] \leq \frac{\mathbb{E}[D_R(p, x^t)] - \mathbb{E}[D_R(p, x^{t+1})]}{\eta_t} + \left(\frac{\beta t}{2} \mathbb{E}[\|x^t - p\|^2] - \frac{\beta(t+1)}{2} \mathbb{E}[\|x^{t+1} - p\|^2] \right) + 2\eta_t n^2 L^2.$$

Therefore, we have

$$\begin{aligned} \mathbf{II} &= \sum_{t=1}^T \mathbb{E}[\hat{f}_t(p) - \hat{f}_t(x^t)] \leq \sum_{t=1}^T \frac{\mathbb{E}[D_R(p, x^t)] - \mathbb{E}[D_R(p, x^{t+1})]}{\eta_t} \\ &\quad + \sum_{t=1}^T \left(\frac{\beta t}{2} \mathbb{E}[\|x^t - p\|^2] - \frac{\beta(t+1)}{2} \mathbb{E}[\|x^{t+1} - p\|^2] \right) + 2n^2 L^2 \left(\sum_{t=1}^T \eta_t \right) \\ &= 2nL\sqrt{T}D_R(p, x^1) + \frac{\beta}{2}\|x^1 - p\|^2 + nL\sqrt{T} \\ &\leq nL\sqrt{T}(1 + 2D_R(p, x^1)) + \frac{\beta B^2}{2}. \end{aligned} \tag{21}$$

By the initialization $x^1 = \operatorname{argmin}_{x \in \mathcal{X}} R(x)$, we have $\nabla R(x^1) = 0$ which implies that $D_R(p, x^1) = R(p) - R(x^1)$. We consider the following two cases:

- A point $p \in \mathcal{X}$ satisfies that $\pi_{x^1}(p) \leq 1 - \frac{1}{\sqrt{T}}$. Then, by Lemma 2.4, we have

$$D_R(p, x^1) = R(p) - R(x^1) \leq \nu \log(T).$$

This together with Eq. (21) implies that

$$\mathbf{II} \leq nL\sqrt{T}(1 + 2\nu \log(T)) + \frac{\beta B^2}{2}. \tag{22}$$

Plugging Eq. (18), Eq. (19), Eq. (20) and Eq. (22) into Eq. (16) yields that

$$\sum_{t=1}^T f_t(p) - \mathbb{E} \left[\sum_{t=1}^T f_t(\hat{x}^t) \right] = \tilde{O}(\sqrt{T}). \tag{23}$$

- A point $p \in \mathcal{X}$ satisfies that $\pi_{x^1}(p) > 1 - \frac{1}{\sqrt{T}}$. Then, we can always find $p' \in \mathcal{X}$ such that $\|p' - p\| = O(\frac{1}{\sqrt{T}})$ and $\pi_{x^1}(p') \leq 1 - \frac{1}{\sqrt{T}}$. Since Eq. (23) holds true for any fixed $p \in \mathcal{X}$ satisfying $\pi_{x^1}(p) \leq 1 - \frac{1}{\sqrt{T}}$, we have

$$\sum_{t=1}^T f_t(p') - \mathbb{E} \left[\sum_{t=1}^T f_t(\hat{x}^t) \right] = \tilde{O}(\sqrt{T}).$$

Recall that each function f_t is Lipschitz continuous, we have

$$\left| \sum_{t=1}^T f_t(p') - f_t(p) \right| = O(\sqrt{T}).$$

Therefore, Eq. (23) also holds true in this case.

Combining the above two cases with the fact that $p \in \mathcal{X}$ is arbitrary, we have

$$\text{Reg}_T = \max_{p \in \mathcal{X}} \left\{ \sum_{t=1}^T f_t(p) - \mathbb{E} \left[\sum_{t=1}^T f_t(\hat{x}^t) \right] \right\} = \tilde{O}(\sqrt{T}).$$

This completes the proof.

C Proof of Lemma 3.5

By the definition, we have

$$\mathbb{E}[\hat{v}_i | x] = \frac{n_i}{\prod_{i \in \mathcal{N}} \text{vol}(\mathbb{S}_i)} \int_{\mathbb{S}_1} \cdots \int_{\mathbb{S}_N} u_i(x_1 + A_1 z_1, \dots, x_N + A_N z_N) (A_i)^{-1} z_i dz_1 \dots dz_N.$$

Since all of A_i are invertible, we can define auxiliary functions $U_i(x)$ by

$$U_i(x_1, x_2, \dots, x_N) = u_i(A_1 x_1, A_2 x_2, \dots, A_N x_N), \quad \forall i \in \mathcal{N}, \quad (24)$$

and have

$$\mathbb{E}[\hat{v}_i | x] = (A_i)^{-1} \left(\frac{n_i}{\prod_{i \in \mathcal{N}} \text{vol}(\mathbb{S}_i)} \int_{\mathbb{S}_1} \cdots \int_{\mathbb{S}_N} U_i((A_1)^{-1} x_1 + z_1, \dots, (A_N)^{-1} x_N + z_N) z_i dz_1 \dots dz_N \right).$$

For the ease of presentation, we let $\tilde{x}_i = (A_i)^{-1} x_i$. Then, by using the same argument as in [Bravo et al., 2018, Lemma C.1] with the independence of the sampling directions $\{z_i, i \in \mathcal{N}\}$, we have

$$\begin{aligned} & \frac{n_i}{\prod_{i \in \mathcal{N}} \text{vol}(\mathbb{S}_i)} \int_{\mathbb{S}_1} \cdots \int_{\mathbb{S}_N} U_i(\tilde{x}_1 + z_1, \dots, \tilde{x}_N + z_N) z_i dz_1 \dots dz_N \\ &= \frac{n_i}{\prod_{i \in \mathcal{N}} \text{vol}(\mathbb{S}_i)} \int_{\mathbb{S}_1} \cdots \int_{\mathbb{S}_N} U_i(\tilde{x}_1 + z_1, \dots, \tilde{x}_N + z_N) \frac{z_i}{\|z_i\|} dz_1 \dots dz_N \\ &= \frac{n_i}{\prod_{i \in \mathcal{N}} \text{vol}(\mathbb{S}_i)} \int_{\mathbb{S}_i} \int_{\prod_{j \neq i} \mathbb{S}_j} U_i(\tilde{x}_i + z_i; \tilde{x}_{-i} + z_{-i}) \frac{z_i}{\|z_i\|} dz_i dz_{-i} \\ &= \frac{n_i}{\prod_{i \in \mathcal{N}} \text{vol}(\mathbb{S}_i)} \int_{\mathbb{B}_i} \int_{\prod_{j \neq i} \mathbb{S}_j} \nabla_i U_i(\tilde{x}_i + w_i; \tilde{x}_{-i} + z_{-i}) \frac{z_i}{\|z_i\|} dw_i dz_{-i}, \end{aligned}$$

where, in the last equality, we use the identity

$$\nabla \int_{\mathbb{B}} F(x + w) dw = \int_{\mathbb{S}} F(x + z) \frac{z}{\|z\|} dz,$$

which, in turn, follows from Stoke's theorem. Since $\text{vol}(\mathbb{B}_i) = (1/n_i) \text{vol}(\mathbb{S}_i)$, the above argument implies that $\mathbb{E}[\hat{v}_i | x] = (A_i)^{-1} \nabla_i \hat{U}_i(\tilde{x})$ with \hat{U}_i given by

$$\hat{U}_i(x) = \mathbb{E}_{w_i \sim \mathbb{B}^{n_i}} \mathbb{E}_{z_{-i} \sim \prod_{j \neq i} \mathbb{S}^{n_j}} [U_i(x_i + w_i; x_{-i} + z_{-i})].$$

By the definition of U_i in Eq. (24) and $\tilde{x}_i = (A_i)^{-1}x_i$, we have

$$\mathbb{E}[\hat{v}_i | x] = (A_i)^{-1}A_i \nabla_i \hat{u}_i(x_i) = \nabla_i \hat{u}_i(x_i),$$

with $\hat{u}_i(x) = \mathbb{E}_{w_i \sim \mathbb{B}^{n_i}} \mathbb{E}_{z_{-i} \sim \prod_{j \neq i} \mathbb{S}^{n_j}} [u_i(x_i + A_i w_i; \hat{x}_{-i})]$ where $\hat{x}_i = x_i + A_i z_i$ for all $i \in \mathcal{N}$.

For the second part of the lemma, since $v_i(x)$ is Lipschitz continuous with parameter ℓ_i , we have

$$\begin{aligned} \|\nabla_i u_i(x_i + A_i w_i; \hat{x}_{-i}) - \nabla_i u_i(x)\| &= \|v_i(x_i + A_i w_i; \hat{x}_{-i}) - v_i(x)\| \\ &\leq \ell_i \sqrt{\|A_i w_i\|^2 + \sum_{j \neq i} \|A_j z_j\|^2} \leq \ell_i \sqrt{\sum_{j \in \mathcal{N}} \|A_j\|_2^2} = \ell_i \sqrt{\sum_{j \in \mathcal{N}} (\sigma_{\max}(A_j))^2}. \end{aligned}$$

This completes the proof.

D Proof of Lemma 4.3

Since Algorithm 2 is developed in which each player chooses her decision using Algorithm 1, Lemma 2.12 implies that

$$\begin{aligned} D_{R_i}(p_i, x_i^{t+1}) + \frac{\eta_t \beta(t+1)}{2\lambda_i} \|x_i^{t+1} - p_i\|^2 & \quad (25) \\ \leq D_{R_i}(p_i, x_i^t) + \frac{\eta_t \beta(t+1)}{2\lambda_i} \|x_i^t - p_i\|^2 + 2\eta_t^2 \|A_i^t \hat{v}_i^t\|^2 + \eta_t \langle \hat{v}_i^t, x_i^t - p_i \rangle, \end{aligned}$$

where $p_i \in \mathcal{X}_i$ and $\{\eta_t\}_{t \geq 1}$ is a nonincreasing sequence satisfying that $0 < \eta_t \leq \frac{1}{2n_i L}$. Since $n = \sum_{i \in \mathcal{N}} n_i$ in the multi-agent setting, Eq. (25) holds true for all $i \in \mathcal{N}$ if $0 < \eta_t \leq \frac{1}{2nL}$. Multiplying Eq. (25) by λ_i and summing up the resulting inequalities over $i \in \mathcal{N}$, then using the fact that $\eta_t \geq \eta_{t+1}$ yields the desired inequality.

E Proof of Theorem 4.1

We are in a position to prove Theorem 4.1 regarding the last-iterate convergence rate of Algorithm 2 for the case when the perfect bandit feedback is available ($\xi_{i,t} \equiv 0$). For simplicity, we assume that $\max_{x, x' \in \mathcal{X}_i} \|x - x'\| \leq B_i$ for some $B_i > 0$. Since $\eta_t = \frac{1}{2nL\sqrt{t}} \leq \frac{1}{2nL}$, Lemma 4.3 implies that

$$\begin{aligned} \sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^{t+1}) + \frac{\eta_{t+1} \beta(t+1)}{2} \left(\sum_{i \in \mathcal{N}} \|x_i^{t+1} - p_i\|^2 \right) \\ \leq \sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^t) + \frac{\eta_t \beta(t+1)}{2} \left(\sum_{i \in \mathcal{N}} \|x_i^t - p_i\|^2 \right) + 2\eta_t^2 \left(\sum_{i \in \mathcal{N}} \lambda_i \|A_i^t \hat{v}_i^t\|^2 \right) + \eta_t \left(\sum_{i \in \mathcal{N}} \lambda_i \langle \hat{v}_i^t, x_i^t - p_i \rangle \right). \end{aligned}$$

Taking the expectation of both sides conditioned on \mathcal{F}_t , we have

$$\begin{aligned} & \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^{t+1}) \mid \mathcal{F}_t \right] + \frac{\eta_{t+1} \beta(t+1)}{2} \mathbb{E} \left[\sum_{i \in \mathcal{N}} \|x_i^{t+1} - p_i\|^2 \mid \mathcal{F}_t \right] \\ & \leq \sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^t) + \frac{\eta_t \beta(t+1)}{2} \left(\sum_{i \in \mathcal{N}} \|x_i^t - p_i\|^2 \right) + 2\eta_t^2 \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \|A_i^t \hat{v}_i^t\|^2 \mid \mathcal{F}_t \right] \\ & \quad + \eta_t \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \hat{v}_i^t, x_i^t - p_i \rangle \mid \mathcal{F}_t \right]. \end{aligned} \quad (26)$$

By the definition of \hat{v}_i^t and Lemma 3.5, we have

$$\|A_i^t \hat{v}_i^t\|^2 = n_i^2 |u_i(x_1^t + A_1^t z_1^t, \dots, x_N^t + A_N^t z_N^t)|^2 \|z_i^t\|^2 \leq n_i^2 L^2, \quad (27)$$

and

$$\mathbb{E}[\langle \hat{v}_i^t, x_i^t - p_i \rangle \mid x^t] = \langle \nabla_i \hat{u}_i(x^t), x_i^t - p_i \rangle.$$

By Lemma 3.5 again and the Young's inequality, we have

$$\begin{aligned} & \mathbb{E}[\langle \hat{v}_i^t, x_i^t - p_i \rangle \mid \mathcal{F}_t] = \langle \nabla_i u_i(x^t), x_i^t - p_i \rangle + \langle \nabla_i \hat{u}_i(x^t) - \nabla_i u_i(x^t), x_i^t - p_i \rangle \\ & \leq \langle \nabla_i u_i(x^t), x_i^t - p_i \rangle + \frac{\lambda_i}{2\beta} \|\nabla_i \hat{u}_i(x^t) - \nabla_i u_i(x^t)\|^2 + \frac{\beta}{2\lambda_i} \|x_i^t - p_i\|^2 \\ & \leq \langle \nabla_i u_i(x^t), x_i^t - p_i \rangle + \frac{\lambda_i \ell_i^2}{2\beta} \left(\sum_{i \in \mathcal{N}} (\sigma_{\max}(A_i^t))^2 \right) + \frac{\beta}{2\lambda_i} \|x_i^t - p_i\|^2. \end{aligned} \quad (28)$$

Since $\nabla^2 R_i(x)$ is positive definite and $\eta_t = \frac{1}{2nL\sqrt{t}}$, we have

$$(\sigma_{\max}(A_i^t))^2 \leq \frac{\lambda_i}{\eta_t \beta(t+1)} = \frac{2nL\lambda_i}{\beta\sqrt{t}}. \quad (29)$$

Plugging Eq. (29) into Eq. (28) and summing up the resulting inequality over $i \in \mathcal{N}$, we have

$$\mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \hat{v}_i^t, x_i^t - p_i \rangle \mid \mathcal{F}_t \right] \leq \sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(x^t), x_i^t - p_i \rangle + \frac{nL}{\beta^2 \sqrt{t}} \left(\sum_{i \in \mathcal{N}} \lambda_i \right) \left(\sum_{i \in \mathcal{N}} \lambda_i^2 \ell_i^2 \right) + \frac{\beta}{2} \left(\sum_{i \in \mathcal{N}} \|x_i^t - p_i\|^2 \right).$$

By β -strongly monotonicity of the game, we have

$$\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(x^t), x_i^t - p_i \rangle \leq -\beta \left(\sum_{i \in \mathcal{N}} \|x_i^t - p_i\|^2 \right) + \sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(p), x_i^t - p_i \rangle.$$

Therefore, we have

$$\mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \hat{v}_i^t, x_i^t - p_i \rangle \mid \mathcal{F}_t \right] \leq \frac{nL}{\beta^2 \sqrt{t}} \left(\sum_{i \in \mathcal{N}} \lambda_i \right) \left(\sum_{i \in \mathcal{N}} \lambda_i^2 \ell_i^2 \right) - \frac{\beta}{2} \left(\sum_{i \in \mathcal{N}} \|x_i^t - p_i\|^2 \right) + \sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(p), x_i^t - p_i \rangle. \quad (30)$$

Plugging Eq. (27) and Eq. (30) into Eq. (26) and taking the expectation of both sides, we have

$$\begin{aligned} & \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^{t+1}) \right] + \frac{\eta_{t+1} \beta (t+1)}{2} \mathbb{E} \left[\sum_{i \in \mathcal{N}} \|x_i^{t+1} - p_i\|^2 \right] \\ & \leq \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^t) \right] + \frac{\eta_t \beta t}{2} \mathbb{E} \left[\sum_{i \in \mathcal{N}} \|x_i^t - p_i\|^2 \right] + 2\eta_t^2 L^2 \left(\sum_{i \in \mathcal{N}} n_i^2 \lambda_i \right) \\ & \quad + \frac{\eta_t n L}{\beta^2 \sqrt{t}} \left(\sum_{i \in \mathcal{N}} \lambda_i \right) \left(\sum_{i \in \mathcal{N}} \lambda_i^2 \ell_i^2 \right) + \eta_t \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(p), x_i^t - p_i \rangle \right]. \end{aligned}$$

Since $\eta_t = \frac{1}{2nL\sqrt{t}}$, we have

$$\begin{aligned} & \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^T) \right] + \frac{\beta \sqrt{T}}{4nL} \mathbb{E} \left[\sum_{i \in \mathcal{N}} \|x_i^T - p_i\|^2 \right] \leq \sum_{t=1}^{T-1} \eta_t \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(p), x_i^t - p_i \rangle \right] \\ & \quad + \sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^1) + \frac{\beta}{4nL} \left(\sum_{i \in \mathcal{N}} \|x_i^1 - p_i\|^2 \right) + \frac{1}{2n^2} \left(\sum_{i \in \mathcal{N}} n_i^2 \lambda_i \right) \left(\sum_{t=1}^{T-1} \frac{1}{t} \right) + \frac{1}{2\beta^2} \left(\sum_{i \in \mathcal{N}} \lambda_i \right) \left(\sum_{i \in \mathcal{N}} \lambda_i^2 \ell_i^2 \right) \left(\sum_{t=1}^{T-1} \frac{1}{t} \right) \end{aligned}$$

Rearranging the above inequality in the compact form and noting that $D_{R_i}(x_i^*, x_i^T) \geq 0$, we have

$$\begin{aligned} & \frac{\beta \sqrt{T}}{4nL} \mathbb{E} [\|x^T - p\|^2] \leq \sum_{t=1}^{T-1} \eta_t \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(p), x_i^t - p_i \rangle \right] \tag{31} \\ & \quad + \sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^1) + \frac{\beta}{4nL} \left(\sum_{i \in \mathcal{N}} B_i^2 \right) + \left(\frac{1}{2n^2} \left(\sum_{i \in \mathcal{N}} n_i^2 \lambda_i \right) + \frac{1}{2\beta^2} \left(\sum_{i \in \mathcal{N}} \lambda_i \right) \left(\sum_{i \in \mathcal{N}} \lambda_i^2 \ell_i^2 \right) \right) \log(T). \end{aligned}$$

By the initialization $x_i^1 = \operatorname{argmin}_{x \in \mathcal{X}} R_i(x)$, we have $\nabla R_i(x_i^1) = 0$ which implies that $D_{R_i}(p_i, x_i^1) = R_i(p_i) - R(x_i^1)$. Then, let us inspect each coordinate of a unique Nash equilibrium x^* and set p coordinate by coordinate in Eq. (31).

- A point $x_i^* \in \mathcal{X}_i$ satisfies that $\pi_{x_i^1}(x_i^*) \leq 1 - \frac{1}{\sqrt{T}}$. Then, by Lemma 2.4, we have

$$D_{R_i}(x_i^*, x_i^1) = R_i(x_i^*) - R_i(x_i^1) \leq \nu_i \log(T).$$

In this case, we choose $p_i = x_i^*$.

- A point $x_i^* \in \mathcal{X}_i$ satisfies that $\pi_{x_i^1}(x_i^*) > 1 - \frac{1}{\sqrt{T}}$. Then, we can always find $\bar{x}_i \in \mathcal{X}_i$ such that $\|\bar{x}_i - x_i^*\| = O(\frac{1}{\sqrt{T}})$ and $\pi_{x_i^1}(\bar{x}_i) \leq 1 - \frac{1}{\sqrt{T}}$. Then, by Lemma 2.4, we have

$$D_{R_i}(\bar{x}_i, x_i^1) = R_i(\bar{x}_i) - R_i(x_i^1) \leq \nu_i \log(T).$$

In this case, we choose $p_i = \bar{x}_i$.

For simplicity, we denote the set of coordinates in the former case by \mathcal{I} which implies that the set of coordinates in the latter case is $\mathcal{N} \setminus \mathcal{I}$. Then, Eq. (31) becomes

$$\begin{aligned}
& \frac{\beta\sqrt{T}}{4nL} \mathbb{E} \left[\sum_{i \in \mathcal{I}} \|x_i^T - x_i^*\|^2 + \sum_{i \in \mathcal{N} \setminus \mathcal{I}} \|x_i^T - \bar{x}_i\|^2 \right] \leq \sum_{t=1}^{T-1} \eta_t \mathbb{E} \left[\sum_{i \in \mathcal{I}} \lambda_i \langle \nabla_i u_i(x_{\mathcal{I}}^*, \bar{x}_{\mathcal{N} \setminus \mathcal{I}}), x_i^t - x_i^* \rangle \right] \\
& + \sum_{t=1}^{T-1} \eta_t \mathbb{E} \left[\sum_{i \in \mathcal{N} \setminus \mathcal{I}} \lambda_i \langle \nabla_i u_i(x_{\mathcal{I}}^*, \bar{x}_{\mathcal{N} \setminus \mathcal{I}}), x_i^t - \bar{x}_i \rangle \right] + \frac{\beta}{4nL} \left(\sum_{i \in \mathcal{N}} B_i^2 \right) \\
& + \left(\frac{1}{2n^2} \left(\sum_{i \in \mathcal{N}} n_i^2 \lambda_i \right) + \frac{1}{2\beta^2} \left(\sum_{i \in \mathcal{N}} \lambda_i \right) \left(\sum_{i \in \mathcal{N}} \lambda_i^2 \ell_i^2 \right) + \sum_{i \in \mathcal{N}} \nu_i \lambda_i \right) \log(T) \\
& = \sum_{t=1}^{T-1} \eta_t \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(x_{\mathcal{I}}^*, \bar{x}_{\mathcal{N} \setminus \mathcal{I}}), x_i^t - x_i^* \rangle \right] + \sum_{t=1}^{T-1} \eta_t \mathbb{E} \left[\sum_{i \in \mathcal{N} \setminus \mathcal{I}} \lambda_i \langle \nabla_i u_i(x_{\mathcal{I}}^*, \bar{x}_{\mathcal{N} \setminus \mathcal{I}}), x_i^t - \bar{x}_i \rangle \right] + O(\log(T)).
\end{aligned}$$

Since $\|\bar{x}_i - x_i^*\| = O\left(\frac{1}{\sqrt{T}}\right)$ and $x_i^*, \bar{x}_i \in \mathcal{X}_i$ where \mathcal{X}_i is convex and compact, we have

$$\mathbb{E} \left[\sum_{i \in \mathcal{N} \setminus \mathcal{I}} \|x_i^T - x_i^*\|^2 \right] \leq \mathbb{E} \left[\sum_{i \in \mathcal{N} \setminus \mathcal{I}} \|x_i^T - \bar{x}_i\|^2 \right] + O\left(\frac{1}{\sqrt{T}}\right).$$

Since $\nabla_i u_i$ is ℓ_i -Lipschitz continuous over \mathcal{X}_i and \mathcal{X}_i is compact, we have

$$\begin{aligned}
& \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(x_{\mathcal{I}}^*, \bar{x}_{\mathcal{N} \setminus \mathcal{I}}), x_i^t - x_i^* \rangle \right] \\
& \leq \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(x^*), x_i^t - x_i^* \rangle \right] + \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(x_{\mathcal{I}}^*, \bar{x}_{\mathcal{N} \setminus \mathcal{I}}) - \nabla_i u_i(x^*), x_i^t - x_i^* \rangle \right] \\
& \leq \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(x^*), x_i^t - x_i^* \rangle \right] + \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \|\nabla_i u_i(x_{\mathcal{I}}^*, \bar{x}_{\mathcal{N} \setminus \mathcal{I}}) - \nabla_i u_i(x^*)\| \|x_i^t - x_i^*\| \right] \\
& \leq \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(x^*), x_i^t - x_i^* \rangle \right] + \mathbb{E} \left[\left(\sum_{i \in \mathcal{N}} \lambda_i \ell_i \right) \left(\sum_{i \in \mathcal{N} \setminus \mathcal{I}} \|x_i^* - \bar{x}_i\| \right) \right] \\
& = \mathbb{E} \left[\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(x^*), x_i^t - x_i^* \rangle \right] + O\left(\frac{1}{\sqrt{T}}\right),
\end{aligned}$$

and

$$\sum_{i \in \mathcal{N} \setminus \mathcal{I}} \lambda_i \langle \nabla_i u_i(x_{\mathcal{I}}^*, \bar{x}_{\mathcal{N} \setminus \mathcal{I}}), x_i^* - \bar{x}_i \rangle \leq \sum_{i \in \mathcal{N} \setminus \mathcal{I}} \lambda_i \|\nabla_i u_i(x_{\mathcal{I}}^*, \bar{x}_{\mathcal{N} \setminus \mathcal{I}})\| \|x_i^* - \bar{x}_i\| = O\left(\frac{1}{\sqrt{T}}\right).$$

Putting these pieces together yields that

$$\mathbb{E} \left[\sum_{i \in \mathcal{N}} \|x_i^T - x_i^*\|^2 \right] \leq \frac{4nL}{\beta\sqrt{T}} \mathbb{E} \left[\sum_{t=1}^{T-1} \eta_t \left(\sum_{i \in \mathcal{N}} \lambda_i \langle \nabla_i u_i(x^*), x_i^t - x_i^* \rangle \right) \right] + O\left(\frac{\log(T)}{\sqrt{T}}\right).$$

Since x^* is a Nash equilibrium, we have $\sum_{i \in \mathcal{N}} \langle \nabla_i u_i(x^*), x_i - x_i^* \rangle \leq 0$ for all $x \in \mathcal{X}$. This together with the above inequality yields that

$$\mathbb{E} \left[\sum_{i \in \mathcal{N}} \|x_i^T - x_i^*\|^2 \right] = \tilde{O} \left(\frac{1}{\sqrt{T}} \right).$$

By the definition of \hat{x}^t , we have

$$\begin{aligned} \mathbb{E} \left[\sum_{i \in \mathcal{N}} \|\hat{x}_i^T - x_i^*\|^2 \right] &\leq 2\mathbb{E} \left[\sum_{i \in \mathcal{N}} \|\hat{x}_i^T - x_i^T\|^2 \right] + 2\mathbb{E} \left[\sum_{i \in \mathcal{N}} \|x_i^T - x_i^*\|^2 \right] \leq 2\mathbb{E} \left[\sum_{i \in \mathcal{N}} \|A_i^t\|_2^2 \right] + \tilde{O} \left(\frac{1}{\sqrt{T}} \right) \\ &= 2\mathbb{E} \left[\sum_{i \in \mathcal{N}} (\sigma_{\max}(A_i^T))^2 \right] + \tilde{O} \left(\frac{1}{\sqrt{T}} \right) \stackrel{\text{Eq. (29)}}{\leq} \frac{4nL(\sum_{i \in \mathcal{N}} \lambda_i)}{\beta\sqrt{T}} + \tilde{O} \left(\frac{1}{\sqrt{T}} \right) = \tilde{O} \left(\frac{1}{\sqrt{T}} \right). \end{aligned}$$

This concludes the proof.

F Imperfect Bandit Feedback

We turn to the imperfect bandit feedback setting and prove that Algorithm 2 still achieves the $\tilde{O}(1/\sqrt{T})$ rate of last-iterate convergence to a (necessarily) unique Nash equilibrium. In particular, we assume that each player $i \in \mathcal{N}$ has access to a “black box” feedback mechanism — *an oracle* — which returns an estimate of their payoff functions at their current action profile. This information can be imperfect for a multitude of reasons: for instance, (i) estimates may be susceptible to random measurement errors; (ii) the transmission of this information could be subject to noise; and/or (iii) the game’s payoff functions may be stochastic expectations of the form

$$u_i(x) = \mathbb{E}[\hat{u}_i(x, \omega)] \quad \text{for some random variable } \omega.$$

With all this in mind, we will explore the noisy bandit feedback setting: $\hat{u}_i^t \leftarrow u_i(\hat{x}^t) + \xi_{i,t}$ where the noise process $\xi_t = (\xi_{i,t})_{i \in \mathcal{N}}$ is a bounded martingale difference adapted to the history $(\mathcal{F}_t)_{t=1}^\infty$ of \hat{x}^t (i.e., ξ_{t-1} is \mathcal{F}_t -measurable but ξ_t is not). More specifically, this implies that $(\xi_t)_{t \geq 1}$ satisfies the statistical hypotheses (almost surely): (i) *Zero-mean*: $\mathbb{E}[\xi_{i,t} \mid \mathcal{F}_t] = 0$; and (ii) *Boundedness*: $\|\xi_{i,t}\| \leq \sigma$ for some constant $\sigma \geq 0$. Alternatively, the above conditions simply posit that the players’ individual payoff estimates are conditionally unbiased and the difference remains bounded, i.e.,

$$\mathbb{E}[\hat{u}_i^t \mid \mathcal{F}_t] = u_i(\hat{x}^t), \quad \|\hat{u}_i^t - u_i(\hat{x}^t)\| \leq \sigma, \quad \text{for all } i \in \mathcal{N}.$$

The above conditions are satisfied by a broad range of error processes, including all compactly supported distributions⁷; further, many applications in operations research, control, network theory, and machine learning can be used as motivations for the bounded noise framework.

Theorem F.1 *Suppose that $x^* \in \mathcal{X}$ is a unique Nash equilibrium of a smooth and λ -strongly monotone game. Each payoff function u_i satisfies that $|u_i(x)| \leq L$ for all $x \in \mathcal{X}$. If each player follows Algorithm 2*

⁷In particular, we will not be assuming i.i.d. errors; this point is crucial for applications to distributed control where measurements are typically correlated with the state of the system.

with parameters $\eta_t = \frac{1}{2n(L+\sigma)\sqrt{t}}$ and $\xi_{i,t} > 0$ satisfies the aforementioned statistical hypotheses (almost surely), we have

$$\mathbb{E} \left[\sum_{i \in \mathcal{N}} \|\hat{x}_i^T - x_i^*\|^2 \right] = \tilde{O} \left(\frac{1}{\sqrt{T}} \right).$$

Proof. The key is to establish a descent lemma for the iterates generated by Algorithm 2 with the fully adaptive stepsize when only the imperfect bandit feedback is available ($\xi_{i,t} > 0$).

Lemma F.2 *Suppose that the iterate $\{x^t\}_{t \geq 1}$ is generated by Algorithm 2 and each function u_i satisfies that $|u_i(x)| \leq L$ for all $x \in \mathcal{X}$, we have*

$$\begin{aligned} & \sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^{t+1}) + \frac{\eta_t \beta(t+1)}{2} \left(\sum_{i \in \mathcal{N}} \|x_i^{t+1} - p_i\|^2 \right) \\ & \leq \sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^t) + \frac{\eta_t \beta(t+1)}{2} \left(\sum_{i \in \mathcal{N}} \|x_i^t - p_i\|^2 \right) + 2\eta_t^2 \left(\sum_{i \in \mathcal{N}} \lambda_i \|A_i^t \hat{v}_i^t\|^2 \right) + \eta_t \left(\sum_{i \in \mathcal{N}} \lambda_i \langle \hat{v}_i^t, x_i^t - p_i \rangle \right). \end{aligned}$$

where $p_i \in \mathcal{X}_i$ and $\{\eta_t\}_{t \geq 1}$ is a nonincreasing sequence satisfying that $0 < \eta_t \leq \frac{1}{2n(L+\sigma)}$.

Proof. Using the same argument as in Lemma 4.3, we have

$$\begin{aligned} & \sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^{t+1}) + \frac{\eta_t \beta(t+1)}{2} \left(\sum_{i \in \mathcal{N}} \|x_i^{t+1} - p_i\|^2 \right) \tag{32} \\ & \leq \sum_{i \in \mathcal{N}} \lambda_i D_{R_i}(p_i, x_i^t) + \frac{\eta_t \beta(t+1)}{2} \left(\sum_{i \in \mathcal{N}} \|x_i^t - p_i\|^2 \right) + \eta_t \left(\sum_{i \in \mathcal{N}} \lambda_i \langle \hat{v}_i^t, x_i^{t+1} - x_i^t \rangle \right) + \eta_t \left(\sum_{i \in \mathcal{N}} \lambda_i \langle \hat{v}_i^t, x_i^t - p_i \rangle \right). \end{aligned}$$

Next, we bound the term $\langle \hat{v}_i^t, x_i^{t+1} - x_i^t \rangle$ using Lemma 2.5. Indeed, we define the function g by

$$g(x_i) = \eta_t \langle \hat{v}_i^t, x_i^t - x_i \rangle + \frac{\eta_t \beta(t+1)}{2\lambda_i} \|x_i^t - x_i\|^2 + D_{R_i}(x_i, x_i^t).$$

and apply the same argument as in Lemma 4.3. The only difference is that we have a new upper bound for the term $\|A_i^t \hat{v}_i^t\|$ here:

$$\|\hat{v}_i^t\|_{x_i^t, \star} = \|A_i^t \hat{v}_i^t\| = n |u_i(x^t + A^t z^t) + \xi_{i,t}| \|z_i^t\| \leq n |u_i(x^t + A^t z^t) + \xi_{i,t}|.$$

Combining the above inequality with the fact that $0 < \eta_t \leq \frac{1}{2n(L+\sigma)}$ gives $\lambda(x^t, g) \leq \frac{1}{2}$. Therefore, by Lemma 2.5, we have $\|x_i^{t+1} - x_i^t\|_{x_i^t} \leq 2\eta_t \|\hat{v}_i^t\|_{x_i^t, \star}$. This together with the Hölder's inequality yields that

$$\langle \hat{v}_i^t, x_i^{t+1} - x_i^t \rangle \leq \|\hat{v}_i^t\|_{x_i^t, \star} \|x_i^{t+1} - x_i^t\|_{x_i^t} \leq 2\eta_t \|\hat{v}_i^t\|_{x_i^t, \star}^2 = 2\eta_t \|A_i^t \hat{v}_i^t\|^2.$$

Plugging the above inequality into Eq. (32) yields the desired inequality. \square

Since the inequality in Lemma F.2 is the same as that derived in Lemma 4.3, we can prove Theorem F.1 by applying the same argument used in Theorem 4.1. \square

Remark F.3 *Theorem F.1 shows that Algorithm 2 can still achieve the near-optimal rate of last-iterate convergence in more challenging environment in which the bandit feedback is imperfect with zero-mean and bounded noises. Can we generalize the proposed algorithm to handle more general noises, e.g., the one with bounded variance? We leave the answers to future work.*