TRANSLOG: A Unified Transformer-based Framework for Log Anomaly Detection

Hongcheng Guo^{1*} , Xingyu Lin^{4*} , Jian $Yang^1$, Yi Zhuang 2 , Jiaqi Bai^1 , Tieqiao Zheng 3 , Liangfan Zheng 3 , Weichao Hou^3 , Bo Zhang 3 , Zhoujun $Li^{1\dagger}$

¹State Key Lab of Software Development Environment, Beihang University ²Bio-robot and human-computer interaction laboratory, Waseda University ³Cloudwise Research ⁴University of Southern California

{hongchengguo, jiaya, jiaqi, lizj}@buaa.edu.cn, linxingy@usc.edu,

syouyi2020@asagi.waseda.jp {steven.zheng,liangfan.zheng,william.hou,bowen.zhang}@cloudwise.com

Liberty:

Abstract

Log anomaly detection is a key component in the field of artificial intelligence for IT operations (AIOps). Considering log data of variant domains, retraining the whole network for unknown domains is inefficient in real industrial scenarios especially for low-resource domains. However, previous deep models merely focused on extracting the semantics of log sequences in the same domain, leading to poor generalization on multidomain logs. To alleviate this issue, we propose a unified Transformer-based framework for Log anomaly detection (TRANSLOG), which is comprised of the pretraining and adapter-based tuning stage. Our model is first pretrained on the source domain to obtain shared semantic knowledge of log data. Then, we transfer the pretrained model to the target domain via adapter-based tuning. The proposed method is evaluated on three public datasets including one source domain and two target domains. Experimental results demonstrate that our simple yet efficient approach, with fewer trainable parameters and lower training costs in the target domain, achieves state-of-the-art performance on three benchmarks1.

1 Introduction

With the rapid development of large-scale IT systems, numerous companies have an increasing demand for high-quality cloud services. Anomaly detection [Breier and Branišová, 2015] is a critical substage to monitoring data peculiarly for logs, which describe detailed system events at runtime and the intention of users in the large-scale services [Zhang et al., 2015]. The field of artificial intelligence for IT operations (AIOps) [Dang et al., 2019] intends to empower IT operations by integrating advanced deep learning algorithms to meet these challenges, which ensures the stability of company data and maintain high efficiency simultaneously.

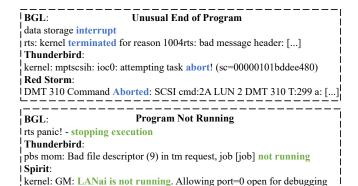


Figure 1: The same anomaly from multiple domains. The top part denotes the "Unusual End of Program" anomaly from three domains including BGL, Thunderbird, and Red Storm while the bottom part is the "Program Not Running" from four domains including BGL, Thunderbird, Spirit, and Liberty.

kernel: GM: LANai is not running. Allowing port=0 open for debugging

Large-scale services are usually implemented by hundreds of developers, it is error-prone to detect anomalous logs from a local perspective. In this case, some automatic detection methods based on machine learning are proposed [Xu et al., 2010]. Due to the development of IT services, the volume of log data has grown to the point where traditional approaches are infeasible. Therefore, research has turned to deep learning methods [Zhang et al., 2016; Du et al., 2017; Zhang et al., 2019; Meng et al., 2019]. As log messages are half-structured and have their semantics, which is similar to natural language corpus, language models like LSTM and Transformer are leveraged to obtain semantics in logs. Recently proposed methods even adopt fashion pretrained models like BERT [Devlin et al., 2018], GPT2 [Radford et al., 2018] for better embedding representation.

We observe that logs from different sources have the same anomalous categories. Despite being different in morphology and syntax, logs of multiple domains are semantically similar. For example, in Figure 1, three sources (BGL, Thunderbird, Red Storm) all have the anomaly called the unusual end of program, thus we naturally think if the model can identify the

^{*}Equal contribution.

[†]Corresponding author.

¹We will release the pretrained model and code.

same anomalies in all domains with shared semantic knowledge. However, existing approaches mostly focus on a single domain, when new components from a different/similar domain are introduced to the system, they lack the ability to accommodate such unseen log messages. In addition, we need to consider the continuous iteration of log data when system upgrades, which is costly to retrain different copies of the model. Therefore, a method based on transfer learning is required to perform well on logs from multiple domains.

In this paper, we address the problems above via a twostage solution called TRANSLOG. TRANSLOG is capable of preserving the shared semantic knowledge between different domains. More specifically, we first create a neural network model based on the self-attention mechanism, which is pretrained on the source domain to obtain common semantics of log sequences. Second, TRANSLOG utilizes a flexible pluginin component called adapter to transfer knowledge from the source domain to the target domain.

Generally, the main contributions of this work are listed as follows: (i) We propose TRANSLOG, an end-to-end framework using Transformer encoder architecture to automatically detect log anomalies. (ii) With only a few additional trainable parameters on the target domain, TRANSLOG allows a high degree of parameter-sharing while reducing time and calculation consumption. (iii) Our TRANSLOG performs well under different amounts of training data, especially when the training data is low-resource. (iv) The proposed approach is evaluated against three public datasets: HDFS, BGL, and Thunderbird. TRANSLOG reaches state-of-the-art performance on all these three datasets.

2 Background

Log Parsing The purpose of log parsing is to convert unstructured log data into the structured event template by removing parameters and keeping keywords [Jiang et al., 2008; Makanju et al., 2009]. The previous work Drain [He et al., 2017] adopts a fixed-depth tree structure to split the log data and extracts structured templates. Spell [Du and Li, 2016] applies the longest common subsequence algorithm to parse logs efficiently. In Figure 2, we utilize Drain to extract all the templates, and then each log message and the corresponding template is matched. Next, the whole log template sequence is fed into anomaly detection models.

Adapter-based Tuning Adapter-based tuning [Houlsby et al., 2019; Bapna and Firat, 2019] is proved to be a parameter-efficient alternative in many NLP tasks. The structure of adapters is lightweight, which is usually composed of simple projection layers. Adapters are always inserted between transformer layers [Vaswani et al., 2017]. When tuning the model on downstream tasks, only the parameters of adapters are updated while the weights of the pretrained model are frozen. Thus, though utilizing much less trainable parameters compared to full fine-tuning [Devlin et al., 2018; Stickland and Murray, 2019], adapter-based tuning reaches comparable performance. In this paper, we design our adapter layer as one down-projection layer, one activation layer, and one up-projection layer in Figure 4.

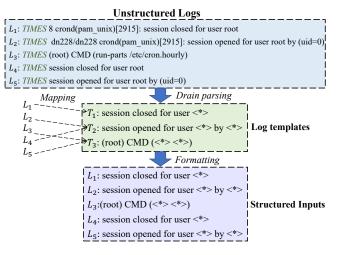


Figure 2: Logs and Templates. The top part is unstructured logs, we adopt Drain algorithm to extract log templates, then we match each log with its template, which is the middle part. The bottom part is structured inputs.

Log Anomaly Detection There are two main methods for log anomaly detection, including supervised and unsupervised methods. Supervised methods are often classificationbased methods [Breier and Branišová, 2015; Huang et al., 2020; Lu et al., 2018; Wittkopp et al., 2021b]. LogRobust [Zhang et al., 2019] utilizes both normal and abnormal log data for training based on the Bi-LSTM architecture. Furthermore, Neurallog [Le and Zhang, 2021] uses BERT to transform raw log messages into semantic embeddings without log parsing. However, obtaining systemspecific labeled samples is costly and impractical. Some unsupervised methods [Xu et al., 2010; Yang et al., 2021; Wittkopp et al., 2021a] have been proposed to alleviate such burden. DeepLog [Du et al., 2017] utilizes the LSTM network to forecast the next log sequence with the ranked probabilities. Besides, LogAnomaly [Meng et al., 2019] utilizes the embeddings of logs to capture the semantic information.

Although these methods attain the improvement of performance, they ignore sharing semantics between multiple log sources, mainly focusing on tackling the single log source setting. Our TRANSLOG leverages such semantic knowledge efficiently based on the Transformer-adapter architecture.

3 TRANSLOG

In this section, we describe the general framework for log anomaly detection, named TRANSLOG. The architecture of the TRANSLOG is shown in Figure 3, which contains two stages: pretraining and adapter-based tuning. The following parts start with the definition of the problem, and then the components of the backbone model are presented. Afterward, we illustrate the exhaustive procedure of two stages.

3.1 Problem Definition

Log anomaly detection problem is defined as a dichotomy problem. The model is supposed to determine whether the in-

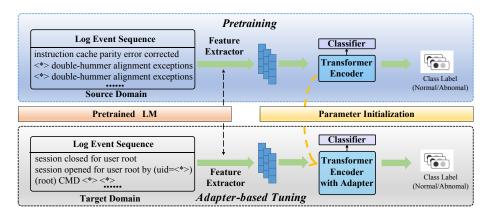


Figure 3: Overview of our proposed architecture. All log event sequence is first fed into the pretrained language model to extract the representations. The Transformer encoder is trained on the high-resource source-domain dataset to acquire shared semantic information. Then, we initialize the Transformer encoder and only tune the parameters of the adapter on the target-domain dataset to transfer the knowledge from the source domain to the target domain.

put log is abnormal or normal. For the source domain, assuming that through preprocessing, we achieve the vector representations of K_{src} log sequences, which is denoted as $S^{src} = \{S_k\}_{k=1}^{K_{src}}$. Then, $S_i^{src} = \{V_t^{src}\}_{t=1}^{T_i^{src}}$ denotes the i-th log sequence, where T_i^{src} is the length of the i-th log sequence. For the target domain, $S^{tgt} = \{S_k^{tgt}\}_{k=1}^{K_{tgt}}$ denotes the representations of K_{tgt} log sequences. $S_j^{tgt} = \{V_t^{tgt}\}_{t=1}^{T_i^{tgt}}$ denotes the i-th log sequence, where T_i^{tgt} is the length of the i-th log sequence. Therefore, the training procedure is defined as follows. We first pretrain the model on the source-domain dataset as below:

$$f_p(y_i|S_i^{src};\Theta)), (1)$$

where f_p represents the pretraining stage, Θ is the parameter of the model in pretraining stage. Then, the model is transferred to the target-domain as below:

$$f_a(y_j|S_j^{src};\Theta_f,\theta_a).$$
 (2)

where f_a represents the adapter-based tuning stage. Θ_f is the parameter of the transformer encoder transferred from the pretraining stage, which is frozen in adapter-based tuning stage. θ_a is the parameter of the adapter. y is the groundtruth. Through Equation 1 and 2, TRANSLOG learns the semantic representation of template sequences between domains.

3.2 Backbone Model

Feature Extractor The feature extractor converts session sequences (template sequence) to vectors with the same dimension d. Here we use the pretrained sentence-bert[Reimers and Gurevych, 2019] model to get the template sequence representation. Recently some methods extract semantic representation from raw log messages, they believe it could prevent the loss of information due to log parsing errors. However, embedding every log message is not realistic considering a large amount of log data. Studies also show that almost all anomalies could be detected by template sequence, even if there are parsing errors. Thus, we only embed all existing log templates. Each session has l fixed length, so through the layer, we can obtain the $X \in \mathbb{R}^{l \times d}$ for each session.




Figure 4: Encoder with light adapter. Where N is the number of transformer layers. The left part describes the traditional transformer encoder inserted by adapters, the right part is our light adapter, which is composed of the down- and up-projection layers.

Encoder with Light Adapter As shown in Figure 4, To better encode the corresponding feature of inputs, we use the transformer encoder as the backbone model. By doing so, our encoder with self-attention mechanism overcomes the limitations of RNN-based models. The core self-attention mechanism is formally written as:

$$Attention(Q, K, V) = softmax(\frac{QK^{T}}{\sqrt{d/heads}})V. \quad \ (3)$$

where heads is the number of the heads, d denotes the dimension of the input, and Q,K,V represent queries, keys, and values, respectively.

The order of a log sequence conveys information of the program execution sequence. Wrong execution order is also considered abnormal. Thus, constant positional embedding is also used. Component after self-attention layer and feedforward layer is the adapter. It's a lightweight neural network between the transformer layers. When tuning a pretrained language model to a new domain, adapters are inserted. During adapter-based tuning, only a few parameters of the adapters are updated on the target domain. More specifically, we use down- and up-scale neural networks as the adapter. Two pro-

jection layers in adapter first map hidden vector from dimension d to dimension m and then map it back to d. The adapter also has a skip-connection operation internally. The output vector h' of the adapter is calculated as follow:

$$h' = W_{up} tanh(W_{down}h) + h. (4)$$

where $h \in \mathbb{R}^d$ represents a given hidden vector. $W_{down} \in \mathbb{R}^{m \times d}$ and $W_{up} \in \mathbb{R}^{d \times m}$ is the down-projection and the upprojection matrix respectively, by setting m << d, we limit the number of parameters added per adapter, which is the core to reduce trainable parameters while retaining semantic information to the maximum extent.

3.3 Pretraining

Inspired by the BERT model [Devlin et al., 2018], which takes a self-supervised method to learn general language features that further be utilized to serve different downstream tasks, we acquire the common reason for log anomaly with the stacked transformer encoder. In this stage, the pretrained model learns the commonalities among different anomalies from the semantic level, which contributes significantly to the anomalous detection for new log sources. More specifically, the objective of this stage is the same as anomaly detection, which is a supervised classification task without adapters in the model. Then, the parameters of the transformer encoder, which is trained during this stage, are shared to the next stage. After parameter initialization, we freeze these parameters during the adapter-based tuning stage.

3.4 Adapter-based Tuning

When tuning a pretrained model from the source domain to a target domain, the way of adapter-based tuning leverages the knowledge obtained from the pretraining stage with lightweight adapters, which are neural networks like [Houlsby et al., 2019]. In this paper, our adapter is composed of one down-projection layer, one activation layer, and one up-projection layer in Figure 4. Through the pretraining stage, we achieve the pretrained model, thus in this second stage, we plug adapters into the transformer layers of the pretrained model, afterward, only the parameters of the adapters are updated during target domain adaption. Parameters of the multi-headed attention and the feedforward layers in the pretrained model are frozen. Unlike fine-tuning, TRANSLOG provides a plug-in mechanism to reuse the pretrained model with only a few additional trainable parameters, without updating the entire model for a new domain in this stage.

3.5 Training Strategy

In this work, we both adopt BCE loss for two stages. Thus, we define the objective loss of the pretraining stage as below.

$$\mathcal{L}_p = -\mathbb{E}_{x,y \in D_{x,y}^{src}}[\log P(y|x;\Theta)], \tag{5}$$

where \mathcal{L}_p represents the loss in the pre-training stage. Θ is the parameter of the whole model in the pretraining stage. x and y are the input data and label respectively, $D_{x,y}^{src}$ represents the data coming from the source domain. Then, we define the objective loss in the adapter-based tuning stage as below.

$$\mathcal{L}_a = -\mathbb{E}_{x,y \in D_{x,y}^{tgt}} [\log P(y|x;\Theta_f, \theta_a)]. \tag{6}$$

Dataset	Category	#Messages	#Anomaly	#Templates
HDFS	Distributed	11M	17K	49
BGL	Supercomputer	5M	20K	423
Thunderbird	Supercomputer	10M	123K	1292

Table 1: A summary of the datasets used in this work. Messages are the raw log strings. Samples are log sequences extracted by ID or sliding window of size 20.

where \mathcal{L}_a is the loss function in the adapter-based tuning stage. Θ_f is the parameter of the encoder module trained in the pretraining stage, which is frozen in the adapter-based tuning stage. θ_a is the parameter of the adapter. $D_{x,y}^{tgt}$ represents the data coming from the target domain.

4 Experiments

In this section, the comprehensive settings of the experiment are illustrated. Afterward, we experiment on three public datasets coming from LogHub [He *et al.*, 2020]. Compared with baseline methods, our TRANSLOG reaches the state-of-the-art performance on all datasets.

Datasets We conduct experiments on three public datasets, which is described in Table 1. 10M/11M/5M continuous log messages from Thunderbird/HDFS/BGL are separately leveraged, which is used in prior work [Yao et al., 2020; Le and Zhang, 2021]. HDFS [Xu et al., 2010] dataset is generated and collected from the Amazon EC2 platform through running Hadoop-based map-reduce jobs. It contains messages about blocks that assign a unique ID to the raw logs. Thunderbird and BGL datasets[Oliner and Stearley, 2007] contain logs collected from a two supercomputer system at Sandia National Labs (SNL) in Albuquerque. The log contains alert and non-alert messages identified by alert category tags. Each log message in the datasets was manually labeled as anomalous or not.

Preprocessing Different datasets require preprocessing correspondingly. We extract log sequences by block IDs for HDFS, since logs in HDFS with the same block ID are correlated. BGL and Thunderbird do not have such IDs, so we utilize a sliding window(size of 20) without overlap to generate a log sequence. 1 shows the detail of datasets. We adopt Drain[He *et al.*, 2017] with specifically designed regex to do log parsing, due to its high efficiency. Number of anomaly is counted based on window. Windows containing anomalous message are considered as anomalies, thus it's less than the number of anomalous log messages. For each dataset, we select the first 80% (according to the timestamps of logs) log sequences for training and the rest 20% for testing.

Implementation Details In the experiment, we try a different number of transformer encoder layers in $\{1, 2, 4\}$. The number of attention heads is 8, and the size of the feedforward network that takes the output of the multi-head self-attention mechanism is 3072. We optimize using Adam way whose learning rate is scheduled by OneCycleLR, with $\beta_1 = 0.9$, $\beta_2 = 0.99$, and $\varepsilon = 10^{-8}$. All runs are trained on 4 NVIDIA v100 with a batch size of 64. For each dataset,

Dataset	Method	Precision Recall		F ₁ Score
	LR	0.96	0.91	0.93
	SVM	0.96	0.97	0.97
HDFS	DeepLog	0.95	0.96	0.96
	LogAnomaly	0.96	0.94	0.96
	LogRobust	0.98	0.98	0.98
	Neurallog	0.96	1	0.98
	TRANSLOG	0.99	0.99	0.99
	LR	0.78	0.79	0.78
	SVM	0.89	0.86	0.87
	DeepLog	0.90	0.83	0.86
BGL	LogAnomaly	0.97	0.94	0.96
	LogRobust	0.62	0.96	0.73
	NeuralLog	0.61	0.78	0.68
	TRANSLOG	0.98	0.98	0.98
	LR	0.46	0.91	0.61
	SVM	0.34	0.91	0.50
	DeepLog	-	-	-
Thunderbird	LogAnomaly	0.61	0.78	0.68
	Logrobust 0.61		0.78	0.68
	NeuralLog 0.93		1	0.96
	TRANSLOG	0.99	0.99	0.99

Table 2: Experimental results compared with baseline models on Thunderbird, BGL and HDFS. The best results are highlighted.

we tune the maximum learning of OneCycleLR scheduler in $\{1e-5, 5e-5, 1e-6\}$.

Baselines and Evaluation We compare TRANSLOG with the six baseline methods, including Logistic Regression(LR), Support Vector Machine(SVM), Deeplog [Du et al., 2017], LogAnomaly [Meng et al., 2019], LogRobust [Zhang et al., 2019] and Neurallog [Le and Zhang, 2021] on the three datasets. These methods are in two categories: machine learning and neural network approaches. Traditional approaches usually build models by transforming the log sequence into log count vectors while neural network approaches leverage word or contextual embeddings to represent log sequences. In our experiments, we use precision $(\frac{TP}{TP+FP})$, recall $(\frac{TP}{TP+FN})$ and F_1 score $(\frac{2*Precision*Recall}{Precision+Recall})$ to compare our method and previous baselines.

Main Results To test the effectiveness of TRANSLOG, we compare the proposed algorithm with baseline methods on HDFS, Thunderbird, and BGL benchmarks. As is shown in TABLE. 2. Our TRANSLOG achieves the highest F_1 score on all three datasets, confirming the effectiveness and generalization of TRANSLOG. To obtain our main results, BGL is pretrained as the source domain in the first stage, while HDFS and Thunderbird are selected as the target domain in the adapter-based tuning stage. We provide a thorough analysis of our model in Section 5.

5 Analysis

In this section, we conduct the ablation study in four aspects for a penetrating analysis of TRANSLOG, including the effect of the pretrained model, the gap between pretrained log models, the efficiency of adapter-based tuning, and the lowresource study.

Effect of Pretrained Log Model To demonstrate the feasibility of transferring semantic information between various

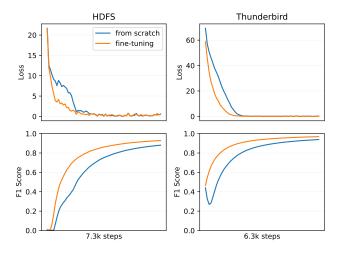


Figure 5: Loss and F_1 score on the dev set w.r.t training steps. The left/right part represents Loss/ F_1 score of the HDFS/Thunderbird. We compare two ways of training including training from scratch and fine-tuning from model pretrained on BGL. All results are using 1-layer Transformer encoder and the same learning rate.

domains, we compare the performance of two training techniques, namely training from scratch and fine-tuning. Here, the way of fine-tuning is to update the parameter of the whole pretrained model. We choose BGL as the source domain for its variety in log templates and its huge data volume. Besides, from the perspective of system kinds, HDFS is a distributed system while Thunderbird is a supercomputer system similar to BGL. Thus, experiments on such different log data distributions can demonstrate both the transferability of semantic knowledge and the effectiveness of TRANSLOG.

We compare two methods in terms of their rate of convergence and final results. Figure 5 displays the loss curves and F_1 score curves w.r.t training steps. The results show that fine-tuning converges faster than training from scratch, which demonstrates that semantic knowledge the pretrained model learned is valuable, besides it also shows the power of the model to transfer information between domains. We furthermore discover that fine-tuning is more stable with a smoother curve, which is more obvious on Thunderbird, illustrating that similar domains share semantics more efficiently.

Due to TRANSLOG achieves good performance even trained from scratch, the final F_1 scores of two methods are close. By observing the F_1 score curve, we discover that fine-tuning requires fewer training steps to gain the best result, which is noteworthy for reducing costs in industrial scenes.

Gap between Pretrained Log Models We analyzed the effectiveness of the pretrained log model. The experimental results show the feasibility of pre-training, but we can not explain whether the performance improvement comes from the pretraining way or the pretrained model itself. Therefore, in this part, we adopt different pretrained log models to analyze the gap between pretrained log models. Specifically, we utilize BGL and Thunderbird as the source data respectively. Figure 6 shows the loss curves of the two training strategies

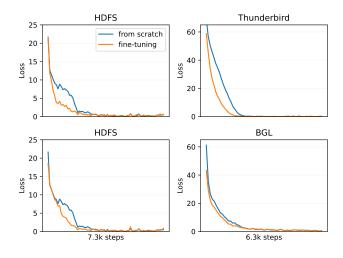


Figure 6: Loss on the dev set w.r.t training steps. The upper/bottom results are based on parameters pretrained on BGL/Thunderbird, thus BGL/Thunderbird are not shown. All results are using 1-layer Transformer encoder and the same learning rate.

on the target source. From the curves, we can see that the finetuning loss of each model decreases faster than training from scratch. At the same time, comparing the two pre-training models, it is obvious that, for the HDFS dataset, the model pretrained on BGL brings greater performance improvement. In conclusion, different pre-training models provide different gains for model performance, which is the gap between pretrained log models.

Efficiency of Adapter-based Tuning Although we have verified that parameters transfer could accelerate convergence without reducing performance, fine-tuning each component is expensive and inconvenient. Thus, we adopt a parameter-efficient strategy, called adapter-based tuning, to allow a high degree of sharing knowledge between domains. By utilizing the adapter, we acquire a compact model for log anomaly detection by adding a few additional parameters.

To confirm the efficiency of our TRANSLOG, general transfer performance of fine-tuning and adapter-based tuning are compared. Experiments are based on a model trained on the BGL and Thunderbird datasets. On each dataset, we utilize batch size 64 and tune the model in learning rate selected from $\{1e-5, 5e-5, 1e-6\}$. Results show that 5e-5 is the most satisfactory for HDFS, 1e-5 is the best for Thunderbird. We conduct the ablation study by adjusting the number of encoder layers in $\{1, 2, 4\}$. Table 3 summarizes the results. We observe that our TRANSLOG with adapters generates a competitive score but adopts 3.5% - 5.5% of the parameters in the whole original model. In addition, experiments on the various number of transformer encoders are executed. Results indicate that more encoder layers for fine-tuning do not always generate better results. Simultaneously, adapter-based tuning performs more robust when we stack more encoder layers.

Low-resource Study To verify the influence of training size, we plot the performances with a varying number of training samples in Figure 7. It presents the comparison re-

Method	Layers	Parameters	HDFS	Thunderbird
Fine-tuning	1	7.2M	0.998	0.997
	2	14.3M	0.998	0.997
	4	28.5M	0.997	0.998
Adapter	1	0.4M	0.997	0.990
	2	0.6M	0.997	0.996
	4	1M	0.998	0.996

Table 3: Transfer result using fine-tuning and adapter based fine-tuning. *Layers* is the number of transformer encoder layers. *Parameters* is the number of trainable parameters in the model.

sults on the BGL dataset. We consider tasks with fewer than 50k training examples as low-resource tasks, as log data is easy to obtain and be labeled manually. We train models for 30 epochs to make sure they are sufficiently trained.

We find that adapter-based tuning consistently outperforms training and fine-tuning. The improvement is more significant when the training size is small. With the number of training samples increasing, both methods will gradually catch up and finally achieve similar results. Another finding is that the quality of the model across runs is more robust, with a similar standard deviation across different training sizes. However, training and fine-tuning yield large variances when the number of the training sample is 5k and 20k.

To summarize, adapter tuning is highly parameter-efficient, and shared parameters contain semantic information that helps the model to detect anomalies. Training adapters with sizes less than 5%, performance decreases nearly 1%.




Figure 7: Test performance on BGL (pretrained on Thunderbird) w.r.t.the number of training examples. 5k, 10k, 20k, 50k corresponding to the font 2.5%, 5%, 10%, 25% training data respectively. We show mean and standard deviation across 3 runs for all methods.

6 Conclusion

In this paper, we propose TRANSLOG, a unified transformerbased framework for log anomaly detection, which contains the pretraining stage and the adapter-based tuning stage. Extensive experiments demonstrate that our TRANSLOG, with fewer trainable parameters and lower training costs, outperforms all previous baselines. We foresee the semantic migration between log sources for a unified multiple sources detection

References

- [Bapna and Firat, 2019] Ankur Bapna and Orhan Firat. Simple, scalable adaptation for neural machine translation. In *EMNLP 2019*, pages 1538–1548, 2019.
- [Breier and Branišová, 2015] Jakub Breier and Jana Branišová. Anomaly detection from log files using data mining techniques. In *Information Science and Applications*. 2015.
- [Dang et al., 2019] Yingnong Dang, Qingwei Lin, and Peng Huang. Aiops: real-world challenges and research innovations. In ICSE 2019, 2019.
- [Devlin *et al.*, 2018] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *NAACL* 2019, 2018.
- [Du and Li, 2016] Min Du and Feifei Li. Spell: Streaming parsing of system event logs. In *ICDM* 2016, 2016.
- [Du *et al.*, 2017] Min Du, Feifei Li, Guineng Zheng, and Vivek Srikumar. Deeplog: Anomaly detection and diagnosis from system logs through deep learning. In *CCS* 2017, 2017.
- [He *et al.*, 2017] Pinjia He, Jieming Zhu, Zibin Zheng, and Michael R Lyu. Drain: An online log parsing approach with fixed depth tree. In *ICWS* 2017, pages 33–40, 2017.
- [He *et al.*, 2020] Shilin He, Jieming Zhu, Pinjia He, and Michael R. Lyu. Loghub: A large collection of system log datasets towards automated log analytics. *CoRR*, abs/2008.06448, 2020.
- [Houlsby *et al.*, 2019] Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin De Laroussilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. Parameter-efficient transfer learning for nlp. In *ICML* 2019, 2019.
- [Huang *et al.*, 2020] Shaohan Huang, Yi Liu, Carol Fung, Rong He, Yining Zhao, Hailong Yang, and Zhongzhi Luan. Hitanomaly: Hierarchical transformers for anomaly detection in system log. *TNSM*, 17(4):2064–2076, 2020.
- [Jiang *et al.*, 2008] Zhen Ming Jiang, Ahmed E. Hassan, Parminder Flora, and Gilbert Hamann. Abstracting execution logs to execution events for enterprise applications (short paper). In *QSIC 2008*, pages 181–186, 2008.
- [Le and Zhang, 2021] Van-Hoang Le and Hongyu Zhang. Log-based anomaly detection without log parsing. *arXiv* preprint arXiv:2108.01955, abs/2108.01955, 2021.
- [Lu *et al.*, 2018] Siyang Lu, Xiang Wei, Yandong Li, and Liqiang Wang. Detecting anomaly in big data system logs using convolutional neural network. In *DASC 2018*, pages 151–158, 2018.
- [Makanju *et al.*, 2009] Adetokunbo Makanju, A. Nur Zincir-Heywood, and Evangelos E. Milios. Clustering event logs using iterative partitioning. In *KDD 2009*, pages 1255– 1264, 2009.
- [Meng et al., 2019] Weibin Meng, Ying Liu, Yichen Zhu, Shenglin Zhang, Dan Pei, Yuqing Liu, Yihao Chen, Ruizhi

- Zhang, Shimin Tao, Pei Sun, et al. Loganomaly: Unsupervised detection of sequential and quantitative anomalies in unstructured logs. In *IJCAI 2019*, 2019.
- [Oliner and Stearley, 2007] Adam J. Oliner and Jon Stearley. What supercomputers say: A study of five system logs. In *DSN* 2007, pages 575–584, 2007.
- [Radford *et al.*, 2018] Alec Radford, Karthik Narasimhan, Tim Salimans, and Ilya Sutskever. Improving language understanding by generative pre-training. 2018.
- [Reimers and Gurevych, 2019] Nils Reimers and Iryna Gurevych. Sentence-bert: Sentence embeddings using siamese bert-networks. In *EMNLP 2019*, pages 3980–3990, 2019.
- [Stickland and Murray, 2019] Asa Cooper Stickland and Iain Murray. BERT and pals: Projected attention layers for efficient adaptation in multi-task learning. In *ICML* 2019, pages 5986–5995, 2019.
- [Vaswani et al., 2017] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. NIPS 2017, 2017.
- [Wittkopp *et al.*, 2021a] Thorsten Wittkopp, Alexander Acker, Sasho Nedelkoski, Jasmin Bogatinovski, Dominik Scheinert, Wu Fan, and Odej Kao. A2log: Attentive augmented log anomaly detection. *CoRR*, 2021.
- [Wittkopp *et al.*, 2021b] Thorsten Wittkopp, Philipp Wiesner, Dominik Scheinert, and Alexander Acker. Loglab: Attention-based labeling of log data anomalies via weak supervision. In *ICSOC 2021*, pages 700–707, 2021.
- [Xu et al., 2010] Wei Xu, Ling Huang, Armando Fox, David Patterson, and Michael I Jordan. Detecting large-scale system problems by mining console logs. In *ICML* 2010, 2010.
- [Yang et al., 2021] Lin Yang, Junjie Chen, Zan Wang, Weijing Wang, Jiajun Jiang, Xuyuan Dong, and Wenbin Zhang. Semi-supervised log-based anomaly detection via probabilistic label estimation. In *ICSE* 2021, pages 1448– 1460, 2021.
- [Yao *et al.*, 2020] Kundi Yao, Heng Li, Weiyi Shang, and Ahmed E. Hassan. A study of the performance of general compressors on log files. *ESE*, 25(5):3043–3085, 2020.
- [Zhang *et al.*, 2015] Shenglin Zhang, Ying Liu, Dan Pei, Yu Chen, Xianping Qu, Shimin Tao, and Zhi Zang. Rapidand robust impact assessment of software changes in large internet-based services. In *ENET* 2015, 2015.
- [Zhang et al., 2016] Ke Zhang, Jianwu Xu, Martin Renqiang Min, Guofei Jiang, Konstantinos Pelechrinis, and Hui Zhang. Automated it system failure prediction: A deep learning approach. In BigData 2016, 2016.
- [Zhang et al., 2019] Xu Zhang, Yong Xu, Qingwei Lin, Bo Qiao, Hongyu Zhang, Yingnong Dang, Chunyu Xie, Xinsheng Yang, Qian Cheng, Ze Li, et al. Robust logbased anomaly detection on unstable log data. In FSE 2019, 2019.