

Blockchain Nash Dynamics and the Pursuit of Compliance

Dimitris Karakostas
University of Edinburgh
d.karakostas@ed.ac.uk

Aggelos Kiayias
University of Edinburgh and IOHK
akiayias@inf.ed.ac.uk

Thomas Zacharias
University of Edinburgh
tzachari@inf.ed.ac.uk

March 24, 2022

Abstract

We study Nash-dynamics in the context of blockchain protocols. We introduce a formal model, within which one can assess whether the Nash dynamics can lead utility-maximizing participants to defect from the “honest” protocol operation, towards variations that exhibit one or more undesirable *infractions*, such as abstaining from participation and producing conflicting protocol histories. Blockchain protocols that do not lead to such infraction states are said to be *compliant*. Armed with this model, we evaluate the compliance of various Proof-of-Work (PoW) and Proof-of-Stake (PoS) protocol families, with respect to different utility functions and reward schemes, leading to the following results: i) PoS ledgers under resource-proportional rewards can be compliant if costs are negligible, but non-compliant if costs are significant; ii) PoW and PoS under block-proportional rewards exhibit different compliance behavior, depending on the lossiness of the network; iii) PoS ledgers can be compliant w.r.t. one infraction, i.e., producing conflicting messages, but non-compliant (and non-equilibria) w.r.t. abstaining or an attack we call selfish signing; iv) taking externalities, such as exchange rate fluctuations, into account, we quantify the benefit of economic penalties, in the context of PoS protocols, in disincentivizing particular infractions.

1 Introduction

The advent of Bitcoin [73] brought the economic aspects of consensus protocols to the forefront. While classical literature in consensus primarily dealt with fail-stop or Byzantine “error models” [82], the pressing question post-Bitcoin is whether the participants’ incentives align with what the consensus protocol asks them to do. Motivated by this, a line of work investigated if Bitcoin is an equilibrium under certain conditions [58, 52]. Another pinpointed deviations that can be more profitable for some players, assuming others follow the protocol [29, 84, 48, 14]. The research body also includes tweaks towards improving the blockchain protocol in various settings [31, 57], game-theoretic studies of pooling behavior [61, 14, 2], and equilibria that involve abstaining from the protocol [33] in high cost scenarios. Going beyond consensus, economic mechanisms have also been considered in the context of multi-party computation [59, 20, 19], to disincentivize “cheating”. Finally, various works optimized particular attacks, e.g., : i) optimal selfish mining strategies [84]; ii) a framework [42] for quantitatively evaluating blockchain parameters and identifying optimal strategies for selfish mining and double-spending, taking into account network delays; iii) alternative strategies [74], that are more profitable than selfish mining.

Though these works provide glimpses on these protocols’ behavior in a game-theoretic perspective, they offer little guidance on how to design and parameterize new consensus protocols. This problem is of high importance, given the negative light shed on Bitcoin’s perceived energy inefficiency and carbon footprint [66], that necessitates alternative designs. Proof-of-Stake (PoS)

is currently the most prominent alternative to Bitcoin’s Proof-of-Work (PoW) mechanism. PoW requires computational effort to produce valid messages, i.e., blocks acceptable by the protocol. PoS relies on each party’s stake, i.e., assets they own, so blocks are created at (virtually) no cost beyond transaction processing. Interestingly, while it is proven that PoS protocols are Byzantine resilient [54, 15, 43] and are even equilibriums under certain conditions [54], their security is heavily contested by PoW protocols proponents via an economic argument termed the *nothing-at-stake* attack [62, 26, 67]. This argument asserts that maintainers of PoS ledgers can maximize their expected rewards by producing conflicting blocks when possible.

What merit do these criticisms have? Participating in a blockchain protocol is a voluntary action that involves a participant downloading the software and committing resources to run it. Given the open source nature of these protocols, nothing prevents the participant from modifying the behaviour of the software in some way and engage with the other parties following a modified strategy. There are a number of undesirable adjustments that a participant can do, e.g., i) run the protocol intermittently instead of continuously; ii) not extend the most recent ledger of transactions they are aware of; iii) extend simultaneously more than one ledger of transactions. One can consider the above as fundamental *infractions* to the protocol rules and they may have serious security implications, both in terms of the consistency and the liveness of the underlying ledger.

To address these issues, many blockchain systems introduce additional mechanisms on top of incentives, frequently with only rudimentary game theoretic analysis. These include: i) rewards for “uncle blocks” (Ethereum); ii) stake delegation (EOS, Polkadot, Cardano [49]), where users assign their participation rights to delegates or stake pools; iii) penalties for misbehavior, also referred to as “*slashing*” (Ethereum 2.0 [11, 13]). Unfortunately, the lack of thorough analysis of these mechanisms is, naturally, a serious impediment to wider adoption. For instance, in the case of penalties employing multiple replicas for redundancy, i.e., to increase crash-fault tolerance, may produce conflicting blocks due to a faulty configuration, if two replicas come alive simultaneously. However, if a party employs no failover mechanism and experiences network connectivity issues, it may fail to participate. Furthermore, software or hardware bugs can always compromise an – otherwise safe and secure – configuration. This highlights the flip side of such penalty mechanisms: participants may choose to not engage, (e.g., to avoid the risk of forfeiting funds, or because they do not own sufficient funds to make a deposit), or, if they do engage, they may steer clear of fault-tolerant sysadmin practices, which could pose quality of service concerns and hurt the system in the long run.

The above considerations put forth the fundamental question that motivates our work: *How effective are blockchain protocol designs in disincentivizing particularly adverse protocol infractions?* In more detail, the question we ask is whether selfish behavior can lead to specific types of deviations, taking a blockchain protocol as the initial point of reference of honest — compliant — behavior.

Our Contributions and Roadmap. Our main question relates to the Nash dynamics of blockchain protocols. In the classical Nash dynamics problem [83], the question is whether allowing selfish players to perform step-wise payoff-improving moves leads the system to an equilibrium, and in how many steps this may happen; e.g., [30] considers the case of congestion games. In this perspective, the action space can be seen as a directed graph, where vertices represent vectors of player strategies and edges correspond to player moves. Notably, deciding whether the Nash dynamics converge to a (Nash or sink) equilibrium is particularly difficult, often being a NP-hard or PSPACE-complete problem [71].

This work adapts Nash dynamics to the setting of blockchain protocols, with a particular focus on studying specific undesirable protocol infractions. Importantly, instead of asking for convergence, we ask whether the “cone” in the directed graph positioned at the protocol contains strategies from a given infraction set \mathcal{X} (Figure 1). If the cone is free of infractions, the protocol is deemed \mathcal{X} -compliant. In turn, we also consider ϵ -Nash-dynamics [17], i.e., considering only steps in the graph which represent best responses and improve the participant’s payoff more than ϵ . Armed with this model, we investigate various protocols from a compliance perspective.

A core motivation of our work is that \mathcal{X} -compliance enables to validate the incentive structure of a blockchain protocol w.r.t. specific disruptive behaviors (as captured by \mathcal{X}), while abstracting

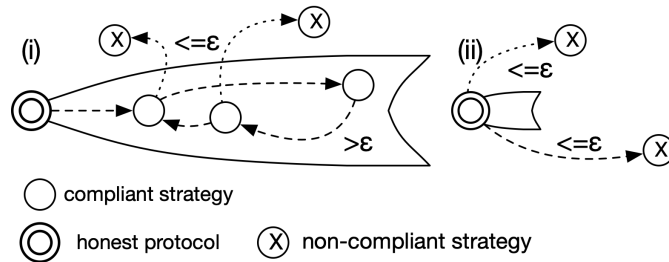


Figure 1: Illustration of a compliant protocol that does not exhibit an equilibrium (i), vs a protocol which is an approximate Nash equilibrium (ii).

away any deviations that avoid the infractions. In this sense, \mathcal{X} -compliance of a protocol is a weaker notion compared to a Nash equilibrium, allowing a variety of possible protocol deviations as long as they do not fall into \mathcal{X} . This also enables a two-tiered analysis where compliance analysis rules out crucial deviations, while the set of all compliant behaviors can be analyzed in, say, worst-case fashion. Moreover, negative results in terms of compliance are immediately informative as they identify one or more specific infractions. This is helpful from the point of view of mechanism parameterisation for blockchain protocols, where various penalties (e.g., reward reduction or slashing of funds) are typically employed to mitigate specific deviant behaviors. So far, there exists no framework that enables a formal argument as to whether a specific penalty is sufficient to mitigate a certain behavior. Our work provides such framework and we illustrate its applicability in this setting, by analyzing an array of Nakamoto longest chain protocol families.

In detail, our paper is organized as follows. Section 2 describes our model of *compliant* strategies and protocols. A strategy is compliant if a party that employs it never violates a predicate \mathcal{X} , which captures well-defined types of deviant behavior. Accordingly, a protocol is compliant if, assuming a starting point where no party deviates, no party will eventually employ a non-compliant strategy, assuming sequential unilateral defections. Section 3 specifies compliance for blockchain protocols, under an infraction predicate that captures abstaining and producing conflicting blocks, and two types of utility, absolute rewards and profit. We then explore different reward schemes and protocol families. Section 4 shows that *resource-proportional* rewards, i.e., which depend only on a party’s mining or staking power, result in compliance w.r.t. rewards alone (i.e., when costs are negligible), but non-compliance w.r.t. profit (rewards minus costs). Next, we explore *block-proportional* rewards, using as baseline the total blocks adopted by an impartial observer of the system. Section 5.1 shows that PoW systems are compliant w.r.t. rewards alone. Section 5.2.1 shows that PoS systems, which enforce that a single party participates at a time, are compliant, under a synchronous network, but non-compliant under a lossy network (contrary to PoW). Section 5.2.2 shows that PoS systems, which allow multiple parties to produce blocks for the same time slot, are not compliant. Notably, our negative results show that a party can gain a *non-negligible* reward by being non-compliant under a certain network routing assumption, in this way also highlighting the way the network interacts with protocol incentives. Section 6 highlights the distinction between compliance and Nash equilibria, by showcasing a protocol under two types of rewards that, in both cases, is compliant w.r.t. an infraction predicate that captures realistic deviations and non-compliant w.r.t. another realistic predicate (and hence, not a Nash equilibrium). Finally, we evaluate compliance under various externalities, specifically the varying exchange rate of the platform’s underlying token, which models real-world prices, and external rewards, which come as a result of successful attacks. We show that applying a penalty would be necessary if a certain deviant behavior is synergistic to mounting the attacks, and we provide estimations for such penalties w.r.t. the ledger’s parameters and the market’s expected behavior.

2 Compliance Model

We assume a distributed protocol Π , which is executed by a set of parties \mathbb{P} over a number of time slots. Every party $\mathcal{P} \in \mathbb{P}$ is activated on each time slot, following a schedule set by an environment \mathcal{Z} , which also provides the parties with inputs. Each party $\mathcal{P} \in \mathbb{P}$ is associated with a number $\mu_{\mathcal{P}} \in [0, 1]$. $\mu_{\mathcal{P}}$ identifies \mathcal{P} 's percentage of participation power in the protocol, e.g., its votes, hashing power, staking power, etc; consequently, $\sum_{\mathcal{P} \in \mathbb{P}} \mu_{\mathcal{P}} = 1$. κ denotes Π 's security parameter, $\text{negl}(\cdot)$ denotes that a function is negligible, i.e., asymptotically smaller than the inverse of any polynomial, $[n]$ denotes the set $\{1, \dots, n\}$, and $E[X]$ denotes the expectation of random variable X .

2.1 Preliminaries

We assume a peer-to-peer network, i.e., parties do not communicate via point-to-point connections. Instead, they use the following variant of a *diffuse* functionality (cf. [39]).

Router. We consider a special party called *router* \mathcal{A} . On each time slot, \mathcal{A} retrieves all created messages and decides their order and time of delivery. In essence, \mathcal{A} models the underlying communication network. In this work, we consider the following three routers, which are of interest: i) *synchronous*: all messages are delivered at the end of the round during which they were created; ii) *lossy*: a message is omitted by \mathcal{A} , i.e., it is never delivered to any recipient, with probability d ; ¹ iii) *uniform*: the order of message delivery is uniformly randomized.

Diffuse Functionality. The functionality, parameterized by a router \mathcal{A} , initializes a variable *slot* to 1, which is readable from all parties. In addition, it maintains a string $\text{RECEIVE}_{\mathcal{P}}()$ for each party \mathcal{P} . Each party \mathcal{P} is allowed to fetch the contents of $\text{RECEIVE}_{\mathcal{P}}()$ at the beginning of each time slot. To diffuse a (possibly empty) message m , \mathcal{P} sends to the functionality m , which records it. On each slot, every party completes its activity by sending a special COMPLETE message to the functionality. When all parties submit COMPLETE , the functionality delivers the messages, which are diffused during this slot, as follows. First, it sends all messages to \mathcal{A} . Following, \mathcal{A} responds with a list of tuples $\langle \mathcal{P}, l_{\mathcal{P}} \rangle$, where $\mathcal{P} \in \mathbb{P}$ and $l_{\mathcal{P}}$ is an ordered list of messages. Subsequently, the functionality includes all messages in $l_{\mathcal{P}}$, following its specified order, in the $\text{RECEIVE}_{\mathcal{P}}()$ string of \mathcal{P} . Hence, the received messages contain no information on each message's creator. Finally, the functionality increases the value of *slot* by 1.

Approximate Nash Equilibrium. An approximate Nash equilibrium is a common tool for expressing a solution to a non-cooperative game involving n parties $\mathcal{P}_1, \dots, \mathcal{P}_n$. Each party \mathcal{P}_i employs a strategy S_i . The strategy is a set of rules and actions the party makes, depending on what has happened up to any point in the game, i.e., it defines the part of the entire distributed protocol Π performed by \mathcal{P}_i . There exists an ‘‘honest’’ strategy, defined by Π , which parties may employ; for ease of notation, Π denotes both the distributed protocol and the honest strategy. A *strategy profile* is a vector of all players' strategies. Each party \mathcal{P}_i has a game *utility* U_i , which is a real function that takes as input a strategy profile. A strategy profile is an ϵ -Nash equilibrium when no party can increase its utility more than ϵ by *unilaterally* changing its strategy (Definition 1).

Definition 1. *Let: i) ϵ be a non-negative real number; ii) \mathcal{S} be the set of strategies a party may employ; iii) $\sigma^* = (S_i^*, S_{-i}^*)$ be a strategy profile of \mathbb{P} , where S_i^* is the strategy followed by \mathcal{P}_i ; iv) S_{-i}^* denote the $n - 1$ strategies employed by all parties except \mathcal{P}_i . We say that σ^* is an ϵ -Nash equilibrium w.r.t. a utility vector $\bar{U} = \langle U_1, \dots, U_n \rangle$ if: $\forall \mathcal{P}_i \in \mathbb{P} \forall S_i \in \mathcal{S} \setminus \{S_i^*\} : U_i(S_i^*, S_{-i}^*) \geq U_i(S_i, S_{-i}^*) - \epsilon$.*

¹This router aims to model the setting where a network with stochastic delays is used by an application, where users reject messages delivered with delay above a (protocol-specific) limit. For example, various protocols, like Bitcoin [73], resolve message conflicts based on the order of delivery; thus, delaying a message for long enough, such that a competing message is delivered beforehand, is equivalent to dropping the message altogether.

For simplicity, when all parties have the same utility U , we say that the profile σ^* is an ϵ -Nash equilibrium w.r.t. U . We also say that Π is an ϵ -Nash equilibrium w.r.t. U when the strategy profile $\sigma_\Pi = \langle \Pi, \dots, \Pi \rangle$ where all parties follow the honest strategy is an ϵ -Nash equilibrium w.r.t. U .

2.2 Basic Notions

A protocol's execution $\mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma, r}$ until a given time slot r is probabilistic and parameterized by: i) the environment \mathcal{Z} ; ii) a router \mathcal{A} ; iii) the strategy profile σ of the participating parties. As discussed, \mathcal{Z} provides the parties with inputs and schedules their activation. For notation simplicity, when r is omitted, $\mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma}$ refers to the end of the execution, which occurs after polynomially many time slots.

An *execution trace* $\mathfrak{S}_{\mathcal{Z}, \mathcal{A}, \sigma, r}$ until a time slot r is the value that the random variable $\mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma, r}$ takes for a fixed environment \mathcal{Z} , router \mathcal{A} , and strategy profile σ , and for fixed random coins of \mathcal{Z} , each party $\mathcal{P} \in \mathbb{P}$, and every protocol-specific oracle (see below). A party \mathcal{P} 's view of an execution trace $\mathfrak{S}_{\mathcal{Z}, \mathcal{A}, \sigma, r}^{\mathcal{P}}$ consists of the messages that \mathcal{P} has sent and received until slot r . For notation simplicity, we omit the subscripts $\{\mathcal{Z}, \mathcal{A}, \sigma, r\}$ from both \mathcal{E} and \mathfrak{S} , unless required for clarity.

The protocol Π defines two components, which are related to our analysis: (1) the oracle \mathcal{O}_Π , and (2) the ‘‘infraction’’ predicate \mathcal{X} . We present them below.

The Oracle \mathcal{O}_Π . The oracle \mathcal{O}_Π provides the parties with the core functionality needed to participate in Π . For example, in a Proof-of-Work (PoW) system, \mathcal{O}_Π is the random or hashing oracle, whereas in an authenticated Byzantine Agreement protocol, \mathcal{O}_Π is a signing oracle. On each time slot, a party can perform at most a polynomial number of queries to \mathcal{O}_Π ; in the simplest case, each party can submit a single query per slot. Finally, \mathcal{O}_Π is *stateless*, i.e., its random coins are decided upon the beginning of the execution and its responses do not depend on the order of the queries.

The Infraction Predicate \mathcal{X} . The infraction predicate \mathcal{X} abstracts the deviant behavior that the analysis aims to capture. Given the execution trace and a party \mathcal{P} , \mathcal{X} responds with 1 only if \mathcal{P} deviates from the protocol in some well-defined manner. Definition 2 provides the core generic property of \mathcal{X} , i.e., that honest parties never deviate. With hindsight, our analysis will focus on infraction predicates that capture either producing conflicting messages or abstaining.

Definition 2 (Infraction Predicate Property). *The infraction predicate \mathcal{X} has the property that, for every execution trace \mathfrak{S} and for every party $\mathcal{P} \in \mathbb{P}$, if \mathcal{P} employs the (honest) strategy Π then $\mathcal{X}(\mathfrak{S}, \mathcal{P}) = 0$.*

We stress that Definition 2 implies that \mathcal{X} being 0 is a necessary but not sufficient condition for honesty. Specifically, for all honest parties \mathcal{X} is always 0, but \mathcal{X} might also be 0 for a party that deviates from Π , in a way not captured by \mathcal{X} . In that case, we say that the party employs an \mathcal{X} -compliant strategy (Definition 3). A strategy profile is \mathcal{X} -compliant if all its strategies are \mathcal{X} -compliant, so the ‘‘all honest’’ profile σ_Π , where all parties employ Π , is \mathcal{X} -compliant.

Definition 3 (Compliant Strategy). *Let \mathcal{X} be an infraction predicate. A strategy S is \mathcal{X} -compliant if and only if $\mathcal{X}(\mathfrak{S}, \mathcal{P}) = 0$ for every party \mathcal{P} and for every trace \mathfrak{S} where \mathcal{P} employs S .*

The observer Ω . We assume a special party Ω , the (*passive*) *observer*. This party does not actively participate in the execution, but it runs Π and observes the protocol's execution. Notably, Ω is *always online*, i.e., it bootstraps at the beginning of the execution and is activated on every slot, in order to receive diffused messages. Therefore, the observer models a user of the system, who frequently uses the system but does not actively participate in its maintenance. Additionally, at the last round of the execution, the environment \mathcal{Z} activates only Ω , in order to receive the diffused messages of the penultimate round and have a complete point of view.

2.3 Compliant Protocols

To define the notion of an (ϵ, \mathcal{X}) -compliant protocol Π , we require two parameters: (i) the associated infraction predicate \mathcal{X} and (ii) a non-negative real number ϵ . Following Definition 3, \mathcal{X} determines the set of compliant strategies that the parties may follow in Π . Intuitively, ϵ specifies the sufficient gain threshold after which a party switches strategies. In particular, ϵ is used to define when a strategy profile σ' is *directly reachable* from a strategy profile σ , in the sense that σ' results from the unilateral deviation of a party \mathcal{P}_i from σ and, by this deviation, the utility of \mathcal{P}_i increases more than ϵ while σ' sets a *best response* for \mathcal{P}_i . Generally, σ' is *reachable* from σ , if σ' results from a “path” of strategy profiles, starting from σ , which are sequentially related via direct reachability. Finally, we define the *cone* of a profile σ as the set of all strategies that are reachable from σ , including σ itself.

Given the above definitions, we say that Π is (ϵ, \mathcal{X}) -compliant if the cone of the “all honest” strategy profile σ_Π contains only profiles that consist of \mathcal{X} -compliant strategies. Thus, if a protocol is compliant, then the parties may (unilaterally) deviate from the honest strategy only in a compliant manner, as dictated by \mathcal{X} . Formally, first we define “reachability” between two strategy profiles, as well as the notion of a “cone” of a strategy profile w.r.t. the reachability relation. Then, we define a compliant protocol w.r.t. its associated infraction predicate.

Definition 4. *Let: i) ϵ be a non-negative real number; ii) Π be a protocol run by parties $\mathcal{P}_1, \dots, \mathcal{P}_n$; iii) $\bar{U} = \langle U_1, \dots, U_n \rangle$ be a utility vector, where U_i is the utility of \mathcal{P}_i ; iv) \mathbb{S} be the set of all strategies a party may employ. We provide the following definitions.*

1. *Let $\sigma, \sigma' \in \mathbb{S}^n$ be two strategy profiles where $\sigma = \langle S_1, \dots, S_n \rangle$ and $\sigma' = \langle S'_1, \dots, S'_n \rangle$. We say that σ' is directly ϵ -reachable from σ w.r.t. \bar{U} , if there exists $i \in [n]$ s.t. (i) $\forall j \in [n] \setminus \{i\} : S'_j = S_j$, (ii) $U_i(\sigma') > U_i(\sigma) + \epsilon$, and (iii) for every strategy profile $\sigma'' = \langle S''_1, \dots, S''_n \rangle$ s.t. $\forall j \in [n] \setminus \{i\} : S''_j = S_j$, it holds that $U_i(\sigma'') \leq U_i(\sigma')$. (i.e., σ' sets a best response for \mathcal{P}_i)*
2. *Let $\sigma, \sigma' \in \mathbb{S}^n$ be two distinct strategy profiles. We say that σ' is ϵ -reachable from σ w.r.t. \bar{U} , if there exist profiles $\sigma_1, \dots, \sigma_k$ such that (i) $\sigma_1 = \sigma$, (ii) $\sigma_k = \sigma'$, and (iii) $\forall j \in [2, k]$ it holds that σ_j is directly ϵ -reachable from σ_{j-1} w.r.t. \bar{U} .*
3. *For every strategy profile $\sigma \in \mathbb{S}^n$ we define the (ϵ, \bar{U}) -cone of σ as the set: $\text{Cone}_{\epsilon, \bar{U}}(\sigma) := \{\sigma' \in \mathbb{S}^n \mid (\sigma' = \sigma) \vee (\sigma' \text{ is } \epsilon\text{-reachable from } \sigma \text{ w.r.t. } \bar{U})\}$.*

Definition 5. *Let: i) ϵ be a non-negative real number; ii) Π be a protocol run by the parties $\mathcal{P}_1, \dots, \mathcal{P}_n$; iii) \mathcal{X} be an infraction predicate; iv) $\bar{U} = \langle U_1, \dots, U_n \rangle$ be a utility vector, where U_i is the utility of party \mathcal{P}_i ; v) \mathbb{S} be the set of all strategies a party may employ; vi) $\mathbb{S}_{\mathcal{X}}$ be the set of \mathcal{X} -compliant strategies.*

A strategy profile $\sigma \in \mathbb{S}^n$ is \mathcal{X} -compliant if $\sigma \in (\mathbb{S}_{\mathcal{X}})^n$.

The (ϵ, \bar{U}) -cone of Π , denoted by $\text{Cone}_{\epsilon, \bar{U}}(\Pi)$, is the set $\text{Cone}_{\epsilon, \bar{U}}(\sigma_\Pi)$, i.e., the set of all strategies that are ϵ -reachable from the “all honest” strategy profile $\sigma_\Pi = \langle \Pi, \dots, \Pi \rangle$ w.r.t. \bar{U} , including σ_Π .

Π is (ϵ, \mathcal{X}) -compliant w.r.t. \bar{U} if $\text{Cone}_{\epsilon, \bar{U}}(\Pi) \subseteq (\mathbb{S}_{\mathcal{X}})^n$, i.e., all strategy profiles in the (ϵ, \bar{U}) -cone of Π are \mathcal{X} -compliant.

2.4 Compliance and Approximate Nash Equilibria

In this subsection, we show that a protocol is an ϵ -Nash equilibrium w.r.t. some utility if and only if it is (ϵ, \mathcal{X}) -compliant w.r.t. the same utility, for any associated infraction predicate \mathcal{X} . We begin by proving a useful lemma stating that a protocol is an approximate Nash equilibrium if and only if the cone of the protocol includes only the all-honest strategy profile.

Lemma 1. *Let: i) ϵ be a non-negative real number; ii) Π be a protocol run by the parties $\mathcal{P}_1, \dots, \mathcal{P}_n$; iii) $\bar{U} = \langle U_1, \dots, U_n \rangle$ be a utility vector, with U_i the utility of \mathcal{P}_i . Then, Π is an ϵ -Nash equilibrium w.r.t. \bar{U} (i.e., $\sigma_\Pi = \langle \Pi, \dots, \Pi \rangle$ is an ϵ -Nash equilibrium w.r.t. \bar{U}) if and only if the (ϵ, \bar{U}) -cone of Π , $\text{Cone}_{\epsilon, \bar{U}}(\Pi)$, is the singleton $\{\sigma_\Pi\}$.*

Proof. (\Rightarrow): Assume that σ_{Π} is an ϵ -Nash equilibrium w.r.t. \bar{U} and let $\sigma = \langle S_1, \dots, S_n \rangle \neq \sigma_{\Pi}$ be a strategy profile s.t. there exists $i \in [n]$ s.t. $\forall j \in [n] \setminus \{i\} : S_j = \Pi$. We will show that σ is not directly ϵ -reachable from σ_{Π} w.r.t. \bar{U} . Since σ_{Π} is an ϵ -Nash equilibrium w.r.t. \bar{U} , it holds that $U_i(\sigma) \leq U_i(\sigma_{\Pi}) + \epsilon$. Therefore, Definition 4 is not satisfied and σ is not directly ϵ -reachable from σ_{Π} w.r.t. \bar{U} . Since no strategy profiles are directly ϵ -reachable from σ_{Π} w.r.t. \bar{U} , it is straightforward that there are no ϵ -reachable strategy profiles from σ_{Π} w.r.t. \bar{U} . The latter implies that the (ϵ, \bar{U}) -cone of Π contains only σ_{Π} , i.e., $\text{Cone}_{\epsilon, \bar{U}}(\Pi) = \{\sigma_{\Pi}\}$.

(\Leftarrow): Assume that σ_{Π} is not an ϵ -Nash equilibrium w.r.t. \bar{U} . This means that there exists a strategy profile $\sigma^* = \langle S_1^*, \dots, S_n^* \rangle$ s.t. there exists $i \in [n]$ s.t. $\forall j \in [n] \setminus \{i\} : S_j^* = \Pi$ and it holds that $U_i(\sigma^*) > U_i(\sigma_{\Pi}) + \epsilon$. Among all unilateral deviations of \mathcal{P}_i , consider the strategy profile σ^{**} that sets the best response for \mathcal{P}_i (that may not necessarily be σ^*). We directly get that $U_i(\sigma^{**}) \geq U_i(\sigma^*) > U_i(\sigma_{\Pi}) + \epsilon$. Thus, by Definition 4, σ^{**} is (directly) ϵ -reachable from σ_{Π} w.r.t. \bar{U} , i.e. $\sigma^{**} \in \text{Cone}_{\epsilon, \bar{U}}(\Pi)$, which implies that $\{\sigma_{\Pi}\} \subsetneq \text{Cone}_{\epsilon, \bar{U}}(\Pi)$. \square

The statement in Lemma 1 resembles the well-known statement that a pure Nash equilibrium is a sink equilibrium that contains a single strategy profile [44]. Nonetheless, there are differences between the notions of a sink equilibrium and a cone. Recall that a sink equilibrium is a strongly connected component of the strategy profile graph that has no outgoing edges. On the other hand, according to Definition 4, the subgraph induced by the nodes of a cone of a strategy profile σ may not even be strongly connected (e.g., the cone could be a subtree rooted at σ).

By applying Lemma 1, we prove the main result of this subsection.

Theorem 1. *Let: i) ϵ be a non-negative real number; ii) Π be a protocol run by the parties $\mathcal{P}_1, \dots, \mathcal{P}_n$; iii) $\bar{U} = \langle U_1, \dots, U_n \rangle$ be a utility vector, with U_i the utility of \mathcal{P}_i . Then, Π is an ϵ -Nash equilibrium w.r.t. \bar{U} if and only if Π is (ϵ, \mathcal{X}) -compliant w.r.t. \bar{U} for any associated infraction predicate \mathcal{X} .*

Proof. (\Rightarrow): Assume that σ_{Π} is an ϵ -Nash equilibrium w.r.t. \bar{U} . By Lemma 1, we have that $\text{Cone}_{\epsilon, \bar{U}}(\Pi) = \{\sigma_{\Pi}\}$. By Definitions 2 and 3, we have that for every infraction predicate \mathcal{X} σ_{Π} is \mathcal{X} -compliant, so we deduce that $\text{Cone}_{\epsilon, \bar{U}}(\Pi) = \{\sigma_{\Pi}\} \subseteq (\mathcal{S}_{\mathcal{X}})^n$, i.e., the protocol Π is (ϵ, \mathcal{X}) -compliant w.r.t. \bar{U} .

(\Leftarrow): Assume that Π is (ϵ, \mathcal{X}) -compliant w.r.t. \bar{U} for every associated infraction predicate \mathcal{X} . We define the “all honest” infraction predicate, \mathcal{X}_{hon} as follows: for every party \mathcal{P} and every trace \mathfrak{S} ,

$$\mathcal{X}_{\text{hon}}(\mathfrak{S}, \mathcal{P}) := \begin{cases} 0, & \text{if } \mathcal{P} \text{ follows } \Pi \text{ in } \mathfrak{S} \\ 1, & \text{otherwise} \end{cases}.$$

Clearly, \mathcal{X}_{hon} satisfies Definition 2, i.e., it is indeed an infraction predicate. By the definition of \mathcal{X}_{hon} , for every strategy $S \neq \Pi$, it holds that $\mathcal{X}_{\text{hon}}(\mathfrak{S}, \mathcal{P}) = 1$ for every party \mathcal{P} and every trace \mathfrak{S} where \mathcal{P} follows S in \mathfrak{S} . The latter implies that for every strategy $S \neq \Pi$ it holds that $S \notin \mathcal{S}_{\mathcal{X}_{\text{hon}}}$ (i.e., S is not \mathcal{X}_{hon} -compliant), which in turn implies that for every strategy profile $\sigma \neq \sigma_{\Pi} = \langle \Pi, \dots, \Pi \rangle$ it holds that $\sigma \notin (\mathcal{S}_{\mathcal{X}_{\text{hon}}})^n$. On the other hand, it is straightforward that $\sigma_{\Pi} \in (\mathcal{S}_{\mathcal{X}_{\text{hon}}})^n$.

By the above, we have that $(\mathcal{S}_{\mathcal{X}_{\text{hon}}})^n = \{\sigma_{\Pi}\}$. By assumption, we have that Π is $(\epsilon, \mathcal{X}_{\text{hon}})$ -compliant w.r.t. \bar{U} , i.e. $\text{Cone}_{\epsilon, \bar{U}}(\Pi) \subseteq (\mathcal{S}_{\mathcal{X}_{\text{hon}}})^n = \{\sigma_{\Pi}\}$. Besides, by Definition 4, we know that $\{\sigma_{\Pi}\} \subseteq \text{Cone}_{\epsilon, \bar{U}}(\Pi)$, thus $\text{Cone}_{\epsilon, \bar{U}}(\Pi) = \{\sigma_{\Pi}\}$. By Lemma 1, we conclude that Π is an ϵ -Nash equilibrium w.r.t. \bar{U} . \square

According to the equivalence proven in Theorem 1, the property that “a protocol is an approximate Nash equilibrium” can be interpreted as a composition of all possible statements that “it is not in any party’s interest to be non-compliant”, however compliance is specified by the associated infraction predicate.

Remark. It is easy to see that \mathcal{X} -compliance is a *strict relaxation* of the approximate Nash equilibrium notion. For example, consider a protocol Π^* that is not an ϵ^* -Nash equilibrium w.r.t. some utility \bar{U}^* (cf. Theorem 3 for such a counterexample). Now set \mathcal{X}^* to be the predicate that always returns 0. Clearly, by Definitions 3 and 5, the protocol Π^* is $(\epsilon^*, \mathcal{X}^*)$ -compliant w.r.t. \bar{U}^* .

3 Blockchain Protocols

In this work, we focus on blockchain-based distributed ledger protocols. In the general case, a ledger defines a global state, which is distributed across multiple parties and is maintained via a consensus protocol. The distributed ledger protocol defines the validity rules which allow a party to extract the final ledger from its view. A blockchain is a distributed database, where each message m is a block \mathcal{B} of transactions and each transaction updates the system’s global state. Therefore, at any point of the execution, a party \mathcal{P} holds some view of the global state, which comprises of the blocks that \mathcal{P} has adopted. We note that, if at least one valid block is diffused (w.r.t. the validity rules of the protocol), then every honest party can extract a final ledger from its execution view.

3.1 The Setting

Every blockchain protocol Π defines a *message validity* predicate \mathcal{V} . Party \mathcal{P} accepts block \mathcal{B} , received during a time slot r , if $\mathcal{V}(\mathfrak{S}_r^{\mathcal{P}}, \mathcal{B}) = 1$. For example, in Proof-of-Work (PoW) systems like Bitcoin, a block is valid if its hash is below a certain threshold; in Proof-of-Stake (PoS) protocols like Ouroboros [54], a block is valid if it was created by a specific party, given a known leader schedule. In all cases, \mathcal{B} is valid if its creator submits at least one query for \mathcal{B} to \mathcal{O}_Π .

Each block \mathcal{B} is associated with the following metadata: i) an index $index(\mathcal{B})$; ii) the party $creator(\mathcal{B})$ that created \mathcal{B} ; iii) a set $ancestors(\mathcal{B}) \subseteq \mathfrak{S}^{creator(\mathcal{B})}$, i.e., blocks in the view of $creator(\mathcal{B})$ (at the time of \mathcal{B} ’s creation) referenced by \mathcal{B} . Message references are implemented as hash pointers, given a hash function H employed by the protocol. Specifically, each block \mathcal{B} contains the hash of all blocks in the referenced blocks $ancestors(\mathcal{B})$. Blockchain systems are typically bootstrapped via a global common reference string, i.e., a “genesis” block \mathcal{B}_G . Therefore, the blocks form a hash tree, stemming from \mathcal{B}_G and $index(\mathcal{B})$ is the height of \mathcal{B} in the hash tree. If \mathcal{B} references multiple messages, i.e., belongs to multiple tree branches, $index(\mathcal{B})$ is the height of the longest one.

The protocol also defines the *message equivalency operator*, \equiv . Specifically, two messages are equivalent if their hashes match, i.e., $m_1 \equiv m_2 \Leftrightarrow H(m_1) = H(m_2)$. At a high level, two equivalent messages are interchangeable by the protocol.

Infraction Predicate. In our analysis of blockchain systems, we will consider two types of deviant behavior (Definition 6): i) creating conflicting valid messages of same origin, and ii) abstaining. We choose these predicates because they may lead to non-compliance in interesting use cases. The former refers to the widely discussed topic in blockchain systems of one participant extending two conflicting transaction histories. The latter deals with the issue of participants who intermittently engage in the system’s maintenance, thus potentially hurting the safety of the deployed system; in particular, the more users participate in maintenance, the higher the level of resources that an adversary needs to reach to break a system’s security. Other infraction predicates are of course also possible to define — see Section 8.

Definition 6 (Blockchain Infraction Predicate). *Given a party \mathcal{P} and an execution trace \mathfrak{S} , we define the following infraction predicates:*

1. conflicting predicate: $\mathcal{X}_{\text{conf}}(\mathfrak{S}, \mathcal{P}) = 1$ if there exist blocks $\mathcal{B}, \mathcal{B}' \in \mathfrak{S}$ such that $creator(\mathcal{B}) = creator(\mathcal{B}') = \mathcal{P} \wedge \mathcal{V}(\mathfrak{S}^{\mathcal{P}}, \mathcal{B}) = \mathcal{V}(\mathfrak{S}^{\mathcal{P}}, \mathcal{B}') = 1 \wedge index(\mathcal{B}) = index(\mathcal{B}') \wedge \mathcal{B} \neq \mathcal{B}'$;
2. abstaining predicate: $\mathcal{X}_{\text{abs}}(\mathfrak{S}, \mathcal{P}) = 1$ if there exists a time slot r such that \mathcal{P} makes no queries to oracle \mathcal{O}_Π during r ;

3. blockchain predicate: $\mathcal{X}_{bc}(\mathfrak{S}, \mathcal{P}) = 1$ if $(\mathcal{X}_{conf}(\mathfrak{S}, \mathcal{P}) = 1) \vee (\mathcal{X}_{abs}(\mathfrak{S}, \mathcal{P}) = 1)$.

We note that preventing conflicting messages is not the same as resilience against Sybil attacks [24]. The latter restricts an attacker from creating multiple identities. Instead, our infraction predicate ensures that a user does not increase their utility by creating conflicting messages with one of its identities. Thus, a system may be compliant but not Sybil resilient, e.g., if a party participates via multiple identities without increasing its utility via conflicting messages.

Finally, at the end of the execution, the observer Ω outputs a chain $\mathcal{C}_{\Omega, \mathfrak{S}}$. Typically, this is the longest valid chain, i.e., the longest branch of the tree that stems from genesis \mathcal{B}_G .² In case multiple longest chains exist, a choice is made either at random or following a chronological ordering of messages. The number of messages in $\mathcal{C}_{\Omega, \mathfrak{S}}$ that are created by a party \mathcal{P} is denoted by $M_{\mathcal{P}, \mathfrak{S}}$.

3.2 Utility: Rewards and Costs

For each execution, the blockchain protocol defines a number of total rewards, which are distributed among the participating parties. For each party \mathcal{P} , these rewards are expressed via the *reward random variable* $R_{\mathcal{P}, \mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma}}$. For a specific trace $\mathfrak{S}_{\mathcal{Z}, \mathcal{A}, \sigma}$, the random variable takes a non-negative real value, denoted by $R_{\mathcal{P}, \mathfrak{S}_{\mathcal{Z}, \mathcal{A}, \sigma}}$. Intuitively, $R_{\mathcal{P}, \mathfrak{S}_{\mathcal{Z}, \mathcal{A}, \sigma}}$ describes the rewards that \mathcal{P} receives from the protocol from the point of view of the observer Ω , i.e., w.r.t. the blocks output by Ω at the end of the execution.

Our analysis is restricted to systems where rewards are distributed to parties if and only if the genesis block is extended by at least one block during the execution, in which case at least one party receives a non-negative amount of rewards (Assumption 1).

Assumption 1. *Let \mathfrak{S} be an execution trace. If no block is produced during \mathfrak{S} , then it holds that $\forall \mathcal{P} \in \mathbb{P} : R_{\mathcal{P}, \mathfrak{S}} = 0$. If at least one block is produced during \mathfrak{S} , then it holds that $\exists \mathcal{P} \in \mathbb{P} : R_{\mathcal{P}, \mathfrak{S}} \neq 0$.*

In addition to rewards, a party's utility is affected by cost. Specifically, the *cost random variable* $C_{\mathcal{P}, \mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma}}$ expresses the operational cost of \mathcal{P} during an execution $\mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma}$. For a fixed trace $\mathfrak{S}_{\mathcal{Z}, \mathcal{A}, \sigma}$, $C_{\mathcal{P}, \mathfrak{S}_{\mathcal{Z}, \mathcal{A}, \sigma}}$ is a non-negative real value. Our analysis is restricted to cost schemes which are *linearly monotonically increasing* in the number of queries that a party makes to the oracle \mathcal{O}_{Π} , with no queries incurring zero cost (Assumption 2). Intuitively, this assumption considers the electricity cost of participation, while the cost of equipment and other operations, such as parsing or publishing messages, is zero.

Assumption 2. *For every execution trace \mathfrak{S} , a party \mathcal{P} 's cost is $C_{\mathcal{P}, \mathfrak{S}} = 0$ if and only if it performs no queries to \mathcal{O}_{Π} in every time slot. Else, if during \mathfrak{S} a party \mathcal{P} performs t queries, then its cost is $C_{\mathcal{P}, \mathfrak{S}} = t \cdot \lambda$, for some fixed parameter λ .*

We define two types of utility. First is *Reward*, i.e., the expected rewards that a party receives when the cost is 0. Second is *Profit*, i.e., rewards minus participation cost.

Definition 7. *Let σ be a strategy profile and $\mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma}$ be an execution during which parties follow σ . We define two types of blockchain utility $U_{\mathcal{P}}$ of a party \mathcal{P} for σ :*

1. Reward: $U_{\mathcal{P}}(\sigma) = E[R_{\mathcal{P}, \mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma}}]$
2. Profit: $U_{\mathcal{P}}(\sigma) = E[R_{\mathcal{P}, \mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma}}] - E[C_{\mathcal{P}, \mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma}}]$

For the computation of $U_{\mathcal{P}}$, the environment \mathcal{Z} and the router \mathcal{A} are fixed. Therefore, the expectation of the random variables $R_{\mathcal{P}, \mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma}}$ and $C_{\mathcal{P}, \mathcal{E}_{\mathcal{Z}, \mathcal{A}, \sigma}}$ is computed over the random coins of \mathcal{Z} , \mathcal{A} , \mathcal{O}_{Π} , and every party $\mathcal{P} \in \mathbb{P}$. Intuitively, a party's utility depends on both their strategy choice and the underlying network (expressed via the router). As such, different routers may yield different optimal strategies for parties to employ and possibly different equilibria *ceteris paribus*. Following, we evaluate the compliance of various Proof-of-Work (PoW) and Proof-of-Stake (PoS) blockchain protocols w.r.t. two types of rewards, *resource-proportional* and *block-proportional*.

²We assume that the longest chain (in blocks) contains the most hashing power, which is the metric used in PoW systems.

4 Resource-Proportional Rewards

As described in Section 2, a party \mathcal{P} controls a percentage $\mu_{\mathcal{P}}$ of the system’s participating power. Although this is set at the beginning of the execution, it is not always public. For instance, \mathcal{P} could obscure its amount of hashing power by refraining from performing some queries. In some cases, each party’s power is published on the ledger and, for all executions, can be extracted from the observer’s chain. This is the case in non-anonymous PoS ledgers, where each party’s power, denoted by its assets, is logged in real time on the ledger.

These systems, where power distribution is public, can employ a special type of rewards, *resource-proportional rewards*. Specifically, the system defines a fixed, total number of rewards $\mathcal{R} > 0$. At the end of an execution, if at least one block is created, each party \mathcal{P} receives a percentage $\xi(\mu_{\mathcal{P}})$ of \mathcal{R} , where $\xi(\cdot) : [0, 1] \rightarrow [0, 1]$; in the real world, ξ is usually the identity function. If no blocks are created during the execution, then every party gets 0 rewards.

Intuitively, resource-proportional rewards (Definition 8) compensate users for investing in the system. Unless no block is created (which typically happens with negligible probability when the parties follow the protocol), the reward level depends *solely* on a party’s power, instead of the messages diffused in the execution.

Definition 8 (Resource-proportional Rewards). *For a total number of rewards $\mathcal{R} \in \mathbb{R}_{>0}$ and $\xi : [0, 1] \rightarrow [0, 1]$ such that $\sum_{\mathcal{P} \in \mathbb{P}} \xi(\mu_{\mathcal{P}}) = 1$, a resource-proportional reward random variable $R_{\mathcal{P}, \mathcal{E}}$ satisfies the following:*

$$\forall \mathfrak{S} \forall \mathcal{P} \in \mathbb{P} : R_{\mathcal{P}, \mathfrak{S}} = \begin{cases} \xi(\mu_{\mathcal{P}}) \cdot \mathcal{R}, & \text{if there is at least one valid block in } \mathfrak{S} \\ 0, & \text{otherwise} \end{cases}$$

As shown in Theorem 2, blockchains with resource-proportional rewards are ϵ -Nash equilibria w.r.t. utility *Reward* (Definition 7), with ϵ typically small. By Theorem 1, the latter implies that such protocols are also (ϵ, \mathcal{X}) -compliant w.r.t. the same utility, where \mathcal{X} is an arbitrary associated infraction predicate. Intuitively, a party is rewarded the same amount regardless of their protocol-related actions, so nobody can increase their rewards by deviating from the honest strategy.

Theorem 2. *Let: i) Π be a blockchain protocol run by the parties $\mathcal{P}_1, \dots, \mathcal{P}_n$; ii) \mathcal{A} be a synchronous router (cf. Section 2.1); iii) $\bar{U} = \langle U_1, \dots, U_n \rangle$ be a utility vector, where U_i is the utility *Reward* of party \mathcal{P}_i ; iv) \mathcal{R} be the total rewards distributed by the protocol; v) $\xi : [0, 1] \rightarrow [0, 1]$ be a resource-proportional reward function; vi) α be the probability that no blocks are produced when all parties follow the honest strategy. Then, Π is an ϵ -Nash equilibrium w.r.t. \bar{U} , for $\epsilon := \alpha \cdot \max_{j \in [n]} \{\xi(\mu_{\mathcal{P}_j}) \cdot \mathcal{R}\}$.*

Proof. By Definition 8 and the definition of α , for the “all honest” strategy profile $\sigma_{\Pi} := \langle \Pi, \dots, \Pi \rangle$, we have that $\Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{\Pi}}} = \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}] = 1 - \alpha$ and $\Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{\Pi}}} = 0] = \alpha$, for every $i \in [n]$. Therefore, for every $i \in [n]$, $U_i(\sigma_{\Pi}) = E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{\Pi}}}] = (1 - \alpha) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}$.

Assume that for some $i \in [n]$, \mathcal{P}_i unilaterally deviates from Π by employing a different strategy S_i . In this case, we consider the strategy profile $\sigma = \langle S_1, \dots, S_n \rangle$ where $S_j = \Pi$ for $j \in [n] \setminus \{i\}$. Since U_i is the utility *Reward* under fair rewards with $\mathcal{R}, \xi(\cdot)$, we have that for all random coins of the execution \mathcal{E}_{σ} , the value of the reward random variable $R_{\mathcal{P}_i, \mathcal{E}_{\sigma}}$ is no more than $\xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}$. Consequently, $U_i(\sigma) \leq \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}$, and so we have that

$$U_i(\sigma) \leq U_i(\sigma_{\Pi}) + \alpha \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R} \leq U_i(\sigma_{\Pi}) + \alpha \cdot \max_{j \in [n]} \{\xi(\mu_{\mathcal{P}_j}) \cdot \mathcal{R}\}.$$

If $\epsilon := \alpha \cdot \max_{j \in [n]} \{\xi(\mu_{\mathcal{P}_j}) \cdot \mathcal{R}\}$ and since i and S_i are arbitrary, we conclude that Π is an ϵ -Nash equilibrium w.r.t. \bar{U} . \square

Theorem 2 is consistent with the incentives’ analysis of [54] under resource-proportional rewards. However, when introducing operational costs to analyze profit, a problem arises: a user can simply abstain and be rewarded nonetheless. Such behavior results in a “free-rider problem” [7], where a user reaps some benefits while not under-paying them or not paying at

all. Theorem 3 formalizes this argument and shows that a blockchain protocol, associated with the abstaining infraction predicate \mathcal{X}_{abs} (cf. Definition 6), under resource-proportional rewards is *not* $(\epsilon, \mathcal{X}_{\text{abs}})$ -compliant w.r.t. utility *Profit*, for reasonable values of ϵ .

Theorem 3. *Let: i) Π be a blockchain protocol run by the parties $\mathcal{P}_1, \dots, \mathcal{P}_n$; ii) \mathcal{A} be a synchronous router (cf. Section 2.1); iii) $\bar{U} = \langle U_1, \dots, U_n \rangle$ be a utility vector, where U_i is the utility Profit of party \mathcal{P}_i ; iv) \mathcal{R} be the total rewards distributed by the protocol; v) $\xi : [0, 1] \rightarrow [0, 1]$ be a resource-proportional reward function; vi) α be the probability that no blocks are produced when all parties follow the honest strategy.*

For $i \in [n]$, also let the following: i) q be the maximum number of queries that a party can make to the oracle \mathcal{O}_Π in each time slot. ii) C be the cost of a single query to \mathcal{O}_Π ; iii) C_i be the expected cost of \mathcal{P}_i when \mathcal{P}_i employs Π ; iv) β_i be the probability that no blocks are produced when \mathcal{P}_i abstains throughout the entire execution and all the other parties follow Π .

*Assume that for every $i \in [n]$, it holds that $C > \beta_i \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R} \cdot q$. Then, for every $\epsilon \geq 0$ s.t. $\epsilon < \max_{i \in [n]} \{C_i - (\beta_i - \alpha) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}\}$, the protocol Π is *not* $(\epsilon, \mathcal{X}_{\text{abs}})$ -compliant w.r.t. \bar{U} .*

Proof. By Definition 8 and the definition of α , for the “all honest” strategy profile $\sigma_\Pi := \langle \Pi, \dots, \Pi \rangle$, we have that $\Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_\Pi}} = \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}] = 1 - \alpha$ and $\Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_\Pi}} = 0] = \alpha$, for every $i \in [n]$. Since Π is an \mathcal{X}_{abs} -compliant strategy, if \mathcal{P}_i follows Π then it does not abstain, i.e., it makes queries to \mathcal{O}_Π . Therefore, by Assumption 2, the expected cost of \mathcal{P}_i , C_i , is greater than 0 and for σ_Π , the utility *Profit* $U_i(\sigma_\Pi)$ is: $U_i(\sigma_\Pi) = E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_\Pi}}] - E[C_{\mathcal{P}_i, \mathcal{E}_{\sigma_\Pi}}] = (1 - \alpha) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R} - C_i$.

Now assume that \mathcal{P}_i unilaterally deviates by following the “always abstain” strategy, S_{abs} , which is of course not \mathcal{X}_{abs} -compliant. Then, \mathcal{P}_i makes no queries to \mathcal{O}_Π and, by Assumption 2, its cost is 0. Let σ_i be the strategy profile where \mathcal{P}_i follows S_{abs} and every party $\mathcal{P} \neq \mathcal{P}_i$ follows Π . By the definition of β_i , we have that $\Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}} = \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}] = 1 - \beta_i$ and $\Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}} = 0] = \beta_i$.

By the definition of U_i , it holds that: $U_i(\sigma_i) = E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}}] - E[C_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}}] = (1 - \beta_i) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R} - 0$. So, for $\epsilon_i < C_i - (\beta_i - \alpha) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}$, we have that:

$$\begin{aligned} U_i(\sigma_i) &= (1 - \beta_i) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R} = \\ &= (1 - \alpha) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R} + (\alpha - \beta_i) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R} \geq \\ &\geq U_i(\sigma_\Pi) + C_i - (\beta_i - \alpha) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R} > \\ &> U_i(\sigma_\Pi) + \epsilon_i \end{aligned}$$

Let $i^* \in [n]$ be such that $C_{i^*} - (\beta_{i^*} - \alpha) \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R} = \max_{i \in [n]} \{C_i - (\beta_i - \alpha) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}\}$ and assume that $0 < C_{i^*} - (\beta_{i^*} - \alpha) \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R}$. By the above, we have that

$$U_{i^*}(\sigma_{i^*}) > U_{i^*}(\sigma_\Pi) + \epsilon, \text{ for every } 0 \leq \epsilon < C_{i^*} - (\beta_{i^*} - \alpha) \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R}. \quad (1)$$

The following claim will imply that the best response for \mathcal{P}_{i^*} must be non \mathcal{X}_{abs} -compliant.

Claim 3.1. *Let σ be a \mathcal{X}_{abs} -compliant profile strategy that is a unilateral deviation from σ_Π for \mathcal{P}_{i^*} . Then, it holds that $U_{i^*}(\sigma) < U_{i^*}(\sigma_{i^*})$.*

Proof of Claim 3.1. Since σ is \mathcal{X}_{abs} -compliant, it holds that \mathcal{P}_{i^*} participates in every trace as if she were honest, with the difference that she makes at least 1 query, whereas as an honest player she would make at most q queries per time slot. Therefore, it holds that $E[C_{\mathcal{P}_{i^*}, \mathcal{E}_\sigma}] \geq \frac{1}{q} C_{i^*}$. Besides, the rewards of \mathcal{P}_{i^*} w.r.t. σ are bounded by the maximum value $\xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R}$. Thus,

$$\begin{aligned} U_{i^*}(\sigma) - U_{i^*}(\sigma_\Pi) &\leq (\xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R} - E[C_{\mathcal{P}_{i^*}, \mathcal{E}_\sigma}]) - ((1 - \alpha) \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R} - C_{i^*}) = \\ &= \alpha \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R} + (C_{i^*} - E[C_{\mathcal{P}_{i^*}, \mathcal{E}_\sigma}]) \leq \\ &\leq \alpha \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R} + \left(1 - \frac{1}{q}\right) \cdot C_{i^*}. \end{aligned} \quad (2)$$

Recall that

$$\begin{aligned} U_{i^*}(\sigma_{i^*}) - U_{i^*}(\sigma_\Pi) &= (1 - \beta_{i^*}) \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R} - ((1 - \alpha) \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R} - C_{i^*}) = \\ &= (\alpha - \beta_{i^*}) \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R} + C_{i^*}. \end{aligned} \quad (3)$$

By Eq. (2) and (3) and given that $C > \beta_{i^*} \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R} \cdot q$, we have that

$$U_{i^*}(\sigma_{i^*}) - U_{i^*}(\sigma) \geq \frac{1}{q} \cdot C_{i^*} - \beta_{i^*} \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R} > 0.$$

◇

By Claim 3.1, we have that the best response σ^* for \mathcal{P}_{i^*} is non \mathcal{X}_{abs} -compliant, as it holds that $U_{i^*}(\sigma^*) \geq U_{i^*}(\sigma_{i^*})$. In addition, by Eq. (1), we get that for every $0 \leq \epsilon < C_{i^*} - (\beta_{i^*} - \alpha) \cdot \xi(\mu_{\mathcal{P}_{i^*}}) \cdot \mathcal{R}$, it holds that $U_{i^*}(\sigma^*) > U_{i^*}(\sigma_{\sigma_{\Pi}}) + \epsilon$, therefore σ^* is directly ϵ -reachable from σ_{Π} w.r.t. \bar{U} . Thus, σ^* is a non \mathcal{X}_{abs} -compliant strategy profile that is in $\text{Cone}_{\epsilon, \bar{U}}(\Pi)$.

Consequently, for $0 \leq \epsilon < \max_{i \in [n]} \{C_i - (\beta_i - \alpha) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}\}$, it holds that $\text{Cone}_{\epsilon, \bar{U}}(\Pi) \subsetneq (\mathbb{S}_{\mathcal{X}_{\text{abs}}})^n$, i.e., the protocol Π is not $(\epsilon, \mathcal{X}_{\text{abs}})$ -compliant w.r.t. \bar{U} . □

Before concluding, let us examine the variables of the bound $\max_{i \in [n]} \{C_i - (\beta_i - \alpha) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}\}$ of Theorem 3. We note that, in the context of blockchain systems, a “party” is equivalent to a unit of power; therefore, a party \mathcal{P} that controls $\mu_{\mathcal{P}}$ of the total power, in effect controls $\mu_{\mathcal{P}}$ of all “parties” that participate in the blockchain protocol.

To discuss α and β_i , we first consider the liveness property [38] of blockchain protocols. Briefly, if a protocol guarantees liveness with parameter u , then a transaction which is diffused on slot r is part of the (finalized) ledger of every honest party on round $r + u$. Therefore, assuming that the environment gives at least one transaction to the parties, if a protocol Π guarantees liveness unless with negligible probability $\text{negl}(\kappa)$,³ then at least one block is created during the execution with overwhelming probability (in κ).

Now, we consider α and β_i . The former is negligible, since consensus protocols typically guarantee liveness against a number of crash (or Byzantine) faults, let alone if all parties are honest. The latter, however, depends on \mathcal{P}_i 's percentage of power $\mu_{\mathcal{P}_i}$. For instance, consider Ouroboros, which is secure if a deviating party \mathcal{P}_i controls less than $\frac{1}{2}$ of the staking power and all others employ Π . Thus, if $\mu_{\mathcal{P}_i} = \frac{2}{3}$ and \mathcal{P}_i abstains, the protocol cannot guarantee liveness, i.e., it is probable that no blocks are created. However, if $\mu_{\mathcal{P}_i} = \frac{1}{4}$, then liveness is guaranteed with overwhelming probability; hence, even if \mathcal{P}_i abstains, at least one block is typically created. Corollary 1 generalizes this argument, by showing that, if enough parties participate, then at least one of them is small enough, such that its abstaining does not result in a system halt, hence it is incentivized to be non-compliant.

Corollary 1. *Let Π be a blockchain protocol, with security parameter κ , which is run by n parties, under the same considerations of Theorem 3. Additionally, assume that Π has liveness with security threshold $\frac{1}{x}$ in the following sense: for every strategy profile σ , if $\sum_{\mathcal{P} \in \mathbb{P}_{-\sigma}} \mu_{\mathcal{P}} < \frac{1}{x}$, where $\mathbb{P}_{-\sigma}$ is the set of parties that deviate from Π when σ is followed, then Π guarantees liveness with overwhelming (i.e., $1 - \text{negl}(\kappa)$) probability. If $x < n$, then for (non-negligible) values $\epsilon < \max_{i \in [n]} \{C_i\} - \text{negl}(\kappa)$, Π is not $(\epsilon, \mathcal{X}_{\text{abs}})$ -compliant w.r.t. \bar{U} .*

Proof. First, since Π guarantees liveness even under some byzantine faults, $\alpha = \text{negl}(\kappa)$.

Second, if $x < n$, then there exists $i \in [n]$ such that $\mu_{\mathcal{P}_i} < \frac{1}{x}$. To prove this, if $n > x$ and $\forall j \in [n] : \mu_{\mathcal{P}_j} \geq \frac{1}{x}$ then $\sum_{j \in [n]} \mu_{\mathcal{P}_j} \geq \frac{n}{x} > 1$. This contradicts to the definition of the parties' participating power (cf. Section 2), where it holds that $\sum_{j \in [n]} \mu_{\mathcal{P}_j} = 1$.

Now consider the strategy profile σ where \mathcal{P}_i abstains and all the other parties honestly follow Π . Then, by definition, $\mathbb{P}_{-\sigma} = \{\mathcal{P}_i\}$ and therefore,

$$\sum_{\mathcal{P} \in \mathbb{P}_{-\sigma}} \mu_{\mathcal{P}} = \mu_{\mathcal{P}_i} < \frac{1}{x}.$$

³Recall that κ is Π 's security parameter, while $\text{negl}(\cdot)$ is a negligible function.

Thus, by the assumption for Π , we have that if the parties follow σ , then Π guarantees liveness with $1 - \text{negl}(\kappa)$ probability. Hence, $\beta_i = \text{negl}(\kappa)$. Finally, since $\xi(\mu_{\mathcal{P}_i}) \in [0, 1]$ and \mathcal{R} is a finite value irrespective of the parties’ strategy profile, the value $(\beta_i - \alpha) \cdot \xi(\mu_{\mathcal{P}_i}) \cdot \mathcal{R}$ is also negligible in κ . \square

The minimal cost $C_{\mathcal{P}_i}^{\perp}$ of (honest) participation for party \mathcal{P}_i depends on the blockchain system’s mechanism. In PoW systems, where participation consists of repeatedly performing computations, cost increases with the percentage of mining power; for instance, controlling 51% of Bitcoin’s mining power for 1 hour costs \$1,700,000.⁴ In PoS systems, cost is typically irrespective of staking power, since participation consists only of monitoring the network and regularly signing messages; for example, running a production-grade Cardano node costs \$180 per month⁵. Therefore, considering Corollary 1, the upper bound $\max_{i \in [n]} \{C_i\} - \text{negl}(\kappa)$ of ϵ is typically rather large for PoS systems.

The free-rider hazard is manifested in Algorand⁶, a cryptocurrency system that follows the Algorand consensus protocol [15, 43] and employs resource-proportional rewards, as defined above. Its users own “Algo” tokens and transact over a ledger maintained by “participation nodes”, which run the Algorand protocol and extend the ledger via blocks. Each user receives a fixed reward⁷ per Algo token they own [35], awarded with every new block. Users may also run a participation node, but are not rewarded [34] for doing so, and participation is proportional to the amount of Algos that the user owns. Therefore, a party that owns a few Algos will expectedly abstain from participation in the consensus protocol.

Remark. In summary, under resource-proportional rewards in PoS protocols, users may choose to abstain. This can impact performance, e.g., delaying block production and transaction finalization while, in the extreme case, it could result in a “tragedy of the commons” situation [64], where all users abstain and the system grinds to a halt. Interestingly, this section illustrates a difference between PoW and PoS. In PoS systems, each party’s power is registered on the ledger, without requiring any action from them. In PoW, power becomes evident only after the party puts their hardware to work. Therefore, the idea behind Theorem 3’s proof, which relies on abstaining, does not necessarily hold in PoW systems, like Fruitchains [81], that define rewards (approximately) proportional to each party’s mining power, as identified by their hashing operations.

5 Block-Proportional Rewards

The arguably most common type of rewards in blockchain systems is *block-proportional* rewards. Each party is rewarded proportionally to the number of blocks it contributes to the final chain, at the end of the execution. Block-proportional rewards are a generalization of the *proportional allocation rule*, which, for example, is employed in Bitcoin. The proportional allocation rule states that a party \mathcal{P} ’s *expected* rewards of a single block are $\mu_{\mathcal{P}}$. As shown by Chen *et al.* [16], this is the unique allocation rule that satisfies a list of desirable properties, namely: i) non-negativity, ii) budget-balance, iii) symmetry, iv) sybil-proofness, and v) collusion-proofness.

Our work expands the scope by considering proportional rewards w.r.t. blocks for the entirety of the execution. Specifically, Definition 9 describes block-proportional rewards, where a party \mathcal{P} ’s rewards are *strictly monotonically increasing* on the number of blocks that \mathcal{P} contributes to the chain output by the observer Ω . The definition considers a *proportional reward function* $\varrho(\cdot, \cdot)$ that takes as input the chain of Ω and \mathcal{P} and outputs a value in $[0, 1]$.

Definition 9 (Block-Proportional Rewards). *For an execution trace \mathfrak{S} , let $C_{\Omega, \mathfrak{S}}$ be the chain output by Ω and $\mathcal{R}_{\Omega, \mathfrak{S}} \in \mathbb{R}_{\geq 0}$ be the total number of rewards which are distributed by the protocol,*

⁴<https://www.crypto51.app> [February 2022]

⁵<https://forum.cardano.org/t/realistic-cost-to-operate-stake-pool/40056> [January 2022]

⁶<https://algorand.foundation>

⁷The weekly reward per owned Algo is 0.00012 Algos. [<https://algoexplorer.io/rewards-calculator>, February 2022]

according to Ω . Let $M_{\mathcal{P},\mathfrak{S}}$ be the number of blocks in the chain output by Ω which are produced by \mathcal{P} . A block-proportional reward random variable $R_{\mathcal{P},\mathfrak{E}}$ satisfies the following conditions:

1. $\forall \mathfrak{S} \forall \mathcal{P} \in \mathbb{P} : R_{\mathcal{P},\mathfrak{S}} = \varrho(\mathcal{C}_{\Omega,\mathfrak{S}}, \mathcal{P}) \cdot \mathcal{R}_{\Omega,\mathfrak{S}}$
2. $\forall \mathfrak{S} : \sum_{\mathcal{P} \in \mathbb{P}} \varrho(\mathcal{C}_{\Omega,\mathfrak{S}}, \mathcal{P}) = 1$
3. $\forall \mathfrak{S} \forall \mathcal{P}, \mathcal{P}' \in \mathbb{P} : M_{\mathcal{P},\mathfrak{S}} > M_{\mathcal{P}',\mathfrak{S}} \Rightarrow \varrho(\mathcal{C}_{\Omega,\mathfrak{S}}, \mathcal{P}) > \varrho(\mathcal{C}_{\Omega,\mathfrak{S}}, \mathcal{P}')$

5.1 Bitcoin

First, we consider the Bitcoin [73] blockchain protocol. Bitcoin is a prime example of a family of protocols that links the amount of valid blocks, that each party can produce per execution, with the party's hardware capabilities, including: i) Proof-of-Work-based protocols like Ethereum [91], Bitcoin NG [28], Zerocash [8]; ii) Proof-of-Space [25] and Proof-of-Space-Time [72] protocols like SpaceMint [80], Chia [1, 18].

Execution Details. Typically, protocols from the aforementioned family enforce that, when all parties follow the protocol honestly, the expected percentage of blocks created by a party \mathcal{P} is $\mu_{\mathcal{P}}$ of the total blocks produced by all parties during the execution. Along the lines of the formulation in [39, 40], in the Bitcoin protocol, each party \mathcal{P} can make at most $\mu_{\mathcal{P}} \cdot q$ queries to the hashing oracle \mathcal{O}_{Π} per time slot, where q is the total number of queries that all parties can make to \mathcal{O}_{Π} during a time slot. We note that when \mathcal{P} follows the Bitcoin protocol, they perform exactly $\mu_{\mathcal{P}} \cdot q$ queries to the hashing oracle. Each query can be seen as an independent block production trial and is successful with probability δ , which is a protocol-specific “mining difficulty” parameter.

From the point of view of the observer Ω , a party \mathcal{P} is rewarded a fixed amount R for each block they contribute to the chain output by Ω . Then, Bitcoin implements a special case of block-proportional rewards (cf. Definition 9), such that:

- The total number of rewards for \mathfrak{S} is $\mathcal{R}_{\Omega,\mathfrak{S}} = |\mathcal{C}_{\Omega,\mathfrak{S}}| \cdot R = \left(\sum_{\hat{\mathcal{P}} \in \mathbb{P}} M_{\hat{\mathcal{P}},\mathfrak{S}} \right) \cdot R$, where $|\cdot|$ denotes the length of a chain in blocks.
- The proportional reward function $\varrho(\cdot, \cdot)$ is defined as $\varrho(\mathcal{C}_{\Omega,\mathfrak{S}}, \mathcal{P}) = \frac{M_{\mathcal{P},\mathfrak{S}}}{|\mathcal{C}_{\Omega,\mathfrak{S}}|} = \frac{M_{\mathcal{P},\mathfrak{S}}}{\sum_{\hat{\mathcal{P}} \in \mathbb{P}} M_{\hat{\mathcal{P}},\mathfrak{S}}}$.

Thus, by Definition 9, we have that:

$$\forall \mathfrak{S} \forall \mathcal{P} \in \mathbb{P} : R_{\mathcal{P},\mathfrak{S}} = \varrho(\mathcal{C}_{\Omega,\mathfrak{S}}, \mathcal{P}) \cdot \mathcal{R}_{\Omega,\mathfrak{S}} = M_{\mathcal{P},\mathfrak{S}} \cdot R. \quad (4)$$

In Bitcoin, on each time slot a party keeps a local chain, which is the longest among all available chains. If multiple longest chains exist, the party follows the chronological ordering of messages.

Following, we assume that none of the participating parties has complete control over message delivery. Therefore, when two parties $\mathcal{P}, \mathcal{P}'$ produce blocks for the same index on the same time slot, it may be unclear which is adopted by third parties that follow the protocol, i.e., depending on which arrives first.

Furthermore, the *index* of each block m is an integer that identifies the distance of m from \mathcal{B}_G , i.e., its height in the tree of blocks. Blocks on the same height, but different branches, have the same index but are non-equivalent (recall, that two messages are equivalent if their hash is equal).

Bitcoin is an Approximate Nash Equilibrium w.r.t. Reward. We prove that under our model, the Bitcoin protocol is a $\Theta(\delta^2)$ -Nash equilibrium w.r.t. the utility *Reward* (hence, by Theorem 1, it is also a $(\Theta(\delta^2), \mathcal{X})$ -compliant w.r.t. the same utility, where \mathcal{X} is any associated infraction predicate) and any synchronous router. By Definition 7 and Eq. (4), we have that when parties follow the strategy profile σ , the utility $U_{\mathcal{P}}$ of party \mathcal{P} is

$$U_{\mathcal{P}}(\sigma) = E[M_{\mathcal{P},\mathfrak{E}_\sigma}] \cdot R, \quad (5)$$

where $M_{\mathcal{P}, \varepsilon_r}$ is the (random variable) number of blocks produced by \mathcal{P} in the chain output by Ω and R is the fixed amount of rewards per block. Our analysis considers typical values of the success probability δ , sufficiently small such that $\delta \cdot q < 1$ (recall that q is the total number of oracle queries available to all parties per slot). We say that party \mathcal{P} is *successful* during time slot r , if \mathcal{P} manages to produce at least one block, i.e., at least one oracle query submitted by \mathcal{P} during r was successful. The time slot r is *uniquely successful* for \mathcal{P} , if no other party than \mathcal{P} manages to produce a block in r . Theorem 4 is the main result of this subsection, which uses in its proof the result of Lemma 2.

Lemma 2. *Assume an execution trace \mathfrak{S} of the Bitcoin protocol where all parties follow the honest strategy under a synchronous router. Let $\mathcal{B}_1, \dots, \mathcal{B}_k$ be a sequence of blocks produced by party $\mathcal{P} \in \mathbb{P}$ during a time slot r that was uniquely successful for \mathcal{P} in \mathfrak{S} . Then, $\mathcal{B}_1, \dots, \mathcal{B}_k$ will be part of the chain output by observer Ω .*

Proof. Let h be the height of \mathcal{B}_1 . Then, for every $j \in \{1, \dots, k\}$, the height of the block \mathcal{B}_j is $h + j - 1$. Assume for the sake of contradiction that there is a $j^* \in [k]$ such that \mathcal{B}_{j^*} is not in the observer's chain. Since each block contains the hash of the previous block in the chain of Ω , the latter implies that the subsequence $\mathcal{B}_{j^*}, \dots, \mathcal{B}_k$ is not in the observer's chain. There are two reasons that \mathcal{B}_{j^*} is missing from the observer's chain.

1. The observer Ω never received \mathcal{B}_{j^*} . However, after the end of time slot r , Ω will be activated and fetch the messages included in its $\text{RECEIVE}_\Omega()$ string. Therefore, the case that Ω never received \mathcal{B}_{j^*} cannot happen.
2. The observer has another block \mathcal{B}'_{j^*} included in its chain that has the same height, $h + j^* - 1$, as \mathcal{B}_{j^*} . Since r was uniquely successful for \mathcal{P} in \mathfrak{S} , the block \mathcal{B}'_{j^*} must have been produced in a time slot r' that is different than r . Assume that \mathcal{P} produced the block sequence $\mathcal{B}'_{j^*}, \dots, \mathcal{B}'_{k'}$ during r' . We examine the following two cases:
 - (a) $r > r'$: then \mathcal{B}'_{j^*} was produced before \mathcal{B}_{j^*} , so in time slot $r' + 1$ all parties received (at least) the sequence $\mathcal{B}'_{j^*}, \dots, \mathcal{B}'_{k'}$. All parties select the longest chain, so the chain that they will select will have at least $h + k' - 1 \geq h + j^* - 1$ number of blocks in $r' + 1$. Thus, for time slot $r \geq r' + 1$ the parties submit queries for producing blocks which height is at least $h + k' > h + j^* - 1$. So at time slot r , the party \mathcal{P} cannot have produced a block which height is $\leq h + j^* - 1$.
 - (b) $r < r'$: then \mathcal{B}_{j^*} was produced before \mathcal{B}'_{j^*} . So in time slot $r + 1$ all parties receive the sequence $\mathcal{B}_1, \dots, \mathcal{B}_k$. Thus, they will adopt a chain with at least $h + k - 1 \geq h + j^* - 1$ number of blocks. Thus, for time slot $r' \geq r + 1$ the parties submit queries for producing blocks with height at least $h + k > h + j^* - 1$. Therefore, \mathcal{P} cannot have produced a block of height $\leq h + j^* - 1$ during time slot r' .

By the above, \mathcal{B}_{j^*} is a block with height $h + j^* - 1$ received by Ω and no other block with height $h + j^* - 1$ is included in Ω 's chain. Since Ω adopts the longest chain, there must be a block with height $h + j^* - 1$ that is included in its chain. It is straightforward that this block will be \mathcal{B}_{j^*} , which leads to contradiction. □

Theorem 4. *Let: i) $N \geq \kappa^c$ be the number of time slots of the execution, where κ is the security parameter and c is a sufficiently large constant; ii) \bar{U} be the utility vector where each party employs the utility Reward; iii) \mathcal{A} be a synchronous router. The Bitcoin protocol is an ϵ -Nash equilibrium w.r.t. \bar{U} under \mathcal{A} , for $\epsilon := \frac{NRq^2}{2} \delta^2$.*

Proof. Consider a protocol execution where all parties follow the honest strategy Π , with σ_Π denoting the profile $\langle \Pi, \dots, \Pi \rangle$. Let \mathcal{P} be a party and $\mu_{\mathcal{P}}$ be its mining power. For $r \in [N]$, let $X_{\mathcal{P}, r}^{\sigma_\Pi}$ be the random variable that is 1 if the time slot r is uniquely successful for \mathcal{P} and 0 otherwise. By protocol description, a party \mathcal{P}' makes $\mu_{\mathcal{P}'} \cdot q$ oracle queries during r , each with

success probability δ . Thus:

$$\begin{aligned}
& \Pr[X_{\mathcal{P},r}^{\sigma_{\Pi}} = 1] = \\
& = \Pr[\mathcal{P} \text{ is successful during } r] \cdot \\
& \quad \cdot \Pr[\text{all the other parties produce no blocks in } r] = \\
& = \left(1 - (1 - \delta)^{\mu_{\mathcal{P}}q}\right) \cdot \prod_{\mathcal{P}' \neq \mathcal{P}} (1 - \delta)^{\mu_{\mathcal{P}'}q} = \\
& = \left(1 - (1 - \delta)^{\mu_{\mathcal{P}}q}\right) \cdot (1 - \delta)^{(1 - \mu_{\mathcal{P}})q} = \\
& = (1 - \delta)^{(1 - \mu_{\mathcal{P}})q} - (1 - \delta)^q.
\end{aligned} \tag{6}$$

The random variable $X_{\mathcal{P},\varepsilon_{\sigma_{\Pi}}} := \sum_{r \in [N]} X_{\mathcal{P},r}^{\sigma_{\Pi}}$ expresses the number of uniquely successful time slots for \mathcal{P} . By Eq. (6), $X_{\mathcal{P}}^{\Pi}$ follows the binomial distribution with N trials and probability of success $(1 - \delta)^{(1 - \mu_{\mathcal{P}})q} - (1 - \delta)^q$. Therefore: $E[X_{\mathcal{P},\varepsilon_{\sigma_{\Pi}}}] = N \left((1 - \delta)^{(1 - \mu_{\mathcal{P}})q} - (1 - \delta)^q \right)$.

Let $M_{\mathcal{P},\varepsilon_{\sigma_{\Pi}}}$ be the number of blocks produced by \mathcal{P} included in the chain output by the observer Ω . In a uniquely successful time slot r , \mathcal{P} produces at least one block, and by Lemma 2, all the blocks that \mathcal{P} produces during r will be included in the chain output by the observer. Therefore, for all random coins $M_{\mathcal{P},\varepsilon_{\sigma_{\Pi}}} \geq X_{\mathcal{P},\varepsilon_{\sigma_{\Pi}}}$ and so it holds that:

$$E[M_{\mathcal{P},\varepsilon_{\sigma_{\Pi}}}] \geq E[X_{\mathcal{P},\varepsilon_{\sigma_{\Pi}}}] = N \left((1 - \delta)^{(1 - \mu_{\mathcal{P}})q} - (1 - \delta)^q \right). \tag{7}$$

Now assume that \mathcal{P} decides to unilaterally deviate from the protocol, following a strategy S . Let σ denote the respective strategy profile. Let $Z_{\mathcal{P},\varepsilon_{\sigma}}$ be the number of blocks that \mathcal{P} produces by following S and $M_{\mathcal{P},\varepsilon_{\sigma}}$ be the number of blocks produced by \mathcal{P} that will be included in the chain output by Ω . Clearly, for all random coins $M_{\mathcal{P},\varepsilon_{\sigma}} \leq Z_{\mathcal{P},\varepsilon_{\sigma}}$. Without loss of generality, we may assume that \mathcal{P} makes all of their $N\mu_{\mathcal{P}}q$ available oracle queries (indeed, if \mathcal{P} made less than $N\mu_{\mathcal{P}}q$ queries then on average it would produce less blocks). Thus, we observe that $Z_{\mathcal{P},\varepsilon_{\sigma}}$ follows the binomial distribution with $N\mu_{\mathcal{P}}q$ trials and probability of success δ . Thus:

$$E[M_{\mathcal{P},\varepsilon_{\sigma}}] \leq [Z_{\mathcal{P},\varepsilon_{\sigma}}] = N\mu_{\mathcal{P}}q\delta. \tag{8}$$

By definition of $U_{\mathcal{P}}$ in Eq. (5) and Eq. (7) and (8), for fixed block rewards R and for every strategy S that \mathcal{P} may follow, we have:

$$\begin{aligned}
U_{\mathcal{P}}(\sigma) - U_{\mathcal{P}}(\sigma_{\Pi}) & = E[M_{\mathcal{P},\varepsilon_{\sigma}}] \cdot R - E[M_{\mathcal{P},\varepsilon_{\sigma_{\Pi}}}] \cdot R \leq \\
& \leq N\mu_{\mathcal{P}}q\delta R - N \left((1 - \delta)^{(1 - \mu_{\mathcal{P}})q} - (1 - \delta)^q \right) R.
\end{aligned} \tag{9}$$

By Bernoulli's inequality, we have that: $(1 - \delta)^{(1 - \mu_{\mathcal{P}})q} \geq 1 - (1 - \mu_{\mathcal{P}})q\delta$. Besides, by binomial expansion, and the assumption that $\delta \cdot q < 1$ we have that: $(1 - \delta)^q \leq 1 - q\delta + \frac{q^2}{2}\delta^2$. Thus, by applying the two above inequalities in Eq. (9), we get that:

$$\begin{aligned}
U_{\mathcal{P}}(\sigma) - U_{\mathcal{P}}(\sigma_{\Pi}) & \leq N\mu_{\mathcal{P}}q\delta R - N \left((1 - \delta)^{(1 - \mu_{\mathcal{P}})q} - (1 - \delta)^q \right) R \leq \\
& \leq N\mu_{\mathcal{P}}q\delta R - N \left(1 - (1 - \mu_{\mathcal{P}})q\delta - \left(1 - q\delta + \frac{q^2}{2}\delta^2 \right) \right) R = \\
& = N\mu_{\mathcal{P}}q\delta R - N \left(\mu_{\mathcal{P}}q\delta - \frac{q^2}{2}\delta^2 \right) R = \\
& = \frac{NRq^2}{2} \delta^2
\end{aligned} \tag{10}$$

By Eq. (10), Bitcoin is an ϵ -Nash equilibrium for $\epsilon := \frac{NRq^2}{2} \delta^2$.

□

Remark. The result of Theorem 4 is in agreement with previous works [58, 55], while similar results exist w.r.t. *profit* [5]. Nonetheless, there are a few remarks to be made. A well-known implication from the selfish mining attack [29, 84] is that Bitcoin is not an equilibrium w.r.t. relative rewards. However, selfish mining relies on withholding a block’s publication, which is a compliant behavior (w.r.t. \mathcal{X}_{bc} , Definition 6). Second, our analysis assumes fixed difficulty, while Bitcoin operates under variable difficulty, which is computed on regular intervals depending on the active mining power. Various interesting result exist for the variable difficulty setting: i) [47] showed that Bitcoin is not an equilibrium w.r.t. rewards, as selfish mining is more profitable; ii) [33] showed that Bitcoin is not an equilibrium w.r.t. profit, as miners stop performing *some* hashing queries to artificially reduce the difficulty; iii) [46] showed that Bitcoin is not an equilibrium w.r.t. profit in some cases (depending on the cost mechanism) and seemingly also non-compliant w.r.t. \mathcal{X}_{abs} , as miners take turns shutting down and resuming operations per difficulty adjustment epoch. Therefore, Bitcoin’s compliance under alternative utilities, variable difficulty, and alternative infraction predicates (e.g., enabling some flexibility in the amount of hashing queries) is a promising line of future research.

5.2 Proof-of-Stake

Proof-of-Stake (PoS) systems differ from Bitcoin in a few points. Typically, the execution of such systems is organized in *epochs*, each consisting of a fixed number l_e of time slots. On each slot, a specified set of parties is eligible to participate in the protocol. Depending on the protocol, the leader schedule of each epoch may or may not be a priori public.

The core difference with PoW concerns the power $\mu_{\mathcal{P}}$ of each party. In PoS, $\mu_{\mathcal{P}}$ represents their *stake* in the system, i.e., the number of coins that \mathcal{P} owns. Stake is dynamic, therefore the system’s coins may change hands and the leader schedule of each epoch depends on the stake distribution at the beginning of the epoch.⁸ As in Bitcoin, each party participates proportionately to their power, so the expected ratio of slots for which \mathcal{P} is leader over the total number of the epoch’s slots is $\mu_{\mathcal{P}}$.

Also, in PoS protocols, the oracle \mathcal{O}_{Π} does not perform hashing as in Bitcoin. Instead, it is parameterized by the leader schedule and typically performs signing. A signature output by \mathcal{O}_{Π} is valid if and only if the input message is submitted by the slot leader in time. This introduces two important consequences: i) only the slot leader can produce valid messages during a given slot; ii) the leader can produce as many valid messages as the number of possible queries to \mathcal{O}_{Π} .

In the next paragraphs, we use the following notation:

- C : the cost of a single query to \mathcal{O}_{Π} ;
- R : the (fixed) reward per block;
- e : the number of epochs in an execution;
- l_e : the number of slots per epoch;
- $\mu_{\mathcal{P},j}$: the power of party \mathcal{P} on epoch j .

5.2.1 Single-Leader Proof-of-Stake

As before, we analyze a representative of a family of protocols; the family is single-leader PoS (SL-PoS) and the representative is Ouroboros [54]. The SL-PoS family includes systems like EOS⁹ and Ouroboros BFT [53], while the analysis is also applicable (with minor changes) on Gasper (cf. Appendix A). We again utilize the blockchain infraction predicates (cf. Definition 6). Section 4 showed that resource-proportional rewards do not necessarily guarantee compliance. Ouroboros, as a consensus protocol, does not define rewards, but the authors proposed a complex reward mechanism that approximates resource-proportional rewards. Nonetheless,

⁸In reality, the snapshot of the stake distribution is retrieved at an earlier point of the previous epoch, but we can employ this simplified version without loss of generality.

⁹https://developers.eos.io/welcome/latest/protocol/consensus_protocol

the Ouroboros implementation (in Cardano) employs block-proportional rewards, so we will also consider fixed rewards per block (cf. Definition 9).

On each slot, Ouroboros defines a single party, the “slot leader”, as eligible to create a valid message. Specifically, the protocol restricts that a leader cannot extend the chain with multiple blocks for the same slot, therefore all honest parties extend their chain by at most 1 block per slot. The leader schedule is public and is computed at the beginning of each epoch via a secure, publicly verifiable Multi-Party Computation (MPC) sub-protocol, which cannot be biased by any single party. To prevent long-range attacks [10], Ouroboros employs a form of rolling checkpoints (“a bounded-depth longest-chain rule” [54]), i.e., a party ignores forks that stem from a block older than a (protocol-specific) limit from the adopted chain’s head (it should be noted that subsequent versions of Ouroboros did not utilize the same logic, cf. Subsection 5.2.2).

Generalizing from the above, a SL-PoS protocol demonstrates the following properties:

- the execution is organized in epochs;
- within each epoch, a single party (the *leader*) is eligible to produce a message per index;
- a party which is online considers the blocks of each past epoch finalized (i.e., does not remove them in favor of a competing, albeit possibly longer, chain);
- no single party with power less than $\frac{1}{2}$ can bias the epoch’s leader schedule.

Synchronous network. First, we assume a diffuse functionality parameterized by a synchronous router (cf. Section 2.1). Theorem 5 shows that SL-PoS with block-proportional rewards is an ϵ -Nash equilibrium for negligible ϵ (hence, by Theorem 1, it is also (ϵ, \mathcal{X}) -compliant, \mathcal{X} being any associated infraction predicate); this result is in line with the incentives’ analysis of Ouroboros [54]. We remark that [9] explored the same setting (synchronous, longest-chain PoS) and identified a selfish mining-like attack against so-called “predictable” protocols, like Ouroboros. This result was later refined by [32], showing that such attacks are profitable for participants controlling more than 32.5% of total stake. Nonetheless, that line of research targeted relative rewards and relied on withholding a block’s publication for some time; our work considers absolute rewards and does not consider block withholding as non-compliant behavior.

Theorem 5. *Assume: i) a synchronous router \mathcal{A} ; ii) $\forall \mathcal{P} \in \mathbb{P} : \mu_{\mathcal{P}} < \frac{1}{2}$. SL-PoS with block-proportional rewards (Definition 9 for fixed block reward R) is an ϵ -Nash equilibrium w.r.t. utility Reward and, if $R > C$, is an ϵ -Nash equilibrium w.r.t. utility Profit, both for negligible ϵ and under \mathcal{A} .*

Proof. To prove the statement, it suffices to show that, if the assumptions hold, no party can increase its reward more than ϵ by unilaterally deviating from the protocol, where $\epsilon = \text{negl}(\kappa)$.

First, if all parties control a minority of staking power, no single party can bias the slot leader schedule for any epoch (unless with $\text{negl}(\kappa)$ probability). Therefore, the (maximum) expected number of slots for which each party \mathcal{P} is leader is $\sum_{j \in [1, e]} l_e \cdot \mu_{\mathcal{P}, j}$, where $\mu_{\mathcal{P}, j}$ is the percentage of staking power of \mathcal{P} during the j -th epoch.

Second, if all parties follow Π , then the total expected rewards for each party \mathcal{P} are $R \cdot \sum_{j \in [1, e]} l_e \cdot \mu_{\mathcal{P}, j}$. This is a direct consequence of the network synchronicity assumption. Specifically, on slot r the (single) leader \mathcal{P} creates exactly one block \mathcal{B} , which extends the longest chain (adopted by \mathcal{P}). At the beginning of slot $r + 1$, all other parties receive \mathcal{B} and, since \mathcal{B} is now part of the (unique) longest chain, all parties adopt it. Consequently, all following leaders will extend the chain that contains \mathcal{B} , so eventually \mathcal{B} will be in the chain output by Ω . Therefore, if all parties follow the protocol and no party can bias the leader schedule, then no party can increase its expected rewards by deviating from the protocol.

Regarding profit, a leader creates a block by performing a single query to \mathcal{O}_{Π} . Additionally, cost depends only on the number of such queries. Therefore, if the cost of performing a single query is less than R , then the profit per slot is larger than 0, so abstaining from even a single slot reduces the expected aggregate profit; therefore, all parties are incentivized to participate in all slots. \square

Lossy network. Second, we assume a lossy, randomized router (cf. Section 2.1).¹⁰ Theorem 6 shows that SL-PoS with block proportional rewards is *not* compliant w.r.t. the conflicting infraction predicate $\mathcal{X}_{\text{conf}}$; specifically, it shows that ϵ is upper-bounded by a large value, which is typically non-negligible.

Theorem 6. *Assume: i) a lossy, randomized router \mathcal{A} with (non-negligible) parameter d (cf. Section 2.1); ii) $\forall \mathcal{P}' \in \mathbb{P} : \mu_{\mathcal{P}'} < \frac{1}{2}$; iii) \mathcal{P} is the party with maximum power $\mu_{\mathcal{P}}$ across the execution and $s_{\mathcal{P}} = \sum_{j \in [1, e]} l_e \cdot \mu_{\mathcal{P}, j}$ is the expected number of slots for which \mathcal{P} is leader; iv) $(1 - d) \cdot R \gg C$.*

SL-PoS with block-proportional rewards (cf. Definition 9) is not $(\epsilon, \mathcal{X}_{\text{conf}})$ -compliant (cf. Definition 5) w.r.t. : i) utility Reward for (non-negligible) $\epsilon < (d - d^t) \cdot R \cdot s_{\mathcal{P}}$; ii) utility Profit for (non-negligible) $\epsilon < ((d - d^t) \cdot R - (t - 1) \cdot C) \cdot s_{\mathcal{P}}$, where $t = \lfloor \frac{\ln(\frac{C}{R \cdot \ln(1/d)})}{\ln(d)} \rfloor$, in both cases under \mathcal{A} .

Proof. Since d is an independent probability, \mathcal{P} cannot bias it in any way. Therefore, \mathcal{P} can only try to increase its rewards (beyond R_H) by performing multiple queries. To prove the statement, we will show that a party is indeed incentivized to produce multiple conflicting blocks, in order to increase the probability that at least one of them is delivered.

Following the honest model, a party's expected rewards are

$$R_H = (1 - d) \cdot R \cdot \sum_{j \in [1, e]} l_e \cdot \mu_{\mathcal{P}, j}$$

and its expected profit is

$$P_H = ((1 - d) \cdot R - C) \cdot s_{\mathcal{P}}$$

Regarding utility *Reward*, assume a deviation S_t , s.t. every time \mathcal{P} is the leader of a slot, \mathcal{P} creates t conflicting blocks. Observe that, if at least one of the t blocks is not lost, then \mathcal{P} will get the reward for the corresponding block (similar to the proof of Theorem 5).

The expected rewards under S_t are:

$$R_{S_t} = (1 - d^t) \cdot R \cdot s_{\mathcal{P}}$$

As t tends to ∞ , d^t tends to 0, therefore R_{S_t} tends to $R \cdot s_{\mathcal{P}}$, which is the maximum possible amount of rewards that \mathcal{P} can hope for. Therefore, the deviation S_{∞} is the best response and the utility improvement is: $(d - d^t) \cdot R \cdot s_{\mathcal{P}}$.

When \mathcal{P} performs t queries, their aggregate cost is $t \cdot C$. Therefore, the profit under S_t is:

$$P_{S_t} = ((1 - d^t) \cdot R - t \cdot C) \cdot s_{\mathcal{P}}$$

Since $(1 - d) \cdot R \gg C$, performing multiple queries yields higher expected profit. However, as more queries are performed, the increase rate of the profit P_{S_t} decreases, until a point where the expected rewards become less than the cost of performing t queries. To compute this threshold we consider the function of the difference between the profit of the honest protocol and S_t :

$$\begin{aligned} f(t) &= (((1 - d^t) \cdot R - t \cdot C) - ((1 - d) \cdot R - C)) \cdot s_{\mathcal{P}} \Rightarrow \\ \Rightarrow f(t) &= ((d - d^t) \cdot R - (t - 1) \cdot C) \cdot s_{\mathcal{P}} \end{aligned}$$

To compute the t for which $f(t)$ is maximized, we consider the point where the derivative of f is 0:

$$\begin{aligned} f'(t) &= (-\ln(d) \cdot R \cdot d^t - C) \cdot s_{\mathcal{P}} = 0 \Rightarrow \\ \Rightarrow t &= \frac{\ln(-\frac{C}{R \cdot \ln(d)})}{\ln(d)}. \end{aligned}$$

□

¹⁰The randomized router is an example, which will be used to prove the negative result of Theorem 7. Other routers, which would model arguably more realistic networks, could also be considered to, possibly, achieve compliance results.

The lossy network analysis is particularly of interest as it was observed in practice. On December 2019, Cardano released its Incentivized Testnet (ITN)¹¹, where stakeholders, i.e., users owning Cardano’s currency, participated in PoS by forming stake pools that produced blocks. The ITN used proportional rewards and the SL-PoS execution model of epochs and slots. Each pool was elected as a slot leader proportionally to its stake and received its share of an epoch’s rewards based on its *performance*, i.e., the number of produced blocks compared to the *expected* blocks (based on its proportional stake). Thus, pool operators were particularly incentivized to avoid abstaining, i.e., failing to produce a block when elected. However, the network was unstable and lossy, so forks started to form. In turn, pools were incentivized¹² to “clone” their nodes, i.e., run multiple parallel instances, to increase network connectivity, reduce packet loss, and also extend all possible forks. To make matters worse, this solution both perpetuated forks and created new ones, as clones did not coordinate but produced different blocks, even when extending the same chain.

We note that, although a lossy network may render a PoS protocol non-compliant, the same does not hold for PoW. As described in the proof of Theorem 6, a party produces multiple blocks per slot to maximize the probability that one of them is eventually output by Ω . Notably, since the PoS protocol restricts that at most one block extends the longest chain per slot, these blocks are necessarily conflicting. However, PoW ledgers do not enforce such restriction; therefore, a party would instead create multiple consecutive (instead of parallel, conflicting) blocks, as covered in the proof of Theorem 4, which yields maximal expected rewards even under a lossy network.

5.2.2 Multi-Leader Proof-of-Stake

We now turn to multi-leader PoS (ML-PoS) and Ouroboros Praos [21], a representative of a family alongside Ouroboros Genesis [6], Peercoin [56], and Tezos’ baking system [88]. These protocols are similar SL-PoS, but with a core difference: multiple parties may be chosen as leaders for the same slot. As Theorem 7 shows, ML-PoS protocols are not compliant for block-proportional rewards. The core idea is the same as with SL-PoS under a lossy network: a party is incentivized to produce multiple blocks to decrease the probability that a competing leader’s competing block is adopted over their own. We note that, although consensus doesn’t enforce a tie-breaking policy for competing messages, parties typically opt for the message that arrives first. The dependency on randomized routing is also worth noting. Since alternative routers could yield positive results, an interesting research direction is to explore the class of routers under which compliance holds, possibly avoiding infractions via specially-crafted peer-to-peer message passing protocols.

Theorem 7. *Assume: i) a synchronous, randomized router \mathcal{A} (cf. Section 2.1); ii) $\forall \mathcal{P}' \in \mathbb{P} : \mu_{\mathcal{P}'} < \frac{1}{2}$; iii) \mathcal{P} is the party with maximum power $\mu_{\mathcal{P}}$ across the execution and $s_{\mathcal{P}} = \sum_{j \in [1, e]} l_e \cdot \mu_{\mathcal{P}, j}$ is the expected number of slots s.t. \mathcal{P} is leader; iv) $(1 - d) \cdot R \gg C$. Let p_l be the (protocol-dependent) probability that multiple leaders are elected in the same slot.*

ML-PoS with block-proportional rewards (cf. Definition 9) is not $(\epsilon, \mathcal{X}_{conf})$ -compliant (cf. Definition 5) w.r.t. : i) utility reward for (non-negligible) $\epsilon < \frac{p_l}{2} \cdot R \cdot s_{\mathcal{P}}$; ii) utility profit for (non-negligible) $\epsilon < (\frac{t-1}{2 \cdot (t+1)} \cdot p_l \cdot R - (t-1) \cdot C) \cdot s_{\mathcal{P}}$, where $t = \lfloor \sqrt{\frac{p_l \cdot R}{C}} \rfloor - 1$, in both cases under \mathcal{A} .

Proof. First, we define a bad event E , during which the expected rewards of party \mathcal{P} are less if following Π , compared to a non-compliant strategy.

Let r be a slot during which \mathcal{P} is leader, along with a different party \mathcal{P}' ; this occurs with probability p_l . Also, on slot $r + 1$ a single leader \mathcal{P}'' exists. E occurs if \mathcal{P}'' receives a block \mathcal{B}' from \mathcal{P}' before a block \mathcal{B} from \mathcal{P} and thus extends the former. If E occurs, the reward for slot r is credited to \mathcal{P}' .

Let p_E be the probability that E occurs. First, p_E depends on the probability p_l that multiple leaders exist alongside \mathcal{P} . p_l depends on the protocol’s leader schedule functionality,

¹¹<https://staking.cardano.org/>

¹²<https://www.reddit.com/r/cardano/comments/ekncza>

but is typically non-negligible. Second, it depends on the order delivery of $\mathcal{B}, \mathcal{B}'$; since the delivery is randomized, the probability p_n that \mathcal{B}' is delivered before \mathcal{B} is at most $p_n = \frac{1}{2}$. Therefore, it holds $p_E = p_l \cdot p_n = \frac{1}{2}p_l$, which is non-negligible.

If all parties follow Π , the expected reward of \mathcal{P} is at most $R_H = (1 - \frac{1}{2}p_l) \cdot R \cdot s_{\mathcal{P}}$.

The proof now follows the same reasoning as Theorem 6. Specifically, we will show a deviation s.t. \mathcal{P} creates multiple blocks to increase the probability that at least one of them is delivered to the other parties first.

Regarding utility *Reward*, assume a deviation S_t , s.t. every time \mathcal{P} is the leader of a slot, \mathcal{P} creates t conflicting blocks. The expected rewards under S_t are:

$$R_{S_t} = (1 - \frac{1}{t+1}p_l) \cdot R \cdot s_{\mathcal{P}}$$

As t tends to ∞ , $\frac{1}{t+1}$ tends to 0, therefore R_S tends to $R \cdot s_{\mathcal{P}}$, which is the maximum possible amount of rewards that \mathcal{P} can hope for. Therefore, the deviation S_{∞} is the best response and the utility improvement is: $\frac{p_l}{2} \cdot R \cdot s_{\mathcal{P}}$.

Regarding costs, the aggregate cost of t queries is $t \cdot C$. Therefore, the profit under S_t is:

$$P_{S_t} = ((1 - \frac{1}{t+1}p_l) \cdot R - t \cdot C) \cdot s_{\mathcal{P}}$$

As in Theorem 6, our goal is to find the maximum t s.t. the utility increase of P_{S_t} is maximized. Now, the utility increase function is:

$$\begin{aligned} f(t) &= (((1 - \frac{1}{t+1}p_l) \cdot R - t \cdot C) - ((1 - \frac{1}{2}p_l) \cdot R - C)) \cdot s_{\mathcal{P}} \Rightarrow \\ \Rightarrow f(t) &= (\frac{t-1}{2 \cdot (t+1)} \cdot p_l \cdot R - (t-1) \cdot C) \cdot s_{\mathcal{P}} \end{aligned}$$

To compute the t for which $f(t)$ is maximized, we consider the point where the derivative of f is 0:

$$\begin{aligned} f'(t) &= (\frac{p_l \cdot R}{(t+1)^2} - C) \cdot s_{\mathcal{P}} = 0 \Rightarrow \\ \Rightarrow t &= \sqrt{\frac{p_l \cdot R}{C}} - 1. \end{aligned}$$

□

6 Compliant Non-equilibria

So far, our positive results w.r.t. compliance relied on showing that the protocol is an equilibrium. In this section, we demonstrate the distinction between the two notions via protocols that are compliant w.r.t. a non-trivial infraction predicate, but not Nash equilibria.

Protocol specifications. To do this, we consider a simple, yet typical, Single-Leader PoS (SL-PoS) protocol Π , which features the following characteristics:

- The slot leaders are randomly elected, directly proportional to their staking power.
- The staking power $\mu_{\mathcal{P}}$ of a party \mathcal{P} remains fixed across the execution (this always holds when employing resource-proportional rewards).
- Only if elected as slot leader, \mathcal{P} will make a single query to the signing oracle \mathcal{O}_{Π} and casts the received block at the specific time slot.
- The single query cost is C , a (typically small) polynomial on the security parameter κ .

We provide two results. First, we show that, under resource-proportional rewards, Π is compliant w.r.t. \mathcal{X}_{conf} but non-compliant (hence not an equilibrium) w.r.t. \mathcal{X}_{abs} . Next, we show that, under block-proportional rewards, Π is compliant w.r.t. \mathcal{X}_{conf} but is susceptible to *selfish signing*, an attack akin to selfish mining, when it is “predictable”, i.e., the leader schedule is known in advance [9].

6.1 Proof-of-Stake under Resource Proportional Rewards

First, we consider Π under resource-proportional rewards (cf. Definition 8) and utility Profit and investigate its compliance w.r.t. the two types of attacks captured by $\mathcal{X}_{\text{conf}}$ and \mathcal{X}_{abs} (cf. Definition 6). The goal of this study is to show that, under a well-defined interval of approximation factor values, the protocol, although non \mathcal{X}_{abs} -compliant (hence, also non approximate Nash equilibrium), operates in a $\mathcal{X}_{\text{conf}}$ -compliant manner. We note that non \mathcal{X}_{abs} -compliance is consistent with Theorem 3; in particular, it applies that result and assigns concrete values to that theorem's generic parameters.

Theorem 8. *Let: i) Π be the SL-PoS blockchain protocol specified in Section 6.1; ii) \mathcal{A} be a synchronous router; iii) \mathcal{R} be the total rewards distributed by the protocol; iv) $\xi : [0, 1] \rightarrow [0, 1]$ be the identity resource-proportional reward function, i.e., $\xi(\mu_{\mathcal{P}}) = \mu_{\mathcal{P}}$; v) $N \geq \kappa^c$ be the number of time slots of the execution, where κ is the security parameter and c is a sufficiently large constant; vi) \mathcal{P}_{max} is the party with the maximum staking power $\mu_{\mathcal{P}_{\text{max}}}$. If $\mu_{\mathcal{P}_{\text{max}}} < \frac{1}{2}$, then the following hold: i) for every $\epsilon \geq 0$, Π is $(\epsilon, \mathcal{X}_{\text{conf}})$ -compliant w.r.t. utility Profit; ii) for $\epsilon_{\text{max}} := \mu_{\mathcal{P}_{\text{max}}} \cdot N \cdot C - \mu_{\mathcal{P}_{\text{max}}}^{N+1} \cdot \mathcal{R}$ and every $\epsilon < \epsilon_{\text{max}}$, Π is not $(\epsilon, \mathcal{X}_{\text{abs}})$ -compliant w.r.t. utility Profit, in both cases under \mathcal{A} .*

Proof. We begin by introducing a useful notion. We say that a strategy profile $\sigma = \langle S_1, \dots, S_n \rangle$ is $\mathcal{X}_{\text{conf}}$ -agnostic, if for every $i \in [n]$, the strategy S_i of \mathcal{P}_i does not depend on the $\mathcal{X}_{\text{conf}}$ -compliance of the other parties' strategies. For instance, S_i does not include checks such as “if some party is creating conflicting blocks, then create conflicting blocks”, or “if \mathcal{P}_j does not create conflicting blocks, then abstain”. Clearly, σ_{Π} is $\mathcal{X}_{\text{conf}}$ -agnostic. We note that an $\mathcal{X}_{\text{conf}}$ -agnostic strategy profile may still be non $\mathcal{X}_{\text{conf}}$ -compliant, i.e., the parties may create conflicting blocks independently of other parties' behavior.

In the following claim, we prove that it is not in the parties' interest to deviate by creating conflicting blocks, when they are behaving according to a $\mathcal{X}_{\text{conf}}$ -agnostic strategy profile.

Claim 8.1. *Let $\sigma = \langle S_1, \dots, S_n \rangle \notin (\mathbb{S}_{\mathcal{X}_{\text{conf}}})^n$ be a strategy profile, i.e., for some party $\mathcal{P}_i \in \mathbb{P}$ and some trace \mathfrak{S} where \mathcal{P}_i employs S_i , it holds that $\mathcal{X}_{\text{conf}}(\mathfrak{S}, \mathcal{P}_i) = 1$. If σ is also $\mathcal{X}_{\text{conf}}$ -agnostic, then there is a strategy profile $\sigma' \in (\mathbb{S}_{\mathcal{X}_{\text{conf}}})^n$ where \mathcal{P}_i unilaterally deviates from σ , such that $U_{\mathcal{P}_i}(\sigma') > U_{\mathcal{P}_i}(\sigma)$.*

Proof of Claim 8.1. We define σ' as follows: in any execution, \mathcal{P}_i makes only one query to \mathcal{O}_{Π} in all time slots that \mathcal{P}_i decided to produce conflicting blocks w.r.t. σ . Whether \mathcal{P}_i decides to honestly extend the longest chain or to create a fork (e.g., by performing selfish signing) remains unchanged in any corresponding executions w.r.t. σ or σ' .

Assume that under σ , \mathcal{P}_i is the leader for a sequence of slots $r, \dots, r + d$, $d \geq 0$, and by creating conflicting blocks it produces a tree of blocks signed by \mathcal{P}_i , rooted at some block that was already in the chain when r was reached. Observe that the height of the said tree is at most $d + 1$ (if \mathcal{P}_i does not abstain at any of slots $r, \dots, r + d$). This implies that when the longest chain rule is applied by the other parties and Ω , $d' \leq d + 1$ blocks of \mathcal{P}_i for that period will be included by following a longest path of length d' on the tree. On the other hand, if \mathcal{P}_i behaves w.r.t. σ' , then a single path of exactly d' blocks of \mathcal{P}_i will be included in the chain during $r, \dots, r + d$. Given that σ is $\mathcal{X}_{\text{conf}}$ -agnostic, the other parties' behavior in σ' remains the same as in σ . So, it holds that $E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma'}}] = E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma}}]$ and for every other party $\hat{\mathcal{P}} \neq \mathcal{P}_i$, it also holds that $E[R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma'}}] = E[R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma}}]$.

On the other hand, since $\sigma \notin (\mathbb{S}_{\mathcal{X}_{\text{conf}}})^n$, and since creating conflicting blocks costs more than making only single queries, it holds that there are traces w.r.t. σ where the cost of \mathcal{P}_i is strictly larger than the cost of \mathcal{P}_i in the corresponding trace (same random coins) w.r.t. σ' . Thus, it holds that $E[C_{\mathcal{P}_i, \mathcal{E}_{\sigma'}}] < E[C_{\mathcal{P}_i, \mathcal{E}_{\sigma}}]$.

Given the above, we conclude that

$$U_{\mathcal{P}_i}(\sigma') = E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma'}}] - E[C_{\mathcal{P}_i, \mathcal{E}_{\sigma'}}] > E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma}}] - E[C_{\mathcal{P}_i, \mathcal{E}_{\sigma}}] = U_{\mathcal{P}_i}(\sigma).$$

◻

Next, in the following claim, we show that by Π 's description, we can focus on $\mathcal{X}_{\text{conf}}$ -agnostic strategy profiles.

Claim 8.2. *Let $\sigma = \langle S_1, \dots, S_n \rangle$ be a non $\mathcal{X}_{\text{conf}}$ -agnostic strategy profile. Then, there exists a strategy profile σ' that is $\mathcal{X}_{\text{conf}}$ -agnostic and for every $\mathcal{P}_i \in \mathbb{P}$ it holds that $U_{\mathcal{P}_i}(\sigma') \geq U_{\mathcal{P}_i}(\sigma)$.*

Proof of Claim 8.2. We provide a constructive proof for creating σ' ; by expressing the strategy S_i as an algorithm, since σ is non $\mathcal{X}_{\text{conf}}$ -agnostic, for $i \in [n]$, S_i potentially contains in each slot r checks of the form “**if**(A) **then**{ cmd_A } **else**{ $\text{cmd}_{\neg A}$ }”, where (i) A is some condition related to the other parties' strategies regarding $\mathcal{X}_{\text{conf}}$ -compliance, and (ii) by Π 's description, the commands $\text{cmd}_A, \text{cmd}_{\neg A}$ are selected from the following types of commands:

1. “do nothing”;
2. “abstain from querying \mathcal{O}_Π ”;
3. “make one query to \mathcal{O}_Π and extend the longest chain”; (honest behavior)
4. “make one query to \mathcal{O}_Π and create a fork”; (set of commands that includes selfish signing)
5. “make multiple queries to \mathcal{O}_Π and extend the longest chain”; (set of commands that includes creation of conflicting blocks)
6. “make multiple queries to \mathcal{O}_Π and create forks”; (set of commands)
7. “make at least one query to \mathcal{O}_Π but publish no block”; (set of commands)
8. “**if**(B) **then**{ cmd_B } **else**{ $\text{cmd}_{\neg B}$ }”; (nested **if**)

We show how we can “remove” checks as above, where in the case of nested **if** we proceed from the inner to the outer layer.

An inner layer check contains commands of type 1-7. The crucial observation is that the change in the utility by the behavior that derives from each of these seven types of commands is *independent* from other parties' actions regarding $\mathcal{X}_{\text{conf}}$ -compliance. Namely, the change in rewards and cost by executing a command of type 1-7 is not affected by the case that some other subset of parties have created conflicting blocks or not so far (and when).

Thus, for the check “**if**(A) **then**{ cmd_A } **else**{ $\text{cmd}_{\neg A}$ }” in slot r , we consider two strategies $S_{i,A}, S_{i,\neg A}$ defined as follows; the party \mathcal{P}_i behaves as in S_i with the following modification: at slot r , \mathcal{P}_i always executes cmd_A (resp. $\text{cmd}_{\neg A}$) when following $S_{i,A}$ (resp. $S_{i,\neg A}$).

Now, let $\sigma_{i,A}$ (resp. $\sigma_{i,\neg A}$) be the strategy profile where \mathcal{P}_i follows $S_{i,A}$ (resp. $S_{i,\neg A}$) and all the other parties follow the same strategy as σ . By the description of $S_{i,A}, S_{i,\neg A}$, we show that

$$(U_{\mathcal{P}_i}(\sigma_{i,A}) \geq U_{\mathcal{P}_i}(\sigma)) \vee (U_{\mathcal{P}_i}(\sigma_{i,\neg A}) \geq U_{\mathcal{P}_i}(\sigma)) .$$

Intuitively, the above holds because the utility of \mathcal{P}_i depends on which of the two commands $\text{cmd}_{i,A}, \text{cmd}_{i,\neg A}$ will be executed, independently of the other parties' strategies regarding $\mathcal{X}_{\text{conf}}$ -compliance. Formally, we want to prove that it always holds that

$$U_{\mathcal{P}_i}(\sigma) \leq \max\{U_{\mathcal{P}_i}(\sigma_{i,A}), U_{\mathcal{P}_i}(\sigma_{i,\neg A})\} . \quad (11)$$

By the definition of $S_{i,A}, S_{i,\neg A}$, we have that

$$\begin{aligned} \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} = x | A] &= \Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}} = x] & \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} = x | \neg A] &= \Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}} = x] \\ \Pr[C_{\mathcal{P}_i, \mathcal{E}_\sigma} = y | A] &= \Pr[C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}} = y] & \Pr[C_{\mathcal{P}_i, \mathcal{E}_\sigma} = y | \neg A] &= \Pr[C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}} = y] \end{aligned}$$

By the above, we get that

$$\begin{aligned}
U_{\mathcal{P}_i}(\sigma) &= E[R_{\mathcal{P}_i, \mathcal{E}_\sigma}] - E[C_{\mathcal{P}_i, \mathcal{E}_\sigma}] = \sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} = x] \cdot x - \sum_y \Pr[C_{\mathcal{P}_i, \mathcal{E}_\sigma} = y] \cdot y = \\
&= \Pr[A] \cdot \sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} = x|A] \cdot x + \Pr[\neg A] \cdot \sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} = x|\neg A] \cdot x - \\
&\quad - \Pr[A] \cdot \sum_y \Pr[C_{\mathcal{P}_i, \mathcal{E}_\sigma} = y|A] \cdot y - \Pr[\neg A] \cdot \sum_y \Pr[C_{\mathcal{P}_i, \mathcal{E}_\sigma} = y|\neg A] \cdot y = \\
&= \Pr[A] \cdot \left(\sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} = x|A] \cdot x - \sum_y \Pr[C_{\mathcal{P}_i, \mathcal{E}_\sigma} = y|A] \cdot y \right) + \\
&\quad + \Pr[\neg A] \cdot \left(\sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} = x|\neg A] \cdot x - \sum_y \Pr[C_{\mathcal{P}_i, \mathcal{E}_\sigma} = y|\neg A] \cdot y \right) = \\
&= \Pr[A] \cdot \left(\sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}} = x] \cdot x - \sum_y \Pr[C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}} = y] \cdot y \right) + \\
&\quad + \Pr[\neg A] \cdot \left(\sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}} = x] \cdot x - \sum_y \Pr[C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}} = y] \cdot y \right) = \\
&= \Pr[A] \cdot (E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}}] - E[C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}})) + \Pr[\neg A] \cdot (E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}}] - E[C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}})) = \\
&= \Pr[A] \cdot U_{\mathcal{P}_i}(\sigma_{i,A}) + \Pr[\neg A] \cdot U_{\mathcal{P}_i}(\sigma_{i,\neg A}) \leq \max\{U_{\mathcal{P}_i}(\sigma_{i,A}), U_{\mathcal{P}_i}(\sigma_{i,\neg A})\}.
\end{aligned}$$

Therefore, Eq. (11) holds. Hence, if $U_{\mathcal{P}_i}(\sigma_{i,A}) \geq U_{\mathcal{P}_i}(\sigma)$ (resp. $U_{\mathcal{P}_i}(\sigma_{i,\neg A}) \geq U_{\mathcal{P}_i}(\sigma)$), then we can “keep” $S_{i,A}$ (resp. $S_{i,\neg A}$) that contains one less check than σ and “discard” the latter. By continuing this process iteratively for all parties, we end up in a strategy profile σ' that contains no checks of the aforementioned form, i.e. σ' is $\mathcal{X}_{\text{conf}}$ -agnostic. By construction, it holds that $U_{\mathcal{P}_i}(\sigma') \geq U_{\mathcal{P}_i}(\sigma)$. \dashv

Given Claims 8.1 and 8.2, we prove the $\mathcal{X}_{\text{conf}}$ -compliance of Π . In particular, we show that for every $\epsilon \geq 0$, if a strategy profile σ is ϵ -reachable from σ_Π , then it is $\mathcal{X}_{\text{conf}}$ -compliant.

For the sake of contradiction, assume that σ is not $\mathcal{X}_{\text{conf}}$ -compliant. The proof is by induction on the length ℓ of the shortest path from σ_Π to σ .

- *Basis:* $\ell = 1$. If σ is $\mathcal{X}_{\text{conf}}$ -agnostic, then by Claim 8.1, σ cannot set a best response for the party \mathcal{P}_i that unilaterally deviates from σ_Π . Besides, if σ is not $\mathcal{X}_{\text{conf}}$ -agnostic, then by Claim 8.2, there is a strategy profile σ' that is $\mathcal{X}_{\text{conf}}$ -agnostic and for which it holds that $U_{\mathcal{P}_i}(\sigma') \geq U_{\mathcal{P}_i}(\sigma)$. Since by Claim 8.1 σ' cannot set a best response for the party \mathcal{P}_i , neither σ can set a best response for the party \mathcal{P}_i . Therefore, σ is not ϵ -directly reachable from σ_Π .
- *Induction step:* Assume that the statement holds for every ϵ -reachable strategy profile with shortest path of length ℓ . Let $\sigma_\Pi \rightarrow \sigma_1 \rightarrow \dots \rightarrow \sigma_\ell \rightarrow \sigma$ be the shortest path of length $\ell + 1$ from σ_Π to σ . Then, $\sigma_1, \dots, \sigma_\ell$ are all $\mathcal{X}_{\text{conf}}$ -compliant. By following the same steps as in Basis, we conclude that, either $\mathcal{X}_{\text{conf}}$ -agnostic or not, σ cannot set a best response for the party that unilaterally deviates from σ_ℓ , thus σ is not ϵ -directly reachable from σ_Π .

To prove the non \mathcal{X}_{abs} -compliance of Π , we apply Theorem 3 by setting the probabilities α and $\beta_i, C_i, i \in [n]$ according to Π 's specification. Namely,

- $\alpha = 0$, as when all parties participate in a round then certainly a slot leader will be elected and create a block.
- $\beta_i = \mu_{\mathcal{P}_i}^N$, as if only \mathcal{P}_i abstains throughout the entire execution while the other parties remain honest, the only case that a block will not be produced is if \mathcal{P}_i is always elected.
- $C_i = \mu_{\mathcal{P}_i} \cdot E[C_{\mathcal{P}_i, \mathcal{E}_\sigma}] = N \cdot C$, by Assumption 2.
- The assumption $C > \mu_{\mathcal{P}_i}^N \cdot \mu_{\mathcal{P}_i} \cdot \mathcal{R} \cdot 1$ holds, as $\mu_{\mathcal{P}_i}^N$ is typically a very small value ($\text{negl}(\kappa)$).

Therefore, we set $\epsilon_{\max} := \max_{i \in [n]} \{\mu_{\mathcal{P}_i} \cdot N \cdot C - \mu_{\mathcal{P}_i}^N \cdot \mu_{\mathcal{P}_i} \cdot \mathcal{R}\} = \mu_{\mathcal{P}_{\max}} \cdot N \cdot C - \mu_{\mathcal{P}_{\max}}^{N+1} \cdot \mathcal{R}$, where we make the reasonable assumption that \mathcal{R} is strictly upper bounded by $\frac{N \cdot C}{\mu_{\mathcal{P}_{\max}}^N}$, as $\frac{N \cdot C}{\mu_{\mathcal{P}_{\max}}^N}$ is typically a very large value.

By Theorem 3, we have that for every $\epsilon < \epsilon_{\max}$, Π is *not* $(\epsilon, \mathcal{X}_{\text{abs}})$ -compliant w.r.t. \bar{U} . \square

6.2 Proof-of-Stake under Relative Utilities

We now continue our study of the SL-PoS protocol Π above. In particular, we also assume that the protocol is *predictable*, i.e., the slot leader schedule for the entire execution is globally known to the parties in advance [9]. However, we can get similar results by studying (sufficiently large) fragments of the execution when the protocol is predictable. We now consider block-proportional rewards (cf. Definition 9) and a different utility function that we call *Relative Profit*. This utility is defined as the fraction of the party's expected profit over the aggregate expected rewards of all parties when the denominator is not 0, and 0 otherwise¹³. Formally, for a party \mathcal{P} and strategy profile σ :

$$U_{\mathcal{P}}(\sigma) = \begin{cases} \frac{E[R_{\mathcal{P}, \mathcal{E}_{Z, \mathcal{A}, \sigma}} - C_{\mathcal{P}, \mathcal{E}_{Z, \mathcal{A}, \sigma}}]}{E[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{Z, \mathcal{A}, \sigma}}]}, & \text{if } E[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{Z, \mathcal{A}, \sigma}}] > 0 \\ 0, & \text{if } E[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{Z, \mathcal{A}, \sigma}}] = 0 \end{cases} = \begin{cases} \frac{E[R_{\mathcal{P}, \mathcal{E}_{Z, \mathcal{A}, \sigma}}] - E[C_{\mathcal{P}, \mathcal{E}_{Z, \mathcal{A}, \sigma}}]}{\sum_{\hat{\mathcal{P}} \in \mathbb{P}} E[R_{\hat{\mathcal{P}}, \mathcal{E}_{Z, \mathcal{A}, \sigma}}]}, & \text{if } \sum_{\hat{\mathcal{P}} \in \mathbb{P}} E[R_{\hat{\mathcal{P}}, \mathcal{E}_{Z, \mathcal{A}, \sigma}}] > 0 \\ 0, & \text{if } \sum_{\hat{\mathcal{P}} \in \mathbb{P}} E[R_{\hat{\mathcal{P}}, \mathcal{E}_{Z, \mathcal{A}, \sigma}}] = 0 \end{cases}. \quad (12)$$

It is easy to see that Relative Profit is an extension of Relative Rewards [29, 52, 9, 55], where the utility is the fraction of the party's rewards over the total rewards, by now taking non-zero costs into account. As we will shortly prove, Π is $\mathcal{X}_{\text{conf}}$ -compliant w.r.t. to Relative Profit, but it is not compliant under a type of deviant behavior that we call *selfish signing*. In selfish signing, a party \mathcal{P} that knows she is going to be elected for $d + 1$ consecutive time slots, $r, r + 1, \dots, r + d$, where d is the *depth* of the specific selfish signing event, can create a fork of $d + 1$ consecutive blocks pointing to a block created $d + 1$ steps earlier. This results in a new longest chain such that the last d blocks of the old chain will get discarded. Given that the discarded blocks belonged to other parties, then selfish signing strictly improves the Relative Profit of \mathcal{P} . The selfish signing behavior is described in Algorithm 1 and illustrated in Figure 2.

Algorithm 1: Selfish signing of depth $d \geq 1$ during time slots $r, \dots, r + d$.

Input: A sequence of $d + 1$ blocks $\mathcal{B}_{r-d-1} \leftarrow \dots \leftarrow \mathcal{B}_{r-1}$.

Output: A new fork of $d + 2$ blocks $\mathcal{B}_{r-d-1} \leftarrow \mathcal{B}'_r \leftarrow \dots \leftarrow \mathcal{B}'_{r+d}$.

```

1 for  $j \leftarrow 0$  to  $d$  do
2   if  $j == 0$  then
3     [ As leader of time slot  $r$ , create a new block  $\mathcal{B}'_r$  that points to  $\mathcal{B}_{r-d-1}$ ;
4   else
5     [ As leader of time slot  $r + j$ , create a new block  $\mathcal{B}'_{r+j}$  that points to  $\mathcal{B}'_{r+j-1}$ ;

```

Next, we describe a strategy denoted by S_{self} , where the party \mathcal{P} takes advantage of Π 's predictability and executes selfish signing at maximum depth whenever possible, under the condition that she never abstains or allows selfish signing to discard her own existing blocks.

¹³A seemingly plausible alternative approach would be to consider the fraction of the party's expected profit over the aggregate expected profit of all parties, i.e., $U_{\mathcal{P}}(\sigma) = \frac{E[R_{\mathcal{P}, \mathcal{E}_{Z, \mathcal{A}, \sigma}} - C_{\mathcal{P}, \mathcal{E}_{Z, \mathcal{A}, \sigma}}]}{E[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{Z, \mathcal{A}, \sigma}} - \sum_{\hat{\mathcal{P}} \in \mathbb{P}} C_{\hat{\mathcal{P}}, \mathcal{E}_{Z, \mathcal{A}, \sigma}}]}$. However, in this approach, there are corner cases where the denominator becomes negative and then, the utility would not provide intuition on the parties' payoffs. By considering only the (always non-negative) aggregate expected rewards in the fraction, we avoid such problematic cases while maintaining relativity in our definition.

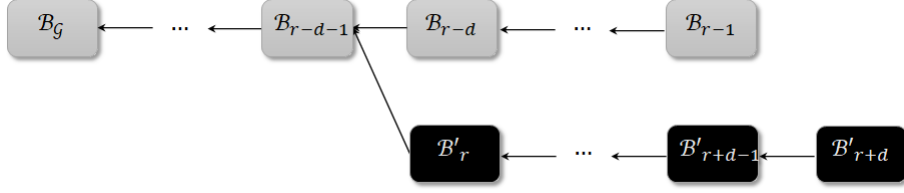


Figure 2: Selfish signing of depth d during time slots $r, \dots, r + d$. The blocks $\mathcal{B}_{r-d}, \dots, \mathcal{B}_{r-1}$ will get discarded when the longest chain rule is applied.

The strategy S_{self} is described in detail in Algorithm 2. For an execution of N time slots, the input is a string $\text{schedule}_{\mathcal{P}} \in \{0, 1\}^N$ defined as follows: for $r \in [N]$, $\text{schedule}_{\mathcal{P}}[r]$ is 1, if \mathcal{P} is the leader of slot r , and 0 otherwise.

Algorithm 2: The strategy S_{self} for party \mathcal{P} .

Input: A string $\text{schedule}_{\mathcal{P}} \in \{0, 1\}^N$, where N is the time length of the execution.
Output: A sequence of pairs $((r_1, d_1), \dots, (r_w, d_w))$ indicating the time slots that selfish signing will take place at the respective depth.

```

1 Initialize a list  $\text{strategy}_{\mathcal{P}} \leftarrow ()$ ;
2 Set  $r \leftarrow 1$ ;
3 while  $r \leq N$  do
4   if  $\text{schedule}_{\mathcal{P}}[r] == 0$  then
5     Set  $r \leftarrow r + 1$ ;                                /* As no leader of time slot  $r$ ,  $\mathcal{P}$  takes no action */
6   else
7     Set  $k^* \leftarrow \max_k \{k \mid \bigwedge_{j=0}^k (\text{schedule}_{\mathcal{P}}[r+j] == 1)\}$ ;
8     Set  $\ell^* \leftarrow \max_{\ell} \{\ell \mid \bigwedge_{j=1}^{\ell} (\text{schedule}_{\mathcal{P}}[r-j] == 0)\}$ ;
9     if  $(k^* == 0) \vee (\ell^* == 0)$  then
10      Set  $r \leftarrow r + 1$ ;                               /* If no selfish signing is possible,  $\mathcal{P}$  acts as an honest party */
11    else
12      Set  $d \leftarrow \min\{k^*, \ell^*\}$ ;
13      Add  $(r, d)$  to  $\text{strategy}_{\mathcal{P}}$ ;                         /*  $\mathcal{P}$  will execute Algorithm 1 in slot  $r$  at depth  $d$  */
14      Set  $r \leftarrow r + (d + 1)$ ;
15 return  $\text{strategy}_{\mathcal{P}}$ ;

```

Note that the output $((r_1, d_1), \dots, (r_w, d_w))$ of Algorithm 2 fully determines the behavior of \mathcal{P} throughout the execution. Namely, \mathcal{P} acts honestly until time slot r_1 when it performs selfish signing that lasts until $r_1 + d_1$, then it acts honestly at slots $r_1 + (d_1 + 1), \dots, r_2 - 1$ and at slot r_2 it performs selfish signing that lasts until $r_2 + d_2$, etc.

Next, we define the infraction predicate $\mathcal{X}_{\text{self}}$:¹⁴

$$\mathcal{X}_{\text{self}}(\mathfrak{S}, \mathcal{P}) := \begin{cases} 0, & \text{if } \mathcal{P} \text{ never performs selfish signing in } \mathfrak{S} \\ 1, & \text{otherwise} \end{cases}.$$

Having introduced S_{self} and $\mathcal{X}_{\text{self}}$, we prove the following theorem. In the theorem statement, we deploy the function $\delta(\mu) = 5 \cdot (1 - \mu) \cdot \mu^2 + 6 \cdot (1 - \mu)^2 \cdot \mu^3 + 3 \cdot (1 - \mu)^2 \cdot \mu^4 + 3 \cdot (1 - \mu)^3 \cdot \mu^4$, for $\mu \in (0, 1)$. The function $\delta(\mu)$ sets a lower bound on the expected number of blocks that get discarded every 7 consecutive time slots when a party with staking power μ unilaterally deviates from σ_{Π} by following S_{self} . It has a maximum at $\mu \approx 0.64469$ and $\delta(0.64469) \approx 1.03001$. In Table 1, we provide some indicative values of $\delta(\mu)$, for $\mu \leq \frac{1}{2}$. By the data in Table 1, we conclude that the block discarding rate remains significant even when the party's staking power is not particularly high, e.g., $\mu = \frac{1}{5}$. This result is a significant enhancement of [9], as it provides quantitative evidence on the effectiveness of the selfish signing strategy against predictable PoS protocols.

Theorem 9. *Let: i) Π be the SL-PoS blockchain protocol specified in Section 6.1 with block-proportional rewards (Definition 9 for fixed block reward R), and assume that Π is also pre-*

¹⁴Observe that $\mathcal{X}_{\text{self}}$ is a special case of the generic family of long-range attacks, i.e., when a party creates a fork by extending an ancestor block, instead of the longest chain's head.

μ	$\delta(\mu)$	μ	$\delta(\mu)$
0.05	0.01258	0.3	0.41462
0.1	0.05032	0.35	0.53819
0.15	0.11228	0.4	0.66247
0.2	0.19624	0.45	0.77994
0.25	0.29864	0.5	0.88281

Table 1: Evaluation of $\delta(\mu) = 5 \cdot (1 - \mu) \cdot \mu^2 + 6 \cdot (1 - \mu)^2 \cdot \mu^3 + 3 \cdot (1 - \mu)^2 \cdot \mu^4 + 3 \cdot (1 - \mu)^3 \cdot \mu^4$ for various values of μ .

dictable; ii) a synchronous router \mathcal{A} ; iii) \mathcal{P}_{\max} is the party with the maximum staking power $\mu_{\mathcal{P}_{\max}}$.

If $R > C$ and $\mu_{\mathcal{P}_{\max}} < \frac{1}{2}$, then the following hold: i) for every $\epsilon \geq 0$, Π is $(\epsilon, \mathcal{X}_{\text{conf}})$ -compliant w.r.t. utility Relative Profit; ii) for $\epsilon_{\max} := \frac{\mu_{\mathcal{P}_{\max}}}{\delta(\mu_{\mathcal{P}_{\max}}) - 1} \cdot \frac{R - C}{R}$, where $\delta(\mu) = 5 \cdot (1 - \mu) \cdot \mu^2 + 6 \cdot (1 - \mu)^2 \cdot \mu^3 + 3 \cdot (1 - \mu)^2 \cdot \mu^4 + 3 \cdot (1 - \mu)^3 \cdot \mu^4$, and every $\epsilon \leq \epsilon_{\max}$, Π is not $(\epsilon, \mathcal{X}_{\text{self}})$ -compliant w.r.t. utility Relative Profit, in both cases under \mathcal{A} .

Proof. First, we express Relative Profit according to the specifications of Π . Let $N \geq \kappa^c$ be the number of time slots of the execution, where κ is the security parameter and c is a sufficiently large constant. For any party \mathcal{P} and strategy profile σ , let $M_{\mathcal{P}, \mathfrak{S}}$ be the number of blocks in the chain output by Ω which are produced by \mathcal{P} , and $Q_{\mathcal{P}, \mathfrak{S}}$ be the number of queries that \mathcal{P} makes to \mathcal{O}_{Π} during the whole execution. Let $M_{\mathcal{P}, \mathcal{E}_{\sigma}}, Q_{\mathcal{P}, \mathcal{E}_{\sigma}}$ be the corresponding random variables. By Eq. (12), we have that if $E[M_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma}}] > 0$, then

$$U_{\mathcal{P}}(\sigma) = \frac{E[M_{\mathcal{P}, \mathcal{E}_{\sigma}}] \cdot R - E[Q_{\mathcal{P}, \mathcal{E}_{\sigma}}] \cdot C}{\sum_{\hat{\mathcal{P}} \in \mathbb{P}} E[M_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma}}] \cdot R}. \quad (13)$$

By Eq. (9), we have that for the all honest strategy profile σ_{Π} it holds that

$$U_{\mathcal{P}}(\sigma_{\Pi}) = \frac{\mu_{\mathcal{P}} \cdot N \cdot R - \mu_{\mathcal{P}} \cdot N \cdot C}{N \cdot R} = \mu_{\mathcal{P}} \cdot \frac{R - C}{R}. \quad (14)$$

To show the $\mathcal{X}_{\text{conf}}$ -compliance of Π , we follow similar steps as in the proof of Theorem 8, yet we adapt our analysis to the Relative Profit utility. In particular, recall that a strategy profile $\sigma = \langle S_1, \dots, S_n \rangle$ is $\mathcal{X}_{\text{conf}}$ -agnostic, if for every $i \in [n]$, the strategy S_i of \mathcal{P}_i does not depend on the $\mathcal{X}_{\text{conf}}$ -compliance of the other parties' strategies.

In the following claim, we prove that it is not in the parties' interest to deviate by creating conflicting blocks, when they are behaving according to a $\mathcal{X}_{\text{conf}}$ -agnostic strategy profile.

Claim 9.1. *Let $\sigma = \langle S_1, \dots, S_n \rangle \notin (\mathcal{S}_{\mathcal{X}_{\text{conf}}})^n$ be a strategy profile, i.e., for some party $\mathcal{P}_i \in \mathbb{P}$ and some trace \mathfrak{S} where \mathcal{P}_i employs S_i , it holds that $\mathcal{X}_{\text{conf}}(\mathfrak{S}, \mathcal{P}_i) = 1$. If σ is also $\mathcal{X}_{\text{conf}}$ -agnostic, then there is a strategy profile $\sigma' \in (\mathcal{S}_{\mathcal{X}_{\text{conf}}})^n$ where \mathcal{P}_i unilaterally deviates from σ , such that $U_{\mathcal{P}_i}(\sigma') > U_{\mathcal{P}_i}(\sigma)$.*

Proof of Claim 9.1. We define σ' as follows: in any execution, \mathcal{P}_i makes only one query to \mathcal{O}_{Π} in all time slots that \mathcal{P}_i decided to produce conflicting blocks w.r.t. σ . Whether \mathcal{P}_i decides to honestly extend the longest chain or to create a fork (e.g., by performing selfish signing) remains unchanged in any corresponding executions w.r.t. σ or σ' .

Assume that under σ , \mathcal{P}_i is the leader for a sequence of slots $r, \dots, r + d$, $d \geq 0$, and by creating conflicting blocks it produces a tree of blocks signed by \mathcal{P}_i , rooted at some block that was already in the chain when r was reached. Observe that the height of the said tree is at most $d + 1$ (if \mathcal{P}_i does not abstain at any of slots $r, \dots, r + d$). This implies that when the longest chain rule is applied by the other parties and Ω , $d' \leq d + 1$ blocks of \mathcal{P}_i for that period will be included by following a longest path of length d' on the tree. On the other hand, if \mathcal{P}_i behaves w.r.t. σ' , then a single path of exactly d' blocks of \mathcal{P}_i will be included in the chain during $r, \dots, r + d$. Given that σ is $\mathcal{X}_{\text{conf}}$ -agnostic, the other parties' behavior in σ' remains the same as in σ . So, it holds that $E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma'}}] = E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma}}]$ and for every other party $\hat{\mathcal{P}} \neq \mathcal{P}_i$, it also holds that $E[R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma'}}] = E[R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma}}]$.

On the other hand, since $\sigma \notin (\mathbb{S}_{\mathcal{X}_{\text{conf}}})^n$, and since creating conflicting blocks costs more than making only single queries, it holds that there are traces w.r.t. σ where the cost of \mathcal{P}_i is strictly larger than the cost of \mathcal{P}_i in the corresponding trace (same random coins) w.r.t. σ' . Thus, it holds that $E[C_{\mathcal{P}_i, \mathcal{E}_{\sigma'}}] < E[C_{\mathcal{P}_i, \mathcal{E}_\sigma}]$.

Next, we show that the non $\mathcal{X}_{\text{conf}}$ -compliance of σ implies an important fact; namely, it holds that $\sum_{\hat{p} \in \mathbb{P}} E[R_{\hat{p}, \mathcal{E}_\sigma}] > 0$, so we are not in the corner case of the branching definition of $U_{\mathcal{P}_i}(\sigma)$ in Eq. (12). Indeed, recall that there are traces (at least one) where \mathcal{P}_i creates conflicting blocks, and one of them will be part of the longest chain. We observe that even if it gets discarded by another party \mathcal{P}_j that performs selfish signing, this block of \mathcal{P}_i is always replaced by blocks of \mathcal{P}_j . Even in the extreme case where back-to-back selfish signing happens, the blocks of the last party that performed selfish signing will be included in the chain. More generally, when a party adds a block in the chain, then we are certain that the chain will contain at least one block in the end of the execution, so the total rewards in the traces where \mathcal{P}_i creates conflicting blocks are a positive value.

Thus, $\sum_{\hat{p} \in \mathbb{P}} E[R_{\hat{p}, \mathcal{E}_{\sigma'}}] = \sum_{\hat{p} \in \mathbb{P}} E[R_{\hat{p}, \mathcal{E}_\sigma}] > 0$, we conclude that

$$U_{\mathcal{P}_i}(\sigma') = \frac{E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma'}}] - E[C_{\mathcal{P}_i, \mathcal{E}_{\sigma'}}]}{\sum_{\hat{p} \in \mathbb{P}} E[R_{\hat{p}, \mathcal{E}_{\sigma'}}]} > \frac{E[R_{\mathcal{P}_i, \mathcal{E}_\sigma}] - E[C_{\mathcal{P}_i, \mathcal{E}_\sigma}]}{\sum_{\hat{p} \in \mathbb{P}} E[R_{\hat{p}, \mathcal{E}_\sigma}]} = U_{\mathcal{P}_i}(\sigma).$$

□

Next, in the following claim, we show that by Π 's description, we can focus on $\mathcal{X}_{\text{conf}}$ -agnostic strategy profiles.

Claim 9.2. *Let $\sigma = \langle S_1, \dots, S_n \rangle$ be a non $\mathcal{X}_{\text{conf}}$ -agnostic strategy profile. Then, there exists a strategy profile σ' that is $\mathcal{X}_{\text{conf}}$ -agnostic and for every $\mathcal{P}_i \in \mathbb{P}$ it holds that $U_{\mathcal{P}_i}(\sigma') \geq U_{\mathcal{P}_i}(\sigma)$.*

Proof of Claim 9.2. We provide a constructive proof for creating σ' ; by expressing the strategy S_i as an algorithm, since σ is non $\mathcal{X}_{\text{conf}}$ -agnostic, for $i \in [n]$, S_i potentially contains in each slot r checks of the form “**if**(A) **then**{ cmd_A } **else**{ $\text{cmd}_{\neg A}$ }”, where (i) A is some condition related to the other parties' strategies regarding $\mathcal{X}_{\text{conf}}$ -compliance, and (ii) by Π 's description, the commands $\text{cmd}_A, \text{cmd}_{\neg A}$ are selected from the following types of commands:

1. “do nothing”;
2. “abstain from querying \mathcal{O}_Π ”;
3. “make one query to \mathcal{O}_Π and extend the longest chain”; (honest behavior)
4. “make one query to \mathcal{O}_Π and create a fork”; (set of commands that includes selfish signing)
5. “make multiple queries to \mathcal{O}_Π and extend the longest chain”; (set of commands that includes creation of conflicting blocks)
6. “make multiple queries to \mathcal{O}_Π and create forks”; (set of commands)
7. “make at least one query to \mathcal{O}_Π but publish no block”; (set of commands)
8. “**if**(B) **then**{ cmd_B } **else**{ $\text{cmd}_{\neg B}$ }”; (nested **if**)

We show how we can “remove” checks as above, where in the case of nested **if** we proceed from the inner to the outer layer.

An inner layer check contains commands of type 1-7. The crucial observation is that the change in the utility by the behavior that derives from each of these six types of commands is *independent* from other parties' actions regarding $\mathcal{X}_{\text{conf}}$ -compliance. Namely, the change in rewards and cost by executing a command of type 1-7 is not affected by the case that some other subset of parties have created conflicting blocks or not so far (and when).

Thus, for the check “**if**(A) **then**{ cmd_A } **else**{ $\text{cmd}_{\neg A}$ }” in slot r , we consider two strategies $S_{i,A}, S_{i,\neg A}$ defined as follows; the party \mathcal{P}_i behaves as in S_i with the following modification: at slot r , \mathcal{P}_i always executes cmd_A (resp. $\text{cmd}_{\neg A}$) when following $S_{i,A}$ (resp. $S_{i,\neg A}$).

Now, let $\sigma_{i,A}$ (resp. $\sigma_{i,\neg A}$) be the strategy profile where \mathcal{P}_i follows $S_{i,A}$ (resp. $S_{i,\neg A}$) and all the other parties follow the same strategy as σ . By the description of $S_{i,A}$, $S_{i,\neg A}$, we show that

$$(U_{\mathcal{P}_i}(\sigma_{i,A}) \geq U_{\mathcal{P}_i}(\sigma)) \vee (U_{\mathcal{P}_i}(\sigma_{i,\neg A}) \geq U_{\mathcal{P}_i}(\sigma)).$$

Intuitively, the above holds because the utility of \mathcal{P}_i depends on which of the two commands $\text{cmd}_{i,A}$, $\text{cmd}_{i,\neg A}$ will be executed, independently of the other parties' strategies regarding $\mathcal{X}_{\text{conf}}$ -compliance. Formally, we want to prove that it always holds that

$$U_{\mathcal{P}_i}(\sigma) \leq \max\{U_{\mathcal{P}_i}(\sigma_{i,A}), U_{\mathcal{P}_i}(\sigma_{i,\neg A})\}. \quad (15)$$

By the definition of $S_{i,A}$, $S_{i,\neg A}$, we have that

$$\begin{aligned} \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} - C_{\mathcal{P}_i, \mathcal{E}_\sigma} = x | A] &= \Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}} - C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}} = x] \\ \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} - C_{\mathcal{P}_i, \mathcal{E}_\sigma} = x | \neg A] &= \Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}} - C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}} = x] \\ \Pr\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_\sigma} = y | A\right] &= \Pr\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma_{i,A}}} = y\right] \\ \Pr\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_\sigma} = y | \neg A\right] &= \Pr\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma_{i,\neg A}}} = y\right] \end{aligned}$$

By the above, we get that

$$\begin{aligned} E[R_{\mathcal{P}_i, \mathcal{E}_\sigma} - C_{\mathcal{P}_i, \mathcal{E}_\sigma}] &= \sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} - C_{\mathcal{P}_i, \mathcal{E}_\sigma} = x] \cdot x = \\ &= \Pr[A] \cdot \sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} - C_{\mathcal{P}_i, \mathcal{E}_\sigma} = x | A] \cdot x + \Pr[\neg A] \cdot \sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_\sigma} - C_{\mathcal{P}_i, \mathcal{E}_\sigma} = x | \neg A] \cdot x = \\ &= \Pr[A] \cdot \sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}} - C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}} = x] \cdot x + \Pr[\neg A] \cdot \sum_x \Pr[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}} - C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}} = x] \cdot x = \\ &= \Pr[A] \cdot E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}} - C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}}] + (1 - \Pr[A]) \cdot E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}} - C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}}] \end{aligned} \quad (16)$$

and

$$\begin{aligned} E\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_\sigma}\right] &= \sum_y \Pr\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_\sigma} = y\right] \cdot y = \\ &= \Pr[A] \cdot \sum_y \Pr\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_\sigma} = y | A\right] \cdot y + \Pr[\neg A] \cdot \sum_y \Pr\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_\sigma} = y | \neg A\right] \cdot y = \\ &= \Pr[A] \cdot \sum_y \Pr\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma_{i,A}}} = y\right] \cdot y + \Pr[\neg A] \cdot \sum_y \Pr\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma_{i,\neg A}}} = y\right] \cdot y = \\ &= \Pr[A] \cdot E\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma_{i,A}}}\right] + (1 - \Pr[A]) \cdot E\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma_{i,\neg A}}}\right] \end{aligned} \quad (17)$$

For simplicity, we set $x := \Pr[A]$, $a := E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}} - C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,A}}}]$, $b := E\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma_{i,A}}}\right]$, $c := E[R_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}} - C_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,\neg A}}}]$, and $d := E\left[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} R_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma_{i,\neg A}}}\right]$. By Eq. (12), (16), (17), we have that

$$\begin{aligned} U_{\mathcal{P}_i}(\sigma) &= \begin{cases} \frac{x \cdot a + (1-x) \cdot c}{x \cdot b + (1-x) \cdot d}, & \text{if } x \cdot b + (1-x) \cdot d > 0 \\ 0, & \text{if } x \cdot b + (1-x) \cdot d = 0 \end{cases} \\ U_{\mathcal{P}_i}(\sigma_{i,A}) &= \begin{cases} \frac{a}{b}, & \text{if } b > 0 \\ 0, & \text{if } b = 0 \end{cases} \\ U_{\mathcal{P}_i}(\sigma_{i,\neg A}) &= \begin{cases} \frac{c}{d}, & \text{if } d > 0 \\ 0, & \text{if } d = 0 \end{cases} \end{aligned}$$

We study all the following possible cases:

- If $x \cdot b + (1 - x) \cdot d = 0$, then
 - If $b = 0$, then $0 = U_{\mathcal{P}_i}(\sigma) = U_{\mathcal{P}_i}(\sigma_{i,A})$.
 - If $d = 0$, then $0 = U_{\mathcal{P}_i}(\sigma) = U_{\mathcal{P}_i}(\sigma_{i,\neg A})$.

- If $x \cdot b + (1 - x) \cdot d > 0$, then

- If $b = 0$, then $a \leq 0$ and $(1 - x) \cdot d > 0$. Therefore,

$$U_{\mathcal{P}_i}(\sigma) = \frac{x \cdot a + (1 - x) \cdot c}{x \cdot b + (1 - x) \cdot d} \leq \frac{(1 - x) \cdot c}{(1 - x) \cdot d} = \frac{c}{d} = U_{\mathcal{P}_i}(\sigma_{i,\neg A}).$$

- If $d = 0$, then $c \leq 0$ and $x \cdot b > 0$. Therefore,

$$U_{\mathcal{P}_i}(\sigma) = \frac{x \cdot a + (1 - x) \cdot c}{x \cdot b + (1 - x) \cdot d} \leq \frac{x \cdot a}{x \cdot b} = \frac{a}{b} = U_{\mathcal{P}_i}(\sigma_{i,A}).$$

- If $b > 0$ and $d > 0$,

- * If $x = 0$, then $U_{\mathcal{P}_i}(\sigma) = \frac{c}{d} = U_{\mathcal{P}_i}(\sigma_{i,\neg A})$.
- * If $x = 1$, then $U_{\mathcal{P}_i}(\sigma) = \frac{a}{b} = U_{\mathcal{P}_i}(\sigma_{i,A})$.
- * If $x \in (0, 1)$ and $\frac{a}{b} \geq \frac{c}{d}$, then

$$\begin{aligned} (1 - x) \cdot c \cdot b \leq (1 - x) \cdot a \cdot d &\Leftrightarrow x \cdot a \cdot b + (1 - x) \cdot c \cdot b \leq x \cdot a \cdot b + (1 - x) \cdot a \cdot d \Leftrightarrow \\ \Leftrightarrow \frac{x \cdot a + (1 - x) \cdot c}{x \cdot b + (1 - x) \cdot d} &\leq \frac{a}{b} \Leftrightarrow U_{\mathcal{P}_i}(\sigma) \leq U_{\mathcal{P}_i}(\sigma_{i,A}). \end{aligned}$$

- * If $x \in (0, 1)$ and $\frac{a}{b} < \frac{c}{d}$, then

$$\begin{aligned} x \cdot c \cdot b > x \cdot a \cdot d &\Leftrightarrow x \cdot c \cdot b + (1 - x) \cdot c \cdot d > x \cdot a \cdot d + (1 - x) \cdot c \cdot d \Leftrightarrow \\ \Leftrightarrow \frac{x \cdot a + (1 - x) \cdot c}{x \cdot b + (1 - x) \cdot d} &< \frac{c}{d} \Leftrightarrow U_{\mathcal{P}_i}(\sigma) < U_{\mathcal{P}_i}(\sigma_{i,\neg A}). \end{aligned}$$

Therefore, for all possible cases Eq. (15) holds. Hence, if $U_{\mathcal{P}_i}(\sigma_{i,A}) \geq U_{\mathcal{P}_i}(\sigma)$ (resp. $U_{\mathcal{P}_i}(\sigma_{i,\neg A}) \geq U_{\mathcal{P}_i}(\sigma)$), then we can “keep” $S_{i,A}$ (resp. $S_{i,\neg A}$) that contains one less check than σ and “discard” the latter. By continuing this process iteratively for all parties, we end up in a strategy profile σ' that contains no checks of the aforementioned form, i.e. σ' is $\mathcal{X}_{\text{conf}}$ -agnostic. By construction, it holds that $U_{\mathcal{P}_i}(\sigma') \geq U_{\mathcal{P}_i}(\sigma)$. \dashv

Given Claims 9.1 and 9.2, we prove the $\mathcal{X}_{\text{conf}}$ -compliance of Π . In particular, we show that for every $\epsilon \geq 0$, if a strategy profile σ is ϵ -reachable from σ_{Π} , then it is $\mathcal{X}_{\text{conf}}$ -compliant.

For the sake of contradiction, assume that σ is not $\mathcal{X}_{\text{conf}}$ -compliant. The proof is by induction on the length ℓ of the shortest path from σ_{Π} to σ .

- *Basis:* $\ell = 1$. If σ is $\mathcal{X}_{\text{conf}}$ -agnostic, then by Claim 9.1, σ cannot set a best response for the party \mathcal{P}_i that unilaterally deviates from σ_{Π} . Besides, if σ is not $\mathcal{X}_{\text{conf}}$ -agnostic, then by Claim 9.2, there is a strategy profile σ' that is $\mathcal{X}_{\text{conf}}$ -agnostic and for which it holds that $U_{\mathcal{P}_i}(\sigma') \geq U_{\mathcal{P}_i}(\sigma)$. Since by Claim 9.1 σ' cannot set a best response for the party \mathcal{P}_i , neither σ can set a best response for the party \mathcal{P}_i . Therefore, σ is not ϵ -directly reachable from σ_{Π} .
- *Induction step:* Assume that the statement holds for every ϵ -reachable strategy profile with shortest path of length ℓ . Let $\sigma_{\Pi} \rightarrow \sigma_1 \rightarrow \dots \rightarrow \sigma_{\ell} \rightarrow \sigma$ be the shortest path of length $\ell + 1$ from σ_{Π} to σ . Then, $\sigma_1, \dots, \sigma_{\ell}$ are all $\mathcal{X}_{\text{conf}}$ -compliant. By following the same steps as in Basis, we conclude that, either $\mathcal{X}_{\text{conf}}$ -agnostic or not, σ cannot set a best response for the party that unilaterally deviates from σ_{ℓ} , thus σ is not ϵ -directly reachable from σ_{Π} .

Subsequently, we will prove the non $\mathcal{X}_{\text{self}}$ -compliance of Π . We denote by σ_i the strategy profile where \mathcal{P}_i unilaterally deviates from σ_Π by following S_{self} . Let $D_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}}$ be the number of blocks that are discarded due to the selfish signing of \mathcal{P}_i w.r.t. σ_i . By the description of S_{self} (cf. Algorithm 2), we have that (i) $E[M_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}}] = E[M_{\mathcal{P}, \mathcal{E}_{\sigma_\Pi}}]$, (ii) $E[Q_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}}] = E[Q_{\mathcal{P}_i, \mathcal{E}_{\sigma_\Pi}}]$, and (iii) $E[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} M_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma_i}}] = E[\sum_{\hat{\mathcal{P}} \in \mathbb{P}} M_{\hat{\mathcal{P}}, \mathcal{E}_{\sigma_\Pi}} - D_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}}]$. Thus, by Eq. (13) and (14), we get that

$$\begin{aligned} U_{\mathcal{P}_i}(\sigma_i) &= \frac{\mu_{\mathcal{P}_i} \cdot N \cdot R - \mu_{\mathcal{P}_i} \cdot N \cdot C}{N \cdot R - E[D_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}}] \cdot R} = \mu_{\mathcal{P}_i} \cdot \frac{R - C}{R} \cdot \frac{1}{1 - \frac{E[D_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}}]}{N}} = \\ &= U_{\mathcal{P}_i}(\sigma_\Pi) \cdot \frac{1}{1 - \frac{E[D_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}}]}{N}}. \end{aligned} \quad (18)$$

We will lower bound $U_{\mathcal{P}_i}(\sigma_i)$ by showing a lower bound for $E[D_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}}]$. To achieve this, we devise a selfish signing strategy, $S_{d \leq 3}$, that although less effective than S_{self} , it captures a significant part of all possible selfish signing attempts in an execution.

The effectiveness of $S_{d \leq 3}$ relies on the fact that the probability the conditions allow for performing selfish signing of depth d drops exponentially in d . Namely, if we consider the string $\text{schedule}_{\mathcal{P}_i} \in \{0, 1\}^N$ as in Algorithm 2, the probability that for round r , a substring $\underbrace{0 \cdots 0}_{d \text{ times}} \underbrace{1 1 \cdots 1}_{d \text{ times}}$ appears (indicating conditions that allow for performing selfish signing of depth d), is $(1 - \mu_{\mathcal{P}_i})^d \cdot \mu_{\mathcal{P}_i}^{d+1}$. Therefore, by searching $\text{schedule}_{\mathcal{P}_i}$ for substrings 011, 00111, 0001111 that correspond to selfish signing at depth up to 3, we can capture a good portion of all available cases that selfish signing is possible according to $\text{schedule}_{\mathcal{P}_i}$.

Given the above, \mathcal{P}_i follows $S_{d \leq 3}$ by executing the following steps:

1. She fragments $\text{schedule}_{\mathcal{P}_i}$ into 7-bit substrings, where for simplicity we assume that the length, N , of $\text{schedule}_{\mathcal{P}_i}$ is a multiple of 7.
2. For each 7-bit substring denoted by $b_1 b_2 b_3 b_4 b_5 b_6 b_7 \in \{0, 1\}^7$:
 - (a) She sequentially checks if $b_1 b_2 b_3 = 011$, $b_2 b_3 b_4 = 011$, $b_3 b_4 b_5 = 011$, $b_4 b_5 b_6 = 011$, $b_5 b_6 b_7 = 011$. When some of these checks is successful, she performs selfish signing at depth 1 during the corresponding slot.
 - (b) If all the above five checks fail, she sequentially checks if $b_1 b_2 b_3 b_4 b_5 = 00111$, $b_2 b_3 b_4 b_5 b_6 = 00111$, $b_3 b_4 b_5 b_6 b_7 = 00111$. When some of these checks is successful, she performs selfish signing at depth 2 during the corresponding slot.
 - (c) If all the above three checks fail, she sequentially checks if $b_1 b_2 b_3 b_4 b_5 b_6 b_7 = 0001111$. If the check is successful, she performs selfish signing at depth 3 during the corresponding slot.
 - (d) After all checks are completed, she proceeds similarly with the next 7-bit substring.

Next, we compute the probabilities of the corresponding events. We get that the following hold:

- $\Pr[b_1 b_2 b_3 = 011] = \Pr[b_2 b_3 b_4 = 011] = \Pr[b_3 b_4 b_5 = 011] = \Pr[b_4 b_5 b_6 = 011] = \Pr[b_5 b_6 b_7 = 011] = (1 - \mu_{\mathcal{P}_i}) \cdot \mu_{\mathcal{P}_i}^2$.
- $\Pr[b_1 b_2 b_3 b_4 b_5 = 00111] = \Pr[b_2 b_3 b_4 b_5 b_6 = 00111] = \Pr[b_3 b_4 b_5 b_6 b_7 = 00111] = (1 - \mu_{\mathcal{P}_i})^2 \cdot \mu_{\mathcal{P}_i}^3$.
- $\Pr[b_1 b_2 b_3 b_4 b_5 b_6 b_7 = 0001111] = (1 - \mu_{\mathcal{P}_i})^3 \cdot \mu_{\mathcal{P}_i}^4$.
- $\Pr[(b_1 b_2 b_3 = 011) \wedge (b_4 b_5 b_6 = 011)] = \Pr[(b_1 b_2 b_3 = 011) \wedge (b_5 b_6 b_7 = 011)] = \Pr[(b_2 b_3 b_4 = 011) \wedge (b_5 b_6 b_7 = 011)] = (1 - \mu_{\mathcal{P}_i})^2 \cdot \mu_{\mathcal{P}_i}^4$, while the probability of any other conjunction of events is 0.

Let $\sigma_{i,d \leq 3}$ be the strategy profile where \mathcal{P}_i unilaterally deviates from σ_Π by following $S_{d \leq 3}$.

Let $D_{\mathcal{P}_i, b_{1-7}}$ be the number of blocks that are discarded during the 7 consecutive slots that correspond to a single 7-bit substring due to the selfish signing of \mathcal{P}_i w.r.t. $\sigma_{i,d \leq 3}$. By the above, we have that

$$\begin{aligned} E[D_{\mathcal{P}_i, b_{1-7}}] &= \sum_{j=1}^3 j \cdot \Pr[\text{exactly } j \text{ blocks are discarded in } b_1 b_2 b_3 b_4 b_5 b_6 b_7] = \\ &= 1 \cdot (5 \cdot (1 - \mu_{\mathcal{P}_i}) \cdot \mu_{\mathcal{P}_i}^2 - 3 \cdot (1 - \mu_{\mathcal{P}_i})^2 \cdot \mu_{\mathcal{P}_i}^4) + \\ &\quad 2 \cdot (3 \cdot (1 - \mu_{\mathcal{P}_i})^2 \cdot \mu_{\mathcal{P}_i}^3 + 3 \cdot (1 - \mu_{\mathcal{P}_i})^2 \cdot \mu_{\mathcal{P}_i}^4) + \\ &\quad 3 \cdot (1 - \mu_{\mathcal{P}_i})^3 \cdot \mu_{\mathcal{P}_i}^4 = \\ &= 5 \cdot (1 - \mu_{\mathcal{P}_i}) \cdot \mu_{\mathcal{P}_i}^2 + 6 \cdot (1 - \mu_{\mathcal{P}_i})^2 \cdot \mu_{\mathcal{P}_i}^3 + 3 \cdot (1 - \mu_{\mathcal{P}_i})^2 \cdot \mu_{\mathcal{P}_i}^4 + 3 \cdot (1 - \mu_{\mathcal{P}_i})^3 \cdot \mu_{\mathcal{P}_i}^4. \end{aligned}$$

Let $\delta(\mu_{\mathcal{P}_i}) := E[D_{\mathcal{P}_i, b_{1-7}}]$ Let $D_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,d \leq 3}}}$ be the total number of blocks that are discarded due to the selfish signing of \mathcal{P}_i w.r.t. $\sigma_{i,d \leq 3}$ during the execution. Since the examination of these events is independent across the 7-bit substrings, we have that

$$E[D_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,d \leq 3}}}] = \frac{N}{7} \cdot \delta(\mu_{\mathcal{P}_i}). \quad (19)$$

By the description of S_{self} and $S_{d \leq 3}$, it is straightforward that $E[D_{\mathcal{P}_i, \mathcal{E}_{\sigma_i}}] > E[D_{\mathcal{P}_i, \mathcal{E}_{\sigma_{i,d \leq 3}}}]$. Thus, by Eq. (14), (18) and (19), we have that

$$\begin{aligned} U_{\mathcal{P}_i}(\sigma_i) &> U_{\mathcal{P}_i}(\sigma_\Pi) \cdot \frac{1}{1 - \frac{\frac{N}{7} \cdot \delta(\mu_{\mathcal{P}_i})}{N}} = U_{\mathcal{P}_i}(\sigma_\Pi) \cdot \left(1 + \frac{1}{\frac{7}{\delta(\mu_{\mathcal{P}_i)}} - 1}\right) = \\ &= U_{\mathcal{P}_i}(\sigma_\Pi) + \frac{\mu_{\mathcal{P}_i}}{\frac{7}{\delta(\mu_{\mathcal{P}_i)}} - 1} \cdot \frac{R - C}{R}. \end{aligned}$$

The function $\delta(\mu) = 5 \cdot (1 - \mu) \cdot \mu^2 + 6 \cdot (1 - \mu)^2 \cdot \mu^3 + 3 \cdot (1 - \mu)^2 \cdot \mu^4 + 3 \cdot (1 - \mu)^3 \cdot \mu^4$ is increasing on the interval $(0, 0.64469]$, therefore the function $\frac{\mu}{\frac{7}{\delta(\mu)} - 1} \cdot \frac{R - C}{R}$ is also increasing on the same interval. So, by setting $\epsilon_{\max} := \frac{\mu_{\mathcal{P}_{\max}}}{\frac{7}{\delta(\mu_{\mathcal{P}_{\max}})} - 1} \cdot \frac{R - C}{R}$, we have that for every $\epsilon \leq \epsilon_{\max}$, it holds that

$$U_{\mathcal{P}_{\max}}(\sigma_{\max}) > U_{\mathcal{P}_{\max}}(\sigma_\Pi) + \epsilon,$$

where in σ_{\max} is the strategy profile that the party \mathcal{P}_{\max} unilaterally deviates from σ_Π by following S_{self} .

It remains to show that the best response for some party \mathcal{P}_i that unilaterally deviates from σ_Π is not $\mathcal{X}_{\text{self}}$ -compliant. In fact, we will show something stronger; for every strategy profile σ that is a $\mathcal{X}_{\text{self}}$ -compliant unilateral deviation of \mathcal{P}_i , it holds that $U_{\mathcal{P}_i}(\sigma) \leq U_{\mathcal{P}_i}(\sigma_\Pi)$.

By the $(0, \mathcal{X}_{\text{conf}})$ -compliance of σ_Π , we have that it is in \mathcal{P}_i 's interest to make only one query to \mathcal{O}_Π , if she decides to participate at a given slot. Thus, it suffices to focus on strategy profiles that are not \mathcal{X}_{abs} -compliant. So, assume that there are execution traces w.r.t. σ where \mathcal{P}_i abstains at certain slots. However, each time \mathcal{P}_i decides to abstain, she loses an amount $R - C$ on her overall profit while, since we assumed that σ is $\mathcal{X}_{\text{self}}$ -compliant, the other (honest) parties' rewards remain unaffected. Therefore, by abstaining, \mathcal{P}_i only reduces the contribution to the her own utility.¹⁵ Formally, let $A_{\mathcal{P}_i, \mathcal{E}_\sigma}$ be the number of times that \mathcal{P}_i decides to abstain.

¹⁵Note that this does not imply the \mathcal{X}_{abs} -compliance of σ_Π , only that it is not in the party's interest to unilaterally deviate from σ_Π by just abstaining.

Since $E[A_{\mathcal{P}_i, \mathcal{E}_\sigma}] > 0$, we have that

$$\begin{aligned} U_{\mathcal{P}_i}(\sigma) &= \frac{(\mu_{\mathcal{P}_i} \cdot N - E[A_{\mathcal{P}_i, \mathcal{E}_\sigma}]) \cdot R - (\mu_{\mathcal{P}_i} \cdot N - E[A_{\mathcal{P}_i, \mathcal{E}_\sigma}]) \cdot C}{(N - E[A_{\mathcal{P}_i, \mathcal{E}_\sigma}]) \cdot R} = \\ &= \frac{\mu_{\mathcal{P}_i} \cdot N - E[A_{\mathcal{P}_i, \mathcal{E}_\sigma}]}{N - E[A_{\mathcal{P}_i, \mathcal{E}_\sigma}]} \cdot \frac{R - C}{R} < \frac{\mu_{\mathcal{P}_i} \cdot (N - E[A_{\mathcal{P}_i, \mathcal{E}_\sigma}])}{N - E[A_{\mathcal{P}_i, \mathcal{E}_\sigma}]} \cdot \frac{R - C}{R} = \\ &= \mu_{\mathcal{P}_i} \cdot \frac{R - C}{R} = U_{\mathcal{P}_i}(\sigma_\Pi). \end{aligned}$$

Finally, given that (i) for every $\epsilon \leq \epsilon_{\max}$, it holds that $U_{\mathcal{P}_{\max}}(\sigma_{\max}) > U_{\mathcal{P}_{\max}}(\sigma_\Pi) + \epsilon$ and (ii) the best response for any party is not $\mathcal{X}_{\text{self}}$ -compliant, we conclude that for every $\epsilon \leq \epsilon_{\max}$, the protocol Π is not $(\epsilon, \mathcal{X}_{\text{self}})$ -compliant w.r.t. Relative Profit. \square

Remark. S_{self} , although profitable, as shown in Theorem 9, is not optimal. Indeed, one may consider incremental improvements by combining the selfish signing behavior with other infractions, such as strategically abstaining during some slots. On that account, obtaining an optimal attack that exploits selfish signing and identifying for which infractions such attack is non-compliant is an interesting future research direction.

7 Externalities

In practice, blockchains coexist with other systems, which may affect the participants' behavior. This section enhances our analysis with parameters external to the ledger. We introduce an exchange rate, to account rewards in the same unit as costs, and analyze how it should behave to ensure compliance, assuming infractions yield an external utility, and finally take penalties into account.

7.1 Utility

In distributed ledger systems, rewards are denominated in the ledger's native currency, but cost is typically denominated in fiat. Therefore, we introduce an *exchange rate*, between the ledger's native currency and USD, to denominate the rewards and cost in the same unit of account and precisely estimate a party's utility. The exchange rate $X_{\mathcal{E}}$ is a random variable, parameterized by a strategy profile σ . For a trace \mathfrak{S}_σ under σ , the exchange rate takes a non-negative real value. The exchange rate is applied once, at the end of the execution. Intuitively, this implies that a party eventually sells their rewards at the end of the execution. Therefore, its utility depends on the accumulated rewards, during the execution, and the exchange rate at the end.

The infraction predicate expresses a deviant behavior that parties may exhibit. So far, we considered distributed protocols in a standalone fashion, analyzing whether they incentivize parties to avoid infractions. In reality, a ledger exists alongside other systems, and a party's utility may depend on parameters external to the distributed ledger. For instance, double spending against Bitcoin is a common hazard, which does not increase an attacker's *Bitcoin rewards*, but awards them external rewards, e.g., goods that are purchased with the double-spent coins.

The external – to the ledger – reward is modeled as a random variable $B_{\mathcal{P}, \mathcal{E}_\sigma}$, which takes non-negative integer values. Similarly to the rewards' random variable, it is parameterized by a party \mathcal{P} and a strategy profile σ . The infraction utility is applied once when computing a party's utility and has the property that, for every trace \mathfrak{S} during which a party \mathcal{P} performs no infraction, it holds that $B_{\mathcal{P}, \mathfrak{S}} = 0$, i.e., a party receives these external rewards only by performing an infraction.

We define a new utility function U , which also takes two forms, *Reward* and *Profit*. For the former, U applies the exchange rate on the protocol rewards and adds the external. For *Profit*, it also subtracts the cost. Definition 10 defines the utility under externalities. For ease of notation, we set the following:

- $\rho_{\mathcal{P},\sigma} = E[R_{\mathcal{P},\mathcal{E}_{\mathcal{Z},\mathcal{A},\sigma}}]$;
- $x_{\sigma} = E[X_{\mathcal{E}_{\mathcal{Z},\mathcal{A},\sigma}}]$;
- $b_{\mathcal{P},\sigma} = E[B_{\mathcal{P},\mathcal{E}_{\mathcal{Z},\mathcal{A},\sigma}}]$;
- $c_{\mathcal{P},\sigma} = E[C_{\mathcal{P},\mathcal{E}_{\mathcal{Z},\mathcal{A},\sigma}}]$.

As in Section 3.2, when computing the utility, the environment and the router are fixed.

Definition 10. *Let: i) σ be a strategy profile; ii) \mathcal{E}_{σ} be an execution under σ ; iii) x_{σ} be the (expected) exchange rate of \mathcal{E}_{σ} ; iv) $b_{\mathcal{P},\sigma}$ be the (expected) external rewards of \mathcal{P} under σ . We define two types of utility $U_{\mathcal{P}}$ of a party \mathcal{P} for σ under externalities:*

1. Reward: $U_{\mathcal{P}}(\sigma) = \rho_{\mathcal{P},\sigma} \cdot x_{\sigma} + b_{\mathcal{P},\sigma}$;
2. Profit: $U_{\mathcal{P}}(\sigma) = \rho_{\mathcal{P},\sigma} \cdot x_{\sigma} + b_{\mathcal{P},\sigma} - c_{\mathcal{P},\sigma}$.

7.2 Compliance

To evaluate compliance under externalities, we will find a relation between the assets' price and external, infraction-based rewards, s.t. the former counters the latter, hence parties are incentivized to remain compliant. Specifically, it suffices to show that the exchange rate reduction counterbalances the external rewards. More formally, Theorem 10 analyzes SL-PoS under a synchronous network and externalities; similar statements can be made for the positive results of Sections 4 and 5.1.

Theorem 10. *Assume i) a synchronous router \mathcal{A} (cf. Section 2.1), ii) the conflicting predicate $\mathcal{X}_{\text{conf}}$, and iii) that $\forall \mathcal{P} \in \mathbb{P} : \mu_{\mathcal{P}} < \frac{1}{2}$. Also let: i) $\mathbb{S}_{-\mathcal{X}_{\text{conf}}}$: the set of all non $\mathcal{X}_{\text{conf}}$ -compliant strategies; ii) $x_{\sigma_{\Pi}}$: the (expected) exchange rate under $\mathcal{E}_{\sigma_{\Pi}}$; iii) $x_{\sigma_{S_{\mathcal{P}}}}$: the (expected) exchange rate when only \mathcal{P} employs some non $\mathcal{X}_{\text{conf}}$ -compliant strategy $S_{\mathcal{P}}$; iv) $b_{\mathcal{P},\sigma_{S_{\mathcal{P}}}}$: the external utility that $S_{\mathcal{P}}$ yields for \mathcal{P} .*

SL-PoS with block-proportional rewards (cf. Definition 9, for fixed block reward R) under the aforementioned externalities is not $(\epsilon, \mathcal{X}_{\text{conf}})$ -compliant (cf. Definition 5) w.r.t. utility Reward (cf. Definition 7) and, if $R > C$, it is also not $(\epsilon, \mathcal{X}_{\text{conf}})$ -compliant w.r.t. utility Profit, in both cases under \mathcal{A} and if and only if $\epsilon < \max_{\mathcal{P} \in \mathbb{P}} \{ \max_{S_{\mathcal{P}} \in \mathbb{S}_{-\mathcal{X}_{\text{conf}}}} \{ \rho_{\mathcal{P},\sigma_{\Pi}} \cdot (x_{\sigma_{S_{\mathcal{P}}}} - x_{\sigma_{\Pi}}) + b_{\mathcal{P},\sigma_{S_{\mathcal{P}}}} \} \}, 0 \}$.

Proof. Following the same reasoning as Theorem 5, if a party \mathcal{P} deviates by only producing conflicting messages, but does not abstain, its expected rewards are the same as following the protocol; specifically, due to network synchronicity, after every round when \mathcal{P} is leader, every other party adopts one of the blocks produced by \mathcal{P} (although possibly not everybody adopts the same block), and, since all these blocks are part of the (equally-long) longest chain (at that point), eventually one of these blocks will be output in the chain of the observer. Consequently, it holds that $\rho_{\mathcal{P},\sigma_{S_{\mathcal{P}}}} = \rho_{\mathcal{P},\sigma_{\Pi}}$.

Second, the maximum additional utility that a party \mathcal{P} may receive by deviating from the honest protocol via producing conflicting blocks is: $\max_{S_{\mathcal{P}} \in \mathbb{S}_{-\mathcal{X}_{\text{conf}}}} \{ \rho_{\mathcal{P},\sigma_{\Pi}} \cdot (x_{\sigma_{S_{\mathcal{P}}}} - x_{\sigma_{\Pi}}) + b_{\mathcal{P},\sigma_{S_{\mathcal{P}}}} \}$.

Therefore, if for at least one party this value is non-negligible, ϵ is not small enough and so the protocol is not compliant. \square

The previous sections offer non-compliance, negative results in PoS systems where (a) resource-proportional rewards are employed and (b) a party is incentivized to produce multiple conflicting messages, i.e., under a lossy network or multiple leaders per slot.

Regarding (a), Section 4 shows that resource-proportional rewards ensure compliance under utility *Reward*, but non-compliance regarding profit. Specifically, assuming a minimal participation cost $C_{\mathcal{P}}^{\perp}$, we showed that, if \mathcal{P} abstains, they incur zero cost without any reward reduction. To explore compliance of resource-proportional rewards under externalities, we consider two strategy profiles $\sigma_{\Pi}, \sigma_{S_{\mathcal{P}}}$, as before. Notably, $S_{\mathcal{P}}$ is the abstaining strategy which, as shown in Section 4, maximizes utility in the standalone setting. For the two profiles, the profit for \mathcal{P} becomes $\rho_{\mathcal{P},\sigma_{\Pi}} \cdot x_{\sigma_{\Pi}} - c_{\mathcal{P},\sigma_{\Pi}}$ and $\rho_{\mathcal{P},\sigma_{S_{\mathcal{P}}}} \cdot x_{\sigma_{S_{\mathcal{P}}}} + b_{\mathcal{P},\sigma_{S_{\mathcal{P}}}}$ respectively. Again, in both cases the

party’s rewards are equal. Therefore, since it holds that $C_{\mathcal{P}}^{\perp} \leq c_{\mathcal{P},\sigma_{\Pi}}$, \mathcal{P} is incentivized to be $(\epsilon, \mathcal{X}_{\text{conf}})$ -compliant (for some ϵ) if:

$$\rho_{\mathcal{P},\sigma_{S_{\mathcal{P}}}} \cdot x_{\sigma_{S_{\mathcal{P}}}} + b_{\mathcal{P},\sigma_{S_{\mathcal{P}}}} \leq \rho_{\mathcal{P},\sigma} \cdot x_{\sigma_{\Pi}} - c_{\mathcal{P},\sigma_{\Pi}} + \epsilon \Rightarrow C_{\mathcal{P}}^{\perp} + b_{\mathcal{P},\sigma_{S_{\mathcal{P}}}} \leq \rho_{\mathcal{P},\sigma_{\Pi}} \cdot (x_{\sigma_{\Pi}} - x_{\sigma_{S_{\mathcal{P}}}}) + \epsilon$$

If the abstaining strategy yields no external rewards, as is typically the case, $b_{\mathcal{P},\sigma_{S_{\mathcal{P}}}} = 0$, so the exchange rate needs to only counterbalance the minimal participation cost.

Regarding (b), we consider single-leader PoS under a lossy network, since the analysis is similar for multi-leader PoS. We again consider two strategy profiles $\sigma_{\Pi}, \sigma_{S_{\mathcal{P}}}$ as above. Now, under $\sigma_{S_{\mathcal{P}}}$, \mathcal{P} produces k blocks during each slot for which it is leader, to increase the probability that at least one of them is output in the observer’s final chain. Also, for simplicity, we set $b_{\mathcal{P},\sigma_{S_{\mathcal{P}}}} = 0$. These PoS systems become $(\epsilon', \mathcal{X}_{\text{conf}})$ -compliant (for $\epsilon' = \frac{\epsilon}{(1-d^k \cdot (1-d)^2) \cdot R_{max}}$) if $x_{\sigma_{S_{\mathcal{P}}}} \leq \frac{1-d \cdot (1-d)^2}{1-d^k \cdot (1-d)^2} \cdot x_{\sigma_{\Pi}} + \epsilon'$ where $R_{max} = R \cdot \sum_{i \in [1,e]} l_e \cdot \mu_{\mathcal{P},i}$ and d, R, l_e are as in Subsection 5.2.2.

7.3 Attacks and Market Response

To estimate the exchange rate’s behavior vis-à-vis external infraction rewards, we turn to historical data from the cryptocurrency market. Although no infractions of the type considered in this work have been observed in deployed PoS systems, we extrapolate data from similar attacks against PoW cryptocurrencies (Table 2).

System	Date	External Utility	Rewards	Reward Difference	Attack Hash Rate %
Ethereum	5/1/19 [76]	\$1.1M	\$12,410	\$-2,646	0.48026
	1/8/20 [86]	\$5.6M	\$84,059	\$-11,806	0.4913
Classic	6/8/20 [87]	\$1.68M	\$91,715	\$-5,761	0.4913
Horizen	8/6/18 [92]	\$550,000	\$5,756	\$-752	0.461373
Vertcoin	2/12/18 [75]	\$100,000	\$3,978	\$-879	0.487124
Bitcoin Gold	16/5/18 [79]	\$17.5M	\$11,447	\$-1,404	0.441631
	23/1/20 [65]	\$72,000	\$4,247	\$814	0.43991
Feathercoin	1/6/13 [68]	\$63,800	\$1,203	\$-95.73	0.48283

Table 2: Double spending attacks and the market’s response to them. External utility is estimated as the reward from double-spent transactions. To compute the reward difference, we multiply the rewards from reorganized blocks with the exchange rate difference, i.e., the asset’s price 5 days after the attack minus the expected price, if an attack had not occurred (following Bitcoin’s price in the same period).

In the considered attacks, the perpetrator \mathcal{M} performed double spending. Specifically, \mathcal{M} created a fork and two conflicting transactions, each published on the two chains of the fork, the main and the adversarial chain. The main chain’s transaction is redeemed for external rewards, e.g., a payment in USD, while the adversarial chain’s transaction transfers the assets between two accounts of \mathcal{M} . Therefore, \mathcal{M} both receives external rewards and retains its cryptocurrency rewards.

The adversarial chain contains a number of blocks created by \mathcal{M} . After this chain becomes longest and is adopted by the network, \mathcal{M} sells its block rewards for USD. To evaluate the exchange rate at this point, we set the period between the launch of the attack and the (presumable) selling of the block rewards to 5 days. This value depends on various parameters. For instance, in Bitcoin, the rewards for a block \mathcal{B} can be redeemed after a “coinbase maturity” period of 100 confirmations, i.e., after at least 100 blocks have been mined on top of \mathcal{B} (equiv. 17 hours).¹⁶ Furthermore, transactions are typically not finalized immediately; for instance, most parties finalize a Bitcoin transaction after 6 confirmations and an Ethereum transaction

¹⁶A Bitcoin block is created on expectation every 10 minutes.

after 240 confirmations (equiv. approximately 1 hour). Usually this restraint is tightened [89] after an attack is revealed.

To estimate the difference in rewards that an infraction effects, we use cryptocurrency prices from Coinmarketcap.¹⁷ First, we obtain the price P_C of each cryptocurrency C 5 days after the attack. Second, we compute the percentage difference p_{BTC} of Bitcoin’s price, between the end and the beginning of the 5 day period. The value $P_C \cdot p_{BTC}$ expresses the *expected* price of the cryptocurrency, assuming no attack had occurred.¹⁸ Next, we find the number b of blocks created in the attack and the reward R per block. Thus, the reward difference is $P_C \cdot p_{BTC} \cdot b \cdot R$.

As shown in [41, 22], this attack is optimal. Therefore, using the computations in [73] and the reorganized blocks during each attack, we approximate the percentage of power needed so that the attack’s success probability is at least 0.5.

7.4 Penalties

Historically (cf. Subsection 7.3), attacks are profitable, so the market’s response is typically insufficient to incentivize compliance. Interestingly, in many occasions the external utility was so high that, even if the exchange rate became 0, it would exceed the amount of lost rewards. Therefore, an additional form of utility reduction is necessary to prevent any specific infraction that is essential to mount attacks similar to those presented in Subsection 7.3. In many PoS systems, like Casper [11, 13], Gasper [12], and Tezos [88], a form of utility reduction has been implemented in the form of penalties. In effect, each party \mathcal{P} is required to deposit an amount of assets $g_{\mathcal{P}}$, which it forfeits if it violates a well-defined condition.

Under penalties, \mathcal{P} ’s reward is as follows. Consider profiles $\sigma_{\Pi}, \sigma_{S_{\mathcal{P}}}$ as before. With σ_{Π} , \mathcal{P} receives $\rho_{\mathcal{P}, \sigma_{\Pi}}$ and retains its deposit $g_{\mathcal{P}}$, both exchanged at rate $x_{\sigma_{\Pi}}$. With $\sigma_{S_{\mathcal{P}}}$, \mathcal{P} forfeits its rewards and deposit, but receives external utility $b_{\mathcal{P}, \sigma_{S_{\mathcal{P}}}}$. Thus, under penalties a party is incentivized to be compliant if the deposit and rewards are larger than the external utility. Note that Theorem 11’s ϵ bound is tighter than that of Theorem 10, so penalties can make infractions less appealing.

Theorem 11. *Assume i) a synchronous router \mathcal{A} (cf. Section 2.1), ii) the conflicting predicate $\mathcal{X}_{\text{conf}}$, and iii) that $\forall \mathcal{P} \in \mathbb{P} : \mu_{\mathcal{P}} < \frac{1}{2}$. Also let: i) $\mathbb{S}_{-\mathcal{X}_{\text{conf}}}$: the set of all non-compliant strategies; ii) $x_{\sigma_{\Pi}}$: the (expected) exchange rate under σ_{Π} ; iii) $x_{\sigma_{S_{\mathcal{P}}}}$: the (expected) exchange rate when only \mathcal{P} employs some non-compliant conflicting strategy $S_{\mathcal{P}}$; iv) $b_{\mathcal{P}, \sigma_{S_{\mathcal{P}}}}$: the external utility that $S_{\mathcal{P}}$ yields for \mathcal{P} ; v) and $\rho_{\mathcal{P}, \sigma} = E[R_{\mathcal{P}, \mathcal{E}_{\sigma}}]$, i.e., the expected rewards of \mathcal{P} under profile σ . Finally, assume the block-proportional rewards (cf. Definition 9 for fixed block reward R) for which it also holds:*

$$\forall \mathbb{S} \forall \mathcal{P} \in \mathbb{P} : R_{\mathcal{P}, \mathbb{S}} = \begin{cases} \varrho(\mathcal{C}_{\Omega, \mathbb{S}}, \mathcal{P}) \cdot \mathcal{R}_{\Omega, \mathbb{S}} + g_{\mathcal{P}}, & \mathcal{P} \text{ produces no conflicting blocks during } \mathbb{S} \\ 0, & \text{otherwise} \end{cases}$$

where $g_{\mathcal{P}}$ is a protocol-specific deposit value. SL-PoS with the above rewards and under the aforementioned externalities is not $(\epsilon, \mathcal{X}_{\text{conf}})$ -compliant (cf. Definition 5) w.r.t. utility Reward (cf. Definition 7) and, if $R > C$, it is also not $(\epsilon, \mathcal{X}_{\text{conf}})$ -compliant w.r.t. utility Profit, in both cases under \mathcal{A} and if and only if $\epsilon < \max\{\max_{\mathcal{P} \in \mathbb{P}} \{\max_{S_{\mathcal{P}} \in \mathbb{S}_{-\mathcal{X}_{\text{conf}}}} \{b_{\mathcal{P}, \sigma_{S_{\mathcal{P}}}}\}\} - \rho_{\mathcal{P}, \sigma_{\Pi}} \cdot x_{\sigma_{\Pi}}, 0\} - \text{negl}(\kappa)$.

Proof. When a party \mathcal{P} employs a non-compliant strategy $S_{\mathcal{P}}$, it receives an external utility $b_{\mathcal{P}, \sigma_{S_{\mathcal{P}}}}$. Also, in that case, it produces conflicting blocks (due to the non-compliance property of $S_{\mathcal{P}}$). Therefore, by definition of the above block-proportional rewards, $R_{\mathcal{P}, \sigma_{S_{\mathcal{P}}}} = 0$; in other words, when \mathcal{P} employs $S_{\mathcal{P}}$ and produces conflicting blocks, \mathcal{P} forfeits the protocol’s rewards (which include the original rewards plus the deposit $g_{\mathcal{P}}$). Therefore, when \mathcal{P} employs $S_{\mathcal{P}}$ and all other parties employ Π , \mathcal{P} ’s utility is $U_{\mathcal{P}}(\sigma_{S_{\mathcal{P}}}) = b_{\mathcal{P}, \sigma_{S_{\mathcal{P}}}}$ (cf. Definition 10).

We also remind that (from the proof of Theorem 5), \mathcal{P} can bias the leader schedule with some negligible probability $\text{negl}(\kappa)$, if it controls a minority of power.

¹⁷<https://coinmarketcap.com/>

¹⁸Historically, the prices of Bitcoin and alternative cryptocurrencies are strongly correlated [60].

Therefore, for any party \mathcal{P} and strategy $S_{\mathcal{P}}$, $\sigma_{S_{\mathcal{P}}}$ is directly ϵ -reachable from σ_{Π} if:

$$\begin{aligned} \rho_{\mathcal{P}, \sigma_{\Pi}} \cdot x_{\sigma_{\Pi}} + \text{negl}(\kappa) + \epsilon &< b_{\mathcal{P}, \sigma_{S_{\mathcal{P}}}} \Leftrightarrow \\ \Leftrightarrow \epsilon &< b_{\mathcal{P}, \sigma_{S_{\mathcal{P}}}} - \rho_{\mathcal{P}, \sigma_{\Pi}} \cdot x_{\sigma_{\Pi}} - \text{negl}(\kappa) \end{aligned}$$

Across all parties and all non-compliant strategies, the maximum such ϵ is:

$$\epsilon < \max_{\mathcal{P} \in \mathbb{P}} \left\{ \max_{S_{\mathcal{P}} \in \mathcal{S}_{-\mathcal{X}_{\text{conf}}}} \{b_{\mathcal{P}, \sigma_{S_{\mathcal{P}}}}\} \right\} - \rho_{\mathcal{P}, \sigma_{\Pi}} \cdot x_{\sigma_{\Pi}} - \text{negl}(\kappa)$$

We note that, as shown in Theorem 5, SL-PoS with block proportional rewards under a synchronous router is an equilibrium, i.e., the honest protocol yields the maximum rewards for each party compared to all other strategies. In the present setting, the honest protocol again yields the maximum utility, compared to all other *compliant* strategies. To prove this it suffices to observe that, if a party does not produce conflicting blocks, its rewards are a linear function of the rewards of the setting of Theorem 5; therefore, between compliant strategies, the honest protocol yields the maximum rewards (as shown in Theorem 5).

Therefore, the given bound of ϵ is bounded from below and, for ϵ less than this bound, there exists a party \mathcal{P} that is incentivized to employ a (non-compliant) strategy $S_{\mathcal{P}}$ and produce conflicting blocks, rendering Π not $(\epsilon, \mathcal{X}_{\text{conf}})$ -compliant. \square

The ϵ bounds in Theorems 10 and 11 depend on the external utility boost $b_{\mathcal{P}, \sigma_{S_{\mathcal{P}}}}$. This highlights the inherent limitations of such systems' designers, since the bound depends on external (to the protocol) parameters. Intuitively, these bounds show that attacks which utilize the $\mathcal{X}_{\text{conf}}$ infraction can be prevented in two ways. First, larger deposits increase the threshold that makes some attacks profitable. However, they also shut off small parties, with inadequate assets. Therefore, a tradeoff exists in preventing such attacks and enabling participation. Second, the longer an attack's duration, the more blocks an adversary needs to produce, hence the larger the rewards that it forfeits. Typically, the attack's duration depends on the required number of confirmations for a transaction to be finalized. Therefore, different confirmation limits, e.g., based on a transaction's value, could satisfy the tradeoff between fast settlement and security.

Considering the latter observation, we now briefly review users' behavior in SL-PoS (cf. Section 5.2.1) under deposits and penalties. In an SL-PoS execution, the percentage of parties that actively participate during each epoch is identifiable via the block density and the number of empty slots (when no block is diffused). Therefore, it is possible to estimate the level of double-signing that a party needs to perform to mount a double-spending attack, and then enforce a transaction finalization rule to dis-incentivize such attacks.

Let \mathcal{P} be a user of an SL-PoS ledger. \mathcal{P} requires k confirmations, i.e., finalizes a transaction after it is "buried" under k blocks. Let τ be a transaction, published on slot r , with value v_{τ} . After l slots, τ is buried under b blocks, with $b = x \cdot l$ for some $x \in (0, 1)$. In case we have full participation in the protocol and the adversary is bounded by $\frac{1}{2}$, it holds $x > \frac{1}{2}$; in the rest of the section, we will focus on this setting. Observe that $(1-x) \cdot 100\%$ of slots will be – seemingly – empty. \mathcal{P} will (on expectation) confirm τ after $\frac{1}{x} \cdot k$ slots, i.e., when k blocks are produced; of these, $\frac{1-x}{x} \cdot k$ are empty.

Let \mathcal{M} be a party that wants to double-spend τ . \mathcal{M} should produce a private chain with at least k blocks. Of these, at most $\frac{1-x}{x} \cdot k$ correspond to the respective empty slots, while $k - \frac{1-x}{x} \cdot k = \frac{2 \cdot x - 1}{x} \cdot k$ conflict with existing blocks, i.e., are evidence of infraction. Let d be a deposit amount, which corresponds to a single slot. Thus, for a period of t slots, the total deposited assets $D = t \cdot d$ are distributed evenly across all slots. \mathcal{M} can be penalized only for infraction blocks, i.e., for slots which showcase conflicting blocks. In a range of $\frac{1}{x} \cdot k$ slots, infraction slots are $\frac{2 \cdot x - 1}{x} \cdot k$. Therefore, \mathcal{M} forfeits at most $\frac{2 \cdot x - 1}{x} \cdot k \cdot d$ in deposit and $\frac{2 \cdot x - 1}{x} \cdot k \cdot R$ in rewards that correspond to infraction blocks. Thus, if $v_{\tau} > \frac{2 \cdot x - 1}{x} \cdot k \cdot (d + R)$, \mathcal{M} can profitably double-spend τ . Consequently, depending on the amount d of deposit per slot, the block reward R , and the rate $(1-x)$ of empty slots, for a transaction τ with value v_{τ} , \mathcal{P} should set the confirmation window's size to:

$$k_{\tau} > \frac{v_{\tau}}{\frac{2 \cdot x - 1}{x} \cdot (d + R)} \quad (20)$$

Finally, the system should allow each participant to withdraw their deposit after some time. However, it should also enforce *some* time limit, such deposits are adequate to enforce (possible) penalties. Intuitively, a party \mathcal{P} should be able to withdraw a deposit amount that corresponds to a slot r , only if no transaction exists, such that r is part of the window of size k (computed as above). In other words, \mathcal{P} 's deposit should be enough to cover all slots, which \mathcal{P} has led and which are part of the confirmations' window of at least one non-finalized transaction.

Remark. The correctness of the penalty enforcement mechanism should be verifiable by only parsing the ledger, i.e., in a non-interactive manner. Interestingly, it might be impossible to create such (non-interactive) proofs of misbehavior for some predicates. For example, in a semi-synchronous network, block withholding (e.g., selfish mining) is indistinguishable from behavior that occurs due to benign network delays. In those cases, the protocol's designer cannot rely on reward distribution and penalization to enforce compliance; instead, the utility should reflect resistance to such infractions, e.g., via extra costs. Additionally, penalties are not applicable if the block's creators cannot be identified, e.g., as in PoW, where block producers are decoupled from the users, and anonymous protocols [70, 8, 37, 51].

8 Conclusion

Our work explores the ability of blockchain designs to disincentivize infractions. Inspired by Nash dynamics, we present a model for strategic compliance, i.e., rational participant behavior that, while it does not violate well-defined properties, it may potentially exhibit "compliant" protocol deviations. We focus primarily on two blockchain-related infractions, abstaining and same-origin conflicting blocks. Given two types of utility, "rewards" and "profit", we analyze compliance of various protocols, offering both positive and negative results: i) PoS blockchains that employ resource-proportional rewards, i.e., which depend *solely* on a party's power, are compliant w.r.t. rewards, but non-compliant w.r.t. profit, as they incentivize abstaining; ii) PoW systems with block-proportional rewards are compliant; iii) compliance of PoS systems, which enforce a single participant per slot, depends on the network's lossiness; iv) PoS systems where multiple participants per slot may act are non-compliant, under certain network routing conditions, as they incentivize producing conflicting blocks; v) PoS systems that are compliant w.r.t. producing conflicting blocks, but non-compliant w.r.t. abstaining or performing a selfish signing attack. Finally, we consider externalities, namely the assets' market price and external proceedings of a successful attack. We show that, if the market does not respond decisively when an attack occurs, infractions that yield such proceedings may render protocols non-compliant. We also suggest a mitigation that combines two approaches in the context of longest chain protocols: i) deposits, which are potentially used for penalizing misbehavior; ii) an adaptive transaction finality rule, applied by users, which increases the number of blocks an attacker has to create to discard a finalized high-value transaction.

Our work opens various lines for future work. First, alternative infraction predicates and utilities could be explored, e.g., to capture attacks such as selfish mining and double spending. For instance, given that Bitcoin is not an equilibrium w.r.t. relative rewards due to selfish mining, proving compliance for this utility would be a rather promising result. Also we only consider rewards that originate from the system; however, in real world systems, a party may also receive assets via *reward transfers* from another party. Introducing transfers would enrich the strategy set, e.g., allowing a party to temporarily reduce its rewards for long term profits, possibly affecting compliance in terms of coalition forming. Finally, Section 7 assumes that the exchange rate and protocol rewards are independent random variables; future work could explore possible correlations between the two and produce an analysis that can be (arguably) closer to the real world. In addition, our analysis treated changes in the market price as an effect of infractions; an interesting question is whether price volatility (e.g., as examined in [78]) can be the cause of non-compliance.

References

- [1] Hamza Abusalah, Joël Alwen, Bram Cohen, Danylo Khilko, Krzysztof Pietrzak, and Leonid Reyzin. Beyond hellman’s time-memory trade-offs with applications to proofs of space. In Tsuyoshi Takagi and Thomas Peyrin, editors, *Advances in Cryptology – ASIACRYPT 2017, Part II*, volume 10625 of *Lecture Notes in Computer Science*, pages 357–379, Hong Kong, China, December 3–7, 2017. Springer, Heidelberg, Germany.
- [2] Nick Arnosti and S. Matthew Weinberg. Bitcoin: A natural oligopoly. In Avrim Blum, editor, *ITCS 2019: 10th Innovations in Theoretical Computer Science Conference*, volume 124, pages 5:1–5:1, San Diego, CA, USA, January 10–12, 2019. LIPIcs.
- [3] Sarah Azouvi, George Danezis, and Valeria Nikolaenko. Winkle: Foiling long-range attacks in proof-of-stake systems. Cryptology ePrint Archive, Report 2019/1440, 2019. <https://eprint.iacr.org/2019/1440>.
- [4] Sarah Azouvi, Patrick McCorry, and Sarah Meiklejohn. Betting on blockchain consensus with fantomette, 2018.
- [5] Christian Badertscher, Juan A. Garay, Ueli Maurer, Daniel Tschudi, and Vassilis Zikas. But why does it work? A rational protocol design treatment of bitcoin. In Nielsen and Rijmen [77], pages 34–65.
- [6] Christian Badertscher, Peter Gazi, Aggelos Kiayias, Alexander Russell, and Vassilis Zikas. Ouroboros genesis: Composable proof-of-stake blockchains with dynamic availability. In David Lie, Mohammad Mannan, Michael Backes, and XiaoFeng Wang, editors, *ACM CCS 2018: 25th Conference on Computer and Communications Security*, pages 913–930, Toronto, ON, Canada, October 15–19, 2018. ACM Press.
- [7] William J Baumol. Welfare economics and the theory of the state. In *The encyclopedia of public choice*, pages 937–940. Springer, 2004.
- [8] Eli Ben-Sasson, Alessandro Chiesa, Christina Garman, Matthew Green, Ian Miers, Eran Tromer, and Madars Virza. Zerocash: Decentralized anonymous payments from bitcoin. In *2014 IEEE Symposium on Security and Privacy*, pages 459–474, Berkeley, CA, USA, May 18–21, 2014. IEEE Computer Society Press.
- [9] Jonah Brown-Cohen, Arvind Narayanan, Alexandros Psomas, and S. Matthew Weinberg. Formal barriers to longest-chain proof-of-stake protocols. In Anna Karlin, Nicole Immorlica, and Ramesh Johari, editors, *Proceedings of the 2019 ACM Conference on Economics and Computation, EC 2019, Phoenix, AZ, USA, June 24–28, 2019*, pages 459–473. ACM, 2019.
- [10] Vitalik Buterin. On stake, 2014. <https://blog.ethereum.org/2014/07/05/stake/>.
- [11] Vitalik Buterin and Virgil Griffith. Casper the friendly finality gadget. *arXiv preprint arXiv:1710.09437*, 2017.
- [12] Vitalik Buterin, Diego Hernandez, Thor Kampehner, Khiem Pham, Zhi Qiao, Danny Ryan, Juhyeok Sin, Ying Wang, and Yan X Zhang. Combining ghost and casper, 2020.
- [13] Vitalik Buterin, Daniël Reijsbergen, Stefanos Leonardos, and Georgios Piliouras. Incentives in ethereum’s hybrid casper protocol. In *IEEE International Conference on Blockchain and Cryptocurrency, ICBC 2019, Seoul, Korea (South), May 14–17, 2019*, pages 236–244. IEEE, 2019.
- [14] Miles Carlsten, Harry A. Kalodner, S. Matthew Weinberg, and Arvind Narayanan. On the instability of bitcoin without the block reward. In Weippl et al. [90], pages 154–167.
- [15] Jing Chen, Sergey Gorbunov, Silvio Micali, and Georgios Vlachos. ALGORAND AGREEMENT: Super fast and partition resilient byzantine agreement. Cryptology ePrint Archive, Report 2018/377, 2018. <https://eprint.iacr.org/2018/377>.

- [16] Xi Chen, Christos H. Papadimitriou, and Tim Roughgarden. An axiomatic approach to block rewards. In *Proceedings of the 1st ACM Conference on Advances in Financial Technologies, AFT 2019, Zurich, Switzerland, October 21-23, 2019*, pages 124–131. ACM, 2019.
- [17] Steve Chien and Alistair Sinclair. Convergence to approximate nash equilibria in congestion games. *Games Econ. Behav.*, 71(2):315–327, 2011.
- [18] Bram Cohen and Krzysztof Pietrzak. Simple proofs of sequential work. In Nielsen and Rijmen [77], pages 451–467.
- [19] Bernardo David, Rafael Dowsley, and Mario Larangeira. Kaleidoscope: An efficient poker protocol with payment distribution and penalty enforcement. In Meiklejohn and Sako [69], pages 500–519.
- [20] Bernardo David, Rafael Dowsley, and Mario Larangeira. ROYALE: A framework for universally composable card games with financial rewards and penalties enforcement. In Goldberg and Moore [45], pages 282–300.
- [21] Bernardo David, Peter Gazi, Aggelos Kiayias, and Alexander Russell. Ouroboros praos: An adaptively-secure, semi-synchronous proof-of-stake blockchain. In Nielsen and Rijmen [77], pages 66–98.
- [22] Amir Dembo, Sreeram Kannan, Ertem Nusret Tas, David Tse, Pramod Viswanath, Xuechao Wang, and Ofer Zeitouni. Everything is a race and nakamoto always wins. In Ligatti et al. [63], pages 859–878.
- [23] Thomas Dinsdale-Young, Bernardo Magri, Christian Matt, Jesper Buus Nielsen, and Daniel Tschudi. Afgjort: A partially synchronous finality layer for blockchains. In Galdi and Kolesnikov [36], pages 24–44.
- [24] John R Douceur. The sybil attack. In *International workshop on peer-to-peer systems*, pages 251–260. Springer, 2002.
- [25] Stefan Dziembowski, Sebastian Faust, Vladimir Kolmogorov, and Krzysztof Pietrzak. Proofs of space. In Rosario Gennaro and Matthew J. B. Robshaw, editors, *Advances in Cryptology – CRYPTO 2015, Part II*, volume 9216 of *Lecture Notes in Computer Science*, pages 585–605, Santa Barbara, CA, USA, August 16–20, 2015. Springer, Heidelberg, Germany.
- [26] Ethereum. Proof of stake faqs, 2018. <https://eth.wiki/en/concepts/proof-of-stake-faqs>.
- [27] EthHub. Eth 2.0 economics, 2021.
- [28] Ittay Eyal, Adem Efe Gencer, Emin Gün Sirer, and Robbert Van Renesse. Bitcoin-ng: A scalable blockchain protocol. In *13th {USENIX} symposium on networked systems design and implementation ({NSDI} 16)*, pages 45–59, 2016.
- [29] Ittay Eyal and Emin Gün Sirer. Majority is not enough: Bitcoin mining is vulnerable. In Nicolas Christin and Reihaneh Safavi-Naini, editors, *FC 2014: 18th International Conference on Financial Cryptography and Data Security*, volume 8437 of *Lecture Notes in Computer Science*, pages 436–454, Christ Church, Barbados, March 3–7, 2014. Springer, Heidelberg, Germany.
- [30] Alex Fabrikant, Christos H. Papadimitriou, and Kunal Talwar. The complexity of pure nash equilibria. In László Babai, editor, *Proceedings of the 36th Annual ACM Symposium on Theory of Computing, Chicago, IL, USA, June 13-16, 2004*, pages 604–612. ACM, 2004.
- [31] Giulia C. Fanti, Leonid Kogan, Sewoong Oh, Kathleen Ruan, Pramod Viswanath, and Gerui Wang. Compounding of wealth in proof-of-stake cryptocurrencies. In Goldberg and Moore [45], pages 42–61.

- [32] Matheus V. X. Ferreira and S. Matthew Weinberg. Proof-of-stake mining games with perfect randomness. In Péter Biró, Shuchi Chawla, and Federico Echenique, editors, *EC '21: The 22nd ACM Conference on Economics and Computation, Budapest, Hungary, July 18-23, 2021*, pages 433–453. ACM, 2021.
- [33] Amos Fiat, Anna Karlin, Elias Koutsoupias, and Christos H. Papadimitriou. Energy equilibria in proof-of-work mining. In Anna Karlin, Nicole Immorlica, and Ramesh Johari, editors, *Proceedings of the 2019 ACM Conference on Economics and Computation, EC 2019, Phoenix, AZ, USA, June 24-28, 2019*, pages 489–502. ACM, 2019.
- [34] Mehdi Fooladgar, Mohammad Hossein Manshaei, Murtuza Jadliwala, and Mohammad Ashiqur Rahman. On incentive compatible role-based reward distribution in algorand. In *50th Annual IEEE/IFIP International Conference on Dependable Systems and Networks, DSN 2020, Valencia, Spain, June 29 - July 2, 2020*, pages 452–463. IEEE, 2020.
- [35] Algorand Foundation. Faqs, 2020.
- [36] Clemente Galdi and Vladimir Kolesnikov, editors. *SCN 20: 12th International Conference on Security in Communication Networks*, volume 12238 of *Lecture Notes in Computer Science*, Amalfi, Italy, September 14–16, 2020. Springer, Heidelberg, Germany.
- [37] Chaya Ganesh, Claudio Orlandi, and Daniel Tschudi. Proof-of-stake protocols for privacy-aware blockchains. In Yuval Ishai and Vincent Rijmen, editors, *Advances in Cryptology – EUROCRYPT 2019, Part I*, volume 11476 of *Lecture Notes in Computer Science*, pages 690–719, Darmstadt, Germany, May 19–23, 2019. Springer, Heidelberg, Germany.
- [38] Juan A. Garay and Aggelos Kiayias. SoK: A consensus taxonomy in the blockchain era. In Stanislaw Jarecki, editor, *Topics in Cryptology – CT-RSA 2020*, volume 12006 of *Lecture Notes in Computer Science*, pages 284–318, San Francisco, CA, USA, February 24–28, 2020. Springer, Heidelberg, Germany.
- [39] Juan A. Garay, Aggelos Kiayias, and Nikos Leonardos. The bitcoin backbone protocol: Analysis and applications. In Elisabeth Oswald and Marc Fischlin, editors, *Advances in Cryptology – EUROCRYPT 2015, Part II*, volume 9057 of *Lecture Notes in Computer Science*, pages 281–310, Sofia, Bulgaria, April 26–30, 2015. Springer, Heidelberg, Germany.
- [40] Juan A. Garay, Aggelos Kiayias, and Nikos Leonardos. The bitcoin backbone protocol with chains of variable difficulty. In Katz and Shacham [50], pages 291–323.
- [41] Peter Gazi, Aggelos Kiayias, and Alexander Russell. Tight consistency bounds for bitcoin. In Ligatti et al. [63], pages 819–838.
- [42] Arthur Gervais, Ghassan O. Karame, Karl Wüst, Vasileios Glykantzis, Hubert Ritzdorf, and Srdjan Capkun. On the security and performance of proof of work blockchains. In Weippl et al. [90], pages 3–16.
- [43] Yossi Gilad, Rotem Hemo, Silvio Micali, Georgios Vlachos, and Nickolai Zeldovich. Algorand: Scaling byzantine agreements for cryptocurrencies. Cryptology ePrint Archive, Report 2017/454, 2017. <https://eprint.iacr.org/2017/454>.
- [44] M. Goemans, Vahab Mirrokni, and A. Vetta. Sink equilibria and convergence. In *46th Annual IEEE Symposium on Foundations of Computer Science (FOCS'05)*, pages 142–151, 2005.
- [45] Ian Goldberg and Tyler Moore, editors. *FC 2019: 23rd International Conference on Financial Cryptography and Data Security*, volume 11598 of *Lecture Notes in Computer Science*, Frigate Bay, St. Kitts and Nevis, February 18–22, 2019. Springer, Heidelberg, Germany.
- [46] Guy Goren and Alexander Spiegelman. Mind the mining. In Anna Karlin, Nicole Immorlica, and Ramesh Johari, editors, *Proceedings of the 2019 ACM Conference on Economics and Computation, EC 2019, Phoenix, AZ, USA, June 24-28, 2019*, pages 475–487. ACM, 2019.

- [47] Cyril Grunspan and Ricardo Pérez-Marco. On profitability of selfish mining, 2019.
- [48] Benjamin Johnson, Aron Laszka, Jens Grossklags, Marie Vasek, and Tyler Moore. Game-theoretic analysis of DDoS attacks against bitcoin mining pools. In Rainer Böhme, Michael Brenner, Tyler Moore, and Matthew Smith, editors, *FC 2014 Workshops*, volume 8438 of *Lecture Notes in Computer Science*, pages 72–86, Christ Church, Barbados, March 7, 2014. Springer, Heidelberg, Germany.
- [49] Dimitris Karakostas, Aggelos Kiayias, and Mario Larangeira. Account management in proof of stake ledgers. In Galdi and Kolesnikov [36], pages 3–23.
- [50] Jonathan Katz and Hovav Shacham, editors. *Advances in Cryptology – CRYPTO 2017, Part I*, volume 10401 of *Lecture Notes in Computer Science*, Santa Barbara, CA, USA, August 20–24, 2017. Springer, Heidelberg, Germany.
- [51] Thomas Kerber, Aggelos Kiayias, Markulf Kohlweiss, and Vassilis Zikas. Ouroboros cryptosinous: Privacy-preserving proof-of-stake. In *2019 IEEE Symposium on Security and Privacy*, pages 157–174, San Francisco, CA, USA, May 19–23, 2019. IEEE Computer Society Press.
- [52] Aggelos Kiayias, Elias Koutsoupias, Maria Kyropoulou, and Yiannis Tselekounis. Blockchain mining games. In Vincent Conitzer, Dirk Bergemann, and Yiling Chen, editors, *Proceedings of the 2016 ACM Conference on Economics and Computation, EC '16, Maastricht, The Netherlands, July 24-28, 2016*, pages 365–382. ACM, 2016.
- [53] Aggelos Kiayias and Alexander Russell. Ouroboros-BFT: A simple byzantine fault tolerant consensus protocol. Cryptology ePrint Archive, Report 2018/1049, 2018. <https://eprint.iacr.org/2018/1049>.
- [54] Aggelos Kiayias, Alexander Russell, Bernardo David, and Roman Oliynykov. Ouroboros: A provably secure proof-of-stake blockchain protocol. In Katz and Shacham [50], pages 357–388.
- [55] Aggelos Kiayias and Aikaterini-Panagiota Stouka. Coalition-safe equilibria with virtual payoffs, 2021.
- [56] Sunny King and Scott Nadal. Ppcoin: Peer-to-peer crypto-currency with proof-of-stake. *self-published paper, August*, 19:1, 2012.
- [57] Elias Koutsoupias, Philip Lazos, Foluso Ogunlana, and Paolo Serafino. Blockchain mining games with pay forward. In Ling Liu, Ryan W. White, Amin Mantrach, Fabrizio Silvestri, Julian J. McAuley, Ricardo Baeza-Yates, and Leila Zia, editors, *The World Wide Web Conference, WWW 2019, San Francisco, CA, USA, May 13-17, 2019*, pages 917–927. ACM, 2019.
- [58] Joshua A. Kroll, Ian C. Davey, and Edward W. Felten. The economics of bitcoin mining, or bitcoin in the presence of adversaries. In *The Twelfth Workshop on the Economics of Information Security (WEIS 2013)*, 2013.
- [59] Ranjit Kumaresan, Tal Moran, and Iddo Bentov. How to use bitcoin to play decentralized poker. In Indrajit Ray, Ninghui Li, and Christopher Kruegel, editors, *ACM CCS 2015: 22nd Conference on Computer and Communications Security*, pages 195–206, Denver, CO, USA, October 12–16, 2015. ACM Press.
- [60] Kenny L. You don't need a diversified crypto portfolio to spread risk: Here's why, 2018. <https://towardsdatascience.com/bitcoin-dominance-5a95f0f3319e>.
- [61] Yoad Lewenberg, Yoram Bachrach, Yonatan Sompolinsky, Aviv Zohar, and Jeffrey S. Rosenschein. Bitcoin mining pools: A cooperative game theoretic analysis. In Gerhard Weiss, Pinar Yolum, Rafael H. Bordini, and Edith Elkind, editors, *Proceedings of the 2015 International Conference on Autonomous Agents and Multiagent Systems, AAMAS 2015, Istanbul, Turkey, May 4-8, 2015*, pages 919–927. ACM, 2015.

- [62] Wenting Li, Sébastien Andreina, Jens-Matthias Bohli, and Ghassan Karame. Securing proof-of-stake blockchain protocols. In *Data Privacy Management, Cryptocurrencies and Blockchain Technology*, pages 297–315. Springer, 2017.
- [63] Jay Ligatti, Xinming Ou, Jonathan Katz, and Giovanni Vigna, editors. *ACM CCS 20: 27th Conference on Computer and Communications Security*, Virtual Event, USA, November 9–13, 2020. ACM Press.
- [64] William Forster Lloyd. *Two lectures on the checks to population*. JH Parker, 1833.
- [65] James Lovejoy. Bitcoin gold (btg) was 51% attacked, 2020. <https://gist.github.com/metalicjames/71321570a105940529e709651d0a9765>.
- [66] Katie Martin and Billy Nauman. Bitcoin’s growing energy problem: ‘it’s a dirty currency’, 2021. <https://www.ft.com/content/1aecb2db-8f61-427c-a413-3b929291c8ac>.
- [67] Julian Martinez. Understanding proof of stake: The nothing at stake theory, 2018. <https://medium.com/coinmonks/understanding-proof-of-stake-the-nothing-at-stake-theory-1f0d71bc027>.
- [68] Maxminer. Feathercoin’s 51% attack - double spending case study, 2013. https://maxminer.files.wordpress.com/2013/06/ftc_51attack.pdf.
- [69] Sarah Meiklejohn and Kazue Sako, editors. *FC 2018: 22nd International Conference on Financial Cryptography and Data Security*, volume 10957 of *Lecture Notes in Computer Science*, Nieuwpoort, Curaçao, February 26 – March 2, 2018. Springer, Heidelberg, Germany.
- [70] Ian Miers, Christina Garman, Matthew Green, and Aviel D. Rubin. Zerocoin: Anonymous distributed E-cash from Bitcoin. In *2013 IEEE Symposium on Security and Privacy*, pages 397–411, Berkeley, CA, USA, May 19–22, 2013. IEEE Computer Society Press.
- [71] Vahab S. Mirrokni and Alexander Skopalik. On the complexity of nash dynamics and sink equilibria. In John Chuang, Lance Fortnow, and Pearl Pu, editors, *Proceedings 10th ACM Conference on Electronic Commerce (EC-2009), Stanford, California, USA, July 6–10, 2009*, pages 1–10. ACM, 2009.
- [72] Tal Moran and Ilan Orlov. Simple proofs of space-time and rational proofs of storage. In Alexandra Boldyreva and Daniele Micciancio, editors, *Advances in Cryptology – CRYPTO 2019, Part I*, volume 11692 of *Lecture Notes in Computer Science*, pages 381–409, Santa Barbara, CA, USA, August 18–22, 2019. Springer, Heidelberg, Germany.
- [73] Satoshi Nakamoto. Bitcoin: A peer-to-peer electronic cash system, 2008.
- [74] Kartik Nayak, Srijan Kumar, Andrew Miller, and Elaine Shi. Stubborn mining: Generalizing selfish mining and combining with an eclipse attack. *Cryptology ePrint Archive*, Report 2015/796, 2015. <https://eprint.iacr.org/2015/796>.
- [75] Mark Nesbitt. Vertcoin (vtc) was successfully 51% attacked, 2018. <https://medium.com/coinmonks/vertcoin-vtc-is-currently-being-51-attacked-53ab633c08a4>.
- [76] Mark Nesbitt. Deep chain reorganization detected on ethereum classic (etc), 2019. <https://blog.coinbase.com/ethereum-classic-etc-is-currently-being-51-attacked-33be13ce32de>.
- [77] Jesper Buus Nielsen and Vincent Rijmen, editors. *Advances in Cryptology – EURO-CRYPT 2018, Part II*, volume 10821 of *Lecture Notes in Computer Science*, Tel Aviv, Israel, April 29 – May 3, 2018. Springer, Heidelberg, Germany.

- [78] Shunya Noda, Kyohei Okumura, and Yoshinori Hashimoto. An economic analysis of difficulty adjustment algorithms in proof-of-work blockchain systems. In Péter Biró, Jason D. Hartline, Michael Ostrovsky, and Ariel D. Procaccia, editors, *EC '20: The 21st ACM Conference on Economics and Computation, Virtual Event, Hungary, July 13-17, 2020*, page 611. ACM, 2020.
- [79] Charlie Osborne. Bitcoin gold suffers double spend attacks, \$17.5 million lost, 2018. <https://www.zdnet.com/article/bitcoin-gold-hit-with-double-spend-attacks-18-million-lost/>.
- [80] Sunoo Park, Albert Kwon, Georg Fuchsbauer, Peter Gazi, Joël Alwen, and Krzysztof Pietrzak. SpaceMint: A cryptocurrency based on proofs of space. In Meiklejohn and Sako [69], pages 480–499.
- [81] Rafael Pass and Elaine Shi. FruitChains: A fair blockchain. In Elad Michael Schiller and Alexander A. Schwarzmann, editors, *36th ACM Symposium Annual on Principles of Distributed Computing*, pages 315–324, Washington, DC, USA, July 25–27, 2017. Association for Computing Machinery.
- [82] Marshall C. Pease, Robert E. Shostak, and Leslie Lamport. Reaching agreement in the presence of faults. *J. ACM*, 27(2):228–234, 1980.
- [83] R. W. Rosenthal. A class of games possessing pure-strategy nash equilibria. *International Journal of Game Theory*, 2:65–67, 1973.
- [84] Ayelet Sapirshstein, Yonatan Sompolinsky, and Aviv Zohar. Optimal selfish mining strategies in bitcoin. In Jens Grossklags and Bart Preneel, editors, *FC 2016: 20th International Conference on Financial Cryptography and Data Security*, volume 9603 of *Lecture Notes in Computer Science*, pages 515–532, Christ Church, Barbados, February 22–26, 2016. Springer, Heidelberg, Germany.
- [85] Yonatan Sompolinsky and Aviv Zohar. Secure high-rate transaction processing in bitcoin. In Rainer Böhme and Tatsuaki Okamoto, editors, *FC 2015: 19th International Conference on Financial Cryptography and Data Security*, volume 8975 of *Lecture Notes in Computer Science*, pages 507–527, San Juan, Puerto Rico, January 26–30, 2015. Springer, Heidelberg, Germany.
- [86] Aleksey Studnev. Attacker stole 807k etc in ethereum classic 51% attack, 2020. <https://bitquery.io/blog/attacker-stole-807k-etc-in-ethereum-classic-51-attack>.
- [87] Aleksey Studnev. Ethereum classic attack, 8 august: Catch me if you can, 2020. <https://bitquery.io/blog/ethereum-classic-attack-8-august-catch-me-if-you-can>.
- [88] Tezos. Proof-of-stake in tezos, 2020.
- [89] Zack Voell. Ethereum classic hit by third 51% attack in a month, 2020. <https://www.coindesk.com/ethereum-classic-blockchain-subject-to-yet-another-51-attack>.
- [90] Edgar R. Weippl, Stefan Katzenbeisser, Christopher Kruegel, Andrew C. Myers, and Shai Halevi, editors. *ACM CCS 2016: 23rd Conference on Computer and Communications Security*, Vienna, Austria, October 24–28, 2016. ACM Press.
- [91] Gavin Wood. Ethereum yellow paper, 2014.
- [92] ZenCash. Zencash statement on double spend attack, 2018. <https://blog.zencash.com/zencash-statement-on-double-spend-attack/>.

A Hybrid PoS and Finality Gadgets

Gaspar [12] is a proof-of-stake blockchain protocol that combines ideas from Casper FFG [11, 13] and the (last message driven) GHOST fork-choice rule [85]. It is of special interest, since it is the protocol of choice for Ethereum’s updated version, 2.0. Interestingly, Eth 2.0 aims at preventing malicious behavior via penalties on incentives, which take the form of confiscating the deposit of a (provably) misbehaving party. However, the high level of required deposit¹⁹ prevents small investors from participating in the protocol. Therefore, compliance is a helpful property in identifying whether infraction is viable under the plain protocol (i.e., without penalties) and, if so, how high the penalty should be set, s.t. it both incentivizes compliance and allows as many parties as possible to participate. Although Gaspar is a consensus protocol in itself, our analysis applies to most systems that employ finality gadgets like Winkle [3], Afgjort [23], and Fantomette [4].

As with the other PoS protocols (Section 5.2), in Gaspar time is measured in *slots* and a constant number l_e of slots defines an *epoch*. In Gaspar, a slot r which has number $e \cdot l_e + k$, $k \in [0, l_e - 1]$ belongs to epoch e , denoted as $\text{ep}(r) = e$. The *view* of a block \mathcal{B} is the view consisting of \mathcal{B} and all its ancestors, where an ancestor of \mathcal{B} is a block that is reachable from \mathcal{B} following parent-child edges on the chain.

For a block \mathcal{B} and an epoch e there is a well-defined *e-th epoch boundary block* of \mathcal{B} , denoted by $\text{EBB}(\mathcal{B}, e)$. In particular, $\text{EBB}(\mathcal{B}, e)$ is the block with the highest slot number that is $\leq e \cdot l_e$ in the chain determined by \mathcal{B} . The *last epoch boundary block* of \mathcal{B} is denoted by $\text{LEBB}(\mathcal{B})$. Since a block \mathcal{B}' can be an epoch boundary block of \mathcal{B} for multiple epochs, an *epoch boundary pair* (\mathcal{B}', e') is used. These pairs play the role of checkpoints, i.e., a party that follows the protocol never discards a justified block (and, consequently, its ancestor block back to the genesis).

In each slot, a subset of protocol participants, called *validators*, forms a committee. Each validator belongs to a single committee per epoch. The first committee member is the *proposer*, i.e., is responsible for creating a new block; similar to the protocols of Section 5.2.1, a single proposer per slot is assigned. Then, each member of the committee attests to the block that is the head of its chain, using a variation of GHOST. Each attestation α is defined as:

$$\alpha = \langle r_\alpha, \mathcal{B}_\alpha, \text{LJ}(\alpha) \xrightarrow{V} \text{LE}(\alpha) \rangle$$

where: (i) $r_\alpha = e \cdot l_e + k$ is the slot of epoch e during which the validator V makes the attestation; (ii) the \mathcal{B}_α block that α attests to; (iii) $\text{LJ}(\alpha) \xrightarrow{V} \text{LE}(\alpha)$ is a *checkpoint edge*, where $\text{LJ}(\alpha)$ and $\text{LE}(\alpha)$ are epoch boundary pairs that will be defined shortly. Therefore, α acts as a “GHOST vote” for block \mathcal{B}_α and as a “Casper FFG vote” for the transition from the epoch boundary pair $\text{LJ}(\alpha)$ to $\text{LE}(\alpha)$. $\text{slot}(\alpha)$ denotes the slot of α and two attestations are equal if their hash is equal (for some hash function H).

If a set of validators with weight more than $\frac{2}{3}$ of the total validating stake attests to an edge $(\mathcal{B}', e') \xrightarrow{V} (\mathcal{B}, e)$, then a *supermajority link* is formed, denoted by $(\mathcal{B}', e') \xrightarrow{J} (\mathcal{B}, e)$.

To define the pairs $\text{LJ}(\alpha)$ and $\text{LE}(\alpha)$, the concept of *justified pairs* is introduced. Given a party \mathcal{P} ’s view of the execution trace $\mathfrak{S}^{\mathcal{P}}$, the set of justified pairs $J(\mathfrak{S}^{\mathcal{P}})$ is defined recursively as follows:

- the pair $(\mathcal{B}_G, 0)$ is in $J(\mathfrak{S}^{\mathcal{P}})$, where \mathcal{B}_G is the genesis block;
- if $(\mathcal{B}', e') \in J(\mathfrak{S}^{\mathcal{P}})$ and $(\mathcal{B}', e') \xrightarrow{J} (\mathcal{B}, e)$, then $(\mathcal{B}, e) \in J(\mathfrak{S}^{\mathcal{P}})$.

Now given an attestation $\alpha = \langle r_\alpha, \mathcal{B}_\alpha, \text{LJ}(\alpha) \xrightarrow{V} \text{LE}(\alpha) \rangle$, the following holds:

- $\text{LJ}(\alpha)$ is the *last justified pair of α* (in terms of epoch number) w.r.t. the view of $\text{LEBB}(\mathcal{B}_\alpha)$;
- $\text{LE}(\alpha)$ is the *last epoch boundary pair of α* , i.e., $\text{LE}(\alpha) = (\text{LEBB}(\mathcal{B}_\alpha), e_\alpha)$.

Finally, with $(\mathcal{B}_k, e + k)$ being the last justified pair in $J(\mathfrak{S}^{\mathcal{P}})$ (in terms of epoch number), a pair (\mathcal{B}, e) is *k-finalized* in $\mathfrak{S}^{\mathcal{P}}$ if:

¹⁹The required deposit has been set to 32ETH [27], which as of April 2021 is equivalent to \$75000. [<https://coinmarketcap.com>]

1. $(\mathcal{B}, e) = (\mathcal{B}_G, 0)$, or
2. there exist $k+1$ (justified) adjacent epoch boundary pairs $(\mathcal{B}, e), (\mathcal{B}_1, e+1), \dots, (\mathcal{B}_k, e+k) \in J(\mathfrak{S}^{\mathcal{P}})$ and there also exists $(\mathcal{B}, e) \xrightarrow{J} (\mathcal{B}_k, e+k)$.

In Gasper, each protocol message m is an attestation α . As with PoS protocols, the oracle \mathcal{O}_{Π} produces a signature for a submitted attestation and a party can produce as many (valid) signatures per round as queries to \mathcal{O}_{Π} .

With the introduction of attestations, we need to slightly adapt the standard blockchain infraction predicate (cf. Section 3.1) for Gasper. The deviant behavior for validators is expressed by Gasper’s infraction predicate (Definition 11), which defines three clauses, based on Gasper’s “slashing conditions” [12]. Intuitively, an infraction occurs if a validator: i) produces two conflicting attestations for the same (attestation) epoch; ii) attempts a “long-range” attestation, i.e., produces two attestations s.t. the first’s edge source is older than the second’s and its edge target is newer than the second’s; iii) does not produce an attestation for some epoch.

Definition 11 (Gasper Infraction Predicate (Validators)). *Given a validator party V and an execution trace \mathfrak{S} , $\mathcal{X}_{\text{Gasper}}(\mathfrak{S}_{\mathcal{Z}, \mathcal{A}, r}, V) = 1$ at slot r if one of the following conditions holds:*

1. $\exists \alpha, \alpha' : (\mathcal{V}(\mathfrak{S}_{\mathcal{Z}, \sigma, r}^V, \alpha) = \mathcal{V}(\mathfrak{S}_{\mathcal{Z}, \sigma, r}^V, \alpha') = 1) \wedge (\text{creator}(\alpha) = \text{creator}(\alpha') = V) \wedge (\text{slot}(\alpha) = \text{slot}(\alpha')) \wedge (\alpha \neq \alpha')$;
2. $\exists \alpha = \langle \cdot, \cdot, (\mathcal{B}_s, e_s) \xrightarrow{V} (\mathcal{B}_t, e_t) \rangle, \alpha' = \langle \cdot, \cdot, (\mathcal{B}'_s, e'_s) \xrightarrow{V} (\mathcal{B}'_t, e'_t) \rangle : (\text{creator}(\alpha) = \text{creator}(\alpha') = V) \wedge (e_s < e'_s) \wedge (e_t > e'_t)$;
3. V is a committee member for slot r and makes no queries to the oracle \mathcal{O}_{Π} during r .

Regarding rewards, we assume those of Eth 2.0, which implements Gasper. Given the chain \mathcal{C}_{Ω} output by the observer Ω , parties receive rewards as validators and/or as proposers. A validator receives a fixed reward²⁰ R_v for each attestation α it produces, which satisfies the following conditions: i) the block that α attests to is finalized in \mathcal{C}_{Ω} ; ii) α is published in \mathcal{C}_{Ω} . A proposer receives a fixed reward R_p for each block \mathcal{B} it produces which is finalized in \mathcal{C}_{Ω} .

Consequently, the analysis of Section 5.2.1 applies directly on Gasper, for the updated infraction predicate (Definition 11). Specifically, when a party is chosen to participate, either as proposer or validator, no other party may also be elected for the same role; therefore, Gasper’s participation schedule is equivalent to single-leader PoS protocols. Additionally, Gasper rewards are akin to block proportional rewards, as parties are rewarded for producing attestations which are eventually accepted by Ω . Therefore, applying the analysis of Section 5.2.1, Gasper is compliant (w.r.t. the Gasper infraction predicate) under a synchronous network, but it is not compliant under a lossy network.

²⁰In practice, both the validation and proposer rewards are not fixed, but depend on the total amount of stake in the system and the number of included attestations respectively. Our simplification though eases analysis and expresses the setting where the total stake and the rate of produced attestations per round are fixed throughout the execution.