

An Evaluation Study of Generative Adversarial Networks for Collaborative Filtering

Fernando B. Pérez Maurera^{1,2,✉}[0000-0001-6578-7404], Maurizio Ferrari Dacrema¹[0000-0001-7103-2788], and Paolo Cremonesi¹[0000-0002-1253-8081]

¹ Politecnico di Milano, Milan, Italy

{fernandobenjamin.perez,maurizio.ferrari,paolo.cremonesi}@polimi.it

² ContentWise, Milan, Italy

fernando.perez@contentwise.com

Abstract. This work explores the reproducibility of CFGAN. CFGAN and its family of models (TagRec, MTPR, and CRGAN) learn to generate personalized and fake-but-realistic rankings of preferences for top-N recommendations by using previous interactions. This work successfully replicates the results published in the original paper and discusses the impact of certain differences between the CFGAN framework and the model used in the original evaluation. The absence of random noise and the use of real user profiles as condition vectors leaves the generator prone to learn a degenerate solution in which the output vector is identical to the input vector, therefore, behaving essentially as a simple autoencoder. The work further expands the experimental analysis comparing CFGAN against a selection of simple and well-known properly optimized baselines, observing that CFGAN is not consistently competitive against them despite its high computational cost. To ensure the reproducibility of these analyses, this work describes the experimental methodology and publishes all datasets and source code.

Keywords: Generative Adversarial Networks · Recommender Systems · Collaborative Filtering · Reproducibility

1 Introduction

In recent years, Generative Adversarial Networks (GANs) have become the state-of-the-art technique inside the group of generative methods, i.e., methods that learn how to generate fake data from the real one. Their primary use has been in the computer vision domain [13,16,17,18]. They have also been used in Information Retrieval [34] and Recommender Systems, the most notable example being Collaborative Filtering GAN (CFGAN) [4], and the family of models based on it, such as TagRec [5], CRGAN [35], MTPR [36], and [37].

This work contributes to the trend of evaluation studies in Machine Learning, Information Retrieval, and Recommender Systems domains [10,11,21,22,38]. This work discusses the implications of certain differences between the CFGAN framework and the model that was used in the experimental evaluation, which

would adversely affect its learning ability, providing a reference for future works. In particular, the generator is left prone to reach a degenerate solution and behave as a simple autoencoder, therefore, belonging to the same family of previous recommendation models such as [28,32]. This discussion is based on the findings of [23], which highlights the importance of describing not only *how* a model works, but also *what* works and *why* it works, as well as how experimental inquiries that aim to deepen our understanding are valuable research contributions even when no new algorithm is proposed. Furthermore, this work analyzes the replicability, reproducibility, and recommendation quality of CFGAN [4] as well as its numerical stability which is known to be a challenge for GANs [9,25]. The main research questions of this work are:

- RQ1:** Is CFGAN replicable and numerically stable? i.e., does CFGAN achieve the claimed results using the same experimental setup as in [4]?
- RQ2:** What is the impact of the differences between the CFGAN framework and the model used for the evaluation in [4], and why do they raise theoretical and methodological concerns regarding the learning ability of the model?
- RQ3:** Is CFGAN reproducible, achieving the claimed recommendation quality when compared to properly-tuned baselines? How does CFGAN compare along other dimensions such as beyond-accuracy and scalability metrics?

2 Collaborative Filtering Generative Adversarial Networks

GANs have been successfully applied to numerous prediction and classification tasks. This work addresses a family of generative models originated from GANs used in Recommender Systems. Briefly, a GAN³ consists of two neural networks that are trained together in an adversarial setting until they reach convergence. The first neural network is called the *generator*, denoted as G , while the second network is called the *discriminator*, denoted as D [3,8,14,13]. CFGAN⁴ is the most notable GAN recommendation algorithm [5,37]. Its main attribute is that it generates personalized user or item profiles, mainly by solely using previous interactions, but is able to learn from sources of information as well [4].

CFGAN Training Process Figure 1 shows an illustration of the training process of CFGAN. Every epoch starts by feeding the generator G with random noise \mathbf{z} and a condition vector \mathbf{c} . The generator creates preferences of users towards items (or vice versa) which are then masked (see Masking). The discriminator D then receives the real profiles, the masked profiles, and the condition. The discriminator tells the probability that each masked and real profiles come from the real data. The discriminator is updated based on how well it is able to correctly distinguish fake data from real data. The generator is updated based on how much it could generate *fake but realistic* data.

³ The supplemental material[29] contains the formal formulation of GANs.

⁴ For a detailed explanation of CFGAN we refer the reader to the reference article [4].

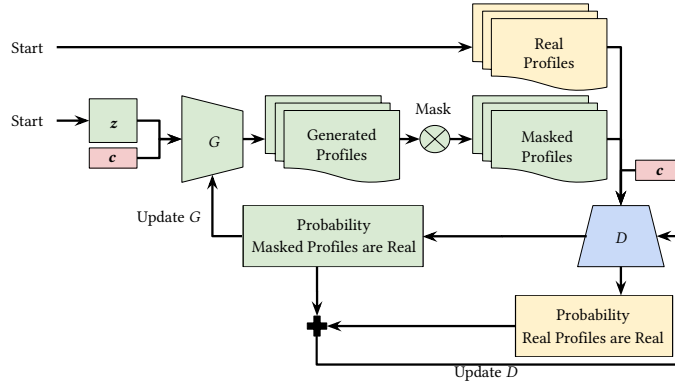


Fig. 1: Training process of CFGAN. G , D , z and c are the generator network, discriminator network, random noise, and condition vectors, respectively. Real profiles are not masked.

Modes CFGAN has two modes: *user-based* (u) or *item-based* (i). The first learns to generate user profiles, while the second learns to generate item profiles.

Masking CFGAN applies a mask to the generated profiles by performing an element-wise product between these and the real profiles. If the variant is *Partial Masking*, then the mask changes (see Variants).

Architecture Both the generator and discriminator of CFGAN are fully connected feed-forward neural networks independent from each other where each has its own hyper-parameters, e.g., number of hidden layers, learning rate, regularization, and others. If the *mode* is *user-based*, then the number of input neurons is the number of *items* in the dataset. Conversely, the number of input neurons for an *item-based* CFGAN is the number of *users* in the dataset.

Recommendations In a top-N item recommendation scenario, the trained generator creates user profiles containing the preference scores of users toward items. Recommendations are built by ranking the items from the highest to lowest score and selecting the top-N.

Variants CFGAN has three variants:

- *Zero Reconstruction (ZR)*: Changes the loss function of the generator. It ensures that a sample of non-interacted items are given zero-weights in the generated profiles.
- *Partial Masking (PM)*: The mask applied to the generated profiles combines the user profile and randomly-chosen unseen items.
- *Zero Reconstruction and Partial Masking (ZP)*: Combines ZR and PM.

3 CFGAN Theoretical and Methodological Questions

This work highlights key differences between the initial description of CFGAN and the model used in the experimental evaluation of that same paper [4]. These differences were not discussed in the original paper but have significant implications on the model’s ability to learn user or item preferences.

3.1 Real Profiles as Condition Vectors

What raises concerns? In the experimental evaluation of CFGAN, the condition vector provided to both the generator and the discriminator is the real user/item profile, i.e., the interactions that CFGAN is learning to generate.

Why is it a concern? As a consequence, CFGAN is prone to generate a trivial solution. The generator could learn the identity function between the condition vector and the output, therefore easily deceiving the discriminator without learning to generate new profiles. On the other hand, the discriminator could learn that the generated user profile should be identical to the condition vector to be real, again learning a trivial function. In practice, this will push the generator to behave as an *autoencoder* [20], which reconstructs as output the same input (condition) it was provided with.

How to avoid this concern? Since the condition vector can contain any information, a simple strategy would be to use other feature data related to the items or users or other contextual information. In a pure collaborative recommendations scenario, where no features or context is available, a possible strategy is to change the condition vector to be the user/item classes (i.e., unique identifiers) depending on the CFGAN mode. This decision is aligned with previous works on GANs [26]. In Recommender Systems, using the user/item classes provides a mechanism to generate *personalized recommendations* to every user. In contrast to the original CFGAN reference, using the user/item classes excludes the possibility that the generator and discriminator learn a trivial solution.

3.2 No Random Noise

What raises concerns? The reference article states that the random noise is not provided as input to the generator in its experiments because the goal is to generate the single best recommendation list rather than multiple ones.

Why is it a concern? This violates the framework defined in the same article and the design principles of GANs. In practice, discarding noise is problematic because it drastically reduces the input space and the generator will be trained on a very sparse set of user profiles. This assumes that the user profiles will not change, which will make CFGAN non-robust in a real application where

the data change rapidly. This is known as the *dataset shift* problem. Since the data change over time as new interactions are collected, and models are not continuously retrained, models should be robust to and be able to use the *new* data that was not present during training [30,27].

How to avoid this concern? Feed the generator with a random noise vector \mathbf{z} and the condition vector \mathbf{c} . \mathbf{z} is drawn from a normal distribution with zero mean and unit variance, i.e., $\mathbf{z} \sim \mathcal{N}(\mu, \sigma^2)$ where $\mu = 0$ and $\sigma^2 = 1$ as suggested by other works [13,26]. The size of \mathbf{z} is a key element while training GANs. However, previous works do not have consensus concerning the size of \mathbf{z} [8]. We use a heuristic to set the size of the random vector and try different values depending on the number of input neurons: 50%, 100%, or 200% of them. In practice, the condition \mathbf{c} and the random vector \mathbf{z} are concatenated, and this new vector becomes the input to the first layer of the generator network.

3.3 Methodological Questions

What raises concerns? The CFGAN description does not state how to choose the number of training epochs nor the stopping criterion for the training phase.

Why is it a concern? The number of training epochs and the stopping criterion are two key methodological aspects for most machine learning models. With the current GAN formulation, these two are defined by hand instead of automatically chosen by the continuous evaluation of GAN, which might lead to a non-optimal model, misuse of computational resources, and negatively affect the published results' replicability. There are well-known objective ways to measure the recommendation quality in offline scenarios without human intervention in the Recommender Systems domain, e.g., with accuracy metrics.

How to avoid this concern? Use an early-stopping mechanism based on the one used in previous works for other machine learning recommenders, such as matrix factorization or linear regression [10,11]. An early-stopping mechanism periodically evaluates CFGAN on validation data while CFGAN is being trained on train data. The training stops when the CFGAN quality does not improve over the best evaluation for a fixed number of evaluations.

4 Experimental Methodology

The experiments, results, and discussion are based on one of the following two experiments: (i) execution of the source code provided in the CFGAN reference article as-is to assess the result replicability; (ii) hyper-parameter tuning of different recommenders using a well-known evaluation framework to study the reproducibility of the results and evaluate along different dimensions (see [10,11]). The source code of the experiments is available online ⁵.

⁵ <https://github.com/recsyspolimi/ecir-2022-an-evaluation-of-GAN-for-CF> and [29].

Datasets The experiments use the same datasets⁶ (a sub-sampled version of Ciao⁷ [4,33], ML100K [15], and ML1M [15]) and splits (*train* and *test*) provided with the CFGAN reference article [4]. For scenarios that required a *validation* split, we created one by applying the same strategy as the reference: random holdout at 80% of the *train* split. Given the modest size of these datasets, all experiments are done on the CPU.

Technologies The implementation of all experiments, is based on the evaluation framework published in [10], which includes the implementation of some simple yet competitive state-of-the-art baselines for Recommender Systems. For the replication study, the original implementation has been used as provided. For the reproducibility study and the other experiments, the original CFGAN source code has been adapted to the framework with no changes to the core algorithm.

4.1 Methodology for the Replicability of CFGAN

The original CFGAN source code includes the implementation of CFGAN and its training loop using a fixed set of hyper-parameters that are dataset-dependent. The training procedure is the following: it fits a CFGAN recommender using the *train* split of the selected dataset and evaluates the recommender using the *test* split. With respect to the evaluation metrics, this source code evaluates CFGAN on *accuracy* metrics: precision (PREC), recall (REC), Mean Reciprocal Rank (MRR), and Normalized Discounted Cumulative Gain (NDCG) at recommendation list length 5 and 20. The limitations of this source code are the lack of the implementation of the baselines and the hyper-parameter tuning of all recommenders, e.g., baselines and CFGAN. Due to this, the replication study is only possible for CFGAN.

4.2 Methodology for the Reproducibility of CFGAN

The reproducibility study expands the original CFGAN evaluation by including: (i) new baselines that were shown to provide high recommendation quality; (ii) a well-defined hyper-parameter optimization strategy; (iii) a well-defined early-stopping strategy; and (iv) a comparison against accuracy, beyond-accuracy, and scalability metrics.

In particular, the goal of (i) and (ii) is to assess the recommendation quality of CFGAN against a wider set of recommendation models which are properly tuned under the same conditions. The models we report range from non-personalized, neighborhood-based, and non-neural machine learning approaches. This decision is aligned with results obtained by previous evaluation studies in the domain [11,10]. Regarding the hyper-parameter optimization of CFGAN, it should be noted that the search-space described in the reference article, considering that

⁶ The Watcha [4] dataset was not provided with the reference article.

⁷ The reference article does not provide instructions to reproduce this version of the dataset. We contacted the authors for clarifications but did not receive a reply.

it is done using a grid-search, contains more than $3 \cdot 10^8$ cases, which cannot be reproduced in a reasonable time. Due to this, this work adopts a different optimization strategy: Bayesian Search as used in [10]. The hyper-parameter ranges and distributions of CFGAN are reported in Table 1. The Bayesian Search starts with 16 initial random searches and performs a total of 50 cases for each algorithm. Each model in this search is fit with the *train* split and evaluated against the *validation* one. The best hyper-parameters are chosen as those with the highest NDCG at 10. Once the optimal hyper-parameters set is chosen, it trains the final models using this set and the union of the train and validation splits, evaluating the final models against the test set.

Evaluation metrics Recommenders are evaluated using the original accuracy metrics (PREC, REC, MRR, and NDCG) and against the following *beyond-accuracy* metrics: novelty [39], item coverage (Cov. Item, quota of recommended items), and distributional diversity (Div. MIL [39] and Div. Gini [1]). Using these new metrics provides a broader picture of the quality of all recommenders.

Baselines Due to space limitations, this work provides only a list of baseline recommenders. A thorough description of all baselines, and the list, range and distribution of their hyper-parameters are in [10]. The baselines list is the following: **Top Popular** [10] as a non-personalized approach. **UserKNN CF** and **ItemKNN CF** [10] as neighborhood-based CF (similarities: cosine, dice, jaccard, asymmetric cosine, and tversky) and shrinkage term. **RP3beta** [6] as a graph-based approach. **PureSVD** [7] and **MF BPR** [31] as matrix factorization models. **SLIM ElasticNet** [10,28] as a machine learning approach. Lastly, **EASE R** as a fast linear autoencoder [32].

CFGAN recommenders The hyper-parameter tuning is done on a total of 18 different CFGAN models: three datasets (Ciao, ML100K, and ML1M), two modes (item-based i and user-based u), and three variants (ZR, PM, and ZP).

To ensure a clear stopping criteria and a fair training for CFGAN, it is trained using the early-stopping criteria defined in [10] and presented in Section 3. The number of minimum and maximum epochs is in Table 1. The early-stopping selects the best number of epochs by using the validation data. The optimal number of epochs is used to train the final model. We recall that the original description of CFGAN *does not provide* an early-stopping mechanism.

Table 1 lists all hyper-parameters of CFGAN, where hyper-parameters like *optimizer*, *activation* are left unchanged with respect to the reference article. Apart from the number of training epochs, the optimizer, and activation, the rest of the hyper-parameters are set by the Bayesian Search.

Table 1: Hyper-parameters for CFGAN. These are divided in two groups. The first group contains specific hyper-parameters of CFGAN. The second group are hyper-parameters of the generator and discriminator neural networks, values between networks can be different.

Hyper-Parameter	Type	Range	Distribution
# of Epochs	Integer	200 – 400 ^a	early-stopping
ZR Coefficient	Real	0 – 1	uniform
ZR Ratio	Integer	10 – 90	uniform
PM Ratio	Integer	10 – 90	uniform
# of Hidden Layers	Integer	1 – 4	uniform
# of Hidden Features	Integer	50 – 300	uniform
# of Steps	Integer	1 – 4	uniform
l_2 Regularization	Real	$1 \cdot 10^{-4} - 1 \cdot 10^{-1}$	log-uniform
Learning Rate	Real	$1 \cdot 10^{-4} - 5 \cdot 10^{-3}$	log-uniform
Batch Size	Integer	32 – 256	uniform
Optimizer	Categorical	ADAM [19]	-
Activation	Categorical	sigmoid	-

^a Due to how the training is performed, this range is close to the 1.000 and 1.500 epochs used in the reference article

5 Experiments Results & Discussion

5.1 RQ1: CFGAN Replicability & Numerical Stability

To address **RQ1**, we report the results of the replication study, as described in Section 4.1, by using the original source code and data. This experiment has two goals: (i) verify that published results are replicable; and (ii) measure the numerical stability of CFGAN given the stochastic nature of its architecture [9,25].

Table 2 shows the results of the experiment, we only report two metrics due to space limitations⁸. The results reported in the reference article are denoted as *Reference*. Due to the stochastic nature of CFGAN models, we do not expect to achieve *exact* numerical replicability. For all datasets, we see that the replicated results are *lower* than those reported in the reference article. For the ML1M dataset, the difference between the average and reported NDCG is -0.62% . On the smaller ML100K, the results are more varied: -2.84% between the average and reported NDCG. For the Ciao dataset, the results could not be replicated due to two factors: (i) the original source code trained a different variant (iZR) than the reported in the reference article (iZP); and (ii) lack of reproducible hyper-parameters sets for this dataset in the reference article. Lastly, with respect to the numerical stability, under 30 executions of this replication, the results indicate that the reference implementation of CFGAN is numerically stable.

⁸ A table with all metrics is available in the supplemental materials of this work.

Table 2: Comparison between the accuracy metrics in the reference article [4] and those obtained in the replicability experiment (see Section 5.1) at recommendation list length of 20. Statistics calculated over 30 executions, evaluating on the last epoch using recommendation lists of length 20. We consistently obtain *lower* results across the three datasets on average. For the Ciao dataset, the original source code trains a different variant (in bold) than the reported in the reference article.

Dataset	Variant	Stats	PREC	NDCG
Ciao	iZR	Mean \pm Std	0.0402 ± 0.0014	0.1135 ± 0.0038
	iZP	Reference [4]	0.0450	0.1240
ML100K	iZP	Mean \pm Std	0.2851 ± 0.0025	0.4207 ± 0.0048
	iZP	Reference [4]	0.2940	0.4330
ML1M	iZP	Mean \pm Std	0.3079 ± 0.0011	0.4035 ± 0.0016
	iZP	Reference [4]	0.3090	0.4060

5.2 RQ2: Impact of Theoretical and Methodological Concerns

This section reports the results of the experiments related to **RQ2**, those used to measure the impact of the theoretical and methodological concerns raised in Section 3. Table 3 compares the results of the reference CFGAN (denoted as Reference), the models tuned in Section 5.3 (presented in Table 4), and the variants of this experiment.

Impact of random noise As seen in Section 2, CFGAN receives random noise as part of its input. However, in the experiments of the reference article, the random noise is removed. This experiment included three different sizes of random noise. The results indicate that the recommendation quality improves slightly by removing the random noise, however, as stated in Section 3, it comes at the cost of risking lower generalizability and lower robustness of the generator in a practical use case. We argue the random noise should always be present. However, we recall that doing an exhaustive analysis of the impact of random noise in GAN and CFGAN is beyond the scope of this paper.

Impact of condition vector Similarly as before, in the experiments of the reference article, the condition vector is set to be the user/item profiles, which increases the risk of reaching a trivial solution. This experiment changed the condition vector to be the user/item classes. The results show that changing the condition vector with the current CFGAN architecture dramatically lowers the model’s ability to learn to generate accurate profiles. This constitutes a *negative result*, as that the current architecture does not appear to be suitable to handle the user/item classes as the condition vector. Identifying an appropriate architecture to do so and an appropriate condition vector to use in scenarios

Table 3: Accuracy and beyond-accuracy values for different CFGAN models for the ML1M dataset at recommendation list length of 20. The suffix Reference is the model in the reference article (where – denotes non published values). The suffix ES indicates that the model uses early-stopping (see Table 4), NO-ES indicates it does not. The suffix CC indicates that the model uses the user/item class as the condition vector. The suffix RN-X means that the model uses random noise of size X. Hyper-parameter sets of variants are chosen as described in Section 4.2 except for those with the Reference suffix.

Variant	PREC	NDCG	Cov. Item	Variant	PREC	NDCG	Cov. Item
iZP Reference [4]	0.3090	0.4060	–	uZP Reference [4]	–	–	–
iZP ES	0.2407	0.2972	0.4894	uZP ES	0.2764	0.3620	0.1833
iZP NO-ES	0.2494	0.3111	0.4041	uZP NO-ES	0.2797	0.3639	0.1882
iZP CC	0.0384	0.0507	0.0296	uZP CC	0.0916	0.1106	0.0231
iZP RN-3020	0.2059	0.2475	0.3995	uZP RN-1841	0.2737	0.3591	0.1841
iZP RN-6040	0.1683	0.2000	0.4663	uZP RN-3682	0.2781	0.3651	0.1839
iZP RN-12080	0.1304	0.1471	0.5076	uZP RN-7364	0.2759	0.3626	0.1955

where only past user interactions are available is an open research question that goes beyond the scope of this paper.

Impact of early-stopping The reference article does not provide an early-stopping mechanism for CFGAN, although models in Recommender Systems typically benefit from one, as discussed in Section 3. This experiment removed the early-stopping and set the maximum number of epochs as 400 (this is the maximum number of epochs set for the early-stopping as seen in Table 1). Results show that using early-stopping slightly decreases the recommendation quality of CFGAN, however, we argue that the benefits of using it outweigh the downsides of it, especially if scalability is taken into account. For instance, the iZP variant trains on 645 and 1200 epochs with and without early-stopping, respectively, i.e., a decrease of 46.25% in training time and 4.47% in NDCG.

5.3 RQ3: Reproducibility Evaluation Against Properly Tuned Baselines

To address **RQ3**, we report the recommendation quality of CFGAN and baseline recommenders using a Bayesian hyper-parameter tuning approach, as described in Section 4.2. The goal is to evaluate [4] on the same top-N recommendation scenario of the reference paper against a set of properly tuned baselines on accuracy and beyond-accuracy metrics and study if published results are reproducible.

Table 4 shows the results of accuracy and beyond-accuracy metrics of properly tuned recommenders. Due to space constraints, the focus of this discussion

Table 4: Accuracy and beyond-accuracy metrics for tuned baselines and CFGAN on the ML1M dataset at recommendation list length of 20. Higher accuracy values than CFGAN models reached by baselines in bold. ItemKNN and UserKNN use asymmetric cosine. CFGAN results are different than Table 2 due to the hyper-parameter tuning. CFGAN models use early-stopping.

	PREC	REC	MRR	NDCG	Novelty	Cov. Item	Div. MIL	Div. Gini
Random	0.0099	0.0056	0.0326	0.0108	0.0732	1.0000	0.9946	0.8977
TopPop	0.1552	0.1146	0.3852	0.1938	0.0473	0.0299	0.4529	0.0095
UserKNN CF	0.2891	0.2570	0.6595	0.3888	0.0513	0.3286	0.8921	0.0655
ItemKNN CF	0.2600	0.2196	0.6254	0.3490	0.0497	0.2097	0.8148	0.0362
RP3beta	0.2758	0.2385	0.6425	0.3700	0.0506	0.3427	0.8565	0.0528
PureSVD	0.2913	0.2421	0.6333	0.3783	0.0516	0.2439	0.9142	0.0712
SLIM ElasticNet	0.3119	0.2695	0.6724	0.4123	0.0514	0.3153	0.8984	0.0696
MF BPR	0.2485	0.2103	0.5753	0.3242	0.0512	0.3126	0.8855	0.0631
EASE R	0.3171	0.2763	0.6795	0.4192	0.0518	0.3338	0.9146	0.0803
CFGAN iZR	0.2862	0.2547	0.6312	0.3770	0.0542	0.4123	0.9583	0.1459
CFGAN iPM	0.2505	0.1950	0.5454	0.3138	0.0523	0.3669	0.9218	0.0901
CFGAN iZP	0.2407	0.1742	0.5230	0.2972	0.0530	0.4894	0.9256	0.0901
CFGAN uZR	0.2955	0.2473	0.6222	0.3799	0.0523	0.2167	0.9205	0.0837
CFGAN uPM	0.2367	0.1928	0.5513	0.3054	0.0516	0.1782	0.8962	0.0550
CFGAN uZP	0.2764	0.2342	0.6208	0.3620	0.0513	0.1833	0.9062	0.0617

is on the dataset with the highest number of interactions studied in the reference article [4], i.e., ML1M. Results with other datasets are comparable ⁹.

The results indicate that CFGAN is outperformed by three simple baselines in NDCG, sometimes by almost 10%, in particular by other autoencoder-based recommendation models like EASE R and SLIM Elastic Net. These findings are consistent to those reported in several other evaluation studies [11,10,12,24,2]. The accuracy across CFGAN models varies depending on the CFGAN mode and variant. For instance, the most and least accurate variants are uZR and iZP, respectively, with approximately 21.76% difference in their NDCG metrics. Under the current methodology, we cannot confirm the claim that item-based models or ZP variants outperform other variants, as indicated in the reference article [4]. In fact, our most accurate variant is uZR. When looking at beyond-accuracy metrics, item-based CFGAN models have equal or higher diversity than baselines. In particular, iZR has the highest novelty, item coverage, and distributional diversity, while also being the second-most accurate variant with respect to NDCG. User-based CFGAN models have less coverage than all baselines.

It can be seen that the results of the replicability study using hyper-parameter optimization and early-stopping reported in Table 4 are lower than those re-

⁹ The full results are in the supplemental material [29].

ported in the replication study in Table 2. This indicates that the non-reproducible hyper-parameter search and early-stopping criteria have an important impact on the recommendation quality. As a last observation, using the results reported in the reference article CFGAN would not be competitive against the baselines.

Scalability Concerning the recommendation time, all algorithms are able to create recommendations lists to all users in a total time between 7 and 20 seconds. Differently from other neural models [10], CFGAN models provide fast recommendations. Due to the lack of random noise, they generate static recommendation lists.

Concerning the training time, CFGAN models take more time to train than any baseline. We categorize models into three groups: (i) ItemKNN, UserKNN, PureSVD, RP3beta, and EASE R take between 2 and 25 seconds on average; (ii) machine learning approaches, i.e., SLIM and MF BPR take between 3 and 9 minutes to train on average; and (iii) all CFGAN models take between 25 and 40 minutes to train on average. Even on a comparatively small dataset as ML1M, the difference in training time between the first and the last group is two orders of magnitude. Using more performing hardware, i.e., GPU could reduce this gap.

Under this offline evaluation, which is the same as in the original article [4], CFGAN does not generate more accurate recommendations than simple baselines. As CFGAN is a neural approach, bigger datasets with more complex relations between users, items, and their interactions might increase the accuracy of CFGAN. However, this is unpractical due to the higher computational cost of CFGAN models, therefore, we do not report experiments with bigger datasets.

6 Conclusions

This work presents an evaluation study of the family of models of CFGAN, addressing three research questions under the same top-N recommendation scenario as the reference article [4]. Are previously published results of CFGAN replicable? What is the impact of the differences between the CFGAN framework and the model evaluated in the reference article? Are previously published results of CFGAN reproducible? Regarding the model’s architecture, using as condition vector the user profile and removing the random noise leaves the model prone to a trivial and not useful solution in which the generator behaves as a simple autoencoder, negatively affecting the model’s ability to generalize. Due to this, we argue a different approach should be used, which is still an open research question. The experimental results indicate that CFGAN is replicable and numerically stable, but not reproducible as it can be outperformed by simple but properly tuned baselines. This result adds to the recent evidence that properly tuned baselines can outperform complex methods and suggest CFGAN is not yet a mature recommendation algorithm.

A Generative Adversarial Networks

GANs have been successfully applied to numerous prediction and classification tasks. In this work, we discuss a family of generative models originated from CFGAN used in Recommender Systems. Briefly, a GAN consists of an adversarial setting between two neural networks that are trained together until they reach convergence. The first neural network is called the *generator*, and it is denoted as G . The second network is called the *discriminator* and it is denoted as D [14,13,8].

We use an example to explain the goals of a GAN. Let us suppose that G is a counterfeit organization trying to produce fake bills and that D is the local police department in charge of distinguishing fake from real bills. Let us also suppose that after the classification of bills, both the police department and the counterfeiters can know if the classification was accurate or not. The first goal is that G learns to generate fake bills as realistically as possible to deceive D . The second goal is for D to keep up to date with the counterfeited bills not to enter the economy. On every iteration of this setup, G updates its counterfeiting methods by looking at the number of errors done by the police. D , on the other hand, updates its detection methods, so the identical bills are not misclassified again. This adversarial setting stops when G produces such realistic bills that the discriminator can not classify the source of the bills anymore.

A.1 Theoretical Formulation

Formally, the data is drawn from a distribution $p_{data}(\mathbf{x})$, and \mathbf{z} is a vector drawn from a prior distribution $p_z(\mathbf{z})$. The generator G is defined as a differentiable function $G(\mathbf{z}, \theta_g)$ with parameters θ_g such that $\mathbf{x} = G(\mathbf{z}, \theta_g)$ meaning that it is a function that maps samples \mathbf{z} drawn from $p_z(\mathbf{z})$ to values \mathbf{x} drawn from a distribution $p_g(\mathbf{x})$. The learning objective for G is to learn a mapping such that $p_g(\mathbf{x}) = p_{data}(\mathbf{x})$, i.e., G learns to generate samples drawn from the same distribution as those of the real data.

On the other hand, the discriminator D is a function with parameters θ_d such that $y = D(\mathbf{x})$ is a scalar that represents the probability of \mathbf{x} to be drawn from $p_{data}(\mathbf{x})$ instead of $p_g(\mathbf{x})$. The learning objective for D is to learn a mapping that assigns high probabilities to samples from $p_{data}(\mathbf{x})$ and low probabilities to samples from $p_g(\mathbf{x})$.

Both G and D are set up in an adversarial setting where the former tries to maximize the probability of D to label generated data as real, thus $\max_{\theta_g} D(G(\mathbf{z}, \theta_g))$ where $\mathbf{z} \sim p_z(\mathbf{z})$ and $G(\mathbf{z}, \theta_g) \sim p_g(\mathbf{x})$. The latter, instead, tries to maximize the probability to distinguish real from generated data, thus $\max_{\theta_d} D(\mathbf{x}, \theta_d)$ where $\mathbf{x} \sim p_{data}(\mathbf{x})$. In Figure 2 we illustrate this adversarial setting. Also in Equation 1 we show the objective function of a GAN [13].

$$\max_{\theta_g} \max_{\theta_d} V(G, D) = \mathbb{E}_{\mathbf{z} \sim p_z(\mathbf{z})} \log D(G(\mathbf{z}, \theta_g)) + \mathbb{E}_{\mathbf{x} \sim p_{data}(\mathbf{x})} \log D(\mathbf{x}) \quad (1)$$

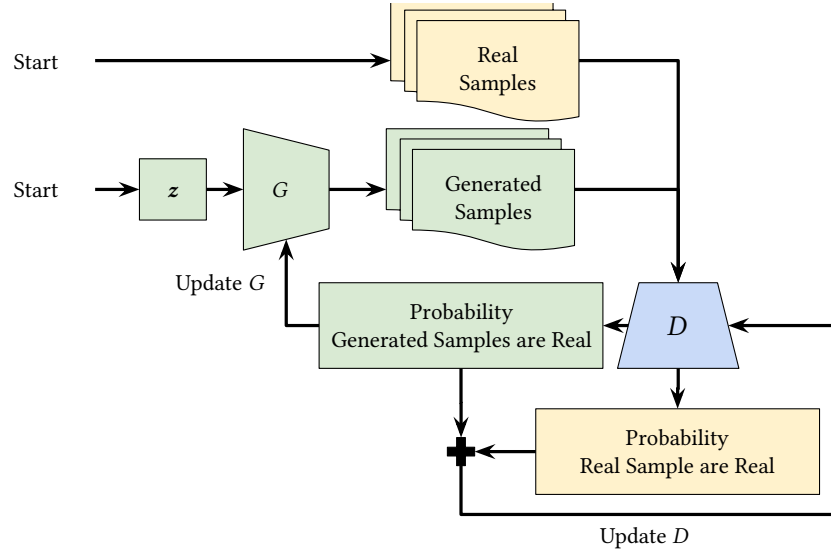


Fig. 2: Training process of a GAN. G , D , z are the generator network, discriminator network, and random noise, respectively.

In practice, GANs are usually trained to minimize a loss function l_{GAN} , using Stochastic Gradient Descent (SGD) while translating the expected values \mathbb{E} to cross-entropy losses [4,13,14].

A.2 Conditional GANs

The main drawback of a GAN is that there is no control over the generated samples, e.g., in [13] a GAN was trained to generate digits from the MNIST dataset. however, it did not control *which* digits were generated by it. Conditional GAN (CGAN) is an extension of the GAN model that solves this issue by including a *condition vector* to the generator and discriminator. This vector represents the features or attributes that the generated and discriminated sample must have [26]. For example, a work on the MNIST dataset showed that by providing the digit class, i.e., “0”, “1”, up until “9”, as a condition to the generator and discriminator a CGAN generates samples of those digits [26]. On [16], a black and white image was used as the condition vector so the generator could generate a colorized version of that image.

The training procedure of CGANs is similar to that of GANs. The only difference is that both the generator and discriminator receive a new vector \mathbf{c} , the condition vector, as part of their input.

B Results RQ1: CFGAN Replicability & Numerical Stability

Table 5: Comparison between the accuracy metrics in the reference article [4] and those obtained in the replicability experiment (see Section 5.1) at recommendation list length of 5 and 20. Statistics calculated over 30 executions, evaluating on the last epoch using recommendation lists of length 20. We consistently obtain *lower* results across the three datasets on average. For the Ciao dataset, the original source code trains a different variant (in bold) than the reported in the reference article.

@	Dataset	Variant	Stats	PREC	REC	MRR	NDCG
5	Ciao	iZR	Mean \pm Std	0.0607 ± 0.0026	0.0693 ± 0.0053	0.1345 ± 0.0059	0.0795 ± 0.0039
		iZP	Reported [4]	0.0720	0.0810	0.1540	0.0920
	ML100K	iZP	Mean \pm Std	0.4244 ± 0.0064	0.1434 ± 0.0034	0.6602 ± 0.0081	0.4588 ± 0.0062
		iZP	Reported [4]	0.4440	0.1520	0.6810	0.4760
	ML1M	iZP	Mean \pm Std	0.4287 ± 0.0013	0.1060 ± 0.0008	0.6424 ± 0.0025	0.4521 ± 0.0013
		iZP	Reported [4]	0.4320	0.1080	0.6470	0.4550
20	Ciao	iZR	Mean \pm Std	0.0402 ± 0.0014	0.1788 ± 0.0071	0.1594 ± 0.0055	0.1135 ± 0.0038
		iZP	Reported [4]	0.0450	0.1940	0.1670	0.1240
	ML100K	iZP	Mean \pm Std	0.2851 ± 0.0025	0.3400 ± 0.0050	0.6732 ± 0.0077	0.4207 ± 0.0048
		iZP	Reported [4]	0.2940	0.3600	0.6930	0.4330
	ML1M	iZP	Mean \pm Std	0.3079 ± 0.0011	0.2671 ± 0.0020	0.6566 ± 0.0024	0.4035 ± 0.0016
		iZP	Reported [4]	0.3090	0.2720	0.6600	0.4060

C Results RQ2: Impact of Theoretical and Methodological Concerns

Table 6: Accuracy and beyond-accuracy values for different CFGAN models for the Ciao dataset at recommendation list length of 20. The suffix Reference is the model in the reference article (where – denotes non published values). The suffix ES indicates that the model uses early-stopping, NO-ES indicates it does not. The suffix CC indicates that the model uses the user/item class as the condition vector. The suffix RN-X means that the model uses random noise of size X.

	PREC	REC	MAP	MRR	NDCG	F1	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
iZR Reference [4]	–	–	–	–	–	–	–	–	–	–	–
iZR ES	0.0414	0.1783	0.0547	0.1586	0.1149	0.0672	0.1409	0.9510	0.6726	0.2955	9.0534
iZR NO-ES	0.0359	0.1647	0.0498	0.1573	0.1058	0.0589	0.1437	0.9628	0.7869	0.3842	9.4161
iZR CC	0.0064	0.0246	0.0045	0.0219	0.0143	0.0102	0.1473	0.0662	0.0423	0.0164	4.5218
iZR RN-331	0.0393	0.1761	0.0536	0.1489	0.1116	0.0643	0.1414	0.9519	0.7290	0.3094	9.1185
iZR RN-662	0.0395	0.1718	0.0465	0.1371	0.1046	0.0643	0.1410	0.9480	0.7491	0.2983	9.0630
iZR RN-1324	0.0377	0.1650	0.0495	0.1465	0.1052	0.0613	0.1417	0.9500	0.8018	0.3236	9.1666
iPM Reference [4]	–	–	–	–	–	–	–	–	–	–	–
iPM ES	0.0353	0.1548	0.0451	0.1317	0.0976	0.0575	0.1391	0.9012	0.5679	0.1844	8.3364
iPM NO-ES	0.0356	0.1662	0.0453	0.1322	0.1005	0.0587	0.1370	0.9120	0.6644	0.2192	8.5638
iPM CC	0.0083	0.0309	0.0093	0.0348	0.0214	0.0131	0.1498	0.9602	0.9480	0.4495	9.5812
iPM RN-331	0.0357	0.1533	0.0458	0.1415	0.0990	0.0579	0.1389	0.9036	0.5865	0.1892	8.3721
iPM RN-662	0.0368	0.1641	0.0448	0.1329	0.1003	0.0601	0.1387	0.9023	0.5939	0.1926	8.3843
iPM RN-1324	0.0346	0.1489	0.0420	0.1339	0.0938	0.0562	0.1394	0.9106	0.6726	0.2189	8.5553
iZP Reference [4]	0.0450	0.1940	–	0.1670	0.1240	–	–	–	–	–	–

Table 6: cont...

	PREC	REC	MAP	MRR	NDCG	F1	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
iZP ES	0.0361	0.1635	0.0503	0.1418	0.1041	0.0591	0.1383	0.9305	0.5880	0.2209	8.6379
iZP NO-ES	0.0336	0.1426	0.0384	0.1246	0.0881	0.0544	0.1401	0.9404	0.6533	0.2566	8.8508
iZP CC	0.0055	0.0210	0.0034	0.0175	0.0117	0.0088	0.1482	0.9097	0.6177	0.1932	8.4167
iZP RN-331	0.0345	0.1576	0.0450	0.1350	0.0980	0.0565	0.1383	0.9303	0.6110	0.2299	8.6842
iZP RN-662	0.0349	0.1492	0.0426	0.1407	0.0953	0.0566	0.1382	0.9257	0.6095	0.2174	8.6045
iZP RN-1324	0.0338	0.1538	0.0484	0.1448	0.1007	0.0554	0.1386	0.9292	0.6236	0.2263	8.6638
uZR Reference [4]	–	–	–	–	–	–	–	–	–	–	–
uZR ES	0.0401	0.1719	0.0523	0.1625	0.1124	0.0650	0.1312	0.8208	0.2079	0.0801	7.1658
uZR NO-ES	0.0324	0.1386	0.0360	0.1147	0.0840	0.0525	0.1430	0.9402	0.5598	0.2418	8.7633
uZR CC	0.0217	0.1019	0.0278	0.0892	0.0624	0.0358	0.1221	0.1153	0.0341	0.0168	4.5713
uZR RN-673	0.0385	0.1635	0.0499	0.1485	0.1069	0.0623	0.1315	0.8228	0.2138	0.0825	7.2085
uZR RN-1347	0.0376	0.1596	0.0457	0.1428	0.1017	0.0608	0.1298	0.7864	0.1782	0.0676	6.9228
uZR RN-2694	0.0386	0.1640	0.0460	0.1449	0.1033	0.0625	0.1311	0.8172	0.2027	0.0785	7.1371
uPM Reference [4]	–	–	–	–	–	–	–	–	–	–	–
uPM ES	0.0273	0.1116	0.0333	0.1049	0.0732	0.0439	0.1306	0.6338	0.0913	0.0377	6.0393
uPM NO-ES	0.0289	0.1279	0.0315	0.1094	0.0767	0.0472	0.1320	0.7352	0.1121	0.0524	6.5022
uPM CC	0.0084	0.0240	0.0051	0.0233	0.0153	0.0125	0.1395	0.0565	0.0312	0.0161	4.4677
uPM RN-673	0.0227	0.0967	0.0287	0.0912	0.0631	0.0367	0.1370	0.6737	0.0891	0.0415	6.1492
uPM RN-1347	0.0224	0.1012	0.0259	0.0868	0.0613	0.0367	0.1321	0.5781	0.0616	0.0323	5.6931
uPM RN-2694	0.0223	0.0970	0.0282	0.0914	0.0626	0.0362	0.1324	0.5298	0.0683	0.0294	5.6474

Table 6: cont...

	PREC	REC	MAP	MRR	NDCG	F1	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
uZP Reference [4]	–	–	–	–	–	–	–	–	–	–	–
uZP ES	0.0230	0.1054	0.0228	0.0664	0.0579	0.0378	0.1204	0.1238	0.0341	0.0169	4.5934
uZP NO-ES	0.0227	0.1088	0.0283	0.0848	0.0646	0.0375	0.1212	0.1209	0.0371	0.0168	4.5927
uZP CC	0.0216	0.0989	0.0254	0.0812	0.0593	0.0354	0.1220	0.1159	0.0312	0.0167	4.5733
uZP RN-673	0.0223	0.1009	0.0278	0.0826	0.0621	0.0365	0.1205	0.1238	0.0349	0.0169	4.5925
uZP RN-1347	0.0233	0.1079	0.0310	0.0902	0.0670	0.0383	0.1204	0.1240	0.0364	0.0169	4.5988
uZP RN-2694	0.0226	0.1052	0.0265	0.0838	0.0621	0.0372	0.1206	0.1227	0.0371	0.0169	4.5945

Table 7: Accuracy and beyond-accuracy values for different CFGAN models for the ML100K dataset at recommendation list length of 20. The suffix Reference is the model in the reference article (where – denotes non published values). The suffix ES indicates that the model uses early-stopping, NO-ES indicates it does not. The suffix CC indicates that the model uses the user/item class as the condition vector. The suffix RN-X means that the model uses random noise of size X.

	PREC	REC	MAP	MRR	NDCG	F1	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
iZR Reference [4]	–	–	–	–	–	–	–	–	–	–	–
iZR ES	0.2415	0.3025	0.1923	0.5866	0.3546	0.2685	0.1073	0.9017	0.3400	0.1235	8.0988
iZR NO-ES	0.2317	0.3030	0.1821	0.5663	0.3446	0.2626	0.1088	0.9121	0.3956	0.1468	8.3357
iZR CC	0.0297	0.0247	0.0100	0.0959	0.0357	0.0270	0.1316	0.5090	0.0417	0.0230	5.4954
iZR RN-471	0.2401	0.3026	0.1913	0.5815	0.3532	0.2678	0.1068	0.8943	0.3206	0.1132	7.9756
iZR RN-943	0.2408	0.2998	0.1917	0.5940	0.3546	0.2671	0.1070	0.8992	0.3406	0.1174	8.0295
iZR RN-1886	0.2327	0.2923	0.1817	0.5774	0.3414	0.2591	0.1071	0.8979	0.3128	0.1138	7.9833
iPM Reference [4]	–	–	–	–	–	–	–	–	–	–	–
iPM ES	0.2171	0.2350	0.1641	0.5247	0.3023	0.2257	0.1037	0.8417	0.2390	0.0731	7.3341
iPM NO-ES	0.2466	0.2829	0.2004	0.5749	0.3506	0.2635	0.1056	0.8875	0.3067	0.1025	7.8294
iPM CC	0.0128	0.0112	0.0027	0.0294	0.0131	0.0119	0.1498	0.5732	0.1518	0.0283	5.7504
iPM RN-471	0.2107	0.2213	0.1533	0.4933	0.2853	0.2159	0.1034	0.8364	0.1972	0.0702	7.2708
iPM RN-943	0.2144	0.2332	0.1618	0.5147	0.2984	0.2234	0.1033	0.8392	0.2257	0.0711	7.2919
iPM RN-1886	0.2128	0.2264	0.1573	0.5106	0.2917	0.2194	0.1039	0.8440	0.2129	0.0734	7.3358
iZP Reference [4]	0.2940	0.3600	–	0.6930	0.4330	–	–	–	–	–	–
iZP ES	0.2757	0.3283	0.2394	0.6580	0.4041	0.2997	0.1040	0.8572	0.2589	0.0848	7.5584
iZP NO-ES	0.2759	0.3311	0.2386	0.6553	0.4055	0.3010	0.1051	0.8802	0.2934	0.1014	7.8161

Table 7: cont...

	PREC	REC	MAP	MRR	NDCG	F1	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
iZP CC	0.1290	0.1133	0.0638	0.2802	0.1525	0.1206	0.1011	0.4057	0.0799	0.0199	5.3747
iZP RN-471	0.2750	0.3271	0.2377	0.6589	0.4029	0.2988	0.1038	0.8535	0.2613	0.0835	7.5368
iZP RN-943	0.2726	0.3212	0.2373	0.6537	0.3999	0.2949	0.1031	0.8329	0.2511	0.0753	7.3841
iZP RN-1886	0.2725	0.3220	0.2354	0.6543	0.3992	0.2952	0.1039	0.8533	0.2589	0.0835	7.5360
uZR Reference [4]	–	–	–	–	–	–	–	–	–	–	–
uZR ES	0.2754	0.3387	0.2409	0.6500	0.4078	0.3038	0.1060	0.8844	0.2371	0.1018	7.8011
uZR NO-ES	0.2732	0.3369	0.2365	0.6507	0.4049	0.3018	0.1085	0.9158	0.3085	0.1388	8.2464
uZR CC	0.1100	0.1520	0.0665	0.3847	0.1689	0.1276	0.1011	0.3616	0.0411	0.0178	5.0993
uZR RN-826	0.2768	0.3382	0.2427	0.6533	0.4100	0.3045	0.1065	0.8922	0.2414	0.1091	7.8922
uZR RN-1653	0.2725	0.3360	0.2375	0.6456	0.4036	0.3009	0.1060	0.8853	0.2250	0.0996	7.7634
uZR RN-3306	0.2694	0.3286	0.2336	0.6356	0.3980	0.2961	0.1070	0.8869	0.2686	0.1118	7.9293
uPM Reference [4]	–	–	–	–	–	–	–	–	–	–	–
uPM ES	0.2326	0.3057	0.1864	0.5809	0.3498	0.2642	0.1058	0.8699	0.2607	0.0951	7.7164
uPM NO-ES	0.2154	0.2872	0.1586	0.5223	0.3158	0.2462	0.1067	0.8861	0.3116	0.1111	7.9411
uPM CC	0.1529	0.1691	0.0923	0.4148	0.2090	0.1606	0.0978	0.4355	0.0478	0.0201	5.3440
uPM RN-826	0.2284	0.2969	0.1823	0.5710	0.3425	0.2582	0.1055	0.8733	0.2511	0.0990	7.7671
uPM RN-1653	0.2426	0.3050	0.1937	0.5717	0.3550	0.2703	0.1054	0.8711	0.2529	0.0976	7.7464
uPM RN-3306	0.2376	0.2929	0.1866	0.5654	0.3448	0.2624	0.1058	0.8727	0.2474	0.0982	7.7524
uZP Reference [4]	–	–	–	–	–	–	–	–	–	–	–
uZP ES	0.2555	0.3163	0.2194	0.6399	0.3834	0.2827	0.1055	0.8855	0.2529	0.1055	7.8565

Table 7: cont...

	PREC	REC	MAP	MRR	NDCG	F1	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
uZP NO-ES	0.2619	0.3289	0.2221	0.6379	0.3909	0.2916	0.1073	0.9100	0.3303	0.1358	8.2238
uZP CC	0.1239	0.1738	0.0798	0.3699	0.1888	0.1446	0.0997	0.3894	0.0430	0.0186	5.1766
uZP RN-826	0.2590	0.3225	0.2230	0.6406	0.3892	0.2873	0.1057	0.8905	0.2632	0.1112	7.9291
uZP RN-1653	0.2530	0.3204	0.2149	0.6311	0.3812	0.2828	0.1063	0.8970	0.2317	0.1110	7.9023
uZP RN-3306	0.2449	0.3090	0.2040	0.6191	0.3679	0.2732	0.1058	0.8812	0.2214	0.0997	7.7605

Table 8: Accuracy and beyond-accuracy values for different CFGAN models for the ML1M dataset at recommendation list length of 20. The suffix Reference is the model in the reference article (where – denotes non published values). The suffix ES indicates that the model uses early-stopping, NO-ES indicates it does not. The suffix CC indicates that the model uses the user/item class as the condition vector. The suffix RN-X means that the model uses random noise of size X.

	PREC	REC	MAP	MRR	NDCG	F1	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
iZR Reference [4]	–	–	–	–	–	–	–	–	–	–	–
iZR ES	0.2862	0.2547	0.2146	0.6312	0.3770	0.2696	0.0542	0.9583	0.4123	0.1459	9.4737
iZR NO-ES	0.2909	0.2608	0.2195	0.6361	0.3833	0.2750	0.0546	0.9621	0.4402	0.1592	9.5998
iZR CC	0.0599	0.0431	0.0237	0.1688	0.0707	0.0501	0.0584	0.8577	0.7257	0.1003	8.4716
iZR RN-3020	0.2861	0.2545	0.2140	0.6267	0.3759	0.2693	0.0542	0.9588	0.4058	0.1454	9.4711
iZR RN-6040	0.2864	0.2538	0.2148	0.6250	0.3758	0.2691	0.0542	0.9580	0.4063	0.1427	9.4464
iZR RN-12080	0.2852	0.2526	0.2140	0.6242	0.3747	0.2679	0.0541	0.9574	0.3987	0.1418	9.4328
iPM Reference [4]	–	–	–	–	–	–	–	–	–	–	–
iPM ES	0.2505	0.1950	0.1734	0.5454	0.3138	0.2193	0.0523	0.9218	0.3669	0.0901	8.7458
iPM NO-ES	0.2534	0.1960	0.1763	0.5480	0.3170	0.2211	0.0528	0.9302	0.3914	0.0970	8.8672
iPM CC	0.0145	0.0069	0.0043	0.0601	0.0171	0.0093	0.0696	0.3734	0.0179	0.0084	5.2277
iPM RN-3020	0.2487	0.1888	0.1707	0.5332	0.3085	0.2147	0.0534	0.9319	0.3672	0.1005	8.9107
iPM RN-6040	0.2107	0.1550	0.1398	0.4687	0.2603	0.1786	0.0597	0.9443	0.4856	0.1206	9.1833
iPM RN-12080	0.2285	0.1545	0.1496	0.4767	0.2725	0.1843	0.0594	0.9609	0.4294	0.1390	9.4311
iZP Reference [4]	0.3090	0.2720	–	0.6600	0.4060	–	–	–	–	–	–
iZP ES	0.2407	0.1742	0.1661	0.5230	0.2972	0.2021	0.0530	0.9256	0.4894	0.0901	8.7580
iZP NO-ES	0.2494	0.1888	0.1743	0.5434	0.3111	0.2149	0.0535	0.9477	0.4041	0.1060	9.0435

Table 8: cont...

	PREC	REC	MAP	MRR	NDCG	F1	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
iZP CC	0.0384	0.0218	0.0166	0.1648	0.0507	0.0278	0.0653	0.5382	0.0296	0.0109	5.6056
iZP RN-3020	0.2059	0.1377	0.1316	0.4490	0.2475	0.1650	0.0535	0.9459	0.3995	0.1034	9.0063
iZP RN-6040	0.1683	0.1112	0.0983	0.3808	0.2000	0.1339	0.0560	0.9479	0.4663	0.1204	9.2016
iZP RN-12080	0.1304	0.0724	0.0670	0.2906	0.1471	0.0931	0.0599	0.9587	0.5076	0.1409	9.4485
uZR Reference [4]	–	–	–	–	–	–	–	–	–	–	–
uZR ES	0.2955	0.2473	0.2241	0.6222	0.3799	0.2692	0.0523	0.9205	0.2167	0.0837	8.6304
uZR NO-ES	0.2959	0.2519	0.2281	0.6376	0.3856	0.2721	0.0522	0.9175	0.2273	0.0782	8.5571
uZR CC	0.1459	0.1118	0.0826	0.3695	0.1831	0.1266	0.0475	0.4457	0.0291	0.0093	5.3905
uZR RN-1841	0.2862	0.2414	0.2136	0.6092	0.3683	0.2619	0.0519	0.9030	0.2127	0.0696	8.3787
uZR RN-3682	0.2915	0.2425	0.2222	0.6211	0.3760	0.2648	0.0514	0.8929	0.2021	0.0638	8.2516
uZR RN-7364	0.2902	0.2435	0.2196	0.6154	0.3739	0.2648	0.0511	0.8797	0.1988	0.0572	8.0952
uPM Reference [4]	–	–	–	–	–	–	–	–	–	–	–
uPM ES	0.2367	0.1928	0.1629	0.5513	0.3054	0.2125	0.0516	0.8962	0.1782	0.0550	8.0858
uPM NO-ES	0.2402	0.2053	0.1660	0.5594	0.3135	0.2214	0.0512	0.8767	0.1877	0.0507	7.9488
uPM CC	0.1443	0.1025	0.0786	0.3268	0.1720	0.1198	0.0480	0.4331	0.0291	0.0091	5.3832
uPM RN-1841	0.2250	0.1729	0.1495	0.5155	0.2835	0.1956	0.0519	0.8958	0.1632	0.0538	8.0511
uPM RN-3682	0.2297	0.1776	0.1545	0.5250	0.2902	0.2003	0.0513	0.8677	0.1749	0.0473	7.8506
uPM RN-7364	0.1963	0.1529	0.1259	0.4935	0.2529	0.1719	0.0523	0.8673	0.1475	0.0419	7.6993
uZP Reference [4]	–	–	–	–	–	–	–	–	–	–	–
uZP ES	0.2764	0.2342	0.2074	0.6208	0.3620	0.2536	0.0513	0.9062	0.1833	0.0617	8.2408

Table 8: cont...

	PREC	REC	MAP	MRR	NDCG	F1	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
uZP NO-ES	0.2797	0.2323	0.2114	0.6198	0.3639	0.2538	0.0513	0.9052	0.1882	0.0622	8.2519
uZP CC	0.0916	0.0715	0.0399	0.2513	0.1106	0.0803	0.0511	0.3083	0.0231	0.0074	5.0549
uZP RN-1841	0.2737	0.2322	0.2050	0.6171	0.3591	0.2512	0.0513	0.9050	0.1841	0.0611	8.2269
uZP RN-3682	0.2781	0.2357	0.2102	0.6241	0.3651	0.2552	0.0514	0.9088	0.1839	0.0631	8.2737
uZP RN-7364	0.2759	0.2363	0.2075	0.6203	0.3626	0.2546	0.0514	0.9093	0.1955	0.0647	8.3079

D Results RQ3: Reproducibility Evaluation Against Properly Tuned Baselines

Table 9: Accuracy and beyond-accuracy metrics for tuned baselines and CFGAN on the Ciao dataset at recommendation list length of 20. CFGAN results are different than Table 6 due to the hyper-parameter tuning.

	PREC	REC	MAP	MRR	NDCG	F1	ARHR	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
Random	0.0045	0.0164	0.0028	0.0124	0.0092	0.0070	0.0137	0.1603	0.9852	1.0000	0.8229	10.3215
TopPop	0.0232	0.1091	0.0282	0.0829	0.0645	0.0383	0.1021	0.1199	0.1312	0.0356	0.0170	4.6100
UserKNN CF cosine	0.0416	0.1874	0.0574	0.1650	0.1201	0.0680	0.2087	0.1325	0.8451	0.5078	0.1269	7.7617
UserKNN CF dice	0.0383	0.1747	0.0515	0.1531	0.1102	0.0628	0.1912	0.1317	0.8157	0.4246	0.1030	7.4729
UserKNN CF jaccard	0.0388	0.1786	0.0516	0.1527	0.1112	0.0637	0.1914	0.1308	0.7905	0.3764	0.0884	7.2620
UserKNN CF asymmetric	0.0376	0.1689	0.0489	0.1477	0.1062	0.0615	0.1848	0.1307	0.7818	0.3445	0.0836	7.1874
UserKNN CF tversky	0.0413	0.1850	0.0578	0.1621	0.1193	0.0676	0.2079	0.1323	0.8388	0.5241	0.1274	7.7472
ItemKNN CF cosine	0.0410	0.1807	0.0555	0.1589	0.1165	0.0669	0.2022	0.1313	0.8116	0.4566	0.1063	7.4955
ItemKNN CF dice	0.0387	0.1709	0.0512	0.1495	0.1090	0.0631	0.1898	0.1357	0.8820	0.6585	0.1880	8.2791
ItemKNN CF jaccard	0.0371	0.1611	0.0518	0.1499	0.1069	0.0603	0.1894	0.1356	0.8800	0.6548	0.1858	8.2591
ItemKNN CF asymmetric	0.0409	0.1792	0.0548	0.1587	0.1157	0.0665	0.2012	0.1312	0.8120	0.4410	0.1050	7.4850
ItemKNN CF tversky	0.0375	0.1596	0.0510	0.1511	0.1065	0.0607	0.1899	0.1354	0.8794	0.6578	0.1856	8.2554
RP3beta	0.0442	0.1971	0.0601	0.1730	0.1262	0.0722	0.2194	0.1355	0.8688	0.7060	0.1868	8.2145
PureSVD	0.0366	0.1596	0.0443	0.1428	0.0999	0.0595	0.1784	0.1332	0.8561	0.3875	0.1165	7.7012
SLIM ElasticNet	0.0430	0.1852	0.0582	0.1640	0.1208	0.0698	0.2114	0.1343	0.8758	0.5798	0.1628	8.1157
MF BPR	0.0246	0.1013	0.0323	0.1052	0.0683	0.0396	0.1271	0.1406	0.9320	0.8641	0.3290	9.0762
EASE R	0.0425	0.1825	0.0560	0.1591	0.1176	0.0689	0.2059	0.1343	0.8799	0.5479	0.1596	8.1095
CFGAN iZR	0.0414	0.1783	0.0547	0.1586	0.1149	0.0672	0.2033	0.1409	0.9510	0.6726	0.2955	9.0534
CFGAN iPM	0.0353	0.1548	0.0451	0.1317	0.0976	0.0575	0.1659	0.1391	0.9012	0.5679	0.1844	8.3364

Table 9: cont...

	PREC	REC	MAP	MRR	NDCG	F1	ARHR	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
CFGAN iZP	0.0361	0.1635	0.0503	0.1418	0.1041	0.0591	0.1772	0.1383	0.9305	0.5880	0.2209	8.6379
CFGAN uZR	0.0401	0.1719	0.0523	0.1625	0.1124	0.0650	0.2056	0.1312	0.8208	0.2079	0.0801	7.1658
CFGAN uPM	0.0273	0.1116	0.0333	0.1049	0.0732	0.0439	0.1298	0.1306	0.6338	0.0913	0.0377	6.0393
CFGAN uZP	0.0230	0.1054	0.0228	0.0664	0.0579	0.0378	0.0843	0.1204	0.1238	0.0341	0.0169	4.5934

Table 10: Training and recommendation time comparison of baselines and CFGAN models for the Ciao dataset. CFGAN models use early-stopping.

	Train Time	Recommendation Time	Recommendation Throughput
Random	0.00 [sec]	0.81 [sec]	793
TopPop	0.00 [sec]	1.32 [sec]	486
UserKNN CF cosine	0.04 ± 0.01 [sec]	0.84 ± 0.25 [sec]	1095
UserKNN CF dice	0.04 ± 0.01 [sec]	0.98 ± 0.21 [sec]	507
UserKNN CF jaccard	0.04 ± 0.01 [sec]	1.01 ± 0.23 [sec]	492
UserKNN CF asymmetric	0.03 ± 0.01 [sec]	1.00 ± 0.19 [sec]	732
UserKNN CF tversky	0.04 ± 0.01 [sec]	0.84 ± 0.11 [sec]	860
ItemKNN CF cosine	0.10 ± 0.03 [sec]	1.10 ± 0.43 [sec]	720
ItemKNN CF dice	0.09 ± 0.04 [sec]	1.02 ± 0.19 [sec]	551
ItemKNN CF jaccard	0.08 ± 0.03 [sec]	0.97 ± 0.15 [sec]	655
ItemKNN CF asymmetric	0.10 ± 0.04 [sec]	1.13 ± 0.28 [sec]	413
ItemKNN CF tversky	0.10 ± 0.04 [sec]	1.00 ± 0.32 [sec]	707
RP3beta	0.68 ± 0.25 [sec]	0.96 ± 0.19 [sec]	835
PureSVD	7.30 ± 6.22 [sec]	1.69 ± 0.38 [sec]	300
SLIM ElasticNet	5.45 ± 1.13 [sec]	1.08 ± 0.01 [sec]	598
MF BPR	17.13 ± 12.22 [sec]	0.99 ± 0.08 [sec]	688
EASE R	16.07 ± 3.69 [sec]	1.18 ± 0.37 [sec]	750
CFGAN iZR	144.21 [sec] / 2.40 ± 0.82 [min]	0.98 ± 0.31 [sec]	455
CFGAN iPM	166.97 [sec] / 2.78 ± 0.80 [min]	0.95 ± 0.09 [sec]	581
CFGAN iZP	211.99 [sec] / 3.53 ± 1.02 [min]	1.06 ± 0.31 [sec]	707
CFGAN uZR	112.04 [sec] / 1.87 ± 0.51 [min]	1.02 ± 0.30 [sec]	617
CFGAN uPM	114.75 [sec] / 1.91 ± 0.44 [min]	0.81 ± 0.09 [sec]	715
CFGAN uZP	158.07 [sec] / 2.63 ± 0.71 [min]	0.95 ± 0.08 [sec]	694

Table 11: Accuracy and beyond-accuracy metrics for tuned baselines and CFGAN on the ML100K dataset at recommendation list length of 20. CFGAN results are different than Table 7 due to the hyper-parameter tuning.

	PREC	REC	MAP	MRR	NDCG	F1	ARHR	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
Random	0.0153	0.0141	0.0044	0.0543	0.0185	0.0147	0.0600	0.1476	0.9878	1.0000	0.8303	10.6237
TopPop	0.1560	0.1675	0.0971	0.4130	0.2132	0.1616	0.7151	0.0972	0.4526	0.0502	0.0207	5.3840
UserKNN CF cosine	0.2641	0.3239	0.2292	0.6581	0.3962	0.2910	1.3349	0.1031	0.8365	0.2432	0.0730	7.3278
UserKNN CF dice	0.2629	0.3218	0.2282	0.6514	0.3943	0.2894	1.3248	0.1029	0.8367	0.2335	0.0727	7.3199
UserKNN CF jaccard	0.2627	0.3227	0.2281	0.6545	0.3946	0.2896	1.3268	0.1029	0.8369	0.2353	0.0729	7.3238
UserKNN CF asymmetric	0.2582	0.3204	0.2220	0.6550	0.3891	0.2859	1.3059	0.1026	0.8237	0.2226	0.0663	7.1813
UserKNN CF tversky	0.2683	0.3257	0.2350	0.6609	0.4015	0.2942	1.3519	0.1035	0.8515	0.2662	0.0819	7.4997
ItemKNN CF cosine	0.2591	0.3189	0.2263	0.6469	0.3901	0.2859	1.3043	0.1031	0.8455	0.1984	0.0724	7.3031
ItemKNN CF dice	0.2454	0.3029	0.2124	0.6317	0.3719	0.2711	1.2497	0.1021	0.8165	0.1712	0.0613	7.0631
ItemKNN CF jaccard	0.2401	0.2943	0.2077	0.6334	0.3652	0.2644	1.2348	0.1014	0.7882	0.1525	0.0536	6.8701
ItemKNN CF asymmetric	0.2652	0.3266	0.2337	0.6496	0.3978	0.2927	1.3185	0.1062	0.8935	0.3479	0.1113	7.9516
ItemKNN CF tversky	0.2779	0.3372	0.2455	0.6615	0.4121	0.3047	1.3759	0.1036	0.8598	0.2329	0.0833	7.5266
RP3beta	0.2603	0.3204	0.2286	0.6566	0.3928	0.2872	1.3184	0.1022	0.8174	0.1887	0.0629	7.1103
PureSVD	0.2863	0.3451	0.2543	0.6667	0.4225	0.3130	1.4022	0.1053	0.8885	0.3037	0.1079	7.9044
SLIM ElasticNet	0.2915	0.3563	0.2683	0.6952	0.4375	0.3207	1.4585	0.1037	0.8597	0.2595	0.0860	7.5762
MF BPR	0.2263	0.2829	0.1746	0.5620	0.3296	0.2515	1.0800	0.1017	0.7774	0.1682	0.0524	6.8514
EASE R	0.2929	0.3530	0.2688	0.6909	0.4368	0.3202	1.4630	0.1042	0.8713	0.2783	0.0938	7.7031
CFGAN iZR	0.2415	0.3025	0.1923	0.5866	0.3546	0.2685	1.1513	0.1073	0.9017	0.3400	0.1235	8.0988
CFGAN iPM	0.2171	0.2350	0.1641	0.5247	0.3023	0.2257	1.0393	0.1037	0.8417	0.2390	0.0731	7.3341
CFGAN iZP	0.2757	0.3283	0.2394	0.6580	0.4041	0.2997	1.3595	0.1040	0.8572	0.2589	0.0848	7.5584
CFGAN uZR	0.2754	0.3387	0.2409	0.6500	0.4078	0.3038	1.3454	0.1060	0.8844	0.2371	0.1018	7.8011
CFGAN uPM	0.2326	0.3057	0.1864	0.5809	0.3498	0.2642	1.1201	0.1058	0.8699	0.2607	0.0951	7.7164
CFGAN uZP	0.2555	0.3163	0.2194	0.6399	0.3834	0.2827	1.2712	0.1055	0.8855	0.2529	0.1055	7.8565

Table 12: Training and recommendation time comparison of baselines and CFGAN models for the ML100K dataset. CFGAN models use early-stopping.

	Train Time	Recommendation Time	Recommendation Throughput
Random	0.00 [sec]	1.24 [sec]	759
TopPop	0.00 [sec]	1.71 [sec]	551
UserKNN CF cosine	0.15 ± 0.05 [sec]	1.44 ± 0.18 [sec]	634
UserKNN CF dice	0.15 ± 0.05 [sec]	1.83 ± 0.43 [sec]	617
UserKNN CF jaccard	0.15 ± 0.03 [sec]	1.78 ± 0.03 [sec]	537
UserKNN CF asymmetric	0.16 ± 0.04 [sec]	1.81 ± 0.10 [sec]	525
UserKNN CF tversky	0.15 ± 0.04 [sec]	1.45 ± 0.35 [sec]	768
ItemKNN CF cosine	0.23 ± 0.06 [sec]	1.89 ± 0.12 [sec]	475
ItemKNN CF dice	0.21 ± 0.07 [sec]	1.95 ± 0.28 [sec]	408
ItemKNN CF jaccard	0.21 ± 0.06 [sec]	1.69 ± 0.25 [sec]	673
ItemKNN CF asymmetric	0.22 ± 0.05 [sec]	1.80 ± 0.17 [sec]	557
ItemKNN CF tversky	0.22 ± 0.10 [sec]	1.77 ± 0.54 [sec]	526
RP3beta	3.41 ± 2.22 [sec]	2.24 ± 0.83 [sec]	328
PureSVD	4.32 ± 5.09 [sec]	2.30 ± 0.69 [sec]	346
SLIM ElasticNet	13.32 ± 4.52 [sec]	2.24 ± 0.30 [sec]	429
MF BPR	44.98 ± 51.80 [sec]	1.78 ± 0.38 [sec]	389
EASE R	14.33 ± 0.66 [sec]	1.95 ± 0.17 [sec]	498
CFGAN iZR	214.36 [sec] / 3.57 ± 0.86 [min]	1.39 ± 0.06 [sec]	699
CFGAN iPM	198.47 [sec] / 3.31 ± 0.74 [min]	2.10 ± 0.46 [sec]	531
CFGAN iZP	339.04 [sec] / 5.65 ± 1.61 [min]	1.73 ± 0.16 [sec]	564
CFGAN uZR	182.70 [sec] / 3.04 ± 1.01 [min]	1.55 ± 0.03 [sec]	617
CFGAN uPM	194.96 [sec] / 3.25 ± 0.85 [min]	1.66 ± 0.24 [sec]	612
CFGAN uZP	258.30 [sec] / 4.31 ± 0.86 [min]	1.82 ± 0.51 [sec]	577

Table 13: Accuracy and beyond-accuracy metrics for tuned baselines and CFGAN on the ML1M dataset at recommendation list length of 20. CFGAN results are different than Table 8 due to the hyper-parameter tuning.

	PREC	REC	MAP	MRR	NDCG	F1	ARHR	Novelty	Div. MIL	Cov. Item	Div. Gini	Div. Shannon
Random	0.0099	0.0056	0.0024	0.0326	0.0108	0.0072	0.0364	0.0732	0.9946	1.0000	0.8977	11.8223
TopPop	0.1552	0.1146	0.0917	0.3852	0.1938	0.1319	0.7065	0.0473	0.4529	0.0299	0.0095	5.4298
UserKNN CF cosine	0.2883	0.2525	0.2265	0.6505	0.3855	0.2693	1.3785	0.0520	0.9110	0.4329	0.0828	8.6076
UserKNN CF dice	0.2877	0.2551	0.2252	0.6556	0.3863	0.2704	1.3802	0.0512	0.8890	0.3194	0.0644	8.2557
UserKNN CF jaccard	0.2893	0.2565	0.2273	0.6571	0.3884	0.2719	1.3866	0.0514	0.8971	0.3528	0.0702	8.3766
UserKNN CF asymmetric	0.2891	0.2570	0.2273	0.6595	0.3888	0.2721	1.3894	0.0513	0.8921	0.3286	0.0655	8.2848
UserKNN CF tversky	0.2890	0.2561	0.2272	0.6569	0.3881	0.2715	1.3850	0.0513	0.8948	0.3408	0.0683	8.3392
ItemKNN CF cosine	0.2785	0.2392	0.2138	0.6279	0.3688	0.2574	1.3205	0.0515	0.9018	0.3197	0.0687	8.3666
ItemKNN CF dice	0.2566	0.2110	0.1913	0.5940	0.3376	0.2316	1.2253	0.0503	0.8519	0.2531	0.0455	7.7630
ItemKNN CF jaccard	0.2556	0.2108	0.1908	0.5925	0.3369	0.2310	1.2226	0.0503	0.8453	0.2596	0.0445	7.7211
ItemKNN CF asymmetric	0.2600	0.2196	0.1985	0.6254	0.3490	0.2381	1.2744	0.0497	0.8148	0.2097	0.0362	7.4341
ItemKNN CF tversky	0.2657	0.2180	0.2005	0.6147	0.3496	0.2395	1.2710	0.0513	0.9005	0.1814	0.0560	8.1173
RP3beta	0.2758	0.2385	0.2146	0.6425	0.3700	0.2558	1.3346	0.0506	0.8565	0.3427	0.0528	7.9254
PureSVD	0.2913	0.2421	0.2234	0.6333	0.3783	0.2644	1.3555	0.0516	0.9142	0.2439	0.0712	8.4463
SLIM ElasticNet	0.3119	0.2695	0.2508	0.6724	0.4123	0.2892	1.4658	0.0514	0.8984	0.3153	0.0696	8.3690
MF BPR	0.2485	0.2103	0.1762	0.5753	0.3242	0.2278	1.1594	0.0512	0.8855	0.3126	0.0631	8.2195
EASE R	0.3171	0.2763	0.2560	0.6795	0.4192	0.2953	1.4853	0.0518	0.9146	0.3338	0.0803	8.5897
CFGAN iZR	0.2862	0.2547	0.2146	0.6312	0.3770	0.2696	1.3288	0.0542	0.9583	0.4123	0.1459	9.4737
CFGAN iPM	0.2505	0.1950	0.1734	0.5454	0.3138	0.2193	1.1354	0.0523	0.9218	0.3669	0.0901	8.7458
CFGAN iZP	0.2407	0.1742	0.1661	0.5230	0.2972	0.2021	1.0929	0.0530	0.9256	0.4894	0.0901	8.7580
CFGAN uZR	0.2955	0.2473	0.2241	0.6222	0.3799	0.2692	1.3541	0.0523	0.9205	0.2167	0.0837	8.6304
CFGAN uPM	0.2367	0.1928	0.1629	0.5513	0.3054	0.2125	1.1064	0.0516	0.8962	0.1782	0.0550	8.0858
CFGAN uZP	0.2764	0.2342	0.2074	0.6208	0.3620	0.2536	1.3010	0.0513	0.9062	0.1833	0.0617	8.2408

Table 14: Training and recommendation time comparison of baselines and CFGAN models for the ML1M dataset. CFGAN models use early-stopping.

	Train Time	Recommendation Time	Recommendation Throughput
Random	0.02 [sec]	12.52 [sec]	482
TopPop	0.02 [sec]	13.97 [sec]	432
UserKNN CF cosine	5.93 ± 2.09 [sec]	17.86 ± 4.00 [sec]	389
UserKNN CF dice	4.01 ± 0.60 [sec]	12.78 ± 0.66 [sec]	483
UserKNN CF jaccard	5.44 ± 1.67 [sec]	19.57 ± 5.00 [sec]	354
UserKNN CF asymmetric	4.18 ± 0.55 [sec]	11.99 ± 0.21 [sec]	497
UserKNN CF tversky	4.84 ± 0.90 [sec]	13.19 ± 1.05 [sec]	424
ItemKNN CF cosine	2.75 ± 1.00 [sec]	16.33 ± 4.50 [sec]	413
ItemKNN CF dice	1.85 ± 0.43 [sec]	13.24 ± 0.29 [sec]	463
ItemKNN CF jaccard	2.76 ± 0.98 [sec]	20.45 ± 2.44 [sec]	269
ItemKNN CF asymmetric	2.10 ± 0.56 [sec]	14.09 ± 0.69 [sec]	453
ItemKNN CF tversky	2.00 ± 0.37 [sec]	12.63 ± 0.56 [sec]	452
RP3beta	9.69 ± 4.41 [sec]	18.74 ± 4.75 [sec]	290
PureSVD	10.27 ± 10.68 [sec]	12.01 ± 2.38 [sec]	545
SLIM ElasticNet	204.75 [sec] / 3.41 ± 2.27 [min]	16.44 ± 5.32 [sec]	467
MF BPR	497.53 [sec] / 8.29 ± 8.04 [min]	11.03 ± 1.80 [sec]	534
EASE R	24.26 ± 3.32 [sec]	14.00 ± 1.43 [sec]	402
CFGAN iZR	1554.32 [sec] / 25.91 ± 7.34 [min]	9.96 ± 0.79 [sec]	691
CFGAN iPM	1751.51 [sec] / 29.19 ± 8.93 [min]	8.46 ± 1.11 [sec]	889
CFGAN iZP	2100.12 [sec] / 35.00 ± 10.09 [min]	8.80 ± 2.21 [sec]	896
CFGAN uZR	1602.18 [sec] / 26.70 ± 7.26 [min]	9.16 ± 0.79 [sec]	656
CFGAN uPM	1637.66 [sec] / 27.29 ± 6.76 [min]	9.52 ± 1.05 [sec]	687
CFGAN uZP	2221.04 [sec] / 37.02 ± 9.31 [min]	9.13 ± 2.55 [sec]	906

References

1. Adomavicius, G., Kwon, Y.: Improving aggregate recommendation diversity using ranking-based techniques. *IEEE Trans. Knowl. Data Eng.* **24**(5), 896–911 (2012). <https://doi.org/10.1109/TKDE.2011.15>
2. Armstrong, T.G., Moffat, A., Webber, W., Zobel, J.: Improvements that don't add up: ad-hoc retrieval results since 1998. In: Proceedings of the 18th ACM Conference on Information and Knowledge Management, CIKM 2009, Hong Kong, China, November 2-6, 2009. pp. 601–610. ACM (2009). <https://doi.org/10.1145/1645953.1646031>
3. Borji, A.: Pros and cons of GAN evaluation measures. *Comput. Vis. Image Underst.* **179**, 41–65 (2019). <https://doi.org/10.1016/j.cviu.2018.10.009>
4. Chae, D., Kang, J., Kim, S., Lee, J.: CFGAN: A generic collaborative filtering framework based on generative adversarial networks. In: Proceedings of the 27th ACM International Conference on Information and Knowledge Management, CIKM 2018, Torino, Italy, October 22-26, 2018. pp. 137–146. ACM (2018). <https://doi.org/10.1145/3269206.3271743>
5. Chen, H., Wang, S., Jiang, N., Li, Z., Yan, N., Shi, L.: Trust-aware generative adversarial network with recurrent neural network for recommender systems. *Int. J. Intell. Syst.* **36**(2), 778–795 (2021). <https://doi.org/10.1002/int.22320>
6. Christoffel, F., Paudel, B., Newell, C., Bernstein, A.: Blockbusters and wallflowers: Accurate, diverse, and scalable recommendations with random walks. In: Proceedings of the 9th ACM Conference on Recommender Systems, RecSys 2015, Vienna, Austria, September 16-20, 2015. pp. 163–170. ACM (2015). <https://doi.org/10.1145/2792838.2800180>
7. Cremonesi, P., Koren, Y., Turrin, R.: Performance of recommender algorithms on top-n recommendation tasks. In: Proceedings of the 2010 ACM Conference on Recommender Systems, RecSys 2010, Barcelona, Spain, September 26-30, 2010. pp. 39–46. ACM (2010). <https://doi.org/10.1145/1864708.1864721>
8. Creswell, A., White, T., Dumoulin, V., Arulkumaran, K., Sengupta, B., Bharath, A.A.: Generative adversarial networks: An overview. *IEEE Signal Process. Mag.* **35**(1), 53–65 (2018). <https://doi.org/10.1109/MSP.2017.2765202>
9. Fellicious, C., Weißgerber, T., Granitzer, M.: Effects of random seeds on the accuracy of convolutional neural networks. In: Machine Learning, Optimization, and Data Science - 6th International Conference, LOD 2020, Siena, Italy, July 19-23, 2020, Revised Selected Papers, Part II. Lecture Notes in Computer Science, vol. 12566, pp. 93–102. Springer (2020). https://doi.org/10.1007/978-3-030-64580-9_8
10. Ferrari Dacrema, M., Boglio, S., Cremonesi, P., Jannach, D.: A troubling analysis of reproducibility and progress in recommender systems research. *ACM Trans. Inf. Syst.* **39**(2), 20:1–20:49 (2021). <https://doi.org/10.1145/3434185>
11. Ferrari Dacrema, M., Cremonesi, P., Jannach, D.: Are we really making much progress? A worrying analysis of recent neural recommendation approaches. In: Proceedings of the 13th ACM Conference on Recommender Systems, RecSys 2019, Copenhagen, Denmark, September 16-20, 2019. pp. 101–109. ACM (2019). <https://doi.org/10.1145/3298689.3347058>
12. Ferrari Dacrema, M., Parroni, F., Cremonesi, P., Jannach, D.: Critically examining the claimed value of convolutions over user-item embedding maps for recommender systems. In: CIKM '20: The 29th ACM International Conference on Information and Knowledge Management, Virtual Event, Ireland, October 19-23, 2020. pp. 355–363. ACM (2020). <https://doi.org/10.1145/3340531.3411901>

13. Goodfellow, I.J., Pouget-Abadie, J., Mirza, M., Xu, B., Warde-Farley, D., Ozair, S., Courville, A.C., Bengio, Y.: Generative adversarial nets. In: *Advances in Neural Information Processing Systems 27: Annual Conference on Neural Information Processing Systems 2014, December 8-13 2014, Montreal, Quebec, Canada*. pp. 2672–2680 (2014), <https://proceedings.neurips.cc/paper/2014/hash/5ca3e9b122f61f8f06494c97b1afccf3-Abstract.html>
14. Goodfellow, I.J., Pouget-Abadie, J., Mirza, M., Xu, B., Warde-Farley, D., Ozair, S., Courville, A.C., Bengio, Y.: Generative adversarial networks. *Commun. ACM* **63**(11), 139–144 (2020). <https://doi.org/10.1145/3422622>
15. Harper, F.M., Konstan, J.A.: The MovieLens datasets: History and context. *ACM Trans. Interact. Intell. Syst.* **5**(4), 19:1–19:19 (2016). <https://doi.org/10.1145/2827872>
16. Isola, P., Zhu, J., Zhou, T., Efros, A.A.: Image-to-image translation with conditional adversarial networks. In: *2017 IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2017, Honolulu, HI, USA, July 21-26, 2017*. pp. 5967–5976. IEEE Computer Society (2017). <https://doi.org/10.1109/CVPR.2017.632>
17. Karras, T., Laine, S., Aila, T.: A style-based generator architecture for generative adversarial networks. In: *IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2019, Long Beach, CA, USA, June 16-20, 2019*. pp. 4401–4410. Computer Vision Foundation / IEEE (2019). <https://doi.org/10.1109/CVPR.2019.00453>
18. Karras, T., Laine, S., Aittala, M., Hellsten, J., Lehtinen, J., Aila, T.: Analyzing and improving the image quality of StyleGAN. In: *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR 2020, Seattle, WA, USA, June 13-19, 2020*. pp. 8107–8116. Computer Vision Foundation / IEEE (2020). <https://doi.org/10.1109/CVPR42600.2020.00813>
19. Kingma, D.P., Ba, J.: Adam: A method for stochastic optimization. In: *3rd International Conference on Learning Representations, ICLR 2015, San Diego, CA, USA, May 7-9, 2015, Conference Track Proceedings* (2015)
20. Kingma, D.P., Welling, M.: An introduction to variational autoencoders. *Found. Trends Mach. Learn.* **12**(4), 307–392 (2019). <https://doi.org/10.1561/22000000056>
21. Lin, J.: The neural hype and comparisons against weak baselines. *SIGIR Forum* **52**(2), 40–51 (jan 2019). <https://doi.org/10.1145/3308774.3308781>
22. Lin, J.: The neural hype, justified! a recantation. *SIGIR Forum* **53**(2), 88–93 (mar 2021). <https://doi.org/10.1145/3458553.3458563>
23. Lipton, Z.C., Steinhardt, J.: Troubling trends in machine learning scholarship. *ACM Queue* **17**(1), 80 (2019). <https://doi.org/10.1145/3317287.3328534>
24. Ludewig, M., Jannach, D.: Evaluation of session-based recommendation algorithms. *User Model. User Adapt. Interact.* **28**(4-5), 331–390 (2018). <https://doi.org/10.1007/s11257-018-9209-6>
25. Madhyastha, P., Jain, R.: On model stability as a function of random seed. In: *Proceedings of the 23rd Conference on Computational Natural Language Learning, CoNLL 2019, Hong Kong, China, November 3-4, 2019*. pp. 929–939. Association for Computational Linguistics (2019). <https://doi.org/10.18653/v1/K19-1087>
26. Mirza, M., Osindero, S.: Conditional generative adversarial nets. *CoRR* **abs/1411.1784** (2014), <http://arxiv.org/abs/1411.1784>
27. Moreno-Torres, J.G., Raeder, T., Alaíz-Rodríguez, R., Chawla, N.V., Herrera, F.: A unifying view on dataset shift in classification. *Pattern Recognit.* **45**(1), 521–530 (2012). <https://doi.org/10.1016/j.patcog.2011.06.019>

28. Ning, X., Karypis, G.: SLIM: sparse linear methods for top-n recommender systems. In: 11th IEEE International Conference on Data Mining, ICDM 2011, Vancouver, BC, Canada, December 11-14, 2011. pp. 497–506. IEEE Computer Society (2011). <https://doi.org/10.1109/ICDM.2011.134>
29. Pérez Maurera, F.B., Ferrari Dacrema, M., Cremonesi, P.: An Evaluation of Generative Adversarial Networks for Collaborative Filtering - Supplemental Material (Jan 2022). <https://doi.org/10.5281/zenodo.5879345>
30. Quionero-Candela, J., Sugiyama, M., Schwaighofer, A., Lawrence, N.D.: Dataset Shift in Machine Learning. The MIT Press (2009)
31. Rendle, S., Freudenthaler, C., Gantner, Z., Schmidt-Thieme, L.: BPR: bayesian personalized ranking from implicit feedback. In: UAI 2009, Proceedings of the Twenty-Fifth Conference on Uncertainty in Artificial Intelligence, Montreal, QC, Canada, June 18-21, 2009. pp. 452–461. AUAI Press (2009)
32. Steck, H.: Embarrassingly shallow autoencoders for sparse data. In: The World Wide Web Conference, WWW 2019, San Francisco, CA, USA, May 13-17, 2019. pp. 3251–3257. ACM (2019). <https://doi.org/10.1145/3308558.3313710>
33. Tang, J., Gao, H., Liu, H.: mTrust: discerning multi-faceted trust in a connected world. In: Proceedings of the Fifth International Conference on Web Search and Web Data Mining, WSDM 2012, Seattle, WA, USA, February 8-12, 2012. pp. 93–102. ACM (2012). <https://doi.org/10.1145/2124295.2124309>
34. Wang, J., Yu, L., Zhang, W., Gong, Y., Xu, Y., Wang, B., Zhang, P., Zhang, D.: IRGAN: A minimax game for unifying generative and discriminative information retrieval models. In: Proceedings of the 40th International ACM SIGIR Conference on Research and Development in Information Retrieval, Shinjuku, Tokyo, Japan, August 7-11, 2017. pp. 515–524. ACM (2017). <https://doi.org/10.1145/3077136.3080786>
35. Wang, Z., Xu, Q., Ma, K., Jiang, Y., Cao, X., Huang, Q.: Adversarial preference learning with pairwise comparisons. In: Proceedings of the 27th ACM International Conference on Multimedia, MM 2019, Nice, France, October 21-25, 2019. pp. 656–664. ACM (2019). <https://doi.org/10.1145/3343031.3350919>
36. Xia, B., Bai, Y., Yin, J., Li, Q., Xu, L.: MTPR: A multi-task learning based poi recommendation considering temporal check-ins and geographical locations. *Applied Sciences* **10**(19) (2020). <https://doi.org/10.3390/app10196664>
37. Xie, F., Li, S., Chen, L., Xu, Y., Zheng, Z.: Generative adversarial network based service recommendation in heterogeneous information networks. In: 2019 IEEE International Conference on Web Services, ICWS 2019, Milan, Italy, July 8-13, 2019. pp. 265–272. IEEE (2019). <https://doi.org/10.1109/ICWS.2019.00053>
38. Yang, W., Lu, K., Yang, P., Lin, J.: Critically examining the "neural hype": Weak baselines and the additivity of effectiveness gains from neural ranking models. In: Proceedings of the 42nd International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR 2019, Paris, France, July 21-25, 2019. pp. 1129–1132. ACM (2019). <https://doi.org/10.1145/3331184.3331340>
39. Zhou, T., Kuscsik, Z., Liu, J.G., Medo, M., Wakeling, J.R., Zhang, Y.C.: Solving the apparent diversity-accuracy dilemma of recommender systems. *Proceedings of the National Academy of Sciences* **107**(10), 4511–4515 (2010). <https://doi.org/10.1073/pnas.1000488107>