

A Unified Review of Deep Learning for Automated Medical Coding

Shaoxiong Ji^{1*}, Wei Sun¹, Hang Dong², Honghan Wu³ and Pekka Marttinen¹

¹Aalto University ²The University of Edinburgh ³University College London

{shaoxiong.ji, wei.sun, pekka.marttinen}@aalto.fi, hang.dong@ed.ac.uk, honghan.wu@ucl.ac.uk

Abstract

Automated medical coding, an essential task for healthcare operation and delivery, makes unstructured data manageable by predicting medical codes from clinical documents. Recent advances in deep learning models in natural language processing have been widely applied to this task. However, it lacks a unified view of the design of neural network architectures for medical coding. This review proposes a unified framework to provide a general understanding of the building blocks of medical coding models and summarizes recent advanced models under the proposed framework. Our unified framework decomposes medical coding into four main components, i.e., encoder modules for text feature extraction, mechanisms for building deep encoder architectures, decoder modules for transforming hidden representations into medical codes, and the usage of auxiliary information. Finally, we discuss key research challenges and future directions.

1 Introduction

Healthcare workers write clinical notes about a patient's health status to document their insights and observations for further diagnosis decision support. Clinical notes as free-text descriptions are an essential component of Electronic Health Records (EHRs), which contain patient medical history, symptom description, lab test result summary, reasons for diagnoses, and daily activities. In typical medical classification systems, diagnosis codes identify a patient's diseases, disorders, symptoms, and specific reasons for the hospital visit. In contrast, procedural codes or intervention codes identify surgical, medical, or diagnostic interventions. Diagnosis codes assigned by a trained health professional act as the standard translation of written patient descriptions. With procedural codes, diagnostic coding is an integral part of the clinical coding process in health information management.

The International Classification of Diseases (ICD) system, maintained by the World Health Organization (WHO), is one of the most widely-used coding system, adopted in countries

across the globe. Specific versions of ICD include ICD-9, ICD-9-CM, ICD-10, and ICD-11. Most ICD-9 codes consist of three digits to the left of a decimal point and one or two digits to the right. Some ICD-9 codes have "V" or "E" in front of the digits, representing preventive health services and environmental causes of health problems. Figure 1 shows a fragment of the patient's clinical note with ICD-9-CM codes assigned. The ICD-9-CM created by the US National Center for Health Statistics (NCHS) is an adaptation of ICD-9 codes used in the United States.

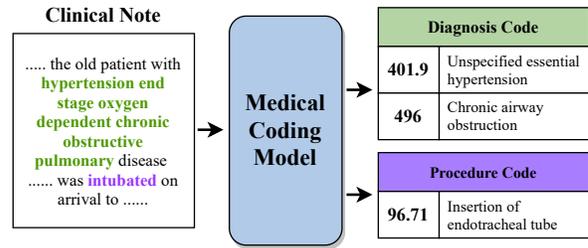


Figure 1: A medical coding model maps an example clinical note to the corresponding ICD procedure and diagnosis codes.

Accurate medical code assignment plays a vital role in patients' paperwork such as hospital records, medical charts, visit summaries, and bills to ensure patients get proper treatment and are charged appropriately and avoid unnecessary testing and treatments [Campbell *et al.*, 2001; Stanfill *et al.*, 2010]. It helps statistics collection such as health statistics and causes of death. Moreover, on the patient side, medical coding delivers standardized treatment aligned with specific insurance codes to help patients get insurance reimbursement for medical expenses. Manual code assignment by a trained human coder is labor-intensive and error-prone [Hsia *et al.*, 1988; Farzandipour *et al.*, 2010]. Incorrect coding can lead to adverse consequences such as billing mistakes and mis-treatment. Thus, intelligent automated coding systems are developed as a recommendation system to empower human coders to allocate correct medical codes to clinical notes.

Automatic medical code assignment uses feature engineering techniques and machine learning-based classifiers to predict medical codes from clinical nodes [Crammer *et al.*, 2007]. Traditional medical coding systems deploy the rule-

*Contact Author

based method [Farkas and Szarvas, 2008], select manual feature [Medori and Fairon, 2010], and apply machine learning-based classification models such as Support Vector Machine (SVM) and Bayesian ridge regression [Lita *et al.*, 2008]. The hierarchical structure of the code system, depicted as a tree structure with multiple levels, is a basic pattern for improving the automated coding method. For example, Perotte *et al.* [2014] adopted the ICD hierarchy and developed flat and hierarchical SVM for diagnosis code classification. Kavuluru *et al.* [2015] explored explicit co-occurrence relations between codes. The breakthrough of natural language processing (NLP) with deep neural networks has led to neural classifiers with word embedding and representation learning. Neural methods for medical text encoding intensively use recurrent neural networks (RNNs), convolutional neural networks (CNNs), and neural attention mechanisms, where parameter selection is an important issue [Liu *et al.*, 2021].

However, two main challenges remain in processing medical text and automated coding. **(1) Noisy and Lengthy Clinical Notes.** Clinical notes contain many professional medical vocabularies and noisy information such as non-standard synonyms and misspellings. They are usually lengthy documents containing many types of clinical information such as health profiles, lab tests, radiology reports, operative reports, and medications. Thus, they typically have hundreds or even thousands of words. Some patients with long hospital stays may have much longer written notes. **(2) Large-scale Imbalanced Medical Codes.** Medical notes are associated with multiple diagnoses, which is usually treated as a multi-label extreme classification problem containing a large label set. The high-dimensional label space has thousands of codes. For example, ICD9 and ICD10 coding systems have more than 14,000 and 68,000 codes, respectively. Moreover, because of the existence of common diseases and rare diseases, the distribution of medical codes in an EHR system has the class imbalance issue, also known as the long-tail phenomenon.

Contributions Previous neural methods devise various network architectures to improve the predictive performance. However, there is no unified study on medical coding models, nor an insightful analysis of the overall model architecture’s submodules to solve the challenges mentioned earlier. This paper proposes an encoder-decoder framework (Fig. 2) to unify existing advanced medical coding models. It discusses the effect of different building blocks to resolve the challenges of medical coding. We provide a complete guideline for researchers or practitioners to develop efficient neural networks for automated medical coding and analyze the critical problems for tackling the existing challenges. Besides, we discuss the evaluation of medical coding and its real-world practice. Finally, we summarize the recent research trends, limitations, and point out several vital directions for future research.

2 A Unified Encoder-Decoder Framework

We propose a unified encoder-decoder framework for automated medical coding, which is illustrated in Fig. 2. The encoder modules take clinical notes as inputs and learn hidden

representations, described in Sec. 2.1. We also introduce and summarize mechanisms for making the architectures deep in Sec. 2.2. The decoder modules decode the hidden representations to predict the code probability (Sec. 2.3). During the encoding and decoding, auxiliary information such as code hierarchy and textual descriptions can also be applied for enhancing representation learning and improving decoding, which is discussed in Sec. 2.4. We summarize recent models in Table 1 under the proposed unified framework and review them in the following subsections.

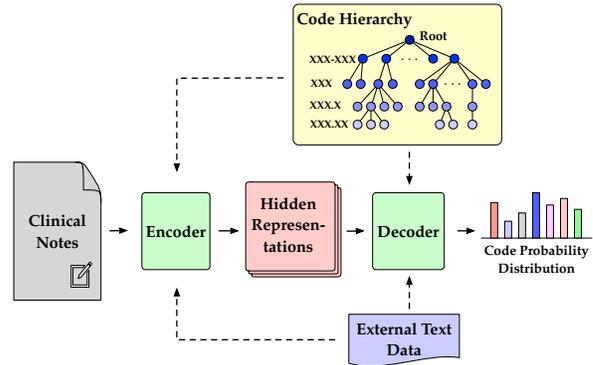


Figure 2: An illustration of the unified encoder-decoder framework for automated medical coding

2.1 Encoder Modules

Recent deep learning-based models use word embedding techniques and develop complex neural network architectures to learn rich text features for automatic medical code assignment. A clinical note with n words is denoted as $\{x_0, \dots, x_n\}$. Its word embedding matrix, typically built by word2vec [Mikolov *et al.*, 2013], is denoted as $\mathbf{X} = [\mathbf{w}_1, \dots, \mathbf{w}_n]^T \in \mathbb{R}^{n \times d_e}$, where d_e is the dimension of word vectors. Recent publications also use contextualized embeddings such as representations pretrained by bidirectional transformers (BERT). The encoder modules of various neural architectures further process embeddings to learn rich hidden representations. This section introduces various neural encoder modules that have been developed in recent years.

Recurrent Neural Encoders

Recurrent neural networks model the temporal sequences via their internal states and capture sequential dependencies. Thus, they have been widely applied to textual sequence modeling and clinical note encoding. Generally, the recurrent neural encoder outputs a hidden representation $\mathbf{H}^l \in \mathbb{R}^{n \times d_h}$ of the l -th layer: $\mathbf{H}^l = \text{RNN}(\mathbf{X})$, where n is the number of words and d_h is the dimension of the hidden representation. Shi *et al.* [2017], one of the first works on applying RNNs for medical coding, developed an Attentive LSTM network. This model encodes clinical descriptions and long titles of ICD codes jointly with hierarchical text representations and uses an attention mechanism for matching important diagnosis snippets. Mullenbach *et al.* [2018] used a simplified gated recurrent unit with bi-direction as a baseline system for medical coding, where the last hidden representations are used

Table 1: A summary of representative models under the unified encoder-decoder framework

Models	Encoders	Deep Connections	Decoders	Auxiliary Data
Attentive LSTM [Shi <i>et al.</i> , 2017]	Attentive LSTM	Stacking	Linear Layer	NA.
HA-GRU [Baumel <i>et al.</i> , 2018]	Hierarchical GRU	Stacking	Attention	NA.
LAAT [Vu <i>et al.</i> , 2021]	BiGRU	Stacking	Attention	NA.
MT-RAM [Sun <i>et al.</i> , 2021b]	BiGRU	RAM	LAN+Multitask	NA.
BiCapsNetLE [Bao <i>et al.</i> , 2021]	BiLSTM+CapsNet	Stacking	Attention	ICD Description
CAML-DR [Mullenbach <i>et al.</i> , 2018]	CNN	Stacking	LAN	ICD Description
MVC-LDA [Sadoughi <i>et al.</i> , 2018]	Multi-view CNN	Stacking	Attention	ICD Description
MultiResCNN [Li and Yu, 2020]	CNN	Residual Network	LAN	NA.
HyperCore [Cao <i>et al.</i> , 2020]	CNN+Hyperbolic Geometry	Stacking	LAN+GCN	ICD Hierarchy
GatedCNN-NCI [Ji <i>et al.</i> , 2021b]	Gated CNN	Embedding Injection	NCI	ICD Description
Fusion [Luo <i>et al.</i> , 2021]	Compressed CNN	Residual Network	Attention	NA.
C-MemNN [Prakash <i>et al.</i> , 2017]	Memory Networks	Stacking	Linear Layer	NA.
KSI [Bai and Vucetic, 2019]	CNN/RNN	Stacking	Linear or LAN	Wikipedia Articles
MSATT-KG [Xie <i>et al.</i> , 2019]	CNN+Attention	Stacking	Attention+KG	ICD Hierarchy
CAIC [Teng <i>et al.</i> , 2020]	CNN/RNN	Stacking	Attention	ICD Description

for classification. From their pilot experiments, GRU shows more robust predictive performance than the LSTM network-based coding model. HA-GRU [Baumel *et al.*, 2018] and HLAN [Dong *et al.*, 2021] further improved the vanilla BiGRU with hierarchical attention, including two levels on sentence and document representations.

Convolutional Neural Encoders

The success of convolutional neural networks in computer vision inspires researchers to use convolutional architecture for medical coding. The TextCNN model [Kim, 2014] acts as a simple but important baseline. The convolutional layer extracts local features from pretrained word vectors. The representation with max-pooling is then used for medical code classification. CAML [Mullenbach *et al.*, 2018] combines multiple-filter CNN-based text encoders and an attention decoder (introduced in Sec. 2.3). DCAN [Ji *et al.*, 2020] develops dilated convolution layers, which apply convolutions with dilated filters to increase the receptive field. When stacking a deeper architecture, the dilation size is exponentially increased to expand the receptive field. Other models also use the CNN-based text encoder. For example, MultiResCNN [Li and Yu, 2020] concatenates the features of multi-filter convolutions. Similarly, MVC-LDA [Sadoughi *et al.*, 2018] introduces multi-view CNN by applying max-pooling over different channels with different convolutional filters. Ji *et al.* [Ji *et al.*, 2021b] developed a Gated CNN encoder that uses an LSTM-style gating mechanism to control the information flow. The Fusion model [Luo *et al.*, 2021] deploys a Compressed CNN module that applies an attention-based soft-pooling over the features of word convolution, which reduces the number of word representations.

Neural Attention Mechanism

The neural attention mechanism computes a weighted sum of vector values of hidden representations dependent on the query vectors. Compared to RNN and CNN, self-attention has been widely adopted for transfer learning, i.e. as building blocks for large pre-trained language models. This allows to leverage the linguistic associations from massive corpora

for subsequent tasks. The superior performance gained by BERT attracts researchers of medical coding to apply BERT-based text encoders. TransICD [Biswas *et al.*, 2021] applies transformer text encoder and structured self-attention to learn representations. BERT-XML [Zhang *et al.*, 2020] combines BERT encoders with multi-label attention. [Feucht *et al.*, 2021] found that Longformer achieves better results than BERT. These attempts explore the possibility of BERT encoders, though they do not achieve superior performance compared with CNN or RNN-based encoders, potentially due to the limitation of BERT to encode long documents and keywords [Gao *et al.*, 2021].

Hierarchical Encoders

Several methods adopt hierarchical text encoders, as a “meta”-encoder with the above encoding modules, to take the hierarchical structure of documents into encoding and potentially solve the difficulty in encoding lengthy clinical documents that encode hierarchical elements of the long documents such as characters, words, sentences, and chunks. Shi *et al.* [2017] build a hierarchical encoder with character representation, word representation, and sentence representation. Dong *et al.* [2021] adapted hierarchical attention networks with label-wise word-level and sentence-level representations for an improved attention-based explanation for each code. To make BERT-based text encoders compatible with long clinical notes, Ji *et al.* [2021a] developed BERT-hier that divides long notes into chunks and uses another Transformer network to encode the embeddings of different chunks. Although the hierarchical BERT-based encoder improves the performance, it is still not as good as advanced CNN or RNN-based models.

2.2 Building Deep Architectures

Most existing neural network-based medical coding models have deep architectures. The most straightforward approach uses stacking to build deep neural architectures, such as stacking multiple recurrent layers and hierarchical components of different levels of elements as in multi-layer perceptrons.

Also, different neural blocks can be stacked into deep networks, for example, the recalibrated aggregation module [Sun *et al.*, 2021b] with multiple convolutional layers is built upon a bidirectional GRU network, the MSATT-KG [Xie *et al.*, 2019] stacks densely connected convolutional layers and multi-scale feature attention, and the BiCapsNetLE [Bao *et al.*, 2021] deploys a capsule neural network upon the BiLSTM layer to further extract features.

When encoding long clinical notes with very deep architectures, features learned by higher layers tend to capture abstract features but sometimes miss some vital information. Ji *et al.* [2021b] proposed to use embedding injection to mitigate the information loss with the increase of neural layers. The embedding injection concatenates the original word embeddings into each intermediate layers of the backbone network as: $\mathbf{J}^l = \text{concat}[\mathbf{X}, \mathbf{H}^l]$, where $\mathbf{J}^l \in \mathbb{R}^{n \times (d_e + d_h)}$ are the features with original embeddings injected.

The most widely used approach to building deep networks for automated medical coding is to use residual connections.

Deep residual learning introduces the skip connection to avoid the effect of the vanishing gradient. It enables the building of very deep neural network architectures. Given the input encoding vector \mathbf{x} , the output of residual connection is denoted as $o = \sigma(\mathbf{x} + \mathcal{G}(\mathbf{x}))$, where \mathcal{G} represents neural layers and σ is a non-linear activation function. Several medical coding models use residual networks between stacked layers, which is denoted as: $\mathbf{H}^{l+1} = \sigma(\mathbf{H}^l + \mathcal{G}(\mathbf{H}^l))$. MultiResCNN [Li and Yu, 2020] is the first to combine residual learning with concatenation of multiple channels with different convolutional filters. The residual neural network is also used by other follow-up works such as DCAN [Ji *et al.*, 2020] and Fusion [Luo *et al.*, 2021].

2.3 Decoder Modules

After the encoder modules have extracted hidden representations of clinical notes, the decoder modules map the learned representations into medical codes as the final classification results via a decoding process. The hierarchical and large-scale characteristics of medical codes have promoted the design of various decoder modules. This section introduces four main types of decoder modules, including the fully connected layer-based decoder, neural attention decoders, hierarchical decoders utilizing the code hierarchy, and multitask decoders that consider multiple coding systems.

Fully Connected Layer

The most straightforward decoder module is a linear fully-connected layer, widely used in many classification tasks. The prediction logits $\hat{y} \in \mathbb{R}^m$ between 0 and 1 are produced by the Sigmoid activation function with a pooling operation over the linearly projected matrix, calculated as: $\hat{y} = \text{Sigmoid}(\text{Pooling}(\mathbf{H}\mathbf{W}^T))$, where $\mathbf{W} \in \mathbb{R}^{m \times d_h}$ are the linear weights for m medical codes. Medical coding models that use a linear layer as decoder include Attentive LSTM [Shi *et al.*, 2017] and C-MemNN [Prakash *et al.*, 2017].

Neural Attention Decoders

The neural attention mechanism has also been applied to decoding in addition to its usage for encoding clinical notes introduced in Sec. 2.1. One useful attention mechanism for de-

coding is the so-called Label-wise Attention Network (LAN) which prioritizes important information in the hidden representation relevant to medical codes. The LAN-based decoder uses the dot product attention to calculate the attention score $\mathbf{A} \in \mathbb{R}^{n \times m}$ as: $\mathbf{A} = \text{Softmax}(\mathbf{H}\mathbf{U})$, where $\mathbf{U} \in \mathbb{R}^{h_L \times m}$ is the query matrix of the label attention layer for m medical codes and h_L is the dimension of query. By multiplying attention \mathbf{A} with the hidden representation, i.e., $\mathbf{A}^T \mathbf{H}$, the output of the attention layer is obtained for medical code prediction. CAML [Mullenbach *et al.*, 2018] is the first to apply LAN by using the attention matrix to capture the importance of ICD code and hidden word representation pair. DCAN [Ji *et al.*, 2020] and MultiResCNN [Li and Yu, 2020] also use the LAN decoder as a building block of their models. Fusion [Luo *et al.*, 2021] deploys a similar code-wise attention after feature aggregation. The LAN-based decoder preserves sequential information captured by the text encoder and enables label awareness to benefit medical code classification. LAAT [Vu *et al.*, 2021] applies the structured self-attention that projected the hidden representation via a linear transformation and non-linear activation as: $\mathbf{H}' = \tanh(\mathbf{W}_s \mathbf{H})$, where $\mathbf{W}_s \in \mathbb{R}^{h \times d_h}$ is a weight matrix, and h is the number of hops of the structured self-attention. In practice, LAAT set the number of attention hops to the number of labels. Similarly, TransICD [Biswas *et al.*, 2021] uses the structured self-attention mechanism to achieve Code-specific decoding for automated medical code prediction.

Hierarchical Decoders

Hierarchical models that make use of the hierarchical code structure have been studied to improve automatic coding a long time ago [de Lima *et al.*, 1998]. In the recent advances of deep learning-based methods, building hierarchical decoders is still a promising research direction. JointLAAT [Vu *et al.*, 2021] proposes a hierarchical joint learning method that produces the code prediction level by level according to the ICD hierarchy. Firstly, the model predicts the normalized ICD codes with the first three characters. Then, the first level's predictions are projected back to a vector and concatenated with the label-specific representation of the second level in the ICD hierarchy for final prediction. An earlier work by [2019] uses three hierarchical decoding layers for ICD codes. The hierarchical decoding-based JointLAAT outperforms the vanilla LAAT slightly in some evaluation metrics. There is still room for improvement by making use of the hierarchical nature of the medical coding system.

Multitask Decoders

Medical coding models aforementioned in this section build decoders for a single coding system. However, there exist several different systems that have been used for different purposes. To enable decoding of multiple coding systems and utilize the joint learning of similar tasks, MT-RAM [Sun *et al.*, 2021b] deploys a multitask decoding scheme that includes two branches with label-wise attention for ICD and CCS code prediction. As a following-up work, MARN [Sun *et al.*, 2021a] improves the multitask decoders with the focal loss to balance the learning of codes with imbalanced code frequencies.

2.4 Usage of Auxiliary Information

Auxiliary information can be utilized to enhance representation learning and improve the performance of medical coding. This section introduces the usage of auxiliary information, including implicit information such as label information via randomly initialized embeddings and explicit information (or external data) such as Wikipedia articles, textual code description, and code hierarchy. Implicit label information has been used by most of previously introduced label attention-based models, and the joint embedding model (LEAM) [Wang *et al.*, 2018] that embeds labels and leverages the compatibility between word and label embeddings to calculate attention scores. The following paragraphs review the methods that use external data explicitly. The external data can be applied to both encoders and decoders. When applied to encoders, external data enhances the representation learning of clinical texts. Combining external data augmentation with the decoding process, the external information usually acts as the regularization for decoders.

Wikipedia Articles Wikipedia articles explain medical diagnoses in detail and are used to enhance the deep learning model on clinical text understanding. Prakash *et al.* [Prakash *et al.*, 2017] resorted to Wikipedia as an external knowledge source. Specifically, the authors used term search to find relevant articles to the diagnoses in clinical notes. They proposed C-MemNN with an iterative condensation of memory representations that utilize external knowledge sources from Wikipedia to enhance memory networks by preserving the hierarchical structure in the memory. KSI [Bai and Vucetic, 2019] uses element-wise multiplication and attention mechanism to fuse the knowledge from Wikipedia articles into clinical notes. Considering the first three digits of ICD-9 diagnosis codes, there are 389 available Wikipedia pages. The KSI model defines the medical coding task as a classification problem of 344 ICD codes found in the code vocabulary of the used dataset. Joint embedding of Wikipedia and clinical notes introduces external knowledge sources to medical coding models. However, because some specific medical codes have no corresponding Wikipedia pages, the usage of KSI is only limited to the coding of three-digit ICD-9 codes, i.e., diagnostic category classification. The absence of fine-grained coding may lead to the ineffectiveness of medical coding models in rare diagnoses or procedures.

Code Description The textual description of medical codes describes the exact meaning of codes and provides extra semantic information for abstract codes. The embeddings of code description are denoted as $\mathbf{D} \in \mathbb{R}^{m \times d_t}$, where m is the number of codes, and d_t is the dimension of description embedding. Several publications utilize the code description to enhance representation learning. CAML-DR [Mullenbach *et al.*, 2018] uses the word vectors of description as a regularization when optimizing the label-wise attention module. Similarly, CAIC [Teng *et al.*, 2020] develops cross-textual attention to establish the connection between medical notes and ICD codes. GatedCNN-NCI [Ji *et al.*, 2021b] builds fully connected interaction between notes and codes. BiCapsNetLE [Bao *et al.*, 2021] uses embeddings of ICD descriptions to inject label information into the word embeddings of

clinical notes and the features learned by capsule networks. DLAC [Feucht *et al.*, 2021] proposes a description-based label attention that computes the label attention matrix with description matrix and transformed hidden representation matrix as $\mathbf{A} = \text{Softmax}(\mathbf{H}\mathbf{U} \cdot \mathbf{D}^\top)$, where $\mathbf{U} \in \mathbb{R}^{d_h \times d_t}$ is a transformation matrix that aligns the dimensions of the hidden representation and the description matrix.

Code Hierarchy As introduced in Sec. 2.1, hierarchical decoders make use of the code hierarchy. MSATT-KG [Xie *et al.*, 2019] infuses code hierarchy into document representation via structured knowledge graph (KG) propagation and label-dependent attention, where the code hierarchy is treated as a KG, and the graph convolutional network (GCN) is used to capture code relationships. Similar to MSATT-KG, HyperCore [Cao *et al.*, 2020] also uses GCN to encode the code hierarchy. Besides, it also utilizes hyperbolic embedding and co-graph representation with code hierarchy. The hierarchical structure of the code system is a unique characteristic of medical coding. It is an exciting research direction that has the potential to improve coding performance and produce reliable and interpretable coding results.

3 Benchmarking and Real-World Usage

This section introduces the data for benchmarking medical coding models and the evaluation metrics to evaluate the performance.

Data The MIMIC database, including MIMIC-II [Saeed *et al.*, 2011] and MIMIC-III [Johnson *et al.*, 2016], is currently the most popular data source for experimental study of medical coding. Searle *et al.* [Searle *et al.*, 2020] argued that the defacto gold-standard codes assigned in MIMIC-III have not undergone secondary validation and constitute a silver-standard dataset. The publicly available MIMIC database has promoted research on medical coding. Another recent dataset is CodiEsp in Spanish, which mainly provides manual codes with in-text explanations (or evidence) of 1,000 Spanish clinical notes, but also English translations of the notes and publications with ICD-10 codes. The dataset was used in the CodiEsp track in eHealth CLEF 2020 [Miranda-Escalada *et al.*, 2020]. In parallel to the public databases, many studies have also been conducted with private in-house patient notes. For example, Zhang *et al.* [Zhang *et al.*, 2020] used de-identified medical notes with ICD-10 codes from a hospital in the USA. Teng *et al.* [Teng *et al.*, 2020] built a dataset of outpatient medical records with ICD-10 codes collected from the first-class hospital in China. Rios *et al.* [Rios *et al.*, 2021] used a dataset of pathology reports with ICD-0-3 codes collected from the Kentucky Cancer Registry. Clinical notes from patient records have strict administrative regulations to protect patient privacy. However, more public de-identified data will be helpful to evaluate the generalizability of medical coding models.

Evaluation Metrics Medical coding uses evaluation metrics of the multi-label multi-class classification problem to evaluate the predictive performance. Standard evaluation metrics such as the area under the receiver operating characteristic curve (AUC-ROC) and F1-score with two averaging

strategies (i.e., micro and macro) and precision at k ($P@k$) are used by most publications. Micro scores consider all labels jointly and consequently give more weight to frequent labels. The hierarchical nature of medical codes leads to the need for hierarchical evaluation. Instead of using a flat evaluation that treats each code independently, CoPHE [Falis *et al.*, 2021] proposes a set of metrics that represent the depth of nodes in a hierarchy, allowing to quantify incorrect but related codes and preserve the counts in the upper layers to assess the issues of under- or over- prediction.

Practice in Public Health Manual medical coding in practice is not perfect, e.g., the overall medium accuracy of coding in the UK is around 83% with large variance among studies (50-98%) surveyed in [Burns *et al.*, 2011]. Errors in manual coding may be due to errors or incompleteness in the patients' data, subjectivity in choosing diagnostic codes, lack of coding expertise, or data entry errors [Coiera, 2015]. There are usually backlogs (of months or over a year) of records to be coded [Alonso *et al.*, 2020]. According to the survey in [Campbell and Giadresco, 2020], computer-assisted coding system can potentially help improve coding accuracy, quality, and efficiency, however, the challenges lie in the requirements in transition from a manual process to a computer-assisted coding environment. Coders should be able to revise the codes suggested by the system and be involved in the system development process [Campbell and Giadresco, 2020]. There are also other challenges in linguistics (e.g. hypothetical contexts) and data formats (e.g. hand-written notes), etc. A recent, ongoing project on deploying NLP system for clinical coding is CogStack for the Artificial Intelligence in Health and Care Award in England [King's College Hospital, 2021]. CogStack uses word embedding and concept embedding based NLP sub-module MedCAT [Kraljjevic *et al.*, 2021] to extract contextual entities with mapping to concepts or codes in UMLS, SNOMED, and ICD-10.

4 Discussion and Future Directions

The advances of deep learning models have significantly improved the predictive performance of medical coding. However, the current trend of leaderboard-oriented research is also concerning. It is easy to fall into the pitfall of excessive neural architecture engineering by chasing the scores in the leaderboard of public benchmarks but miss other critical matters. When improving the predictive performance, the following issues should also be carefully considered.

Clinical Relatedness Modern neural models can effectively learn textual features for given input texts. We can usually achieve satisfactory performance with a strong classifier and appropriate training. However, whether the encoding model can capture the clinical relatedness for medical coding is still unclear. Future work, for example, can be clinical knowledge infusion into the neural encoders.

Class Imbalance and Hierarchical Decoding The medical coding tasks suffer from class imbalance with a long tail of rare diagnoses in the class distribution. Nevertheless, current research considers less about the class imbalance issue, which should be addressed in future work. The code hierarchy as prior human knowledge sheds light on the imbalanced

classes. However, how to enable global and local learning for the whole hierarchy and local branches in the hierarchy is a challenging future work when developing hierarchical decoding approaches.

Long-term Dependency and Scalability It is challenging for neural encoders to capture long-term dependency, especially when clinical notes are extremely long documents. Self-attention-based models that succeed in sentence understanding have scalability issues due to the complexity of self-attention. Although some remedies attempt to make self-attention more efficient in the NLP community, few studies have been done in the context of medical coding. Also, recent deep learning models are becoming increasingly large. Future work should consider the scalability issue when dealing with long clinical documents and high-dimensional medical codes.

Interpretability Existing models with a certain level of explanation are post-hoc studies, for example, by interpreting the predictions through the visualization of attention weights [Feucht *et al.*, 2021]. It is indeed important to understand the model's prediction and prioritized features learned by the model. However, the medical coding model is still a black box. Thus, further work should focus more on interpretability that can improve the transparency of neural medical coding models.

Updated Guidelines and Data Shift Coding guidelines are usually updated frequently. The changes in guidelines should be considered in developing automated medical coding tools to facilitate the updated workflows at hospitals. clinical practice changes all the time. For example, new pandemic might lead to significant changes in the health systems. Medical coding models should also be able to be robust to data shift.

5 Conclusion

Recent years have witnessed increasing attention to the problem of automated medical coding. This paper reviews automated medical coding from an exciting perspective that unifies existing deep learning-based models into an encoder-decoder framework. Specifically, we discuss 1) neural encoders with recurrent and convolutional networks and neural attention mechanism and hierarchical encoders typically used for long clinical notes; 2) mechanisms to build deep architectures, including simple stacking, embedding injection, and residual connection; 3) decoder modules with linear layers, neural attention, hierarchical and multitask decoders; 4) the usage of auxiliary information such as Wikipedia articles, code description, and code hierarchy. Besides, we introduce data for medical coding, the evaluation of medical coding models, and real-world practice. We summarize the limitation and point out future research directions at the end of this review.

Acknowledgments

This work was supported by the Academy of Finland (grant 336033) and EU H2020 (grant 101016775). H. Dong was supported by Health Data Research UK National Phenomics and Text Analytics Implementation Projects.

References

- [Alonso *et al.*, 2020] Vera Alonso, João Vasco Santos, Marta Pinto, Joana Ferreira, Isabel Lema, Fernando Lopes, and Alberto Freitas. Problems and barriers during the process of clinical coding: a focus group study of coders' perceptions. *Journal of medical systems*, 44(3):1–8, 2020.
- [Bai and Vucetic, 2019] Tian Bai and Slobodan Vucetic. Improving Medical Code Prediction from Clinical Text via Incorporating Online Knowledge Sources. In *WWW*, pages 72–82, 2019.
- [Bao *et al.*, 2021] Weidong Bao, Hongfei Lin, Yijia Zhang, Jian Wang, and Shaowu Zhang. Medical code prediction via capsule networks and icd knowledge. *BMC Medical Informatics and Decision Making*, 21(2):1–12, 2021.
- [Baumel *et al.*, 2018] Tal Baumel, Jumana Nassour-Kassis, Raphael Cohen, Michael Elhadad, and Noemie Elhadad. Multi-label Classification of Patient Notes: Case Study on ICD Code Assignment. In *AAAI Workshop*, 2018.
- [Biswas *et al.*, 2021] Biplob Biswas, Thai-Hoang Pham, and Ping Zhang. TransICD: Transformer Based Code-Wise Attention Model for Explainable ICD Coding. In *AIME*, pages 469–478. Springer, 2021.
- [Burns *et al.*, 2011] E.M. Burns, E. Rigby, R. Mamidanna, A. Bottle, P. Aylin, P. Ziprin, and O.D. Faiz. Systematic review of discharge coding accuracy. *Journal of Public Health*, 34(1):138–148, 07 2011.
- [Campbell and Giadresco, 2020] Sharon Campbell and Katrina Giadresco. Computer-assisted clinical coding: A narrative review of the literature on its benefits, limitations, implementation and impact on clinical coding professionals. *Health Information Management Journal*, 49(1):5–18, 2020.
- [Campbell *et al.*, 2001] Susan E Campbell, Marion K Campbell, Jeremy M Grimshaw, and Anne E Walker. A systematic review of discharge coding accuracy. *Journal of Public Health*, 23(3):205–211, 2001.
- [Cao *et al.*, 2020] Pengfei Cao, Yubo Chen, Kang Liu, Jun Zhao, Shengping Liu, and Weifeng Chong. HyperCore: Hyperbolic and Co-graph Representation for Automatic ICD Coding. In *ACL*, pages 3105–3114, 2020.
- [Coiera, 2015] E. Coiera. Chapter 24: Natural language and formal terminology. In *Guide to Health Informatics*, Third Edition. CRC Press, 2015.
- [Crammer *et al.*, 2007] Koby Crammer, Mark Dredze, Kuzman Ganchev, Partha Talukdar, and Steven Carroll. Automatic Code Assignment to Medical Text. In *Biological, Translational, and Clinical Language Processing*, pages 129–136, 2007.
- [de Lima *et al.*, 1998] Luciano RS de Lima, Alberto HF Laender, and Berthier A Ribeiro-Neto. A hierarchical approach to the automatic categorization of medical documents. In *CIKM*, pages 132–139, 1998.
- [Dong *et al.*, 2021] Hang Dong, Víctor Suárez-Paniagua, William Whiteley, and Honghan Wu. Explainable Automated Coding of Clinical Notes using Hierarchical Label-wise Attention Networks and Label Embedding Initialisation. *Journal of Biomedical Informatics*, 2021.
- [Falis *et al.*, 2019] Matus Falis, Maciej Pajak, and et al. Ontological attention ensembles for capturing semantic concepts in ICD code prediction from clinical text. In *Proceedings of LOUHI 2019*, pages 168–177, 2019.
- [Falis *et al.*, 2021] Matúš Falis, Hang Dong, Alexandra Birch, and Beatrice Alex. CoPHE: A Count-Preserving Hierarchical Evaluation Metric in Large-Scale Multi-Label Text Classification. In *Proceedings of EMNLP*, pages 907–912, 2021.
- [Farkas and Szarvas, 2008] Richárd Farkas and György Szarvas. Automatic Construction of Rule-based ICD-9-CM Coding Systems. In *BMC Bioinformatics*, volume 9(Suppl 3), pages 1–9. Springer, 2008.
- [Farzandipour *et al.*, 2010] Mehrdad Farzandipour, Abbas Sheikhtaheri, and Farahnaz Sadoughi. Effective Factors on Accuracy of Principal Diagnosis Coding based on International Classification of Diseases, the 10th Revision (ICD-10). *IJIM*, 30(1):78–84, 2010.
- [Feucht *et al.*, 2021] Malte Feucht, Zhiliang Wu, Sophia Althammer, and Volker Tresp. Description-based label attention classifier for explainable icd-9 classification. In *Proceedings of W-NUT*, pages 62–66, 2021.
- [Gao *et al.*, 2021] Shang Gao, Mohammed Alawad, and et al. Limitations of transformers on clinical text classification. *IEEE JBHI*, 25(9):3596–3607, 2021.
- [Hsia *et al.*, 1988] David C Hsia, W Mark Krushat, Ann B Fagan, Jane A Tebbutt, and Richard P Kusserow. Accuracy of Diagnostic Coding for Medicare Patients under the Prospective-payment System. *New England Journal of Medicine*, 318(6):352–355, 1988.
- [Ji *et al.*, 2020] Shaoxiong Ji, Erik Cambria, and Pekka Marttinen. Dilated convolutional attention network for medical code assignment from clinical text. In *Proceedings of ClinicalNLP*, page 73–78, 2020.
- [Ji *et al.*, 2021a] Shaoxiong Ji, Matti Hölttä, and Pekka Marttinen. Does the Magic of BERT Apply to Medical Code Assignment? A Quantitative Study. *Computers in Biology and Medicine*, 2021.
- [Ji *et al.*, 2021b] Shaoxiong Ji, Shirui Pan, and Pekka Marttinen. Medical code assignment with gated convolution and note-code interaction. In *Findings of ACL-IJCNLP*, 2021.
- [Johnson *et al.*, 2016] Alistair EW Johnson, Tom J Pollard, and et al. MIMIC-III, a Freely Accessible Critical Care Database. *Scientific Data*, 3:160035, 2016.
- [Kavuluru *et al.*, 2015] Ramakanth Kavuluru, Anthony Rios, and Yuan Lu. An Empirical Evaluation of Supervised Learning Approaches in Assigning Diagnosis Codes to Electronic Medical Records. *Artificial Intelligence in Medicine*, 65(2):155–166, 2015.
- [Kim, 2014] Yoon Kim. Convolutional Neural Networks for Sentence Classification. *arXiv preprint arXiv:1408.5882*, 2014.

- [King’s College Hospital, 2021] King’s College Hospital. Cogstack wins an artificial intelligence in health and care. <https://www.kch.nhs.uk/news/public/news/view/34965>, June 2021.
- [Kraljevic *et al.*, 2021] Zeljko Kraljevic, Thomas Searle, Anthony Shek, Lukasz Roguski, Kawsar Noor, Daniel Bean, Aurelie Mascio, Leilei Zhu, Amos A Folarin, Angus Roberts, Rebecca Bendayan, Mark P Richardson, Robert Stewart, Anoop D Shah, Wai Keong Wong, Zina Ibrahim, James T Teo, and Richard J B Dobson. Multi-domain clinical natural language processing with MedCAT: The medical concept annotation toolkit. *Artif. Intell. Med.*, 117:102083, 2021.
- [Li and Yu, 2020] Fei Li and Hong Yu. ICD Coding from Clinical Text Using Multi-Filter Residual Convolutional Neural Network. In *Proceedings of AAAI*, 2020.
- [Lita *et al.*, 2008] Lucian Vlad Lita, Shipeng Yu, Stefan Niculescu, and Jinbo Bi. Large Scale Diagnostic Code Classification for Medical Patient Records. In *Proceedings of IJCNLP*, 2008.
- [Liu *et al.*, 2021] Jie-Jyun Liu, Tsung-Han Yang, Si-An Chen, and Chih-Jen Lin. Parameter selection: Why we should pay more attention to it. In *ACL-IJCNLP*, 2021.
- [Luo *et al.*, 2021] Junyu Luo, Cao Xiao, Lucas Glass, Jimeng Sun, and Fenglong Ma. Fusion: Towards automated icd coding via feature compression. In *Findings of ACL-IJCNLP*, pages 2096–2101, 2021.
- [Medori and Fairon, 2010] Julia Medori and Cédric Fairon. Machine Learning and Features Selection for Semi-automatic ICD-9-CM Encoding. In *Proceedings of LOUHI*, pages 84–89, 2010.
- [Mikolov *et al.*, 2013] Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. Distributed Representations of Words and Phrases and their Compositionality. In *NIPS*, pages 3111–3119, 2013.
- [Miranda-Escalada *et al.*, 2020] Antonio Miranda-Escalada, Aitor Gonzalez-Agirre, Jordi Armengol-Estapé, and Martin Krallinger. Overview of automatic clinical coding: annotations, guidelines, and solutions for non-english clinical cases at codiesp track of clef ehealth 2020. In *Working Notes of CLEF*, 2020.
- [Mullenbach *et al.*, 2018] James Mullenbach, Sarah Wiegreffe, Jon Duke, Jimeng Sun, and Jacob Eisenstein. Explainable Prediction of Medical Codes from Clinical Text. In *Proceedings of NAACL-HLT*, pages 1101–1111, 2018.
- [Perotte *et al.*, 2014] Adler Perotte, Rimma Pivovarov, Karthik Natarajan, Nicole Weiskopf, Frank Wood, and Noémie Elhadad. Diagnosis code assignment: models and evaluation metrics. *JAMIA*, 21(2):231–237, 2014.
- [Prakash *et al.*, 2017] Aaditya Prakash, Siyuan Zhao, Saadid A Hasan, Vivek Datla, Kathy Lee, Ashequl Qadir, Joey Liu, and Oladimeji Farri. Condensed Memory Networks for Clinical Diagnostic Inferencing. In *Proceedings of AAAI*, 2017.
- [Rios *et al.*, 2021] Anthony Rios, Eric B Durbin, Isaac Hands, and Ramakanth Kavuluru. Assigning icd-o-3 codes to pathology reports using neural multi-task training with hierarchical regularization. In *Proceedings of ACM BCB*, pages 1–10, 2021.
- [Sadoughi *et al.*, 2018] Najmeh Sadoughi, Greg P Finley, and et al. Medical code prediction with multi-view convolution and description-regularized label-dependent attention. *arXiv preprint arXiv:1811.01468*, 2018.
- [Saeed *et al.*, 2011] Mohammed Saeed, Mauricio Villarroel, and et al. Multiparameter Intelligent Monitoring in Intensive Care II (MIMIC-II): A Public-access Intensive Care Unit Database. *Critical Care Medicine*, 39(5):952, 2011.
- [Searle *et al.*, 2020] Thomas Searle, Zina Ibrahim, and Richard Dobson. Experimental Evaluation and Development of a Silver-Standard for the MIMIC-III Clinical Coding Dataset. In *Proceedings of SIGBioMed Workshop*, pages 76–85, 2020.
- [Shi *et al.*, 2017] Haoran Shi, Pengtao Xie, Zhiting Hu, Ming Zhang, and Eric P Xing. Towards Automated ICD Coding Using Deep Learning. *arXiv preprint arXiv:1711.04075*, 2017.
- [Stanfill *et al.*, 2010] Mary H Stanfill, Margaret Williams, Susan H Fenton, Robert A Jenders, and William R Hersh. A Systematic Literature Review of Automated Clinical Coding and Classification systems. *JAMIA*, 17(6):646–651, 2010.
- [Sun *et al.*, 2021a] Wei Sun, Shaoxiong Ji, Erik Cambria, and Pekka Marttinen. Multitask balanced and recalibrated network for medical code prediction. *arXiv preprint arXiv:2109.02418*, 2021.
- [Sun *et al.*, 2021b] Wei Sun, Shaoxiong Ji, Erik Cambria, and Pekka Marttinen. Multitask Recalibrated Aggregation Network for Medical Code Prediction. In *Proceedings of ECML-PKDD*, 2021.
- [Teng *et al.*, 2020] Fei Teng, Zheng Ma, Jie Chen, Ming Xiao, and Lufei Huang. Automatic medical code assignment via deep learning approach for intelligent healthcare. *IEEE JBHI*, 24(9):2506–2515, 2020.
- [Vu *et al.*, 2021] Thanh Vu, Dat Quoc Nguyen, and Anthony Nguyen. A label attention model for icd coding from clinical text. In *Proceedings of IJCAI*, 2021.
- [Wang *et al.*, 2018] Guoyin Wang, Chunyuan Li, Wenlin Wang, Yizhe Zhang, Dinghan Shen, Xinyuan Zhang, Ricardo Henao, and Lawrence Carin. Joint Embedding of Words and Labels for Text Classification. In *Proceedings of ACL*, pages 2321–2331, 2018.
- [Xie *et al.*, 2019] Xiancheng Xie, Yun Xiong, Philip S Yu, and Yangyong Zhu. EHR coding with multi-scale feature attention and structured knowledge graph propagation. In *CIKM*, pages 649–658, 2019.
- [Zhang *et al.*, 2020] Zachariah Zhang, Jingshu Liu, and Narges Razavian. BERT-XML: Large Scale Automated ICD Coding Using BERT Pretraining. In *Proceedings of ClinicalNLP*, pages 24–34, 2020.