

Eternal Vertex Cover on Bipartite and Co-Bipartite Graphs

Neeldhara Misra 

Department of Computer Science and Engineering,
Indian Institute of Technology, Gandhinagar
<http://www.neeldhara.com>
neeldhara.m@iitgn.ac.in

Saraswati Girish Nanoti

Department of Mathematics,
Indian Institute of Technology, Gandhinagar
nanoti_saraswati@iitgn.ac.in

Abstract

The ETERNAL VERTEX COVER problem is a dynamic variant of the vertex cover problem. We have a two player game in which guards are placed on some vertices of a graph. In every move, one player (the attacker) attacks an edge. In response to the attack, the second player (the defender) moves some of the guards along the edges of the graph in such a manner that at least one guard moves along the attacked edge. If such a movement is not possible, then the attacker wins. If the defender can defend the graph against an infinite sequence of attacks, then the defender wins.

The minimum number of guards with which the defender has a winning strategy is called the eternal vertex cover number of the graph G . On general graphs, the computational problem of determining the minimum eternal vertex cover number is NP-hard and admits a 2-approximation algorithm and an exponential kernel. The complexity of the problem on bipartite graphs is open, as is the question of whether the problem admits a polynomial kernel.


We settle both these questions by showing that Eternal Vertex Cover is NP-hard and does not admit a polynomial compression even on bipartite graphs of diameter six. We also show that the problem admits a polynomial time algorithm on the class of cobipartite graphs.

2012 ACM Subject Classification Theory of computation → Parameterized complexity and exact algorithms; Theory of computation → Graph algorithms analysis; Theory of computation → Algorithm design techniques

Keywords and phrases eternal vertex cover, vertex cover, kernelization, polynomial compression, bipartite, cobipartite, polynomial time algorithms

1 Introduction

The ETERNAL VERTEX COVER problem is a dynamic variant of the vertex cover problem introduced by Klostermeyer and Mynhardt (2009). The setting is the following. We have a two player game — between players whom we will refer to as the *attacker* and *defender* — on a simple, undirected graph G . In the beginning, the defender can choose to place guards on some of the vertices of G . The attacker's move involve choosing an edge to “attack”. The defender is able to “defend” this attack if she can move the guards along the edges of the graph in such a way that at least one guard moves along the attacked edge. If such a movement is not possible, then the attacker wins. If the defender can defend the graph against an infinite sequence of attacks, then the defender wins (see Figure 1). The minimum number of guards with which the defender has a winning strategy is called the *eternal vertex cover number* of the graph G and is denoted by $\text{evc}(G)$.

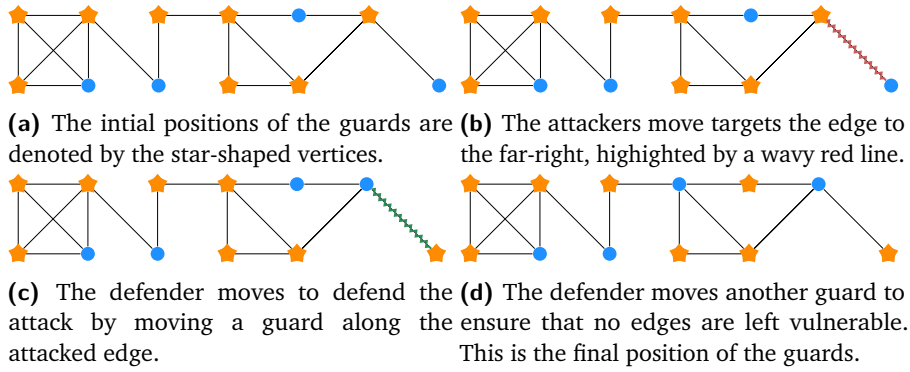

■ **Figure 1** An attack that is defended by moving two guards.

If S_ℓ is the subset of vertices that have guards on them after the defender has played her ℓ -th move, and S_ℓ is not a vertex cover of G , then the attacker can target any of the uncovered edges to win the game. Therefore, when the defender has a winning strategy, it implies that she can always “reconfigure” one vertex cover into another in response to any attack, where the reconfiguration is constrained by the rules of how the guards can move and the requirement that at least one of these guards needs to move along the attacked edge. Therefore, it is clear that $\text{evc}(G) \geq \text{mvc}(G)$, where $\text{mvc}(G)$ denotes the minimum size of a vertex cover of G . It also turns out that twice as many vertices as the $\text{mvc}(G)$ also suffice to defend against any sequence of attacks — this might be achieved, for example, by placing guards on both endpoints of any maximum matching. Therefore, we have that $\text{mvc}(G) \leq \text{evc}(G) \leq 2\text{mvc}(G)$.

Klostermeyer and Mynhardt (2009) gave a characterization of the graphs for which the upper bound is achieved. A characterization for graphs for which lower bound is achieved remains open, but several special cases have been addressed in the literature (see, for instance Babu et al., 2021). Also, Klostermeyer and Mynhardt (2011) study graphs with equal eternal vertex cover and eternal domination numbers, which is a closely related dynamic variant of the dominating set problem.

The natural computational question associated with this parameter is the following: given a graph G and a positive integer k , determine if $\text{evc}(G) \leq k$. The problem is only known to be in PSPACE in general. Fomin et al. (2010) show that this problem is NP-hard by a reduction from vertex cover, and admits a 2-approximation algorithm based on both endpoints of a

matching. They also study the problem from a parameterized perspective. In parameterized complexity, one asks if for an instance of size n and a parameter k , a problem can be solved in time $f(k)n^{O(1)}$ where f is an arbitrary computable function independent of n . Problems that can be solved in that time are said to be fixed parameter tractable, and the corresponding complexity class is called FPT. They show that the problem is fixed parameter tractable when parameterized by the number of available guards k , by demonstrating an algorithm with running time $O\left(2^{O(k^2)} + nm\right)$ for ETERNAL VERTEX COVER, where n is the number of vertices and m the number of edges of the input graph. This work leaves open the question of whether ETERNAL VERTEX COVER admits a polynomial kernel¹.

The computational question of ETERNAL VERTEX COVER is also well studied on special classes of graphs. For instance, it is known to be NP-complete when restricted to locally connected graphs, a graph class which includes all biconnected internally triangulated planar graphs (Babu et al., 2021). It can also be solved in linear time on the class of cactus graphs (Babu et al., 2020), quadratic time on chordal graphs (Babu and Prabhakaran, 2020; Babu et al., 2020) and in polynomial time on “generalized” trees (Araki et al., 2015). However, the complexity of the problem on bipartite graphs remains open, and is an intriguing question especially considering that the vertex cover problem is tractable on bipartite graphs.

1.1 Our Contributions

We resolve the question of the complexity of ETERNAL VERTEX COVER on bipartite graphs by showing NP-hardness even on bipartite graphs of constant diameter. It turns out that the same result can also be used to argue the likely non-existence of a polynomial compression, which resolves the question of whether ETERNAL VERTEX COVER has a polynomial kernel in the negative. Finally, we also observe that the hardness results carry over to the related problem of ETERNAL CONNECTED VERTEX COVER (Fujito and Nakamura, 2020), where we would like the vertex covers at every step to induce connected subgraphs.

Summarizing, our main result is the following:

► **Theorem 1.** *Both the ETERNAL VERTEX COVER and ETERNAL CONNECTED VERTEX COVER problems are NP-hard and do not admit a polynomial compression parameterized by the number of guards (unless $NP \subseteq coNP / poly$), even on bipartite graphs of diameter six.*

We also show that ETERNAL VERTEX COVER is tractable on the class of cobipartite graphs, a result that is not implied by any of the polynomial time algorithms known so far.

► **Theorem 2.** *There is a polynomial-time algorithm for ETERNAL VERTEX COVER on the class of cobipartite graphs.*

Organization

We establish notation and provide relevant definitions in Section 2. The proof of Theorem 1 follows from the construction described in Lemma 6, and is the main focus of Section 3, while the proof of Theorem 2 can be found in Section 4 (with an overall schematic of the cases given in Figures 7 and 8a to 8c). In Section 5, we suggest some directions for further work.

¹ We refer the reader to Section 2 for the definition of the notion of a polynomial kernel.

2 Preliminaries and Notations

All graphs in this paper are finite, undirected and without multiple edges and loops. For notation and terminology not defined in this paper we refer to [Diestel \(2017\)](#).

Let $G = (V, E)$ be a graph. The set of neighbours of a vertex v in G is denoted by $N_G(v)$, or briefly by $N(v)$ ². More generally, for $U \subseteq V$, the neighbours in $V \setminus U$ of vertices in U are called neighbours of U ; their set is denoted by $N(U)$. A subset $S \subseteq V$ is said to be *independent* if for all $u, v \in S$, $(u, v) \notin E$.

A path is a non-empty graph $P = (V, E)$ of the form $V = \{x_0, x_1, \dots, x_k\}$ and $E = \{x_0x_1, x_1x_2, \dots, x_{k-1}x_k\}$, where the x_i 's are all distinct. The number of edges of a path is its length, and the path of length k is denoted by P^k . The distance $d_G(x, y)$ in G of two vertices x, y is the length of a shortest $x - y$ path in G ; if no such path exists, we set $d(x, y) := \infty$. The greatest distance between any two vertices in G is the diameter of G , denoted by $\text{diam}(G)$.

A *vertex cover* of a graph $G = (V, E)$ is a subset S of the vertex set such that every edge has at least one of its endpoints in S . Note that $V \setminus S$ is an independent set. We use $\text{mvc}(G)$ to denote the size of a minimum vertex cover of G . A *dominating set* of a graph G is a subset X of the vertex set such that every vertex of G either belongs to X or has a neighbor in X .

Consider a graph $G = (V, E)$ on n vertices and m edges. Guards are placed on the vertices of the graph in order to protect it from an infinite sequence (which is not known to the guards in advance) of attacks on the edges of the graph. In each round, one edge $uv \in E$ is attacked, and each guard either stays on the vertex it is occupying or moves to a neighboring vertex.

Moreover, the guards are bound to move in such a way that at least one guard moves from u to v or from v to u . The minimum number of guards which can protect all the edges of G is called the eternal vertex cover number of G and is denoted by $\text{evc}(G)$.

A *bipartite* graph is a graph whose vertex set can be partitioned into at most two independent sets. A *co-bipartite graph* is a graph which is the complement of a bipartite graph. In other words, a co-bipartite graph is a graph whose vertex set can be partitioned into at most two cliques.

Parameterized Complexity.

A parameterized problem L is a subset of $\Sigma^* \times \mathbb{N}$ for some finite alphabet Σ . An instance of a parameterized problem consists of (x, k) , where k is called the parameter. A central notion in parameterized complexity is fixed parameter tractability (FPT), which means for a given instance (x, k) solvability in time $f(k) \cdot p(|x|)$, where f is an arbitrary function of k and p is a polynomial in the input size. The notions of kernelization and compression are defined as follows.

► **Definition 1.** A kernelization algorithm, or in short, a kernel for a parameterized problem $Q \subseteq \Sigma^* \times \mathbb{N}$ is an algorithm that, given $(x, k) \in \Sigma^* \times \mathbb{N}$, outputs in time polynomial in $|x| + k$ a pair $(x', k') \in \Sigma^* \times \mathbb{N}$ such that (a) $(x, k) \in Q$ if and only if $(x', k') \in Q$ and (b) $|x'| + k' \leq g(k)$, where g is an arbitrary computable function. The function g is referred to as the size of the kernel. If g is a polynomial function then we say that Q admits a polynomial kernel.

² Here, as elsewhere, we drop the index referring to the underlying graph if the reference is clear.

► **Definition 2.** A polynomial compression of a parameterized language $Q \subseteq \Sigma^* \times \mathbb{N}$ into a language $R \subseteq \Sigma^*$ is an algorithm that takes as input an instance $(x, k) \in \Sigma^* \times \mathbb{N}$, works in time polynomial in $|x| + k$, and returns a string y such that:

1. $|y| \leq p(k)$ for some polynomial $p(\cdot)$, and
2. $y \in R$ if and only if $(x, k) \in Q$.

Our focus in this paper is the ETERNAL VERTEX COVER problem, in which we are interested in computing $\text{evc}(G)$ for a graph G , and its parameterized complexity with respect to the number of guards:

ETERNAL VERTEX COVER

Input: A graph $G = (V, E)$ and a positive integer $k \in \mathbb{Z}^+$.

Parameter: k

Question: Does G have an eternal vertex cover of size at most k ?

ETERNAL VERTEX COVER is known to admit an exponential kernel of size $4^k(k+1)+2k$ (Fomin et al., 2010). We use the following standard framework to show that it is unlikely to admit a polynomial compression.

► **Definition 3.** Let P and Q be parameterized problems. We say that P is polynomial parameter reducible to Q , written $P \leq_{\text{ppt}} Q$, if there exists a polynomial time computable function $f : \Sigma^* \times \mathbb{N} \rightarrow \Sigma^* \times \mathbb{N}$ and a polynomial p , such that for all $(x, k) \in \Sigma^* \times \mathbb{N}$ (a) $(x, k) \in P$ if and only if $(x', k') = f(x, k) \in Q$ and (b) $k' \leq p(k)$. The function f is called polynomial parameter transformation.

► **Proposition 4.** Let P and Q be parameterized problems such that there is a polynomial parameter transformation from P to Q . If Q has a polynomial compression, then P also has a polynomial compression.

In the RED BLUE DOMINATING SET problem, we are given a bipartite graph $G = (B \cup R, E)$ and an integer k and asked whether there exists a vertex set $S \subseteq R$ of size at most k such that every vertex in B has at least one neighbor in S . In the literature, the sets B and R are called “blue vertices” and “red vertices”, respectively. It is known (see Dom et al., 2014, Theorem 4.1) that RBDS parameterized by $(|B|, k)$ does not have a polynomial kernel, and more generally, a polynomial compression (see Fomin et al., 2019, Corollary 19.6):

► **Proposition 5** (Corollary 19.6 Fomin et al. (2019)). The RED BLUE DOMINATING SET problem, parameterized by $|B| + k$, does not admit a polynomial compression unless $\text{coNP} \subseteq \text{NP/poly}$.

Note that based on Propositions 4 and 5, to show that a polynomial compression for ETERNAL VERTEX COVER parameterized by the number of guards implies $\text{coNP} \subseteq \text{NP/poly}$, it suffices to show a polynomial parameter transformation from RED BLUE DOMINATING SET to ETERNAL VERTEX COVER.

For more background on parameterized complexity and algorithms, the reader is referred to the books Cygan et al. (2015); Fomin et al. (2019); Niedermeier (2006); Flum and Grohe (2006); Downey and Fellows (2013).

3 Hardness on Bipartite Graphs

In this section we demonstrate the intractability of ETERNAL VERTEX COVER on the class of bipartite graphs of diameter six. Our key tool is a reduction from RED BLUE DOMINATING SET which also happens to be a polynomial parameter transformation.

► **Lemma 6.** *There is a polynomial parameter transformation from RED BLUE DOMINATING SET parameterized by $|B| + k$ to ETERNAL VERTEX COVER parameterized by solution size.*

Proof. Let $\langle G = (V, E), b + k \rangle$ be an instance of RED BLUE DOMINATING SET. We have $V = R \cup B$. We denote the vertices in R by $\{v_1, \dots, v_r\}$, the vertices in B by $\{u_1, \dots, u_b\}$ and use m to denote $|E|$. We assume that G is connected, since RED BLUE DOMINATING SET does not have a polynomial sized kernel even for connected graphs. We assume that every blue vertex has at least one red neighbour and by returning a trivial NO-instance of ETERNAL VERTEX COVER if some blue vertex has no red neighbour. The correctness of this follows from the fact that if some blue vertex does not have a red neighbour then it cannot be dominated by any subset of R . Further, we assume that $k < b$ by returning a trivial YES-instance of ETERNAL VERTEX COVER if $k \geq b$. Also we assume $b > 1$, since when $b = 1$, the instance is easily resolved and we may return an appropriate instance of ETERNAL VERTEX COVER (a trivial YES instance if $k \geq 1$ and a trivial NO instance otherwise).

The Construction.

We will develop an instance of ETERNAL VERTEX COVER which we denote by $\langle H, \ell \rangle$ based on $\langle G, k \rangle$ as follows. First, we introduce r red vertices, denoted by $A := \{v_i \mid 1 \leq i \leq r\}$ and n blue vertices, denoted by $B := \{u_i \mid 1 \leq i \leq b\}$. Next, for all $i \in [b]$, we add $b^2 + 3$ dependent vertices of type i , denoted by $C_i := \{w_j^i \mid 1 \leq j \leq b^2 + 3\}$. Now, we add $b^2 + 3$ dependent vertices of type \star , denoted by $D := \{w_j^\star \mid 1 \leq j \leq b^2 + 3\}$. Finally, we add two special vertices denoted by \star and \dagger , which we will refer to as the *universal* and *backup* vertices respectively. To summarize, the vertex set consists of the following $r + (b^3 + b^2 + 4b + 5)$ vertices:

$$V(H) := A \cup B \cup C_1 \cup \dots \cup C_n \cup D \cup \{\star, \dagger\}.$$

We now describe the edges in H :

- There are m *structural* edges given by (v_p, u_q) for every pair (p, q) such that $(v_p, u_q) \in E(G)$. In other words, for every edge (v_p, u_q) in the graph G , the original vertex v_p is adjacent to the partner vertex u_q .
- The dependent vertices of type i are adjacent to the i^{th} blue vertex, i.e., for every $i \in [b]$, we have a *sliding* edge (u_i, w) for each $w \in C_i$.
- The dependent vertices of type \star are adjacent to the universal vertex, i.e., we have a *sliding* edge (\star, w) for each $w \in D$.
- The universal vertex \star is adjacent to every red vertex via a *supplier* edge. In particular, for every $i \in [r]$, we have the edge (v_i, \star) .
- Finally, we have the edge (\star, \dagger) , indicating that the backup vertex \dagger is adjacent to the universal vertex. We call this edge a *bridge*.

To summarize, we have the following edges in H :

$$\begin{aligned}
E(H) = & \{(v_p, u_q) \mid 1 \leq p \leq r; 1 \leq q \leq b; \text{ and } (v_p, u_q) \in E(H)\} \leftarrow \text{the structural edges} \\
& \cup \{(u_1, w) \mid w \in C_i\} \leftarrow \text{the type 1 sliding edges} \\
& \cup : \\
& \cup \{(u_i, w) \mid w \in C_i\} \leftarrow \text{the type } i \text{ sliding edges} \\
& \cup : \\
& \cup \{(u_n, w) \mid w \in C_i\} \leftarrow \text{the type } n \text{ sliding edges} \\
& \cup \{(\star, w) \mid w \in D\} \leftarrow \text{the type } \star \text{ sliding edges} \\
& \cup \{(v_i, \star) \mid 1 \leq i \leq n\} \leftarrow \text{the supplier edges} \\
& \cup \{(\star, \dagger)\} \leftarrow \text{the bridge edge.}
\end{aligned} \tag{1}$$

We now let $\ell := b + k + 2$, and this completes the description of the reduced instance $\langle H, \ell \rangle$.

▷ **Claim 7.** The vertex cover number of H is $b + 1$.

Proof. This follows from the fact that there is a matching of size $b + 1$ in H , consisting of edges joining each blue vertex and \star to one of their adjacent dependent vertices. (showing the lower bound), and that $B \cup \{\star\}$ is a vertex cover in H (which implies the upper bound). ◀

▷ **Claim 8.** Any vertex cover of H that has at most ℓ vertices must contain $B \cup \{\star\}$.

Proof. Consider a vertex cover $S \subseteq V(H)$ that does not contain some blue vertex $u_i \in B$. Then S must contain all the dependent vertices in C_i , but since $|C_i| = b^2 + 3$, this contradicts our assumption that $|S| \leq \ell$. Consider a vertex cover $S \subseteq V(H)$ that does not contain the universal vertex \star . Then S must contain all the dependent vertices in C_i , but since $|C_i| = b^2 + 3$, this contradicts our assumption that $|S| \leq \ell$. ◀

The Backward Direction.

Suppose $\langle H, \ell \rangle$ is a YES-instance of ETERNAL VERTEX COVER. We argue that $\langle G = (V, E), k \rangle$ is a YES-instance of RED BLUE DOMINATING SET.

We know that any sequence of edge attacks in H can be defended by deploying at most $\ell = n + k + 2$ guards. Let \mathcal{S} denote the initial placement of guards.

We now consider two cases:

Case 1. \mathcal{S} contains the backup vertex.

We already know that \mathcal{S} contains all the blue vertices and the universal vertex by [Claim 8](#). This accounts for the positions of $(n + 1)$ guards. Additionally, because of the case we are in, we have one guard on the backup vertex. So the remaining k guards occupy either red or dependent vertices. We propose that the corresponding vertices in G form a dominating set. Specifically, let

$$A' := \{j \mid 1 \leq j \leq r \text{ and } v_i \in \mathcal{S}\} \text{ and } B' := \{j \mid 1 \leq j \leq b \text{ and } C_j \cap \mathcal{S} \neq \emptyset\}.$$

For each $j \in B'$, let ℓ_j be such that v_{ℓ_j} is an arbitrarily chosen neighbor of u_j in G . Note that it is possible that $j_1 \neq j_2$ in B' but $\ell_{j_1} = \ell_{j_2}$. We now define $C' := \{\ell_j \mid j \in B'\}$.

Intuitively speaking, our choice of dominating set is made by choosing all red vertices in G for whom the corresponding vertices in H have a guard on them, and additionally, for all blue vertices who have a guard on a dependent neighbor vertex in H , we choose an arbitrary red neighbor in G — while this choice may coincide for some blue vertices, we note that the total number of chosen vertices is no more than the number of guards who are positioned on dependent and red vertices, i.e., k . In other words, we have that $|A' \cup C'| \leq k$.

We now claim that $S := \{v_i \mid i \in A' \cup C'\}$ is a dominating set for the blue vertices in G . Suppose not. Then, let $u_t \in B$ be a vertex that is not dominated by S . Let us attack a structural edge (u_t, v_q) . Note that v_q is not occupied by a guard, and the guard on u_t is forced to move to v_q to defend this attack. However, observe that our assumption that u_t is not dominated in G implies that no neighbor of u_t has a guard in \mathcal{S} . Therefore, this configuration now cannot be extended to a vertex cover, contradicting our assumption that every attack can be defended. Therefore, S is indeed a dominating set in G of size at most k .

Case 2. \mathcal{S} does not contain the backup vertex.

In this case, we attack the bridge. Let S' denote the placement of the guards obtained by defending this attack. Note that S' must contain the backup vertex. Now we argue as we did in the previous case. This concludes the proof in the reverse direction.

The Forward Direction.

Suppose $\langle G = (V, E), k \rangle$ is a YES-instance of RED BLUE DOMINATING SET. We argue that $\langle H, \ell \rangle$ is a YES-instance of ETERNAL VERTEX COVER.


Let $S \subseteq V(G)$ be a dominating set of G . Without loss of generality (by renaming), we assume that $S = \{v_1, \dots, v_k\}$. Let $S^* := \{v_1, \dots, v_k\} \subseteq A$, i.e., the red vertices of H corresponding to the solution in G .

Note that all the following are vertex covers of size $b + k + 2$ for H :

- A backup vertex cover is given by $X := B \cup \{\star\} \cup S^* \cup \{\dagger\}$.
- A dependent vertex cover of type i (or type \star) is given by $Y_i := B \cup \{\star\} \cup S^* \cup \{w\}$, where w is a dependent vertex from C_i (or D).
- A red vertex cover is given by $Z_j := B \cup \{\star\} \cup S^* \cup \{v_j\}$, for some $j > k$.

We remark that there may other vertex covers of size $n + k + 2$ that don't "fit" into any of the categories listed above. A vertex cover that is either a backup, dependent, or red vertex cover is called a *nice* vertex cover.

We argue that if guards are occupying a nice vertex cover, then any attack can be defended by moving guards along edges in such a way that the new configuration also corresponds to a nice vertex cover. This implies that any sequence of attacks can be defended, by starting with an arbitrary nice vertex cover.

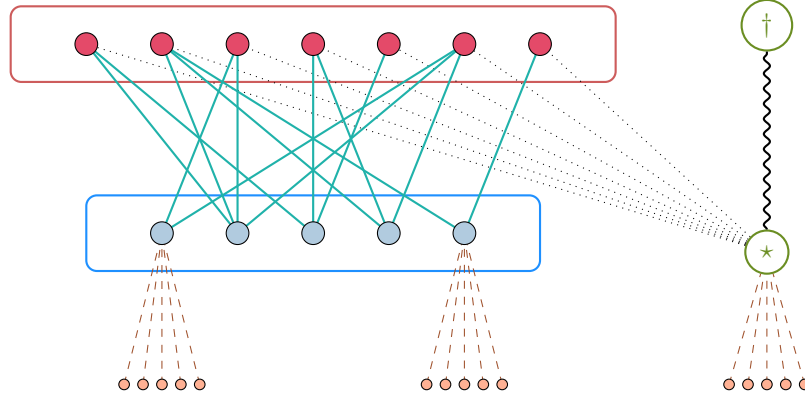

■ **Figure 2** A schematic depicting the construction of (H, ℓ) starting with an instance (G, k) of RED BLUE DOMINATING SET. The red vertices from G instance are shown in the red rectangle on the top while the blue vertices are in the blue rectangle positioned at the bottom. The solid green lines correspond to edges in $E(G)$. The small orange vertices are the dependent vertices (some of them are omitted for clarity), while the global and backup vertices are shown by nodes labeled \star and \dagger respectively. The wavy line shows the bridge, the dotted lines shows the supplier edges while the dashed lines show the sliding edges.

▷ **Claim 9.** Let $\mathcal{S} \subseteq V(H)$ be a nice vertex cover, and let $e \in E(H)$. If the guards are currently occupying \mathcal{S} , there is a legal move that defends e such that the new position of the guards also corresponds to a nice vertex cover.

Proof. We argue this by an exhaustive case analysis on (\mathcal{S}, e) .

Case 1. \mathcal{S} is a backup vertex cover and e is a structural edge.

Let $e = (v_q, u_p)$. If $q \leq k$, then the guards on v_q and u_p exchange positions. Otherwise, if $q > k$, there exists $r \leq k$ such that $(u_p, v_r) \in E(G)$ because \mathcal{S} dominates B . We perform the following sequence of moves:


- The guard on u_p moves to v_q along the structural edge that was attacked;
- the guard on v_r moves to u_p along a structural edge;
- the guard on the universal vertex moves to v_r along a supplier edge; and
- the guard on \dagger moves to \star along the bridge.

The new configuration corresponds to a red vertex cover.

Case 2. \mathcal{S} is a backup vertex cover and e is a sliding edge.

Let $i \in [b]$ and suppose $e = (u_i, w)$ for some $w \in C_i$. Let $q \in [k]$ be such that $(v_q, u_i) \in E(G)$. We now perform the following sequence of moves:

- the guard on u_i moves to w along the sliding edge that was attacked;

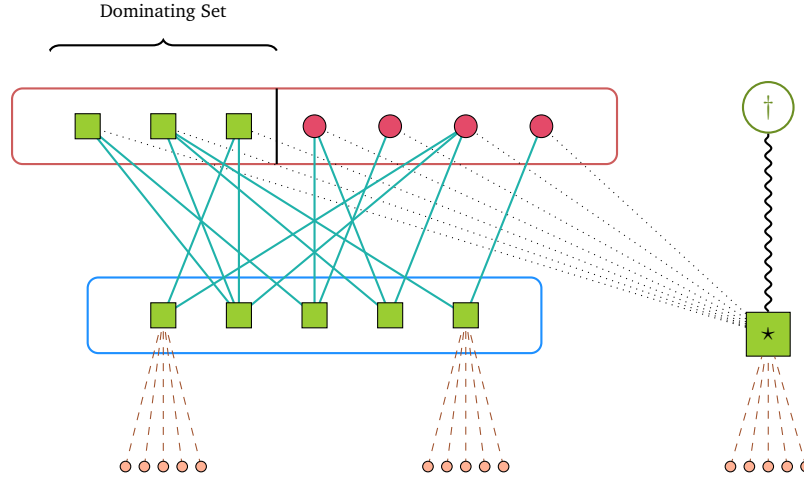

■ **Figure 3** This figure depicts a possible initial position of $n + k + 1$ guards in a reduced instance of ETERNAL VERTEX COVER that is based on a YES-instance of RED BLUE DOMINATING SET. Note that in the reduced instance we may deploy up to $\ell = n + k + 2$ guards, and the position of the last guard (not shown) determines the type of the vertex cover that we are working with.

- the guard on v_q moves to u_i along a structural edge;
- the guard on the universal vertex moves to v_q along a supplier edge; and
- the guard on \dagger moves to \star along the bridge.

Suppose $e = (\star, w)$ is the sliding edge which is attacked, then the guard on \star moves to w and the guard on \dagger moves to \star .

The new configuration corresponds to a dependent vertex cover (c.f. Figure 4).

Case 3. \mathcal{S} is a backup vertex cover and e is a supplier edge.


Let $e = (v_i, \star)$. If $i \leq k$, the guards on v_i and \star exchange positions. If $i > k$, we have the guard on the universal vertex move to v_i via the supplier edge that was attacked. The guard on the backup vertex then moves to \star along the bridge, leading to a red vertex cover.

Case 4. \mathcal{S} is a backup vertex cover and e is a bridge edge.


The guards on \dagger and \star exchange places and the resulting configuration is again a backup vertex cover.

Case 5. \mathcal{S} is a red vertex cover and e is a structural edge.

Let $e = (v_q, u_p)$. If $q \leq k$, then the guards on v_q and u_p exchange positions. If $q > k$, and if v_q has a guard, then the guards on u_p and v_q exchange positions. Otherwise let $j \neq q$ be

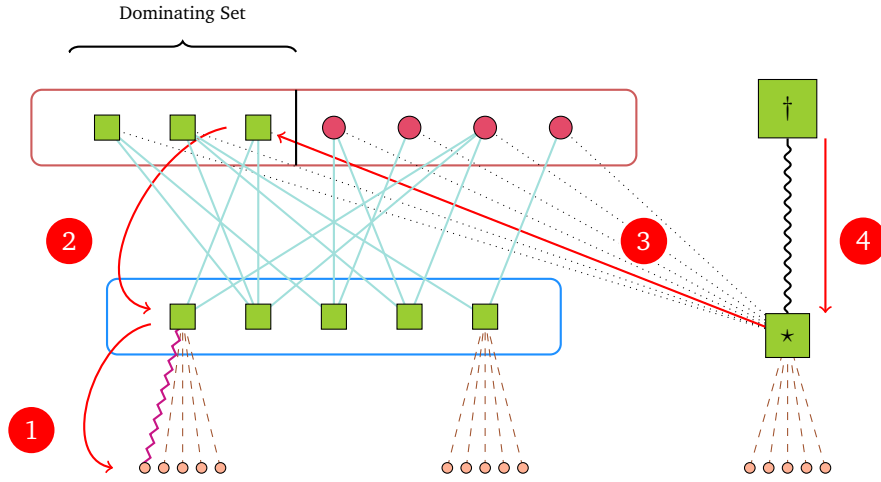

(a) This figure demonstrates a defense for when S is a backup vertex cover and a sliding edge is attacked.

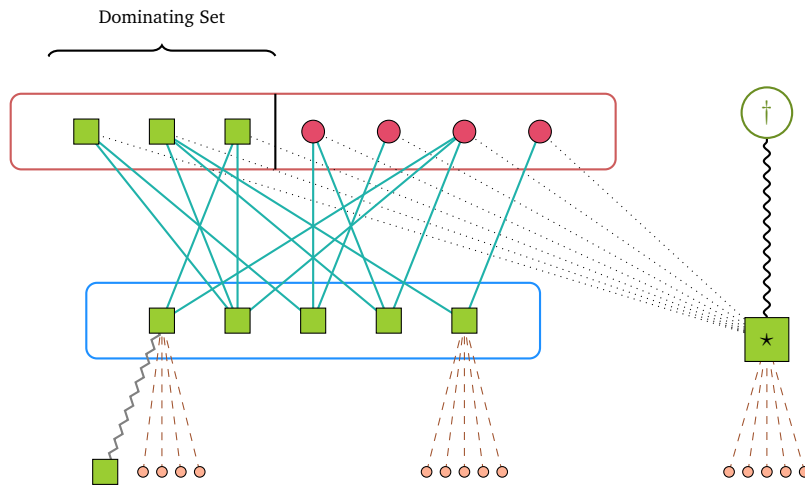

(b) This figure demonstrates the positions of the guards after the defence in Figure 4a is executed.

■ **Figure 4** This figure demonstrates the case when S is a backup vertex cover and a sliding edge is attacked.

such that v_j has a guard. Note that $j > k$. Let $r \in [k]$ be such that $(v_r, u_p) \in E(G)$.

- The guard on u_p moves to v_q along the structural edge that was attacked;
- the guard on v_r moves to u_p along a structural edge;
- the guard on the universal vertex moves to v_r along a supplier edge; and
- the guard on v_j moves to \star along a supplier edge.

Note that this new configuration of guards corresponds to a red vertex cover (c.f. Figure 5).

Case 6. \mathcal{S} is a red vertex cover and e is a sliding edge.

Let $i \in [b]$ and suppose $e = (u_i, w)$ for some $w \in C_i$. Let $r \in [k]$ be such that $(v_r, u_i) \in E(G)$. Let $j > k$ such that v_j has a guard. Then we have the following sequence of moves.

- the guard on u_i moves to w along the sliding edge that was attacked;
- the guard on v_r moves to u_i along a structural edge;
- the guard on the universal vertex moves to v_r along a supplier edge; and
- the guard on v_j moves to \star along a supplier edge.

Now suppose $e = (\star, w)$ for some $w \in D$. Let $j > k$ such that v_j has a guard.

- the guard on \star moves to w along the sliding edge that was attacked and
- the guard on v_j moves to \star along a supplier edge.

In both cases, the new configuration of the guards corresponds to a dependent vertex cover.

Case 7. \mathcal{S} is a red vertex cover and e is a supplier edge.


Let $e = (v_i, \star)$. If $i \leq k$, the guards on v_i and \star exchange positions. If $i > k$ and v_i has a guard, the guard on v_i and \star exchange positions. If $i > k$ and v_i does not have a guard, let $j > k$ and $j \neq i$ be such that v_j has a guard. We have the guard on the universal vertex move to v_i via the supplier edge that was attacked. The guard on v_j then moves to \star along a supplier edge, leading to another red vertex cover.

Case 8. \mathcal{S} is a red vertex cover and e is a bridge edge.


Let $j > k$ be such that v_j has a guard. The guard on \star moves to \dagger along the attacked bridge edge. The guard on v_j moves to \star along a supplier edge and the resulting configuration is a backup vertex cover.

Case 9. \mathcal{S} is a dependent vertex cover and e is a structural edge.

Suppose $w \in C_j$ is such that w has a guard. Suppose $e = (v_q, u_j)$. If $q < k$, guards on v_q and u_j exchange and we have the same dependent vertex cover. If $q > k$, guard on u_j moves to v_q along the attacked structural edge and guard on w moves to u_j along a sliding edge. Thus we have a red vertex cover.

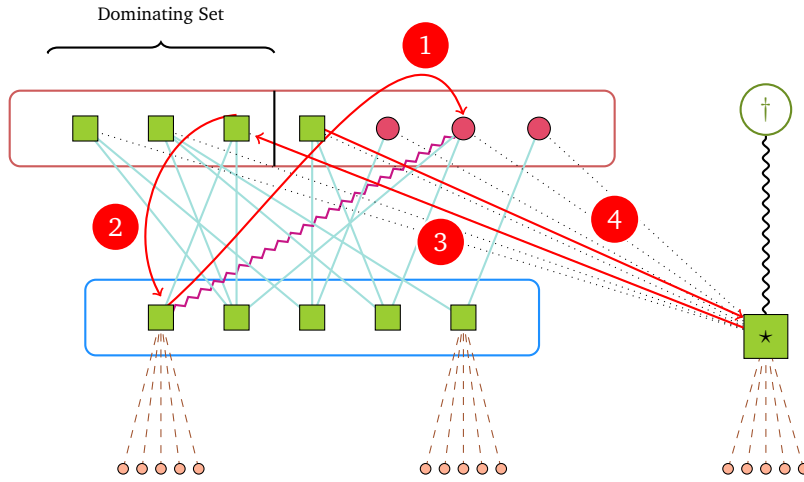

(a) This figure demonstrates a defense for when S is a red vertex cover and a structural edge is attacked.

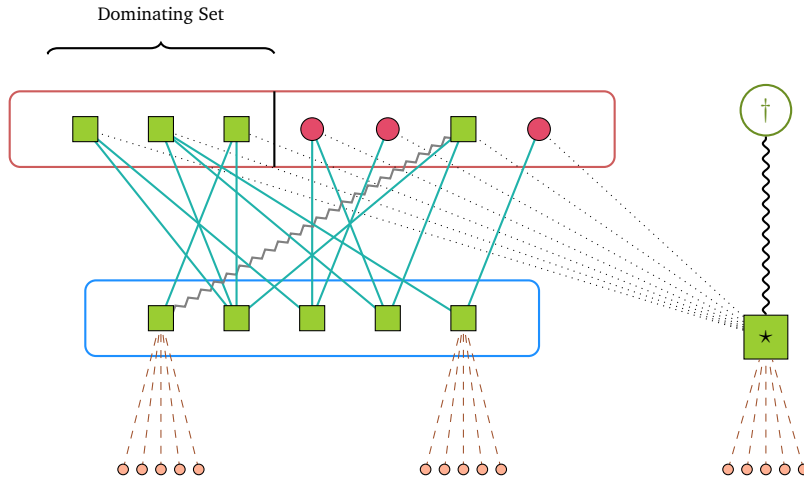

(b) This figure demonstrates the positions of the guards after the defence in Figure 5a is executed.

■ **Figure 5** This figure demonstrates the case when S is a red vertex cover and a structural edge is attacked.

Let $e = (v_q, u_p)$ for some $p \neq j$. If $q \leq k$, then the guards on v_q and u_p exchange positions and we have the same dependent vertex cover. If $q > k$, let $r \in [k]$ be such that $(v_r, u_p) \in E(G)$. If $(v_r, u_j) \in E(G)$, we perform the following sequence of moves:

- The guard on u_p moves to v_q along the structural edge that was attacked;
- the guard on v_r moves to u_p along a structural edge;
- the guard on u_j moves to v_r along a structural edge; and
- the guard on w moves to u_j along a sliding edge.

Note that this new configuration of guards corresponds to a red vertex cover.

If $(v_r, u_j) \notin E(G)$, there exists $s \in [k]$ such that $(v_r, u_s) \in E(G)$. We perform the following sequence of moves:

- The guard on u_p moves to v_q along the structural edge that was attacked;
- the guard on v_r moves to u_p along a structural edge;
- the guard on \star moves to v_r along a supplier edge;
- the guard on v_s moves to \star along a supplier edge;
- the guard on u_j moves to v_s along a structural edge; and
- the guard on w moves to u_j along a sliding edge.

Note that this new configuration of guards corresponds to a red vertex cover.

Suppose $w \in D$ is such that w has a guard. Let $e = (v_q, u_p)$. If $q \leq k$, then the guards on v_q and u_p exchange positions and we have the same dependent vertex cover. If $q > k$, let $r \in [k]$ be such that $(v_r, u_p) \in E(G)$. We perform the following sequence of moves:

- The guard on u_p moves to v_q along the structural edge that was attacked;
- the guard on v_r moves to u_p along a structural edge;
- the guard on \star moves to v_r along a supplier edge; and
- the guard on w moves to \star along a sliding edge.

Note that this new configuration of guards corresponds to a red vertex cover.

Case 10. \mathcal{S} is a dependent vertex cover and e is a sliding edge.

Let $w \in C_j$ be such that w has a guard. Suppose $e = (u_j, w)$ is the sliding edge which was attacked, then the guards exchange their positions and we have the same dependent vertex cover. Suppose $e = (u_j, z)$ for some $z \neq w$ is the sliding edge which was attacked, then the guard on u_j moves to z to defend the attack and the guard from w moves to u_j , leading to a different dependent vertex cover. Let $i \in [b]$ and suppose $e = (u_i, z)$ for some $z \in C_i$. Let $q \in [k]$ be such that $(v_q, u_i) \in E(G)$ and $r \in [k]$ such that $(v_r, u_j) \in E(G)$. If $r \neq q$, we perform the following sequence of moves:

- the guard on u_i moves to z along the sliding edge that was attacked;
- the guard on v_q moves to u_i along a structural edge;

- the guard on the universal vertex moves to v_q along a supplier edge;
- the guard on v_r moves to \star along a supplier edge;
- the guard on u_j moves to v_r along a structural edge; and
- the guard on w moves to u_j along a sliding edge.

Note that the new configuration corresponds to a dependent vertex cover (c.f. Figure 6).

If u_i and u_j are dominated by a common vertex in G , that is, there exists $q \in [k]$ be such that $(v_q, u_i) \in E(G)$ and $(v_q, u_j) \in E(G)$, then we perform the following sequence of moves:

- the guard on u_i moves to z along the sliding edge that was attacked;
- the guard on v_q moves to u_i along a structural edge;
- the guard on u_j moves to v_q along another structural edge;
- the guard on w moves to u_j .

The new configuration corresponds to a dependent vertex cover.

Let $w \in D$ be such that w has a guard. Suppose $e = (\star, w)$ is the sliding edge which was attacked, then the guards exchange their positions and we have the same dependent vertex cover. Suppose $e = (\star, z)$ for some $z \neq w$ is the sliding edge which was attacked, then the guard on \star moves to z to defend the attack and the guard from w moves to \star , leading to a different dependent vertex cover. Let $i \in [b]$ and suppose $e = (u_i, z)$ for some $z \in C_i$. Let $q \in [k]$ be such that $(v_q, u_i) \in E(G)$. We perform the following sequence of moves:

- the guard on u_i moves to z along the sliding edge that was attacked;
- the guard on v_q moves to u_i along a structural edge;
- the guard on the universal vertex moves to v_q along a supplier edge; and
- the guard on w moves to \star along a sliding edge.

Note that the new configuration corresponds to a dependent vertex cover.

Case 11. \mathcal{S} is a dependent vertex cover and e is a supplier edge.


Let $w \in C_j$ be such that w has a guard. Let $e = (v_i, \star)$. If $i \leq k$, the guards on v_i and \star exchange positions. Suppose $i > k$, there exists $q \in [k]$ such that $(v_q, u_j) \in E(G)$. We have the following sequence of moves:

- The guard on the universal vertex moves to v_i via the supplier edge that was attacked.
- The guard on v_q moves to \star along a supplier edge;
- The guard on u_j moves to v_q along a structural edge; and
- The guard on w moves to u_j along a sliding edge.


Note that the resulting configuration is a red vertex cover.

Let $w \in D$ be such that w has a guard. Let $e = (v_i, \star)$. If $i \leq k$, the guards on v_i and \star exchange positions. Let $i > k$. We now perform the following sequence of moves:

- The guard on \star moves to v_i along the attacked supplier edge; and

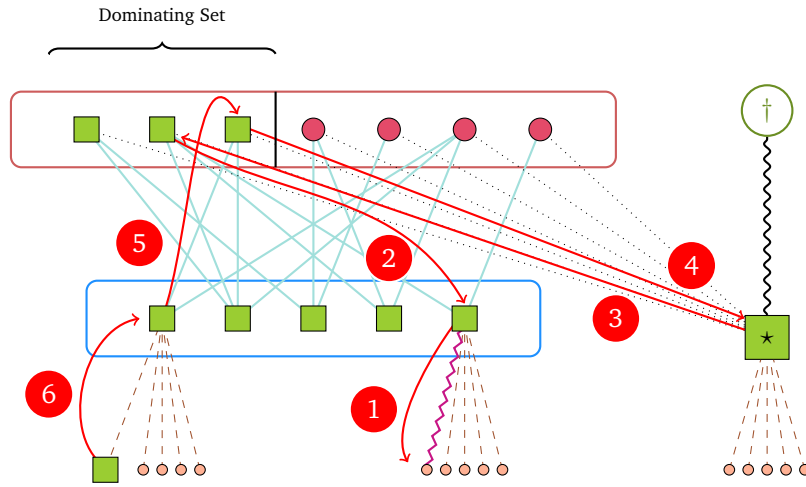

(a) This figure demonstrates a defense for when S is a dependent vertex cover and a sliding edge is attacked.

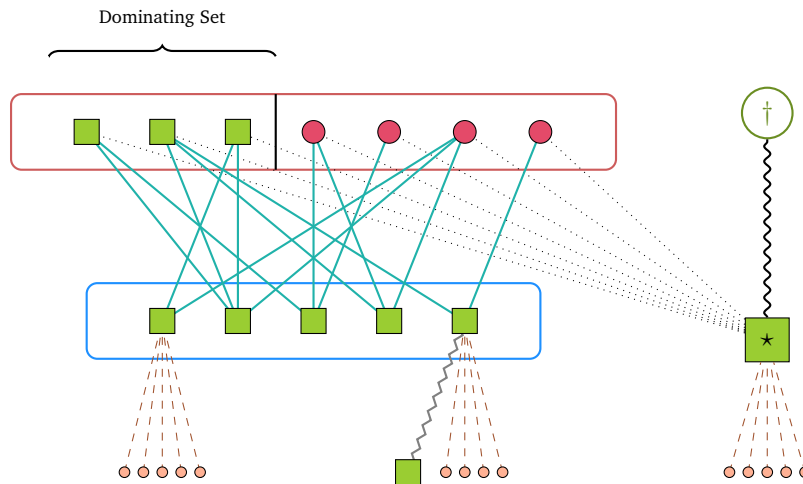

(b) This figure demonstrates the positions of the guards after the defence in Figure 6a is executed.

■ **Figure 6** This figure demonstrates the case when S is a dependent vertex cover and a sliding edge is attacked.

- The guard on w moves to \star along a sliding edge.

Note that the resulting configuration is a red vertex cover.

Case 12. \mathcal{S} is a dependent vertex cover and e is a bridge edge.

Let $w \in C_j$ be such that w has a guard. There exists $q \in [k]$ such that $(v_q, u_j) \in E(G)$. We now perform the following sequence of moves:

- The guard on \star moves to \dagger along the attacked bridge edge;
- The guard on v_q moves to \star along a supplier edge;
- The guard on u_j moves to v_q along a structural edge; and
- The guard on w moves to u_j along a sliding edge.

Note that the resulting configuration is a backup vertex cover.

Let $w \in D$ be such that w has a guard. The guard on \star moves to \dagger along an attacked bridge edge and the guard on w moves to \star along a sliding edge. The resulting configuration is a backup vertex cover. ◀

Having argued that any attack on a nice vertex cover can be defended in such a way that the resulting configuration is also a nice vertex cover, we have completed the argument in the forward direction as well. ◀

Observe that the instance that we construct in the proof of [Lemma 6](#) is both bipartite and has diameter at most six.

It is also easily checked that all the vertex covers used by the defense in the forward direction induced connected subgraphs, since every vertex cover contains all the blue vertices, a dominating set for the blue vertices, and a universal vertex that is adjacent to all the vertices in the dominating set; and any other vertex is adjacent to one of the blue vertices (or the universal vertex). Therefore, the reduction above also serves to demonstrate the hardness of ETERNAL CONNECTED VERTEX COVER on bipartite graphs — note that the argument for the reverse direction is exactly the same since every connected vertex cover is also a vertex cover.

Overall, [Lemma 6](#) along with [Proposition 5](#) and the remarks above lead to our main result.

► **Theorem 1.** *Both the ETERNAL VERTEX COVER and ETERNAL CONNECTED VERTEX COVER problems are NP-hard and do not admit a polynomial compression parameterized by the number of guards (unless $\text{NP} \subseteq \text{coNP}/\text{poly}$), even on bipartite graphs of diameter six.*

4 A Polynomial-time Algorithm for Co-bipartite Graphs

In this section, we focus on a proof of Theorem 2.

► **Theorem 2.** *There is a polynomial-time algorithm for ETERNAL VERTEX COVER on the class of cobipartite graphs.*

To the best of our knowledge, this result is not subsumed by any of the known polynomial-time algorithms for special classes of graphs. In particular, it is easily checked that the class of cobipartite graphs is not contained in any of the following classes: chordal graphs, cactus graphs, and generalized trees³.

Let $G = (V = A \uplus B, E)$ be a cobipartite graph with bipartition A, B . Recall that $G[A]$ and $G[B]$ are cliques. Consider that A has p vertices $\{a_1, a_2, \dots, a_p\}$ and B has q vertices $\{b_1, b_2, \dots, b_q\}$. Without loss of generality we assume that $p \leq q$. Without loss of generality, we assume that there are no global vertices in A . (If there is some global vertex in A , simply shift that vertex to B). We also assume throughout that $p \geq 1$ — if $p = 0$ then G is a clique and $\text{evc}(G) = \text{mvc}(G) = |V(G)| - 1$.

Since the cliques require $p - 1$ and $q - 1$ vertices respectively for a vertex cover, we have $\text{mvc}(G) \geq p + q - 2$. Since $p = |A| \geq 1$, there exists a (non-global) vertex a_i on the A side and therefore it has at least one non-neighbor (say b_j) and thus we have a vertex cover of size $p + q - 2$ given by $V(G) \setminus \{a_i, b_j\}$. Therefore, $\text{mvc}(G) = p + q - 2$. We make a note of this fact in the following claim.

▷ Claim 10. For any co-bipartite graph G with bipartitions A and B with all the notations as described above, if there are no global vertices in A and $|A| \geq 1$, $\text{mvc}(G) = p + q - 2$.

Consider a configuration where all the vertices have a guard except one. This will always be a vertex cover because only one vertex is uncovered, no two endpoints of any edge can be uncovered. Now if any edge not adjacent to this particular vertex is attacked, the guards can exchange places. If any edge adjacent to this vertex is attacked, the guard on the other endpoint of the edge will cross the edge and come to this vertex. So, we are again left with a situation where all the vertices have a guard except one. Therefore, if the number of guards is one less than the number of vertices i.e. $p + q - 1$, the defender always has a winning strategy. Therefore, $\text{evc}(G) \leq p + q - 1$.

Thus, for all co-bipartite graphs we have:

$$\text{mvc}(G) = p + q - 2 \text{ and } p + q - 2 \leq \text{evc}(G) \leq p + q - 1.$$

We will now derive the characterization of co-bipartite graphs which have $\text{evc}(G) = \text{mvc}(G) = p + q - 2$.

Consider any non-global vertex on the A side (or B side), then its non-neighbour must exist on the B side (respectively A side) because $G[A]$ (respectively $G[B]$) is a clique. For any vertex a_i , if $a_i b_j \notin E(G)$, then b_j is said to be a *friend* of a_i . We will also use the phrases: “ a_i is a friend of b_j ”, or “ a_i and b_j are friends” to mean that a_i and b_j are non-neighbours (and thus belong to different sides of the bipartition). Note that a vertex is non-global if and only if it has at least one friend.

³ The notion of generalized trees in the context of eternal vertex cover was considered by [Araki et al. \(2015\)](#). Such graphs are characterized by the following property: every block is an elementary bipartite graph or a clique having at most two cut-vertices in it. Note that a cobipartite graph with four vertices in both parts with two disjoint edges across the parts is not a generalized tree.

Denote $A \setminus \{a_i\} \cup B \setminus \{b_j\}$ by S_{ij} . Note that S_{ij} will be a vertex cover if and only if a_i and b_j are friends. We now argue a series of claims that account for all possible scenarios for co-bipartite graphs. A summary of the cases can be found in Figures 7 and 8.

► **Lemma 11.** *For any co-bipartite graph G with all the notations as described above (with no global vertices on the A side) and $|A| \geq 3$, we have $\text{evc}(G) \neq \text{mvc}(G)$ if and only if there is exactly one non-global vertex on the B side.*

Proof. Using Claim 10, we have $\text{mvc}(G) = p + q - 2$. We will show that except when B side has exactly one non-global vertex, $p + q - 2$ guards are sufficient to defend any sequence of attacks and when B side has exactly one non-global vertex, we show that the attacker has a winning strategy no matter where we place the $p + q - 2$ guards.

Note that since $G[A]$ and $G[B]$ are cliques, any vertex cover of size $p + q - 2$ will have $p - 1$ vertices from A and $q - 1$ vertices from B . In each of the following cases, we start with an arbitrary vertex cover S_{ij} where a_i and b_j are friends. For each type of attack, we show that it is possible to reconfigure the guards in such a way that at least one guard moves along the attacked edge and the resulting configuration is again a vertex cover.

Case 1: There is no edge between A and B .

Let S_{ij} be the initial vertex cover. If any edge which is not incident to either a_i or b_j is attacked, the guards on its endpoints exchange positions along the attacked edge to take care of the attack and we again have the same vertex cover.

The following types of edges can be attacked which are incident to a_i or b_j .

1. Some edge $a_i a_r$ on the A side is attacked:

The guard on a_r moves to a_i along the attacked edge. The resulting vertex cover is S_{rj} . We know that a_r is a friend of b_j because there is no edge between A and B .

2. Some edge $b_s b_j$ on the B side is attacked:

The guard on b_s moves to b_j along the attacked edge. The resulting vertex cover is S_{is} . We know that a_i is a friend of b_s because there is no edge between A and B .

Thus $p + q - 2$ guards are sufficient to defend any attack.

Case 2: There is just one edge between A and B .


Let the edge between A and B be $a_1 b_1$. We ensure that there will always be a guard on both a_1 and b_1 . Let S_{ij} be the initial vertex cover where $i, j \neq 1$. If any edge which is not incident to either a_i or b_j is attacked, the guards on its endpoints exchange positions along the attacked edge to take care of the attack and we again have the same vertex cover.

The following types of edges can be attacked which are incident to a_i or b_j .


1. Some edge $a_i a_r$ with $r \neq 1$ on the A side is attacked:

The guard on a_r moves to a_i along the attacked edge. The resulting vertex cover is S_{rj} . We know that a_r is a friend of b_j because $r, j \neq 1$.


2. Some edge $a_1 a_i$ is attacked:

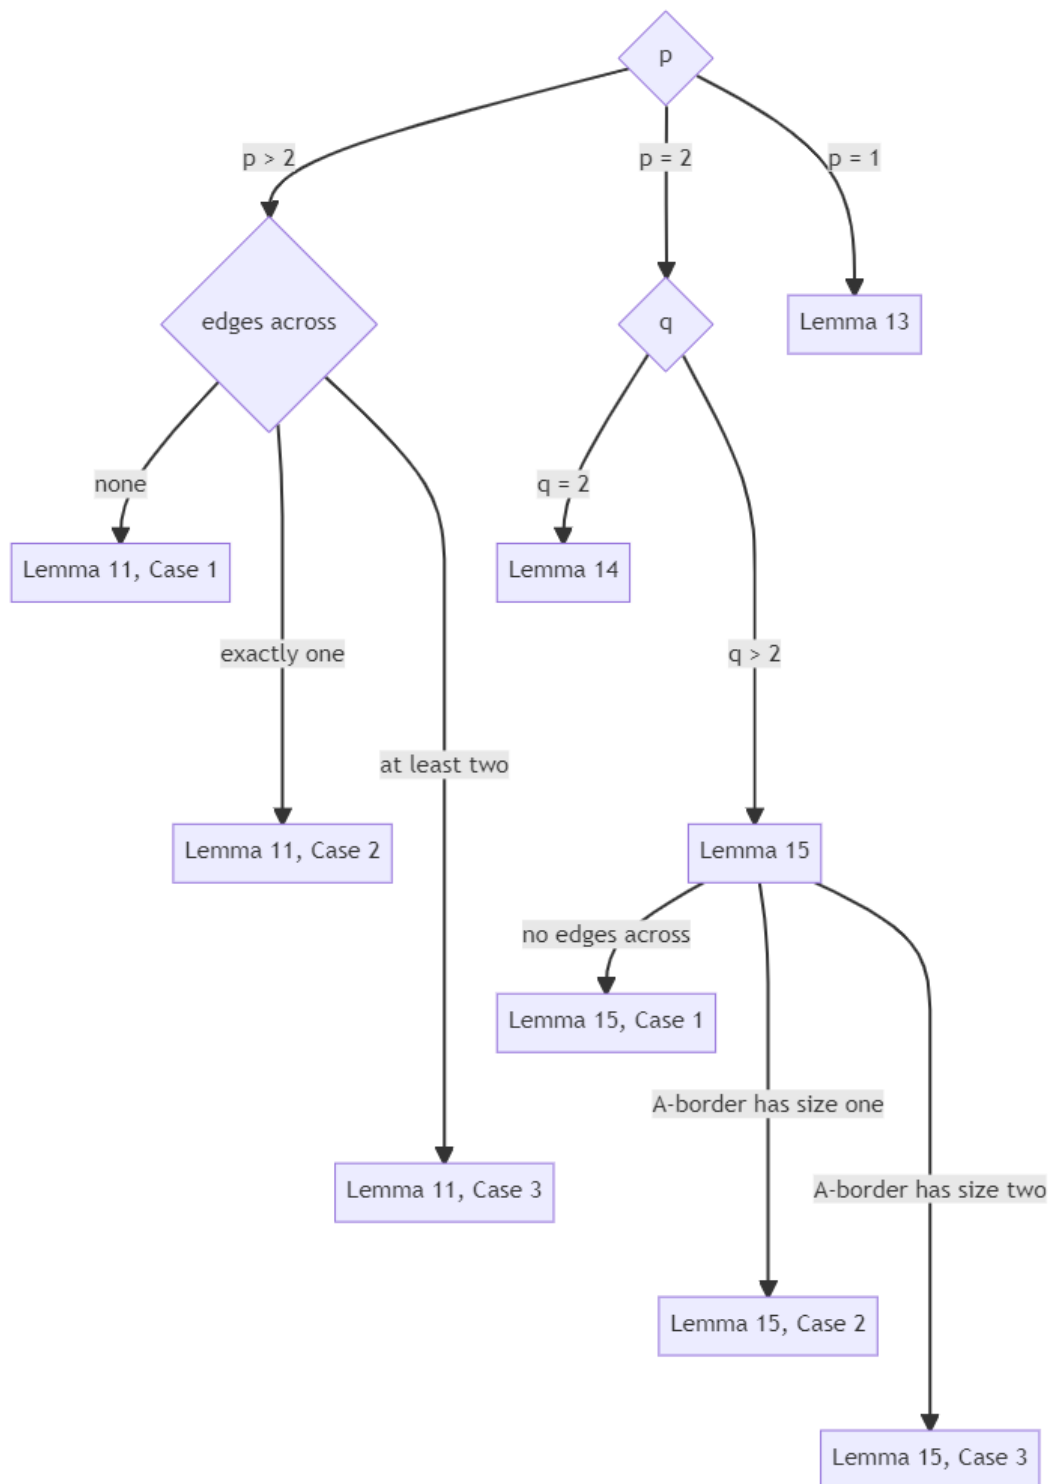


■ **Figure 7** An overview of the proof of Theorem 2.

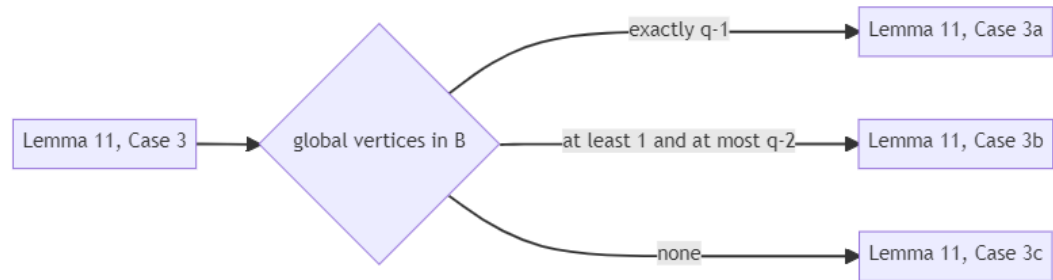

(a)

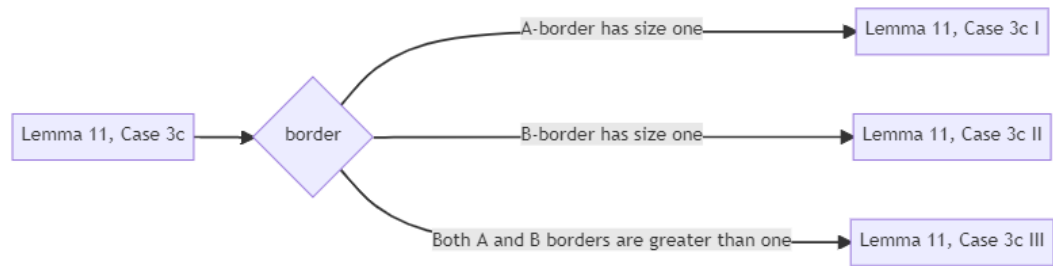

(b)

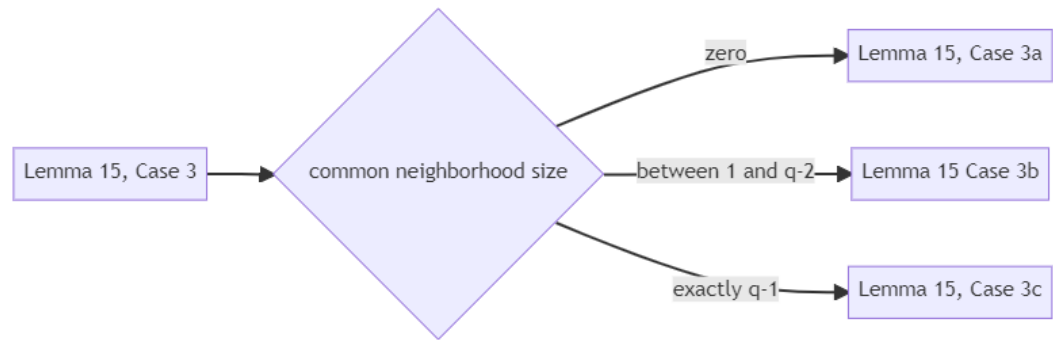

(c)

■ **Figure 8** An overview of the cases in the proof of Theorem 2 (continued from Figure 7).

The guard on a_1 moves to a_i and a guard on a_r moves to a_1 for some $r \neq 1, i$. The resulting vertex cover is S_{rj} where a_r is a friend of b_j because $r, j \neq 1$ (c.f. Figure 9).

3. Some edge $b_s b_j$ on the B side is attacked:

The guard on b_s moves to b_j along the attacked edge. The resulting vertex cover is S_{is} . We know that a_i is a friend of b_s because $s, i \neq 1$.

4. Some edge $b_1 b_j$ is attacked:

The guard on b_1 moves to b_j along the attacked edge and a guard on b_s moves to b_1 for some $s \neq 1, j$. The resulting vertex cover is S_{is} where a_i is a friend of b_s because $i, s \neq 1$.

Thus $p + q - 2$ guards are sufficient to defend any attack.

Case 3: There are at least two edges between A and B.

Case a: There is exactly one vertex on the B side which is not global.

Let b_1 be the vertex on the B side which is not global. All the other vertices on the B side are global. Since by assumption there is no global vertex on A side, b_1 is a friend of all the vertices on A side and any vertex on A side does not have any other friend. That is why, any arbitrary vertex cover of size $p + q - 2$ is of the form S_{i1} for some $i \in [1, p]$. Let all the vertices of S_{i1} be occupied by guards. We show that the attacker has a winning strategy.

Attack $b_2 b_1$. The guard on b_2 is forced to move to b_1 along the attacked edge and cannot move any further. So there must be a guard on b_1 . If some guard from the A side moves to the B side, there will be $p - 2$ guards on the A side and thus some edge on the A side will be vulnerable. If some guard on the B side moves to the A side, there will be $q - 2$ guards on the B side and thus some edge on the B side will be vulnerable. If there are $p - 1$ guards on the A side and $q - 1$ guards on the B side after the attack, then some vertex a_r (r may be equal to i) must be empty and some vertex b_s where $s \neq 1$ must be empty. So now the edge $a_r b_s$ is vulnerable. (This edge exists because b_s is a global vertex). Thus the defender is not able to defend this attack. Thus $p + q - 2$ guards are not sufficient and $\text{evc}(G) \neq \text{mvc}(G)$ (c.f. Figure 10).

Case b: There is at least one and at most $q - 2$ global vertices on the B side.


Let $B = B_1 \cup B_2$ where $B_1 = \{b_1, b_2, \dots, b_k\}$ is the set of non-global vertices and $B_2 = \{b_{k+1}, b_{k+2}, \dots, b_q\}$ is the set of global vertices. Note that $k \geq 2$ and $q \geq k + 1$. Thus each vertex in A has at least one friend in B_1 and each vertex in B_1 has at least one friend in A. Hence, any arbitrary vertex cover of size $p + q - 2$ will be of the form S_{ij} where $i \in [1, p]$ and $j \in [1, k]$. We show how to defend any attack when guards are occupying a vertex cover of this type.

Suppose some edge whose both endpoints have guards on them is attacked, then the guards exchange positions and we again have the same vertex cover.


The following types of edges can be attacked which are incident to a_i or b_j .

1. Some edge $a_r a_i$ is attacked:


The guard on a_r moves to a_i along the attacked edge. If b_j is a friend of a_r , we are done and we have a new vertex cover S_{rj} . If not, then there exists $s \in [1, k]$ such that $s \neq j$ and

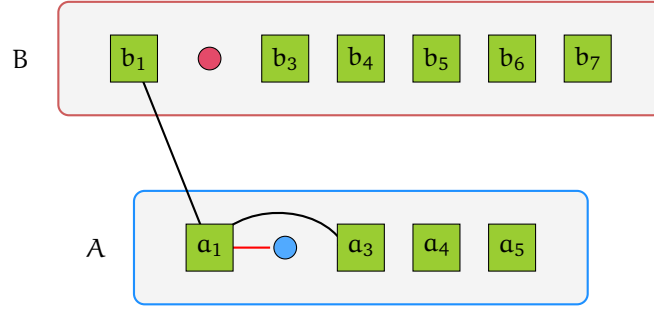

(a) This figure demonstrates the case when there is only one edge between A and B and an edge on the A side (say $a_1 a_2$) is attacked.

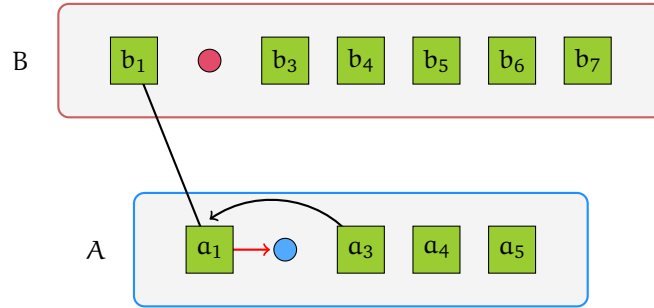


(b) This figure demonstrates the defense for the attack in Figure 9a. The guard on a_3 moves to a_1 and the guard on a_1 moves to a_2 .

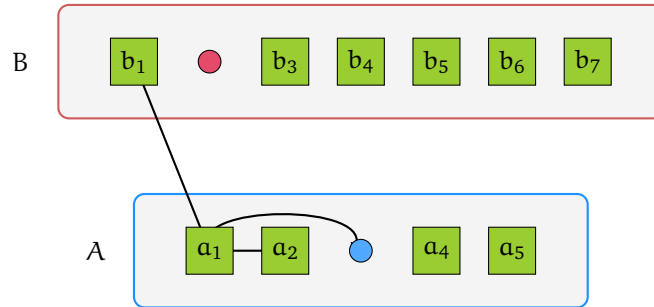


(c) This figure demonstrates the position of guards after executing the defense in Figure 9b.


■ **Figure 9** This figure demonstrates Case 2 from Lemma 11.

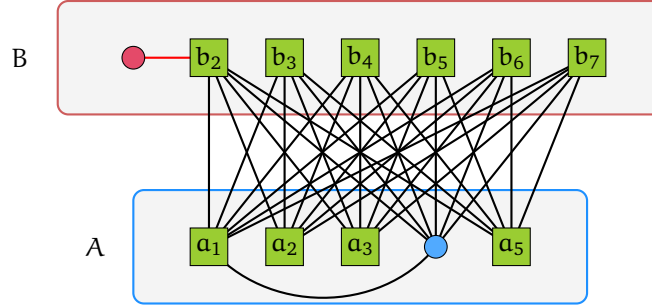

(a) This figure demonstrates the case when there are at least two edges between A and B, exactly 1 non-global vertex and an edge on the B side (say b_1b_2) is attacked.

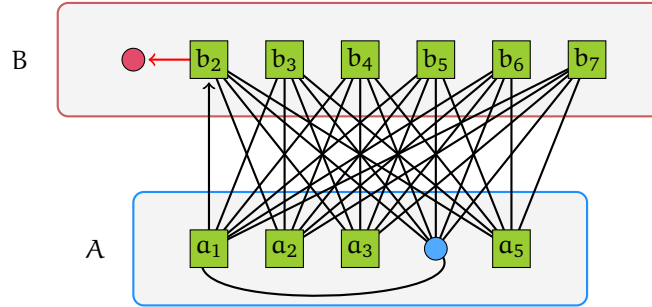

(b) This figure demonstrates the defense for the attack in Figure 10a. The guard on b_2 moves to b_1 , and the guard on a_1 moves to a_2 .

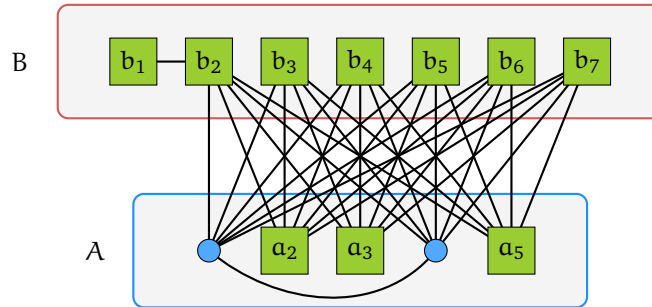

(c) This figure demonstrates the position of guards after executing the defense in Figure 10b. The edge a_1a_4 is now vulnerable.

■ **Figure 10** This figure demonstrates Case 3a from Lemma 11.

b_s is a friend of a_r . In this case, the guard on b_s moves to b_j . The resulting vertex cover will be S_{rs} .

2. Some edge $b_s b_j$ is attacked where $s \leq k$:

The guard on b_s moves to b_j along the attacked edge. If a_i is a friend of b_s , we are done and we have a new vertex cover S_{is} . If not, then there exists $r \in [1, p]$ such that $r \neq i$ and a_r is a friend of b_s . In this case, the guard on a_r moves to a_i . The resulting vertex cover will be S_{rs} .

3. Some edge $b_s b_j$ is attacked where $s > k$:

The guard on b_s moves to b_j along the attacked edge. If there exists $t \in [1, k]$ and $t \neq j$ such that a_i is a friend of b_t , the guard on b_t moves to b_s . The resulting vertex cover will be S_{it} . If not, then consider any $t \in [1, k]$ and $t \neq j$. There exists $r \in [1, p]$ and $r \neq i$ such that a_r is a friend of b_t . The guard on b_t moves to b_s and the guard on a_r moves to a_i . The resulting vertex cover will be S_{rt} .

4. Some edge $a_i b_s$ is attacked where $s \leq k$:

The guard on b_s moves to a_i along the attacked edge. There exists $r \in [1, p]$ such that a_r is a friend of b_s and $r \neq i$ (because a_i is a neighbour of b_s and b_s is non-global). Now, the guard on b_{k+1} moves to b_s and the guard on a_r moves to b_{k+1} . The resulting vertex cover will be S_{rs} .

5. Some edge $a_i b_s$ is attacked where $s > k$:

The guard on b_s moves to a_i along the attacked edge. If there exists $r \in [1, p]$ and $r \neq i$ such that a_r is a friend of b_j , the guard on a_r moves to b_s . The resulting vertex cover will be S_{rj} . If not, consider any $r \neq i$ and $r \in [1, p]$. There exists $t \in [1, k]$ and $t \neq j$ such that b_t is a friend of a_r . The guard on b_t moves to b_j and the guard on a_r moves to b_s . The resulting vertex cover will be S_{rt} .

6. Some edge $a_r b_j$ is attacked:


The guard on a_r moves to b_j along the attacked edge. Since $k \geq 2$, there exists $t \neq j$ such that b_t is also non-global. If b_t is a friend of a_r , the guard on b_{k+1} moves to a_i , the guard on b_t moves to b_{k+1} . The resulting vertex cover is S_{rt} . If not, and if b_t is a friend of a_i , the guard on b_t moves to a_r . The resulting vertex cover is S_{rt} . Otherwise $\exists s \in [1, p]$ such that $s \neq i, r$ and a_s is a friend of b_t . In this case, the guard on b_t moves to a_r and the guard on a_s moves to a_i . The resulting vertex cover is S_{st} .

Therefore, in each case we can defend any attack using $p + q - 2$ guards and thus $\text{evc}(G) = \text{mvc}(G) = p + q - 2$ (c.f. [Figure 11](#)).


Case c: There are no global vertices on the B side.

Case I: Only one vertex on the A side has neighbours on the B side.


Let a_1 be the vertex on the A side which has neighbours on the B side. Since there are at least two edges between A and B, a_1 has at least two neighbours on the B side, let $\{b_1, b_2, \dots, b_k\}$ be the neighbours of a_1 on the B side. Note that $k \geq 2$ and $k < q$ (which is because a_1 is not global). Consider a vertex cover of size $p + q - 2$ given by S_{ij} where $i \neq 1$. We show that every attack can be defended and we can again get a vertex cover of the same type, i.e., we ensure that a_1 will always have a guard. Suppose some edge whose both endpoints have

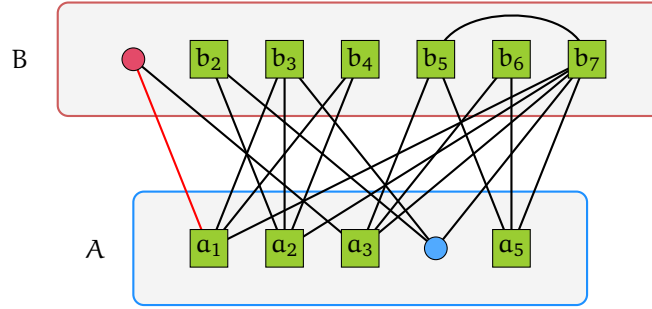

(a) This figure demonstrates the case when there are at least two edges between A and B, between 2 and 6 non-global vertices on the B side and an edge between the A side and the B side (say $a_1 b_1$) is attacked.

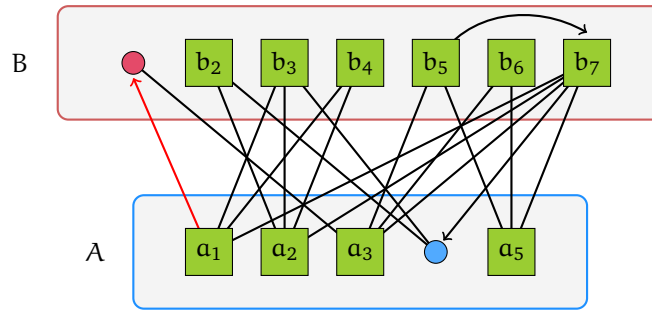

(b) This figure demonstrates the defense for the attack in Figure 11a. The guard on a_1 moves to b_1 , the guard on b_7 moves to a_4 and the guard on b_5 moves to b_7 .

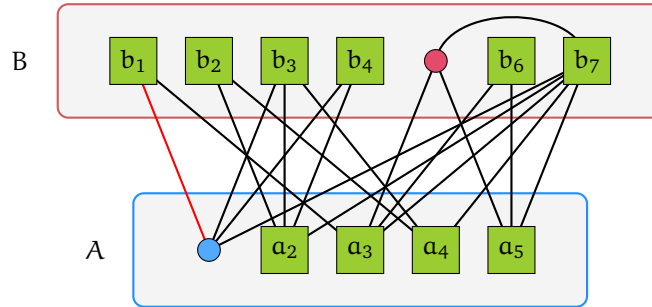

(c) This figure demonstrates the position of guards after executing the defense in Figure 11b.

■ **Figure 11** This figure demonstrates Case 3b from Lemma 11.

guards on them is attacked, then the guards exchange positions and we again have the same vertex cover. The following types of edges can be attacked which are incident to a_i or b_j .

1. **Some edge $a_i a_r$ is attacked where $r \neq 1$:**

The guard on a_r moves to a_i along the attacked edge. The new vertex cover will be S_{rj} .

2. **Some edge $a_1 a_i$ is attacked:**

The guard on a_1 moves to a_i along the attacked edge and the guard on some a_r (where $r \neq 1, i$) moves to a_1 . The new vertex cover will be S_{rj} .

3. **Some edge $b_j b_s$ is attacked:**

The guard on b_s moves to b_j along the attacked edge. The new vertex cover will be S_{is} .

4. **Some edge $a_1 b_j$ is attacked (for $j \leq k$):**

The guard on a_1 moves to b_j along the attacked edge. The guard on some b_s for $s < k, s \neq j$ moves to a_1 . The new vertex cover will be S_{is} .

Thus $p+q-2$ guards are sufficient to defend any attack on G and $evc(G) = mvc(G) = p+q-2$ (c.f. Figure 12).

Case II: Only one vertex on the B side has neighbours on the A side.

Let b_1 be the vertex on the B side which has neighbours on the A side. Since there are at least two edges between A and B, b_1 has at least two neighbours on the B side, let $\{a_1, a_2, \dots, a_k\}$ be the neighbours of b_1 on the A side. Note that $k \geq 2$ and $k < p$ (which is because b_1 is not global). Consider a vertex cover of size $p+q-2$ given by S_{ij} where $j \neq 1$. It can be shown every attack on G can be defended and we can again get a vertex cover of the same type, i.e., we can always ensure that b_1 will always have a guard and maintain a vertex cover of size $p+q-2$ by using a strategy symmetric to the **Case I** above. Here, $evc(G) = mvc(G) = p+q-2$.

Case III: Both sides have at least two vertices which have neighbours on the other side.

Since there are no global vertices, every vertex has at least one friend. Consider an arbitrary vertex cover S_{ij} of size $p+q-2$ where a_i is a friend of b_j . We show that any attack can be defended and we again get a vertex cover.


Suppose some edge whose both endpoints have guards on them is attacked, then the guards exchange positions and we again have the same vertex cover. The following types of edges can be attacked which are incident to a_i or b_j .

1. **Some edge $a_r a_i$ is attacked:**


The guard on a_i moves to a_r along the attacked edge. If a_r is a friend of b_j , we are done and we have a vertex cover S_{rj} . If not, then there exists some $s \in [1, q]$ such that b_s is a friend of a_r . The guard on b_s moves to b_j and we have the vertex cover S_{rs} .

2. **Some edge $b_j b_s$ is attacked:**


The guard on b_s moves to b_j . If a_i is a friend of b_s , we are done and we have a vertex cover S_{is} . If not, then there exists some $r \in [1, p]$ such that a_r is a friend of b_s . The guard on a_r moves to a_i and we have the vertex cover S_{rs} .

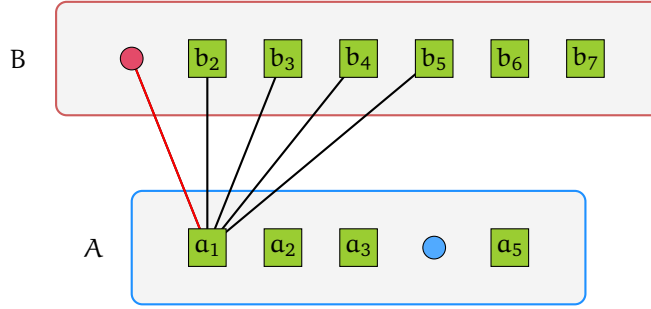

(a) This figure demonstrates the case when there are at least two edges between A and B, no global vertices on the B side and an edge between the A side and the B side (say a_1b_1) is attacked.

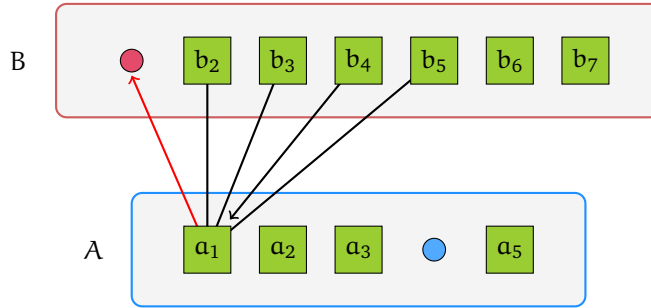

(b) This figure demonstrates the defense for the attack in Figure 12a. The guard on a_1 moves to b_1 and the guard on b_4 moves to a_1 .

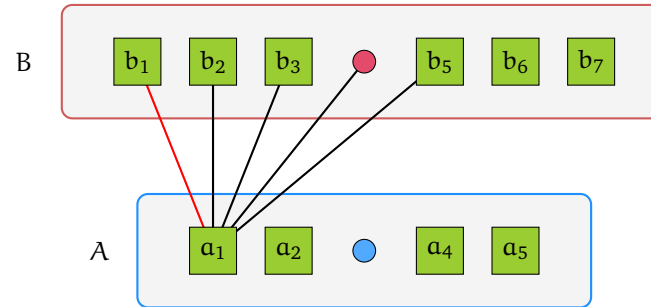

(c) This figure demonstrates the position of guards after executing the defense in Figure 12b.

■ **Figure 12** This figure demonstrates Case 3cI from Lemma 11.

3. Some edge $a_i b_s$ is attacked ($s \neq j$):

The guard on b_s moves to a_i . Since a_i is not the only vertex on the A side which has a neighbour on the B side, there exists another vertex a_r with ($r \neq i$) which has a neighbour on the B side.

If there exists an edge $a_r b_s$, the guard from a_r moves to b_s . If a_r is a friend of b_j , we are done and we have a new vertex cover S_{rj} . If not, then there exists b_t with $t \neq s, j$ such that b_t is a friend of a_r . The guard on b_t moves to b_j and we have the new vertex cover S_{rt} .

If there does not exist an edge $a_r b_s$, then there exists some edge $a_r b_t$ for $t \neq s$. If $t = j$, i.e., there exists some edge $a_r b_j$, the guard on a_r moves to b_j and we have the vertex cover S_{rs} . If $t \neq j$, the guard on b_t moves to b_j , the guard on a_r moves to b_t and we have the vertex cover S_{rs} .

4. Some edge $a_r b_j$ is attacked ($r \neq i$):

We can show using an argument which is symmetric to the above one that $p + q - 2$ guards are able to defend the attack and again form a vertex cover.

Thus $p+q-2$ guards are sufficient to defend any attack on G and $\text{evc}(G) = \text{mvc}(G) = p+q-2$. Thus we have shown that except **Case 3a**, $\text{evc}(G) = \text{mvc}(G) = p + q - 2$ and in **Case 3a** $\text{evc}(G) = p + q - 1$ and $\text{mvc}(G) = p + q - 2$ which completes the proof of **Lemma 11**. ◀

Now we determine the value of $\text{evc}(G)$ for a co-bipartite graph G with all the notations as described above and $p \leq 3$.

► **Lemma 12.** *For a co-bipartite graph G with all the notations as described above and $p = 0$, we have $\text{evc}(G) = \text{mvc}(G) = p + q - 1$.*


Proof. If $p = 0$, then the graph is a clique with q vertices and thus $\text{evc}(G) = \text{mvc}(G) = q - 1 = p + q - 1$. ◀

► **Lemma 13.** *For a co-bipartite graph G with all the notations as described above and $p = 1$, $\text{evc}(G) = \text{mvc}(G) = p + q - 2$ if and only if a_1 has no neighbours on the B side.*


Proof. Since $q \geq p$ and $p = 1$, we have $q \geq 1$. If $q = 1$, then if $a_1 b_1 \in E(G)$, then a_1 will be a global vertex which is not allowed according to the convention. Therefore a_1 has no neighbours on the B side. Since there are no edges, no guards are required to protect G . Therefore $\text{evc}(G) = \text{mvc}(G) = 0 = p + q - 2$.

Now consider the case where $q > 1$. If a_1 has no neighbours on the B side, then $\text{evc}(G) = \text{mvc}(G) = q - 1 = p + q - 2$ because B is a clique of size q and A is an isolated vertex.


If a_1 has at least one neighbour on the other side, then we show that $p + q - 2 = q - 1$ guards are not sufficient to protect G . Let $\{b_1, b_2, \dots, b_k\}$ be the neighbours of a_1 on the B side where $1 \leq k < q$. A vertex cover of G of size $q - 1$ will be of the form S_{1j} where $j > k$. Now attack $a_1 b_1$. To defend this attack, the guard on b_1 is forced to move to a_1 . So there are only $q - 2$ guards on B to protect a clique of size q . Therefore some edge must be left vulnerable. Thus we have $\text{evc}(G) = p + q - 1 = q$ and $\text{evc}(G) \neq \text{mvc}(G)$. ◀

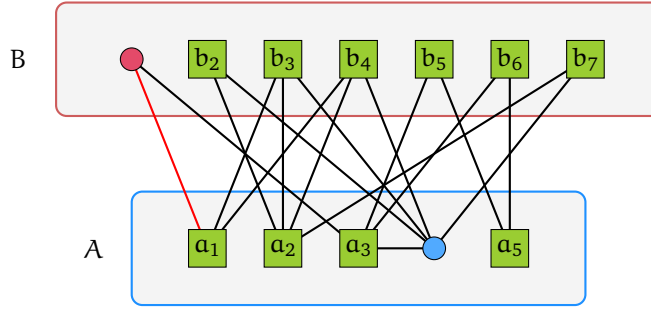

(a) This figure demonstrates the case when there are at least two edges between A and B, no global vertices on the B side, only one edge on the A side is connected to the B side and an edge between the A side and the B side (say $a_1 b_1$) is attacked.

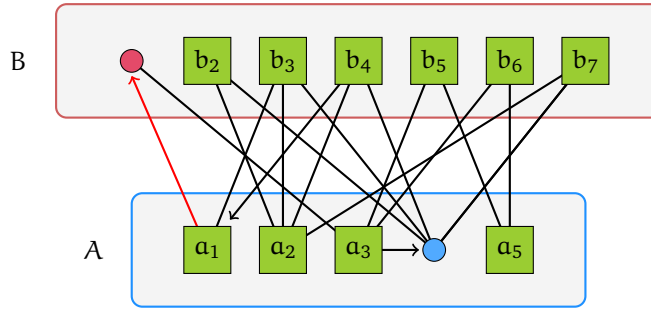

(b) This figure demonstrates the defense for the attack in Figure 13a. The guard on a_1 moves to b_1 , the guard on b_4 moves to a_1 and the guard on a_3 moves to a_4 .

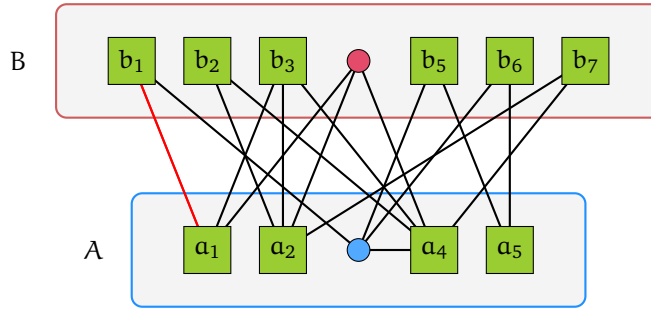

(c) This figure demonstrates the position of guards after executing the defense in Figure 13b.

■ **Figure 13** This figure demonstrates Case 3cIII from Lemma 11.

► **Lemma 14.** *For a co-bipartite graph G with all the notations as described above and $p = q = 2$, we have $\text{evc}(G) = \text{mvc}(G) = p + q - 2 = 2$ if and only if a_1 and a_2 each have one neighbour on the other side which is unique or a_1 and a_2 have no neighbour on the other side.*

Proof. Since $p = q = 2$ and no vertex on the A side is global according to the convention, we have the following possibilities:

1. a_1 and a_2 have no neighbour on the B side.
2. a_1 and a_2 have one neighbour each on the B side which is unique.
3. a_1 and a_2 have one common neighbour on the B side.
4. Exactly one of a_1 and a_2 has a neighbour on the B side.

Case 1: a_1 and a_2 have no neighbour on the B side.

Since we have two disconnected edges, i.e., two disjoint cliques of size 1, so we have $\text{evc}(G) = \text{mvc}(G) = 2 = p + q - 2$.

Case 2: a_1 and a_2 have one neighbour each on the B side which is unique.

Let b_1 be the neighbour of a_1 and b_2 be the neighbour of a_2 . The two vertex covers of size $p + q - 2$ are S_{12} and S_{21} . Without loss of generality we start with the vertex cover S_{12} and show that any attack can be defended.

If any edge with guards on both of its endpoints is attacked, the guards exchange positions and we again have the same vertex cover.

The following types of edges can be attacked which are incident to a_i or b_j .

1. **The edge a_1a_2 is attacked:**

The guard on a_2 moves to a_1 along the attacked edge and the guard on b_1 moves to b_2 and thus the resultant vertex cover is S_{21} .

2. **The edge b_1b_2 is attacked:**

The guard on b_1 moves to b_2 and the guard on a_2 moves to a_1 and the resultant vertex cover is S_{21} .


3. **The edge a_1b_1 is attacked:**

The guard on b_1 moves to a_1 and the guard on a_2 moves to b_2 . The resultant vertex cover is S_{21} .


4. **The edge a_2b_2 is attacked:**

The guard on a_2 moves to b_2 and the guard on b_1 moves to a_1 . The resultant vertex cover is S_{21} .


Thus we have $\text{evc}(G) = \text{mvc}(G) = 2$ (c.f. [Figure 14](#)).



(a) This figure demonstrates Case 2, Lemma 14 when the edge a_1b_1 is attacked.



(b) This figure shows the defense for the attack in Figure 14a. Here, the guard on b_1 moves to a_1 and the guard on a_2 moves to b_2 .



(c) This figure shows the state of the graph after the defense in figure 14b has been executed.

■ **Figure 14** A figure corresponding to Case 2 from Lemma 14.

Case 3: a_1 and a_2 have one common neighbour on the B side.

Let b_1 be the common neighbour of a_1 and a_2 . Since both a_1 and a_2 are non-global, we know that a_1 and a_2 are not adjacent with b_2 . Any vertex cover of size $p + q - 2$ will be of the form S_{i2} where $i \in \{1, 2\}$. Now attack b_1b_2 , the guard on b_1 is forced to move to b_2 . If the guard on a_{3-i} moves to b_1 , a_1a_2 will be unprotected, otherwise one of a_1b_1 and a_2b_1 will be unprotected.

Therefore, $p + q - 2$ guards are not sufficient and $\text{evc}(G) \neq \text{mvc}(G)$.

Case 4: Exactly one of a_1 and a_2 has a neighbour on the B side.

Let a_1 be the vertex which has a neighbour (say b_1) on the B side. The vertex covers of size 2 will be S_{12} , S_{21} and S_{22} . If we have S_{12} as the initial vertex cover, attack a_1b_1 . The guard on b_1 is forced to move to a_1 . The guard on a_2 cannot move anywhere and thus b_1b_2 is left unprotected. Similarly, if we have S_{21} as the initial vertex cover, attack a_1b_1 . The guard on a_1 is forced to move to b_1 . The guard on b_2 cannot move anywhere and thus a_1a_2 is left unprotected. If we have S_{22} as the initial vertex cover, attack a_1a_2 . The guard on a_1 is forced to move to a_2 and to maintain a vertex cover, the guard on b_1 is forced to remain in his position. So we have the vertex cover S_{12} . We have already shown that it is possible for the attacker to win from the vertex cover S_{12} .

Thus $p + q - 2$ guards are not sufficient to protect the graph and $\text{evc}(G) \neq \text{mvc}(G)$. ◀

► **Lemma 15.** *For a co-bipartite graph G with all the notations as described above and $p = 2, q > 2$, we have $\text{evc}(G) \neq \text{mvc}(G)$ if and only if exactly one vertex from A is adjacent to at least one vertex from the B side, or there is exactly one non-global vertex on the B side.*

Proof. Since $p = 2$, by **Claim 10** we have $\text{mvc}(G) = p + q - 2 = 2 + q - 2 = q$.

Case 1: There is no edge between A and B.

Since G consists of two disjoint cliques of size 2 and q , we have $\text{evc}(G) = \text{mvc}(G) = 2 - 1 + q - 1 = q = p + q - 2$.

Case 2: Exactly one vertex from A is adjacent to at least one vertex from the B side.

Let a_1 be the vertex from the A side which is adjacent to at least one vertex from the B side. Let $\{b_1, b_2, \dots, b_k\}$ be the vertices on the B side which are adjacent to a_1 where $1 \leq k < q$. Any vertex cover of size q will be of the form S_{1j} where $j > k$ or S_{2i} where $i \in [1, q]$. Suppose we have an initial vertex cover S_{2i} , now attack b_1b_2 . The guard on b_1 is forced to move to b_2 . So now we have a vertex cover which contains b_2 , i.e., the guards will rearrange to get a vertex cover of the form S_{1j} where $j > k$. Therefore, we can assume without loss of generality that the initial vertex cover is of the form S_{1j} where $j > k$. Now attack a_1b_1 . The guard on b_1 is forced to move to a_1 . The guard on a_2 cannot move to the B side. So there are $q - 2$ guards on B side to protect a clique of size q , thus some edge is unprotected. Thus q guards are not sufficient to protect G and $\text{evc}(G) \neq \text{mvc}(G)$.

Case 3: Both a_1 and a_2 have at least one neighbour from the B side

Let $B = B_1 \cup B_2 \cup B_3 \cup B_4$ where B_1 is the set of vertices which are adjacent to a_1 but not adjacent to a_2 , B_2 is the set of vertices which are adjacent to a_2 but not adjacent to a_1 , B_3 is the set of vertices which are adjacent to both a_1 and a_2 ; and B_4 is the set of vertices which are neither adjacent to a_1 nor adjacent to a_2 .

Since both a_1 and a_2 have at least one neighbour from the B side, we have $|B_1 \cup B_3| \geq 1$ and $|B_2 \cup B_3| \geq 1$. Since both a_1 and a_2 are non-global, they both have at least one friend, i.e., $|B_2 \cup B_4| \geq 1$ and $|B_1 \cup B_4| \geq 1$. Therefore, $|B_3| < q$.

Any vertex cover of size $p + q - 2$ is given by S_{ij} where $b_j \in B_{3-i} \cup B_4$.

Case α : $B_3 = \emptyset$

Since $B_3 = \emptyset$, we have $|B_1| \geq 1$ and $|B_2| \geq 1$. Without loss of generality we start with a vertex cover S_{1j} where $b_j \in B_2 \cup B_4$. We show that each type of attack on this vertex cover can be defended and we will again get a vertex cover of size $p + q - 2$.

If any edge whose both endpoints have guards on them is attacked, then the guards exchange positions and we again have the same vertex cover.

The following types of edges can be attacked which are incident to a_1 or b_j .

1. The edge $a_1 a_2$ is attacked:

The guard on a_2 moves to a_1 along the attacked edge. If $b_j \in B_4$, we are done and we have the new vertex cover S_{2j} . If not, then $b_j \in B_2$ and there exists $b_k \in B_1$ (because $|B_1| \geq 1$). Now the guard on b_k moves to b_j and we have the new vertex cover S_{2k} .

2. The edge $b_k b_j$ is attacked for $b_k \in B_2 \cup B_4$:

The guard on b_k moves to b_j along the attacked edge. The resultant vertex cover will be S_{1k} .

3. The edge $b_k b_j$ is attacked for $b_k \in B_1$:

The guard on b_k moves to b_j along the attacked edge and the guard on a_2 moves to a_1 . The resultant vertex cover will be S_{2k} .

4. The edge $a_1 b_k$ is attacked for $b_k \in B_1$:

The guard on b_k moves to a_1 along the attacked edge. If $b_j \in B_2$, the guard on a_2 moves to b_j and we have the vertex cover S_{2k} . If $b_j \in B_4$, since $|B_2| \geq 1$, there exists $b_r \in B_2$. The guard on b_r moves to b_k and the guard on a_2 moves to b_r . The new vertex cover will be S_{2j} .

5. The edge $a_2 b_j$ is attacked for $b_j \in B_2$:

The guard on a_2 moves to b_j along the attacked edge. There exists $b_k \in B_1$ because $|B_1| \geq 1$. The guard on b_k moves to a_1 and we have the new vertex cover S_{2k} .

Thus we have shown that each type of attack can be defended on a vertex cover of the form S_{1j} where $b_j \in B_2 \cup B_4$. So, $\text{evc}(G) = \text{mvc}(G) = p + q - 2 = q$.

Case b: $1 \leq |B_3| \leq q - 2$

Without loss of generality we start with a vertex cover S_{1j} where $b_j \in B_2 \cup B_4$. We show that each type of attack on this vertex cover can be defended and we will again get a vertex cover of size $p + q - 2$.

If any edge whose both endpoints have guards on them is attacked, the guards exchange positions along the attacked edge and we again have the same vertex cover.

The following types of edges can be attacked which are incident to a_1 or b_j .

1. The edge a_1a_2 is attacked:

The guard on a_2 moves to a_1 along the attacked edge. If $b_j \in B_4$, we are done and we have the new vertex cover S_{2j} . If not, then $b_j \in B_2$ and there exists $b_k \in B_1 \cup B_4$ (because $|B_1 \cup B_4| \geq 1$). Now the guard on b_k moves to b_j and we have the new vertex cover S_{2k} .

2. The edge b_kb_j is attacked for $b_k \in B_2 \cup B_4$:

The guard on b_k moves to b_j . The resultant vertex cover will be S_{1k} .

3. The edge b_kb_j is attacked for $b_k \in B_1$:

The guard on b_k moves to b_j along the attacked edge and the guard on a_2 moves to a_1 . The resultant vertex cover will be S_{2k} . If b_kb_j is attacked for $b_k \in B_3$, guard on b_k moves to b_j , there exists $b_r \in B_1 \cup B_2 \cup B_4$ where $r \neq j$ because $|B_3| \leq q - 2$. Suppose there exists $b_r \in B_2 \cup B_4$ with $r \neq j$, then guard on b_r moves to b_k and we have the vertex cover S_{1r} . If not, then there exists $b_r \in B_1$. Then the guard on b_r moves to b_k and the guard on a_2 moves to a_1 . The resultant vertex cover will be S_{2r} .

4. The edge a_1b_k is attacked for $b_k \in B_1$:

The guard on b_k moves to a_1 along the attacked edge. If $b_j \in B_2$, the guard on a_2 moves to b_j and we have the vertex cover S_{2k} . If $b_j \in B_4$, since $|B_2 \cup B_3| \geq 1$, there exists $b_r \in B_2 \cup B_3$. The guard on b_r moves to b_k and the guard on a_2 moves to b_r . The new vertex cover will be S_{2j} .


5. The edge a_1b_k is attacked for $b_k \in B_3$:

The guard on b_k moves to a_1 along the attacked edge. If $b_j \in B_4$, the guard on a_2 moves to b_k and we have the vertex cover S_{2j} . Otherwise, $b_j \in B_2$ and since $|B_1 \cup B_4| \geq 1$, there exists $b_r \in B_1 \cup B_4$. Now the guard on b_r moves to b_k and the guard on a_2 moves to b_j , thus we have the vertex cover S_{2r} .


6. The edge a_2b_j is attacked for $b_j \in B_2$:

The guard on a_2 moves to b_j along the attacked edge. There exists $b_k \in B_1 \cup B_4$ because $|B_1 \cup B_4| \geq 1$. If there exists $b_k \in B_1$, the guard on b_k moves to a_1 and we have the new vertex cover S_{2k} . Otherwise, $b_k \in B_4$. Consider some $b_r \in B_3$. The guard on b_r moves to a_2 and the guard on b_k moves to b_r . The new vertex cover will be S_{1k} .


Thus we have shown that each type of attack can be defended on a vertex cover of the form S_{1j} where $b_j \in B_2 \cup B_4$. So, $\text{evc}(G) = \text{mvc}(G) = p + q - 2 = q$ (c.f. Figure 15).

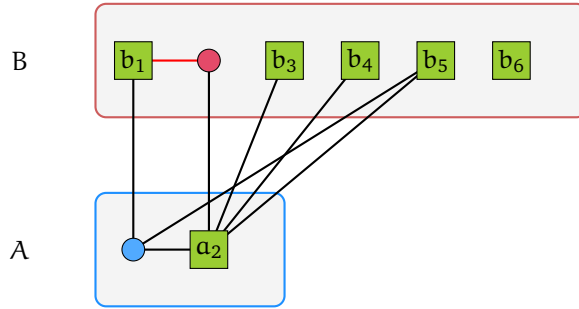

(a) This figure demonstrates the case when $p = 2$, $q > 2$, between 1 and $q - 2$ global vertices on the B side and an edge on the B side (say $b_1 b_2$) is attacked.

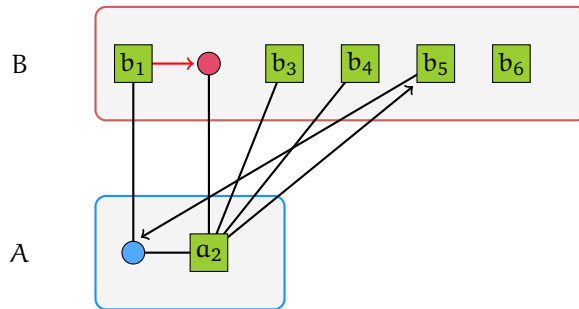

(b) This figure demonstrates the defense for the attack in Figure 15a. The guard on b_1 moves to b_2 , the guard on b_5 moves to a_1 and the guard on a_2 moves to b_5 .

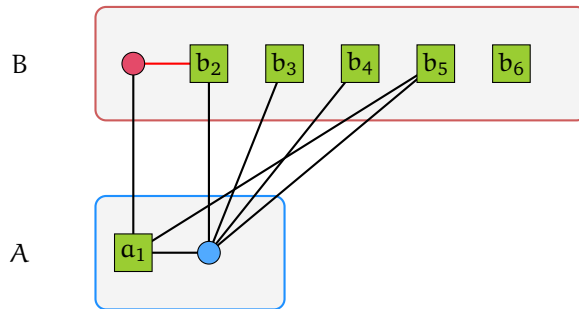

(c) This figure demonstrates the position of guards after executing the defense in Figure 15b.

■ **Figure 15** This figure demonstrates Case 3b from Lemma 15.

Case c: $|B_3| = q - 1$

Let $b_1 \notin B_3$. Therefore, b_1 has at least one friend, say a_1 (without loss of generality). So, $b_1 \in B_2 \cup B_4$. Suppose $b_1 \in B_2$. Then a_2 will be a global vertex which is not possible according to the convention. So $b_1 \in B_4$. Thus any vertex cover of size $p + q - 2$ will be of the form S_{i1} where $i \in \{1, 2\}$. Now attack $b_1 b_2$. The guard on b_2 will be forced to move to b_1 . If some guard from the A side comes to the B side, $a_1 a_2$ will be unprotected. If not, then there are $q - 1$ guards on the B side out of which one is on b_1 . Therefore some $b_j \in B_3$ is left empty and since some a_r from the A side will be empty (r may be equal to i), the edge $a_r b_j$ will be vulnerable.

Thus $p + q - 2$ guards are not sufficient to protect G and thus $\text{evc}(G) \neq \text{mvc}(G)$. \blacktriangleleft

It follows from Lemmas 11 to 15 that given a co-bipartite graph, its eternal vertex cover number can be calculated based on the number of vertices and degree of each vertex. Thus we have a polynomial time algorithm for ETERNAL VERTEX COVER on co-bipartite graphs. This concludes the proof of Theorem 2.

5 Concluding Remarks

We established the hardness of ETERNAL VERTEX COVER on bipartite graphs of constant diameter. We also showed that, under standard complexity-theoretic assumptions, the problem does not admit a polynomial compression on these graph classes when parameterized by the number of guards. Because of the relationship between $\text{mvc}(G)$ and $\text{evc}(G)$, this also implies hardness when parameterized by the vertex cover number. In the light of these developments, it will be interesting to pursue improved FPT and approximation algorithms for these classes of graphs. It is also unclear if ETERNAL VERTEX COVER is in NP even on these classes of graphs.

References

- Araki, H., Fujito, T., and Inoue, S. (2015). On the eternal vertex cover numbers of generalized trees. *IEICE Trans. Fundam. Electron. Commun. Comput. Sci.*, 98-A(6):1153–1160. (↑ 3, 18)
- Babu, J., Chandran, L. S., Francis, M. C., Prabhakaran, V., Rajendraprasad, D., and Warrier, N. J. (2021). On graphs whose eternal vertex cover number and vertex cover number coincide. *Discrete Applied Mathematics (in press)*. (↑ 2, 3)
- Babu, J. and Prabhakaran, V. (2020). A new lower bound for the eternal vertex cover number of graphs. In *Proceedings of the 26th International Conference on Computing and Combinatorics COCOON*, pages 27–39. (↑ 3)
- Babu, J., Prabhakaran, V., and Sharma, A. (2020). A substructure based lower bound for eternal vertex cover number. In *Proceedings of the 21st Italian Conference on Theoretical Computer Science*, pages 1–14. (↑ 3)
- Cygan, M., Fomin, F. V., Kowalik, Ł., Lokshtanov, D., Marx, D., Pilipczuk, M., Pilipczuk, M., and Saurabh, S. (2015). *Parameterized Algorithms*. Springer. (↑ 5)
- Diestel, R. (2017). *Graph theory*. Springer. (↑ 4)
- Dom, M., Lokshtanov, D., and Saurabh, S. (2014). Kernelization lower bounds through colors and ids. *ACM Trans. Algorithms*, 11(2):13:1–13:20. (↑ 5)
- Downey, R. G. and Fellows, M. R. (2013). *Fundamentals of Parameterized Complexity*. Springer. (↑ 5)
- Flum, J. and Grohe, M. (2006). *Parameterized Complexity Theory*. Springer. (↑ 5)
- Fomin, F. V., Gaspers, S., Golovach, P. A., Kratsch, D., and Saurabh, S. (2010). Parameterized algorithm for eternal vertex cover. *Information Processing Letters*, 110(16):702–706. (↑ 2, 5)
- Fomin, F. V., Lokshtanov, D., Saurabh, S., and Zehavi, M. (2019). *Kernelization: Theory of Parameterized Preprocessing*. Cambridge University Press. (↑ 5)
- Fujito, T. and Nakamura, T. (2020). Eternal connected vertex cover problem. In *Proceedings of the 16th International Conference on Theory and Applications of Models of Computation, TAMC*, pages 181–192. Springer. (↑ 3)
- Klostermeyer, W. and Mynhardt, C. M. (2011). Graphs with equal eternal vertex cover and eternal domination numbers. *Discrete Mathematics*, 311(14):1371–1379. (↑ 2)
- Klostermeyer, W. F. and Mynhardt, C. M. (2009). Edge protection in graphs. *Australas. J Comb.*, 45:235–250. (↑ 2)
- Niedermeier, R. (2006). *Invitation to Fixed-Parameter Algorithms*. Oxford University Press. (↑ 5)