

One-Sided Matching with Permission

Tianyi Yang, Yuxiang Zhai, Dengji Zhao, Miao Li, Xinwei Song

ShanghaiTech University

{yangty2, zhaiyx, zhaodj, limiao, songxw}@shanghaitech.edu.cn

Abstract

Classical one-sided matching assumes participants in the matching market are of a fixed size, each with an initial endowment and can exchange with others. In this paper, we consider a more dynamic and challenging setting where only a few participants are initially in the market, while the others need their invitation/permission to join in. However, the invitation does not always occur naturally and thus requires incentives. If we simply apply Top Trading Cycle, a classic solution for traditional matching, invitees may compete with their inviters in the matching and therefore they are reluctant to invite others. To combat this, we propose a new solution to protect inviters which guarantees that inviting all their friends is a dominant strategy for all participants. This solution novelly utilizes participants' invitations, which is not a simple extension of any existing solutions. We demonstrate its advantages in terms of participants' satisfaction by simulations and compare it with other existing solutions.

1 Introduction

One-sided matching is a classical resource allocation problem, where each participant is endowed with an indivisible item and a strict preference over all items. A well-known matching mechanism called Top Trading Cycle (TTC) [Shapley and Scarf, 1974] enjoys a wide range of applications including house allocation and kidney exchange [Roth *et al.*, 2004]. In the classical setting, we always assume that the market is static and fixed, but merely concern about how a matching market forms. In reality, there exist online house swapping and second-hand goods exchanging platforms, where people can propagate the information to their social networks to form a larger and credible market. This process shows a natural expansion of the market via social networks, simply because more participants will bring more selections. In addition, mechanism design on social networks has been proven as an efficient and trustworthy approach to advertise and attract more participants to join a game [Pickard *et al.*, 2011; Li *et al.*, 2022]. Hence, mechanism design for matching in social networks is one of the promising fields that is worth further investigations [Zhao, 2021].

In this paper, we focus on one-sided matching with initial endowments in social networks. Initially, participants can only exchange items with their direct neighbors (as they don't know the others), and by recursively inviting neighbors they can enlarge the market and have more selections. Eventually, the selection region for each participant will be the whole social network. However, invitations may bring competitors, which is the major obstacle when directly applying the existing solutions like TTC to the network setting. In fact, similar dilemmas happen in other mechanism design settings when a traditional mechanism is applied in a network setting. To solve the problem, in auctions, we can reward buyers' invitations [Li *et al.*, 2017; Zhao *et al.*, 2018; Kawasaki *et al.*, 2020]. However, without monetary transfers, it is more difficult to incentivize participants' invitations in the matching problem.

To solve the matching problem, we should guarantee that inviters' matching is not getting worse after inviting neighbors. Existing solutions attempt to solve it with TTC by adding restrictions on either the selection range of participants or the network structure (e.g., restrict the network to trees [Kawasaki *et al.*, 2021]). These solutions cannot be generalized and they are essentially the applications of TTC.

Focusing on the feature of social network, where people are willing to share and help each other when there is no harm to their own interests, we propose a novel diffusion one-sided matching mechanism called Leave and Share (LS). The first principle of LS is that participants can only receive items from their neighbors, which guarantees that inviters and invitees are not able to compete with each other (as they can always exchange with their neighbors without anyone's invitations). The second principle is that their neighbors are dynamically changing, which happens when a group of participants are matched, their remaining neighbors are shared and become neighbors of each other. The sharing process doesn't hurt the people left but benefit the remaining people significantly. Our contributions advance the state of the art in the following ways:

- We model one-sided matching in the social network setting and define desirable properties where the network structure is not restricted.
- We propose a new matching mechanism called Leave and Share (LS), which ensures that all participants report

their preferences truthfully and invite all their neighbors.

- The matching result of LS outperforms all the existing solutions and also ensures that there doesn't exist a group of neighbors who can receive a better allocation by exchanging items among themselves.
- LS is applicable in all network settings. Especially, it performs the same as TTC in a complete graph, i.e., the traditional setting.

1.1 Related Work

Shapley and Scarf [1974] proposed the classical one-sided matching mechanism TTC in housing market. Roth [1982] and Ma [1994] proved that TTC is the only mechanism that satisfies individual rationality, strategy-proofness and Pareto efficiency at the same time. Other literature of one-sided matching include, e.g., kidney exchange problem [Roth *et al.*, 2004; Sönmez *et al.*, 2020] and assignment problem [Gardenfors, 1973; Sandholm, 1998].

For matching in networks, Hatfield *et al.* [2013] and Fleiner *et al.* [2018] studied the trading network, in which they aimed at achieving a series of stable supply chains. Gourvès *et al.* [2017] studied the housing market in a social network by only focusing on trading in neighbors. However, they all considered that agents' social contacts are static rather than using their contacts to enlarge the market.

Mechanism design in social networks has been well-studied in auctions [Li *et al.*, 2017; Zhao *et al.*, 2018]. Auctions have been proposed in social networks to incentivize buyers to invite their neighbors to participate in the sale. Similar diffusion mechanisms have been investigated in data acquisition [Zhang *et al.*, 2020a], recommendations [Bao *et al.*, 2015], answer querying [Zhang *et al.*, 2020b] and etc. Their main technique is to use monetary transfers to reward agents' invitations, which is not feasible in matching.

2 The Model

We consider one-sided matching problem in a social network denoted by an undirected graph $G = (N, E)$, which has a set of n agents $N = \{1, \dots, n\}$. Each agent $i \in N$ is endowed with an indivisible item h_i and let $H = \{h_1, \dots, h_n\}$ be the set of all agents' items. Without loss of generality, we assume that agent 1 is the first agent in this matching market and she invites her neighbors. We define agent i is j 's neighbor if there is an edge $e \in E$ between agent i and j , and let $r_i \subseteq N$ be i 's neighbor set.

Each agent $i \in N$ has a strict preference \succ_i over H . $h \succ_i h'$ represents agent i prefers h to h' and we use \succeq_i to represent the weak preference. Denote agent i 's type as $\theta_i = (\succ_i, r_i)$. We define $\theta = (\theta_1, \dots, \theta_n)$ as the type profile of all agents. Let θ_{-i} be the type profile of all agents except for agent i , then θ can be written as $\theta = (\theta_i, \theta_{-i})$. Let Θ be the type profile space of all agents. Similarly, we have $\Theta = (\Theta_i, \Theta_{-i})$.

In this paper, a matching mechanism asks each agent i to report her type where reporting neighbor set is equivalent to inviting neighbors in practice. We denote agent i 's reported type as $\theta'_i = (\succ'_i, r'_i)$, where \succ'_i is the reported preference and $r'_i \subseteq r_i$ is the reported neighbor set. Let $\theta' = (\theta'_1, \dots, \theta'_n)$ denote the reported type profile of all agents.

For a given report profile θ' , we generate a directed graph $G(\theta') = (N(\theta'), E(\theta'))$, where $(i, j) \in E(\theta')$ if and only if $j \in r'_i$. Under θ' , agent i is qualified if and only if there is a path from agent 1 to i in $G(\theta')$. That is, i can be properly invited following the invitation chain from agent 1. Let $Q(\theta')$ be the set of all qualified agents under θ' .

An allocation policy $\pi = (\pi_i)_{i \in N}$ is a redistribution of items, in which $\pi_i(\theta') \in H$ is the item allocated to agent i under π . Let Π be the set of all possible allocations for all agents.

Definition 1. A one-sided matching mechanism \mathcal{M} is defined by an allocation policy $\pi = (\pi_i)_{i \in N}$, where $\pi_i : \Theta \rightarrow H$.

The above definition is not different from the traditional settings. In the network, we need to restrict the allocation because some agents may not be properly invited.

Definition 2. A diffusion one-sided matching mechanism in social networks is a one-sided matching mechanism, $\pi = (\pi_i)_{i \in N}$, such that for all reported type profile θ' , it satisfies:

1. for all unqualified agents $i \notin Q(\theta')$, $\pi_i(\theta') = h_i$.
2. for all qualified agents $i \in Q(\theta')$, $\pi_i(\theta')$ is independent of the reports of all unqualified agents.

Next, we define two desirable properties for diffusion one-sided matching mechanisms: individual rationality and incentive compatibility. Intuitively, individual rationality requires that for each agent, reporting her preference truthfully guarantees that she gets an item no worse than her own (i.e. joining the matching is not losing).

Definition 3 (Individual Rationality). A diffusion one-sided matching mechanism \mathcal{M} is individually rational if for all $i \in N$, all $(\succ_i, r'_i) \in \Theta_i$, and all $\theta'_{-i} \in \Theta_{-i}$, we have $\pi_i((\succ_i, r'_i), \theta'_{-i}) \succeq_i h_i$.

Different from the traditional one-sided matching settings, each agent here can misreport both her preference and her neighbor set to manipulate the allocation result. Therefore, incentive compatibility in this model requires that reporting both preference and neighbor set truthfully is a dominant strategy for each agent.

Definition 4 (Incentive Compatibility). A diffusion one-sided matching mechanism \mathcal{M} is incentive compatible (IC) if for all $i \in N$, all $\theta_{-i}, \theta'_{-i} \in \Theta_{-i}$ and all $\theta_i, \theta'_i \in \Theta_i$, we have $\pi_i(\theta_i, \theta'_{-i}) \succeq_i \pi_i(\theta'_i, \theta'_{-i})$.

Since stability is an important property for matching markets, we extend it to our model.

Definition 5 (Blocking Coalition). Given an allocation $\pi(\theta) \in \Pi$, we say a set of agents $S \subseteq N$ (with items set $H_S \subseteq H$) is a blocking coalition for $\pi(\theta)$ if S forms a fully connected component in $G(\theta)$ and there exists an allocation $z(\theta) \in \Pi$ such that for all $i \in S$, $z_i(\theta) \in H_S$ and $z_i(\theta) \succeq_i \pi_i(\theta)$ with at least one $j \in S$, $z_j(\theta) \succ_j \pi_j(\theta)$.

Similar to the definition of the traditional blocking coalition, a blocking coalition S in social networks means by swapping among themselves, each agent in S can be allocated an item no worse than $\pi(\theta)$ and with at least one agent being strictly better off. The definition here further requires

that the coalition forms a fully connected sub-graph, otherwise they cannot freely exchange with each other. With the extension of the blocking coalition, we define stability in the network setting as follows.

Definition 6 (Stability). *Given a certain allocation $\pi(\theta)$, if there is no blocking coalition for it, we say the allocation $\pi(\theta)$ is stable.*

The stability in the social network setting guarantees that no fully connected coalition of agents can improve their allocation by swapping among themselves instead of participating in the mechanism. In the rest of the paper, we will design a mechanism to satisfy the above properties.

3 The Mechanism

Top Trading Cycle (TTC) is a well-known method for the traditional one-sided matching, but it cannot be directly applied in the network setting to incentivize invitations. The reason is that agents' invitations may bring competitors and thus lead to a worse allocation compared to swapping with their neighbors only. As a result, some agents will not truthfully report their types. One way to solve this is adding restrictions on TTC. The definition of TTC is as follows, which only considers agents' preferences and ignores their connections.

Definition 7 (Top Trading Cycle). *Construct a directed graph by the preference of each agent: each agent points to the agent who has her favorite item remaining in the matching. There is at least one cycle. For each cycle, allocate the item to the agent who points to it and remove the cycle. Repeat the process until there is no agent left.*

3.1 Extensions of TTC in Networks

Since TTC cannot work in social network settings, one trivial extension is called Swap With Neighbors (SWN), which only allows agents to swap with their neighbors under TTC. This completely removes all possible competitions between inviters and invitees. The definition of SWN is as follows.

Definition 8 (Swap With Neighbors). *Construct a directed graph by the preference of each agent: each agent points to her favorite item among herself and her neighbors remaining in the matching. There is at least one cycle. For each cycle, allocate the item to the agent who points to it and remove the cycle. Repeat the process until there is no agent left.*

Although SWN guarantees that there is no competition between inviters and invitees, it also heavily restricts the matching opportunities. In reality, not all invitees will compete with their inviters. Thus, further extensions focused on enlarging the selection domain to improve the allocation. One attempt is to restrict the network to trees and allow each agent to swap with her sub-tree (more selections than her neighbors) [Kawasaki *et al.*, 2021; Zheng *et al.*, 2020]. Let's call this extension Swap With Children (SWC). The definition of SWC is as follows, which only works in trees.

Definition 9 (Swap With Children). *Construct a directed graph by the preference of each agent: each agent points to her favorite item among herself, her neighbors, and her descendants remaining in the matching. There is at least one*

cycle. For each cycle, allocate the item to the agent who points to it and remove the cycle. Repeat the process until there is no agent left.

3.2 Our Mechanism

From the above extensions, we can see the key challenge to guarantee incentive compatibility is to prevent invitees making their inviters' matching worse-off. Both SWN and SWC avoid competitions by restricting their matching choices, which is essentially not our goal to enlarge the market. Is it possible to allow each agent to have a chance to be matched with anyone in the network? If there is such matching mechanism, we have to guarantee that an inviter's invitees will not hurt the inviter, but this can happen in a very long and complex chain of influences. One may conduct an automated search to find such mechanism, but it will not be scalable for more agents with different connections.

Instead, in this paper, we use one important feature of the matching: when a group of agents matched with their favorite items, it is clear that their remaining neighbors cannot compete with them anymore. Therefore, their neighbors should be free to match with others. While the matched agents can share their neighbors, but they cannot control the others. So eventually, at least their neighbors could be matched with each other freely. This is essentially the intuition of our mechanism.




Figure 1: Preferences are $h_6 \succ_1 h_1 \succ_1 \dots$, $h_5 \succ_2 h_2 \succ_2 \dots$, $h_4 \succ_3 h_3 \succ_3 \dots$, $h_3 \succ_4 h_4 \succ_4 \dots$, $h_2 \succ_5 h_5 \succ_5 \dots$, $h_1 \succ_6 h_6 \succ_6 \dots$. One allocation for the agents 1 to 6 is $(h_6, h_5, h_4, h_3, h_2, h_1)$.

To see the value of our mechanism, consider the example given in Figure 1, where only agents 3 and 4 can exchange with each other in both SWN and SWC, and the rest of the agents will end up with their own items. However, agents 3 and 4 will not block the exchange for agents 2 and 5 once they get their preferred items. Thus, we could allow agents 2 and 5 to be matched, and again agents 1 and 6 could also be matched if the others already received their favorite items.

To summarize, our mechanism applies SWN as a base protocol, which allows agents to receive items from their neighbors only. This guarantees that inviters are not worse-off. However, when a group of agents are matched/left, their remaining neighbors become neighbors of each other, which will dynamically update agents' neighbor sets.

Before we introduce our mechanism, we define two notations to simplify the description.

Definition 10. *Given a set $A \subseteq N$, we define a favorite agent function for agent i as $f_i(A) = j \in A$ such that $\forall k \in A, h_j \succeq_i^A h_k$. We say j is i 's favorite agent in A .*

We define an ordering that will be used in our mechanism. An ordering of agents is a one-to-one function $\mathcal{P} : N^+ \rightarrow N$, where agent $\mathcal{P}(i)$ is the i^{th} agent in the ordering. We set

$\mathcal{P}(1) = 1$ the first agent in the matching. Other agents in \mathcal{P} are sorted in ascending order by the length of the shortest path from agent 1 to them. When multiple agents have the same length of the shortest path, we use a random tie-breaking.

Leave and Share (LS)

1. Initialize $N_{out} = \emptyset$ and an empty stack S . Define the top and bottom of S as S_{top} and S_{bottom} respectively, and let $A_i = r'_i \cup \{S_{bottom}, i\}$.
2. While $N_{out} \neq \emptyset$:
 - (a) Find the minimum t that $\mathcal{P}(t) \notin N_{out}$. Push $\mathcal{P}(t)$ into S .
 - (b) While S is not empty:
 - i. While $f_{S_{top}}(A_{S_{top}}) \notin S$, push $f_{S_{top}}(A_{S_{top}})$ into S .
 - ii. Pop off all agents from S_{top} to $f_{S_{top}}(A_{S_{top}})$, who already formed a trading cycle C following their favorite agents. Allocate each agent $i \in C$ the item $h_{f_i(A_i)}$. Add C to N_{out}^t .
 - iii. Update C 's remaining neighbors' neighbor set by removing C , i.e. for all $j \in \bigcup_{i \in C} r'_i \setminus N_{out}^t$, set $r'_j = r'_j \setminus C$.
 - (c) Add N_{out}^t to N_{out} . Let all remaining neighbors of N_{out}^t connect with each other, i.e. they become neighbors of each other. That is, let $X = \bigcup_{i \in N_{out}^t} r'_i \setminus N_{out}^t$ and for all $j \in X$, set $r'_j = r'_j \cup X$.

In the Leave and Share mechanism, the first while loop (step 2) guarantees that all agents are matched (including self-match) in the end. The second loop in step (b) makes sure that the agent in the bottom of the stack has to be matched before the others can share their neighbors in step (c). This is essential, otherwise, agents may delay their time to be matched in order to share others neighbors for a better allocation. This is the reason to define the order \mathcal{P} .

We use an example to illustrate how Leave and Share executes. Consider the social network in Figure 2(a). The ordering is given as $\mathcal{P} = (1, 2, 3, 4, 5, 6, 7, 9, 8)$. The type profile θ is given in Table 1. The changes of N_{out}^t and r'_i in each turn are shown in Table 2. Figure 2(b) to Figure 2(d) show the process of the Leave and Share, which runs as follows.

1. Starting at $\mathcal{P}(1)$, push $\mathcal{P}(1) = 1$ into the stack. $S_{top} = 1$, $f_1(A_1) = 2 \notin S$. Push agent 2 into the stack. $f_2(A_2) = 4 \notin S$. Push agent 4 into the stack. $f_4(A_4) = 5 \notin S$. Push agent 5 into the stack. $f_5(A_5) = 6 \notin S$. Push agent 6 into the stack. $f_6(A_6) = 4$, since $4 \in S$, pop off all agents from agent 6 to agent 4 get the trading cycle $C = \{4, 5, 6\}$ and $N_{out}^1 = \{4, 5, 6\}$. Remove C from C 's remaining neighbors' neighbor set. Update $r'_2 = \{1, 3\}$, $r'_8 = \emptyset$, $r'_9 = \emptyset$.
2. Based on the new neighbor set, $S_{top} = 2$, $f_2(A_2) = 3 \notin S$. Push agent 3 into the stack. $S_{top} = 3$, $f_3(A_3) = 1$. Since $1 \in S$, pop off all agents from agent 3 to agent 1 to

get $C = \{1, 2, 3\}$ and $N_{out}^1 = \{1, 2, 3, 4, 5, 6\}$. Remove C from C 's remaining neighbors' neighbor sets. Update $N_{out}^1 = \{1, 2, 3, 4, 5, 6\}$, $r'_7 = \emptyset$.

Now that the stack is empty, update $N_{out} = N_{out}^1$ and connect the remaining neighbors of N_{out}^1 with each other, i.e., update $r'_7 = \{8, 9\}$, $r'_8 = \{7, 9\}$, $r'_9 = \{7, 8\}$.

3. Find new $t = 7$ and push $\mathcal{P}(7) = 7$ into the stack. $S_{top} = 7$, $f_7(A_7) = 8 \notin S$. Push agent 8 into the stack. $S_{top} = 8$, $f_8(A_8) = 9 \notin S$. Push agent 9 into the stack. $S_{top} = 9$, $f_9(A_9) = 7$. Since $7 \in S$, pop off all agents from agent 9 to agent 7 to get $C = \{7, 8, 9\}$. Update $N_{out}^7 = \{7, 8, 9\}$.
4. The stack is empty again, add $N_{out}^7 = \{7, 8, 9\}$ to N_{out} , and now we have $N_{out} = N = \{1, 2, 3, 4, 5, 6, 7, 8, 9\}$. The mechanism terminates. The final allocation of the agents is shown in Table 2.

i	\succ_i	r_i
1	$h_2 \succ h_4 \succ h_3 \succ h_1 \succ \dots$	2
2	$h_4 \succ h_3 \succ h_5 \succ h_2 \succ \dots$	1,3,4
3	$h_8 \succ h_4 \succ h_1 \succ h_3 \succ \dots$	2,7
4	$h_5 \succ h_1 \succ h_3 \succ h_4 \succ \dots$	2,5,6,9
5	$h_2 \succ h_6 \succ h_9 \succ h_5 \succ \dots$	4,6,8
6	$h_4 \succ h_1 \succ h_8 \succ h_6 \succ \dots$	4,5
7	$h_8 \succ h_3 \succ h_6 \succ h_7 \succ \dots$	3
8	$h_9 \succ h_5 \succ h_1 \succ h_8 \succ \dots$	5
9	$h_7 \succ h_4 \succ h_6 \succ h_9 \succ \dots$	4

Table 1: The preference and neighbors of each agent. We omit those items which rank lower than their own items.

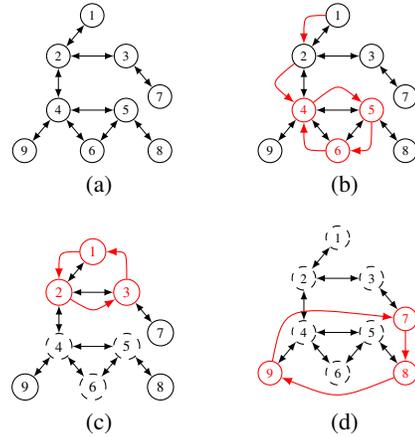


Figure 2: A running example of LS, where the lines between nodes represent neighbor relationship. Red nodes in sub-figures are the trading cycles, and the red arrows point to their favorite neighbors. Agents who left the game are denoted by dashed lines.

4 Properties of Leave and Share

In this section, we will prove that LS is individually rational, incentive compatible and the allocation is stable.

Theorem 1. For any ordering \mathcal{P} , LS is individually rational.

	t=1			t=7		Allocation
N_{out}^t	\emptyset	$\{4, 5, 6\}$	$\{1, 2, 3, 4, 5, 6\}$	\emptyset	$\{7, 8, 9\}$	$\pi_i(\theta)$
r_1^t	$\{2\}$	$\{2\}$	—	—	—	$\pi_1(\theta) = h_2$
r_2^t	$\{1, 3, 4\}$	$\{1, 3\}$	—	—	—	$\pi_2(\theta) = h_3$
r_3^t	$\{2, 7\}$	$\{2, 7\}$	—	—	—	$\pi_3(\theta) = h_1$
r_4^t	$\{2, 5, 6, 9\}$	—	—	—	—	$\pi_4(\theta) = h_5$
r_5^t	$\{4, 6, 8\}$	—	—	—	—	$\pi_5(\theta) = h_6$
r_6^t	$\{4, 5\}$	—	—	—	—	$\pi_6(\theta) = h_4$
r_7^t	$\{3\}$	$\{3\}$	\emptyset	$\{8, 9\}$	—	$\pi_7(\theta) = h_8$
r_8^t	$\{5\}$	\emptyset	\emptyset	$\{7, 9\}$	—	$\pi_8(\theta) = h_9$
r_9^t	$\{4\}$	\emptyset	\emptyset	$\{7, 8\}$	—	$\pi_9(\theta) = h_7$

Table 2: The update of the neighbor set of each agent. The allocation is shown in the rightmost column.

We briefly show that LS is IR. In LS, agent i leaves only when she gets an item h_j . Agent i can always choose herself as her favorite agent, then LS will allocate h_i to i .

Theorem 2. *For any ordering \mathcal{P} , LS is incentive compatible.*

Proof. Since each agent i 's type consists of two parts, her preference \succ_i and her neighbor set r_i , the proof of incentive compatibility will prove neither misreporting \succ_i nor misreporting r_i can improve her allocation.

Misreport on \succ : For agent i , we fix her reported neighbor set as r_i' . Her real preference is \succ_i and reported preference is \succ_i' . Now we compare her allocation $\pi_i((\succ_i, r_i), \theta_{-i}) = h_j$ with $\pi_i((\succ_i', r_i'), \theta_{-i}) = h_{j'}$.

Since \mathcal{P} is based on the minimum distance, which is irrelevant to agents' preferences, we only need to prove that $h_j \succeq_i h_{j'}$ for all agents for a given order.

Before i is pushed into the stack, all trading cycles are irrelevant to \succ_i' (as i has not been preferred by the agents in the stack before and \succ_i' is not used at all). Thus we only consider the situation when agent i is pushed into the stack and then \succ_i can decide which agent after i is pushed into the stack.

When i is on the top of the stack, the next pushed agent $f_i(A_i)$ is determined by \succ_i' . Agent i can be allocated with h_j' only when there is a trading cycle with i . Assume that $h_{j'} \succ_i h_j$, i.e., misreporting \succ_i gives a better match. We will show this leads to a contradiction. If i reported \succ_i truthfully, then i would first choose j' before j (j' is pushed into the stack first), since i didn't match with j' , which means that j' formed a cycle $C_{j'}$ with others without i . If reporting \succ_i' , i is matched with j' , then it must be the case that there exists another trading cycle B which breaks the cycle $C_{j'}$. Otherwise, whenever i points to j' , j' will form the original cycle $C_{j'}$ as it is independent of i 's preference. The only possibility for i to achieve this is by pointing her favorite agent with the false preference \succ_i' . By doing so, i can force other agents to leave earlier with different cycles including B . However, we will show that it is impossible for B to break $C_{j'}$.

If B can actually break $C_{j'}$, there must be an overlap between B and $C_{j'}$. Assume that x is the node where B joins $C_{j'}$ and y is the node where B leaves $C_{j'}$ (x and y can be the same node). For node y , her match in B and $C_{j'}$ cannot be the same (the model assumes strict preference), and no matter when y is pushed into the stack, both items in B and $C_{j'}$ are still there. Assume the matching in $C_{j'}$ is her favorite, then cycle B will never be formed. This is a contradiction, thus we cannot have $h_{j'} \succ_i h_j$, i.e., reporting \succ_i truthfully is a dominant strategy.

Misreport on r : As the above showed for any reported neighbor set r_i' , reporting \succ_i truthfully is a dominant strategy. Thus, here, we need to further show that under truthful preference report, reporting r_i is a dominant strategy. That is, for the allocations $\pi_i((\succ_i, r_i), \theta_{-i}) = h_j$ and $\pi_i((\succ_i, r_i'), \theta_{-i}) = h_{j'}$, we will show $h_j \succeq_i h_{j'}$.

Firstly, we show that the tradings before i being pushed into the stack are irrelevant to i 's neighbor set report r_i' . For all the agents ranked before i in \mathcal{P} , their shortest distance is smaller than or equal to i 's shortest distance to agent 1, which means that their shortest paths do not contain i and therefore r_i cannot change them. Thus, r_i' cannot change the order of all agents ordered before i in \mathcal{P} . Agent i could be a cut point to disconnect certain agents D_i from agent 1, so r_i' can impact D_i 's distances and qualification. However, D_i can only be involved in the matching after i is in the stack, as others cannot reach D_i without i . Hence, before i is pushed into the stack, the tradings only depend on the order before i and the agents excluding D_i , which are independent of i . In fact, the order of the agents pushed into the stack before i is the same no matter what r_i' is. That is, when i is pushed into the stack, the agents, except for D_i , remaining in the game is independent of i .

Then when i misreports r_i , she will only reduce her own options in the favorite agent selection. Whether r_i' disconnects D_i or not, reporting r_i' here is equivalent to modifying \succ_i by disliking neighbors in $r_i \setminus r_i'$. As we have showed, this is not beneficial for the agent. Therefore, reporting r_i truthfully is a dominant strategy, i.e., $h_j \succeq_i h_{j'}$.

Put the above two steps together, we have proved that LS is incentive compatible. \square

Theorem 3. *Given the type profile of all agents θ , the allocation of LS is stable.*

Proof. For every $S \subseteq N$ and their items set H_S . Let the allocation given by LS be $\pi(\theta)$. If there exists a blocking coalition S , we know that $S \subseteq N$ is the nodes set of a fully connected component in $G(\theta)$.

Since S is the nodes set of a fully connected component, we have $\forall i \in S, S \subseteq r_i$. A blocking coalition S suggests there exists a $z(\theta) \in \Pi$ such that for all $i \in S$, $z_i(\theta) \in H_S$, $z_i(\theta) \succeq_i \pi_i(\theta)$ with at least one $j \in S$ we have $z_j(\theta) \succ_j \pi_j(\theta)$. Therefore, for all $j \in S$, the blocking coalition guarantees the owner of $z_j(\theta)$ and j are in one trading cycle. This indicates if a trading cycle contains any agent in the coalition, all the agents in the trading cycle are in the coalition. Based on LS, $z_j(\theta) \succeq \pi_j(\theta)$ means the owner of $z_j(\theta)$ will be pushed into the stack before the owner of $\pi_j(\theta)$. Thus, the trading cycle which contains the owner of $z_j(\theta)$ and j can trade by the cycle, which means for all the agents in the blocking coalition S , $z_i(\theta) = \pi_i(\theta)$. This contradicts the assumption that there exists at least one $j \in S \subseteq r_j$, $z_j(\theta) \succ_j \pi_j(\theta)$. Hence, the allocation of LS is stable. \square

5 Simulations and Analysis

In this part, we compare our mechanism with Top Trading Cycle (TTC), Swap With Neighbors (SWN), and Swap With Children (SWC) by simulations. We adopt a cardinal method

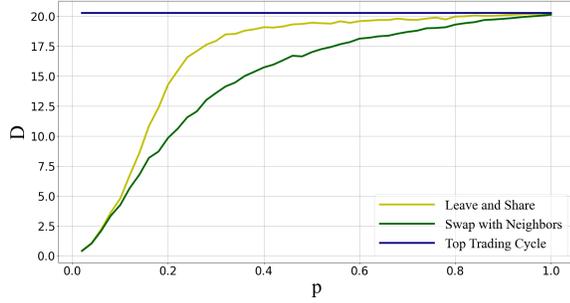


Figure 3: 100 graphs generated for each different p to see how D changes accordingly. The minimum scale for p is 0.02.

to measure the performances of mechanisms. Although TTC cannot be directly applied in the social network setting, it provides a performance upper bound for a one-sided matching mechanism in social networks. The lower bound is given by SWN since agents should be able to swap with their neighbors. We define $\succ_i(j)$ as the j^{th} favorite item of i . Assuming that h_i is $\succ_i(j)$ and $\pi_i(\theta)$ is $\succ_i(k)$, where $j \geq k$ for IR property, we define the ascension of i as $d_i = j - k$. The average ascension of agents is defined as $D = \frac{\sum_{i \in N} d_i}{n}$. We use D to measure the average improvement of agents' satisfaction in a one-sided matching mechanism.

To generate random networks, we define the probability of setting up an edge between any two nodes as p . A higher p leads to a more connected graph. Especially, when $p = 1$, the graph is complete. Thus, we can use p to represent the connectivity of graphs. To generate a tree, for each node, we uniformly select an integer i from $[1, ub]$ as the number of the node's child nodes. Beginning at the root node, we create i child nodes for each node by a breadth-first order until the tree reaches a certain size n . We generate agents' preferences by randomly selecting from all permutations of the items.

Figure 3 shows the performances of three mechanisms. SWN only allows swap in neighbors, while TTC allows swap without limit and LS considers invitations and sharing. In this figure, we generate 100 graphs of 50 nodes with fixed but randomly generated preferences and adjust p to see how D changes. When p is close to 1, the performances of LS and SWN are close, and they are the same as TTC when $p = 1$. Note that LS converges to TTC faster than SWN, because of the sharing process. On the other extreme case, when p goes to 0, both LS and SWN have a poorer performance, because there are fewer neighbors to swap or share.

Next, we compare LS with SWC, the other extension of TTC only on trees, in two different dimensions that (a) different tree sizes; (b) same tree size, but different tree structures.

In terms of tree size, we generate 100 different trees for each tree size. As Figure 4 shows, LS outperforms the other two mechanisms significantly as the tree size is increasing. Also, the results showed that SWC and SWN are not so different, because the probability of forming a cycle with more than two agents is quite small. It requires all agents except for one in a cycle to prefer their parents' item rather than their whole sub-trees'. The larger the cycle is, the smaller

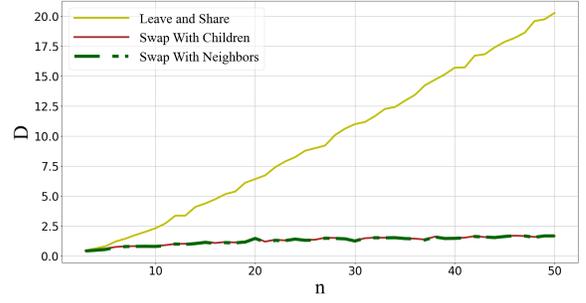


Figure 4: The tree is generated by a uniform distribution $[1, n - 1]$ for the number of each node's child node, in which n is the size of the tree. For LS, n and D are positive correlated.

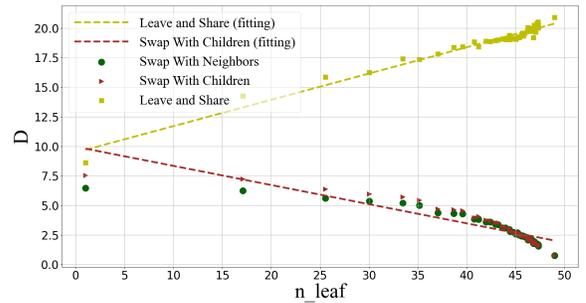


Figure 5: For LS, n_{leaf} and D are positive correlated. For SWN and SWC, n_{leaf} and D are negative correlated.

the probability is. Thus the improvement of SWC is actually very limited, while LS takes a big advantage from sharing.

Moreover, if we fix the tree size, their performances vary under different tree structures. We use the number of leaf nodes to indicate the difference between trees. For a certain tree with n nodes, the lower bound and upper bound of n_{leaf} are 1 and $n - 1$ respectively. We do the same simulation to show the relation between D and n_{leaf} .

In Figure 5, we generate 100 different trees for each ub from 1 to 49 and count the number of each tree's leaf nodes. Then we run three different mechanisms on each tree and calculate D . When n_{leaf} is small, SWC and LS are close, because there are few neighbors to share and forming a big cycle is hard. With the increase of n_{leaf} , LS performs better, because merging can match nodes in different branches, even for leaf nodes. However, allocated by SWC, those nodes can only be allocated with their own items.

6 Conclusions

In this paper, we proposed a novel one-sided matching protocol in social networks called Leave and Share to incentivize participants to invite all their neighbors to join the game. We not only proved that it is incentive compatible and stable, but also evaluated its performance with TTC-like mechanisms. The mechanism works in all network settings and significantly outperformed the benchmark mechanisms in the experiments with different kinds of networks.

References

- [Bao *et al.*, 2015] Jie Bao, Yu Zheng, David Wilkie, and Mohamed Mokbel. Recommendations in location-based social networks: a survey. *GeoInformatica*, 19(3):525–565, 2015.
- [Fleiner *et al.*, 2018] Tamás Fleiner, Zsuzsanna Jankó, Akihisa Tamura, and Alexander Teytelboym. Trading networks with bilateral contracts. In *Web and Internet Economics - 14th International Conference, WINE 2018, Oxford, UK, December 15-17, 2018, Proceedings*, volume 11316, page 444. Springer, 2018.
- [Gardenfors, 1973] Peter Gardenfors. Assignment problem based on ordinal preferences. *Management Science*, 20(3):331–340, 1973.
- [Gourvès *et al.*, 2017] Laurent Gourvès, Julien Lesca, and Anaëlle Wilczynski. Object allocation via swaps along a social network. In *Proceedings of the Twenty-Sixth International Joint Conference on Artificial Intelligence, IJCAI 2017, Melbourne, Australia, August 19-25, 2017*, pages 213–219. ijcai.org, 2017.
- [Hatfield *et al.*, 2013] John William Hatfield, Scott Duke Kominers, Alexandru Nichifor, Michael Ostrovsky, and Alexander Westkamp. Stability and competitive equilibrium in trading networks. *Journal of Political Economy*, 121(5):966–1005, 2013.
- [Kawasaki *et al.*, 2020] Takehiro Kawasaki, Nathanaël Barrot, Seiji Takanashi, Taiki Todo, and Makoto Yokoo. Strategy-proof and non-wasteful multi-unit auction via social network. In *Proceedings of the AAI Conference on Artificial Intelligence*, volume 34, pages 2062–2069, 2020.
- [Kawasaki *et al.*, 2021] Takehiro Kawasaki, Ryoji Wada, Taiki Todo, and Makoto Yokoo. Mechanism design for housing markets over social networks. In *AAMAS '21: 20th International Conference on Autonomous Agents and Multiagent Systems, Virtual Event, United Kingdom, May 3-7, 2021*, pages 692–700. ACM, 2021.
- [Li *et al.*, 2017] Bin Li, Dong Hao, Dengji Zhao, and Tao Zhou. Mechanism design in social networks. In *Proceedings of the Thirty-First AAAI Conference on Artificial Intelligence, February 4-9, 2017, San Francisco, California, USA*, pages 586–592. AAAI Press, 2017.
- [Li *et al.*, 2022] Bin Li, Dong Hao, Hui Gao, and Dengji Zhao. Diffusion auction design. *Artificial Intelligence*, 303:103631, 2022.
- [Ma, 1994] Jinpeng Ma. Strategy-proofness and the strict core in a market with indivisibilities. *International Journal of Game Theory*, 23(1):75–83, 1994.
- [Pickard *et al.*, 2011] Galen Pickard, Wei Pan, Iyad Rahwan, Manuel Cebrian, Riley Crane, Anmol Madan, and Alex Pentland. Time-critical social mobilization. *Science*, 334(6055):509–512, 2011.
- [Roth *et al.*, 2004] Alvin E Roth, Tayfun Sönmez, and M Utku Ünver. Kidney exchange. *The Quarterly journal of economics*, 119(2):457–488, 2004.
- [Roth, 1982] Alvin E Roth. Incentive compatibility in a market with indivisible goods. *Economics letters*, 9(2):127–132, 1982.
- [Sandholm, 1998] Tuomas Sandholm. Contract types for satisficing task allocation. In *Proceedings of the AAAI spring symposium: Satisficing models*, pages 23–25, 1998.
- [Shapley and Scarf, 1974] Lloyd Shapley and Herbert Scarf. On cores and indivisibility. *Journal of mathematical economics*, 1(1):23–37, 1974.
- [Sönmez *et al.*, 2020] Tayfun Sönmez, M Utku Ünver, and M Bumin Yenmez. Incentivized kidney exchange. *American Economic Review*, 110(7):2198–2224, 2020.
- [Zhang *et al.*, 2020a] Wen Zhang, Yao Zhang, and Dengji Zhao. Collaborative data acquisition. In *Proceedings of the 19th International Conference on Autonomous Agents and Multiagent Systems, AAMAS '20, Auckland, New Zealand, May 9-13, 2020*, pages 1629–1637. International Foundation for Autonomous Agents and Multiagent Systems, 2020.
- [Zhang *et al.*, 2020b] Yao Zhang, Xiuzhen Zhang, and Dengji Zhao. Sybil-proof answer querying mechanism. In *Proceedings of the Twenty-Ninth International Joint Conference on Artificial Intelligence, IJCAI 2020*, pages 422–428. ijcai.org, 2020.
- [Zhao *et al.*, 2018] Dengji Zhao, Bin Li, Junping Xu, Dong Hao, and Nicholas R. Jennings. Selling multiple items via social networks. In *Proceedings of the 17th International Conference on Autonomous Agents and MultiAgent Systems, AAMAS 2018, Stockholm, Sweden, July 10-15, 2018*, pages 68–76. International Foundation for Autonomous Agents and Multiagent Systems Richland, SC, USA / ACM, 2018.
- [Zhao, 2021] Dengji Zhao. Mechanism design powered by social interactions. In *AAMAS '21: 20th International Conference on Autonomous Agents and Multiagent Systems, Virtual Event, United Kingdom, May 3-7, 2021*, pages 63–67. ACM, 2021.
- [Zheng *et al.*, 2020] Yue Zheng, Tianyi Yang, Wen Zhang, and Dengji Zhao. Barter exchange via friends' friends. *arXiv preprint arXiv:2010.04933*, 2020.