

Rawlsian Fairness in Online Bipartite Matching: Two-sided, Group, and Individual

Seyed A. Esmaeili, Sharmila Duppala, Vedant Nanda, Aravind Srinivasan, and John P. Dickerson

University of Maryland, College Park

Abstract

Online bipartite-matching platforms are ubiquitous and find applications in important areas such as crowdsourcing and ridesharing. In the most general form, the platform consists of three entities: two sides to be matched and a platform operator that decides the matching. The design of algorithms for such platforms has traditionally focused on the operator’s (expected) profit. Recent reports have shown that certain demographic groups may receive less favorable treatment under pure profit maximization. As a result, a collection of online matching algorithms have been developed that give a fair treatment guarantee for one side of the market at the expense of a drop in the operator’s profit. In this paper, we generalize the existing work to offer fair treatment guarantees to *both* sides of the market *simultaneously*, at a calculated worst case drop to operator profit. We consider group and individual Rawlsian fairness criteria. Moreover, our algorithms have theoretical guarantees and have adjustable parameters that can be tuned as desired to balance the trade-off between the utilities of the three sides. We also derive hardness results that give clear upper bounds over the performance of any algorithm.

1 Introduction

Online bipartite matching has been used to model many important applications such as crowdsourcing [Ho and Vaughan, 2012; Tong *et al.*, 2016; Dickerson *et al.*, 2019], rideshare [Lowalekar *et al.*, 2018; Dickerson *et al.*, 2021; Ma *et al.*, 2021], and online ad allocation [Goel and Mehta, 2008; Mehta, 2013]. In the most general version of the problem, there are three interacting entities: two sides of the market to be matched and a platform operator which assigns the matches. For example, in rideshare, riders on one side of the market submit requests, drivers on the other side of the market can take requests, and a platform operator such as Uber or Didi Chuxing matches the riders’ requests to one or more available drivers. In the case of crowdsourcing, organizations offer tasks, workers look for tasks to complete, and a plat-

form operator such as Amazon Mechanical Turk (MTurk) or Upwork matches tasks to workers.

Online bipartite matching algorithms are often designed to optimize a performance measure—usually, maximizing overall profit for the platform operator or a proxy of that objective. However, fairness considerations were largely ignored. This is troubling especially given that recent reports have indicated that different demographic groups may not receive similar treatment. For example, in rideshare platforms once the platform assigns a driver to a rider’s request, both the rider and the driver have the option of rejecting the assignment and it has been observed that membership in a demographic group may cause adverse treatment in the form of higher rejection. Indeed, [Cook, 2018; White, 2016; Wirtschafter, 2019] report that drivers could reject riders based on attributes such as gender, race, or disability. Conversely, [Rosenblat *et al.*, 2016] reports that drivers are likely to receive less favorable ratings if they belong to certain demographic groups. A similar phenomenon exists in crowdsourcing [Galperin and Greppi, 2017]. Moreover, even in the absence of such evidence of discrimination, as algorithms become more prevalent in making decisions that directly affect the welfare of individuals [Barocas *et al.*, 2019; Dwork *et al.*, 2012], it becomes important to guarantee a standard of fairness.

In response, a recent line of research has been concerned with the issue of designing fair algorithms for online bipartite matching. [Lesmana *et al.*, 2019; Ma and Xu, 2022; Xu and Xu, 2020] present algorithms which give a minimum utility guarantee for the drivers at a bounded drop to the operator’s profit. Conversely, [Nanda *et al.*, 2020] give guarantees for both the platform operator and the riders instead. Finally, [Sühr *et al.*, 2019] shows empirical methods that achieve fairness for both the riders and drivers simultaneously but lacks theoretical guarantees and ignores the operator’s profit.

Nevertheless, the existing work has a major drawback in terms of optimality guarantees. Specifically, the two sides being matched along with the platform operator constitute the three main interacting entities in online matching and despite the significant progress in fair online matching none of the previous work considers all three sides simultaneously. In this paper, we derive algorithms with theoretical guarantees for the platform operator’s profit as well as fairness guarantees for the two sides of the market. Unlike the previous work

we not only consider the size of the matching but also its quality. Further, we consider two online arrival settings: the **KIID** and the richer **KAD** setting (see Section 2 for definitions). We consider both group and individual notions of Rawlsian fairness and interestingly show a reduction from individual fairness to group fairness in the **KAD** setting. Moreover, we show upper bounds on the optimality guarantees of any algorithm and derive impossibility results that show a conflict between group and individual notions of fairness. Finally, we empirically test our algorithms on a real-world dataset.

2 Online Model & Optimization Objectives

Our model follows that of [Mehta, 2013; Feldman *et al.*, 2009; Bansal *et al.*, 2010; Alaei *et al.*, 2013] and others. We have a bipartite graph $G = (U, V, E)$ where U represents the set of static (offline) vertices (workers) and V represents the set of online vertex types (job types) which arrive dynamically in each round. The online matching is done over T rounds. In a given round t , a vertex of type v is sampled from V with probability $p_{v,t}$ with $\sum_{v \in V} p_{v,t} = 1, \forall t \in [T]$ the probability $p_{v,t}$ is known beforehand for each type v and each round t . This arrival setting is referred to as the known adversarial distribution (**KAD**) setting [Alaei *et al.*, 2013; Dickerson *et al.*, 2021]. When the distribution is stationary, i.e. $p_{v,t} = p_v, \forall t \in [T]$, we have the arrival setting of the known independent identical distribution (**KIID**). Accordingly, the expected number of arrivals of type v in T rounds is $n_v = \sum_{t \in [T]} p_{v,t}$, which reduces to $n_v = T p_v$ in the **KIID** setting. We assume that $n_v \in \mathbb{Z}^+$ for **KIID** [Bansal *et al.*, 2010]. Every vertex u (v) has a group membership,* with \mathcal{G} being the set of all group memberships; for any vertex $u \in U$, we denote its group memberships by $g(u) \in \mathcal{G}$ (similarly, we have $g(v)$ for $v \in V$). Conversely, for a group g , $U(g)$ ($V(g)$) denotes the subset of U (V) with group membership g . A vertex u (v) has a set of incident edges E_u (E_v) which connect it to vertices in the opposite side of the graph. In a given round, once a vertex (job) v arrives, an irrevocable decision has to be made on whether to reject v or assign it to a neighbouring vertex u (where $(u, v) \in E_v$) which has not been matched before. Suppose, that v is assigned to u , then the assignment is not necessarily successful rather it succeeds with probability $p_e = p_{(u,v)} \in [0, 1]$. This models the fact that an assignment could fail for some reason such as the worker refusing the assigned job. Furthermore, each vertex u has patience parameter $\Delta_u \in \mathbb{Z}^+$ which indicates the number of failed assignments it can tolerate before leaving the system, i.e. if u receives Δ_u failed assignments then it is deleted from the graph. Similarly, a vertex v has patience $\Delta_v \in \mathbb{Z}^+$, if a vertex v arrives in a given round, then it would tolerate at most Δ_v many failed assignments in that round before leaving the system.

For a given edge $e = (u, v) \in E$, we let each entity assign its own utility to that edge. In particular, the platform operator assigns a utility of w_e^O , whereas the offline vertex u assigns a utility of w_e^U , and the online vertex v assigns a utility of w_e^V .

*For a clearer representation we assume each vertex belongs to one group although our algorithms apply to the case where a vertex can belong to multiple groups.

This captures entities' heterogeneous wants. For example, in ridesharing, drivers may desire long trips from nearby riders, whereas the platform operator would not be concerned with the driver's proximity to the rider, although this maybe the only consideration the rider has. Similar motivations exist in crowdsourcing as well.

Letting \mathcal{M} denote the set of successful matchings made in the T rounds, then we consider the following optimization objectives:

- **Operator's Utility (Profit):** The operator's expected profit is simply the expected sums of the profits across the matched edges, this leads to $\mathbb{E}[\sum_{e \in \mathcal{M}} w_e^O]$.

- **Rawlsian Group Fairness:**

- **Offline Side:** Denote by \mathcal{M}_u the subset of edges in the matching that are incident on u . Then our fairness criterion is equal to

$$\min_{g \in \mathcal{G}} \frac{\mathbb{E}[\sum_{u \in U(g)} (\sum_{e \in \mathcal{M}_u} w_e^U)]}{|U(g)|}.$$

this value equals the minimum average expected utility received by a group in the offline side U .

- **Online Side:** Similarly, we denote by \mathcal{M}_v the subset of edges in the matching that are incident on vertex v , and define the fairness criterion to be

$$\min_{g \in \mathcal{G}} \frac{\mathbb{E}[\sum_{v \in V(g)} (\sum_{e \in \mathcal{M}_v} w_e^V)]}{\sum_{v \in V(g)} n_v}.$$

this value equals the minimum average expected utility received throughout the matching by any group in the online side V .

- **Rawlsian Individual Fairness:**

- **Offline Side:** The definition here follows from the group fairness definition for the offline side by simply considering that each vertex u belongs to its own distinct group. Therefore, the objective is $\min_{u \in U} \mathbb{E}[\sum_{e \in \mathcal{M}_u} w_e^U]$.

- **Online Side:** Unlike the offline side, the definition does not follow as straightforwardly. Here we cannot obtain a valid definition by simply assigning each vertex type its own group. Rather, we note that a given individual is actually a given arriving vertex at a given round $t \in [T]$, accordingly our fairness criterion is the minimum expected utility an individual receives in a given round, i.e. $\min_{t \in [T]} \mathbb{E}[\sum_{e \in \mathcal{M}_{v_t}} w_e^V]$, where v_t is the vertex that arrived in round t .

3 Main Results

Performance Criterion: We note that we are in the online setting, therefore our performance criterion is the competitive ratio. Denote by \mathcal{I} the distribution for the instances of matching problems, then $\text{OPT}(\mathcal{I}) = \mathbb{E}_{I \sim \mathcal{I}}[\text{OPT}(I)]$ where $\text{OPT}(I)$ is the optimal value of the sampled instance I . Similarly, for a given algorithm ALG , we define the value of its objective over the distribution \mathcal{I} by $\text{ALG}(\mathcal{I}) = \mathbb{E}_{\mathcal{D}}[\text{ALG}(I)]$ where the expectation $\mathbb{E}_{\mathcal{D}}[\cdot]$ is over the randomness of the

instance and the algorithm. The competitive ratio is then defined as $\min_{\mathcal{I}} \frac{\text{ALG}(\mathcal{I})}{\text{OPT}(\mathcal{I})}$.

In our work, we address optimality guarantees for each of the three sides of the matching market by providing algorithms with competitive ratio guarantees for the operator’s profit and the fairness objectives of the static and online side of the market simultaneously. Specifically, for the **KIID** arrival setting we have:

Theorem 3.1. *For the **KIID** setting, algorithm $\text{TSGF}_{\text{KIID}}(\alpha, \beta, \gamma)$ achieves a competitive ratio of $(\frac{\alpha}{2e}, \frac{\beta}{2e}, \frac{\gamma}{2e})^\dagger$ simultaneously over the operator’s profit, the group fairness objective for the offline side, and the group fairness objective for the online side, where $\alpha, \beta, \gamma > 0$ and $\alpha + \beta + \gamma \leq 1$.*

The following two theorems hold under the condition that $p_e = 1, \forall e \in E$. Specifically for the **KAD** setting we have:

Theorem 3.2. *For the **KAD** setting, algorithm $\text{TSGF}_{\text{KAD}}(\alpha, \beta, \gamma)$ achieves a competitive ratio of $(\frac{\alpha}{2}, \frac{\beta}{2}, \frac{\gamma}{2})$ simultaneously over the operator’s profit, the group fairness objective for the offline side, and the group fairness objective for the online side, where $\alpha, \beta, \gamma > 0$ and $\alpha + \beta + \gamma \leq 1$.*

Moreover, for the case of individual fairness whether in the **KIID** or **KAD** arrival setting we have:

Theorem 3.3. *For the **KIID** or **KAD** setting, we can achieve a competitive ratio of $(\frac{\alpha}{2}, \frac{\beta}{2}, \frac{\gamma}{2})$ simultaneously over the operator’s profit, the individual fairness objective for the offline side, and the individual fairness objective for the online side, where $\alpha, \beta, \gamma > 0$ and $\alpha + \beta + \gamma \leq 1$.*

We also give the following hardness results. In particular, for a given arrival (**KIID** or **KAD**) setting and fairness criterion (group or individual), the competitive ratios for all sides cannot exceed 1 simultaneously:

Theorem 3.4. *For all arrival models, given the three objectives: operator’s profit, offline side group (individual) fairness, and online side group (individual) fairness. No algorithm can achieve a competitive ratio of (α, β, γ) over the three objectives simultaneously such that $\alpha + \beta + \gamma > 1$.*

It is natural to wonder if we can combine individual and group fairness. Though it is possible to extend our algorithms to this setting. The follow theorem shows that they can conflict with one another:

Theorem 3.5. *Ignoring the operator’s profit and focusing either on the offline side alone or the online side alone. With α_G and α_I denoting the group and individual fairness competitive ratios, respectively. No algorithm can achieve competitive ratios (α_G, α_I) over the group and individual fairness objectives of one side simultaneously such that $\alpha_G + \alpha_I > 1$.*

Finally, we carry experiments on real-world datasets in section 5.

4 Algorithms and Theoretical Guarantees

Our algorithms use linear programming (LP) based techniques [Bansal *et al.*, 2010; Nanda *et al.*, 2020; Xu and Xu,

[†]Here, e denotes the Euler number, not an edge in the graph.

2020; Brubach *et al.*, 2016] where first a *benchmark* LP is set up to upper bound the optimal value of the problem, then an LP solution is sampled from to produce an algorithm with guarantees. Due to space constraints, all proofs and the technical details of Theorems (3.4 and 3.5) are in the appendix.

4.1 Group Fairness for the KIID Setting:

Before we discuss the details of the algorithm, we note that for a given vertex type $v \in V$, the expected arrival rate n_v could be greater than one. However, it is not difficult to modify the instance by simply “fragmenting” each type with $n_v > 1$ such that in the new instance $n_v = 1$ for each type. This can be done with the operator’s profit, offline group fairness, and online group fairness having the same values. Therefore, in what remains for the **KIID** setting $n_v = 1, \forall v \in V$ and therefore for any round t , each vertex v arrives with probability $\frac{1}{T}$. It also follows that for a given group g , $\sum_{v \in V(g)} n_v = \sum_{v \in V(g)} 1 = |V(g)|$.

For each edge $e = (u, v) \in E$ we use x_e to denote the expected number of probes (i.e, assignments from u to type v not necessarily successful) made to edge e in the LP benchmark. We have a total of three LPs each having the same set of constraints of (4), but differing by the objective. For compactness we do not repeat these constraints and instead write them once. Specifically, LP objective (1) along with the constraints of (4) give the optimal benchmark value of the operator’s profit. Similarly, with the same set of constraints (4) LP objective (2) and LP objective (3) give the optimal group max-min fair assignment for the offline and online sides, respectively. Note that the expected max-min objectives of (2) and (3), can be written in the form of a linear objective. For example, the max-min objective of (2) can be replaced with an LP with objective $\max \eta$ subject to the additional constraints that $\forall g \in \mathcal{G}, \eta \leq \frac{\sum_{u \in U(g)} \sum_{e \in E_u} w_e^U x_e p_e}{|U(g)|}$. Having introduced the LPs, we will use LP(1), LP(2), and LP(3) to refer to the platform’s profit LP, the offline side group fairness LP, and the online side group fairness LP, respectively.

$$\max \sum_{e \in E} w_e^O x_e p_e \quad (1)$$

$$\max \min_{g \in \mathcal{G}} \frac{\sum_{u \in U(g)} \sum_{e \in E_u} w_e^U x_e p_e}{|U(g)|} \quad (2)$$

$$\max \min_{g \in \mathcal{G}} \frac{\sum_{v \in V(g)} \sum_{e \in E_v} w_e^V x_e p_e}{|V(g)|} \quad (3)$$

$$\text{s.t } \forall e \in E : 0 \leq x_e \leq 1 \quad (4a)$$

$$\forall u \in U : \sum_{e \in E_u} x_e p_e \leq 1 \quad (4b)$$

$$\forall u \in U : \sum_{e \in E_u} x_e \leq \Delta_u \quad (4c)$$

$$\forall v \in V : \sum_{e \in E_v} x_e p_e \leq 1 \quad (4d)$$

$$\forall v \in V : \sum_{e \in E_v} x_e \leq \Delta_v \quad (4e)$$

Now we prove that LP(1), LP(2) and LP(3) indeed provide valid upper bounds (benchmarks) for the optimal solution for the operator’s profit and expected max-min fairness for the offline and online sides of the matching.

Lemma 4.1. *For the **KIID** setting, the optimal solutions of LP (1), LP (2), and LP (3) are upper bounds on the expected optimal that can be achieved by any algorithm for the operator’s profit, the offline side group fairness objective, and the online side group fairness objective, respectively.*

Our algorithm makes use of the dependent rounding subroutine [Gandhi *et al.*, 2006]. We mention the main properties of dependent rounding. In particular, given a fractional vector $\vec{x} = (x_1, x_2, \dots, x_t)$ where each $x_i \in [0, 1]$, let $k = \sum_{i \in [t]} x_i$, dependent rounding rounds x_i (possibly fractional) to $X_i \in \{0, 1\}$ for each $i \in [t]$ such that the resulting vector $\vec{X} = (X_1, X_2, X_3, \dots, X_t)$ has the following properties: (1) **Marginal Distribution**: The probability that $X_i = 1$ is equal to x_i , i.e. $Pr[X_i = 1] = x_i$ for each $i \in [t]$. (2) **Degree Preservation**: Sum of X_i 's should be equal to either $\lfloor k \rfloor$ or $\lceil k \rceil$ with probability one, i.e. $Pr[\sum_{i \in [t]} X_i \in \{\lfloor k \rfloor, \lceil k \rceil\}] = 1$. (3) **Negative Correlation**: For any $S \subseteq [t]$, (1) $Pr[\bigwedge_{i \in S} X_i = 0] \leq \prod_{i \in S} Pr[X_i = 0]$ (2) $Pr[\bigwedge_{i \in S} X_i = 1] \leq \prod_{i \in S} Pr[X_i = 1]$. It follows that for any $x_i, x_j \in \vec{x}$, $\mathbb{E}[X_i = 1 | X_j = 1] \leq x_i$.

Going back to the LPs (1,2,3), we denote the optimal solutions to LP (1), LP (2), and LP (3) by \vec{x}^*, \vec{y}^* and \vec{z}^* respectively. Further, we introduce the parameters $\alpha, \beta, \gamma \in [0, 1]$ where $\alpha + \beta + \gamma \leq 1$ and each of these parameters decide the "weight" the algorithm places on each objective (the operator's profit, the offline group fairness, and the online group fairness objectives). We note that our algorithm makes use of the subroutine **PPDR** (Probe with Permuted Dependent Rounding) shown in Algorithm 1.

Algorithm 1 PPDR(\vec{x}_v)

- 1: Apply dependent rounding to the fractional solution \vec{x}_v to get a binary vector \vec{X}_v .
 - 2: Choose a random permutation π over the set E_v .
 - 3: **for** $i = 1$ to $|E_v|$ **do**
 - 4: Probe vertex $\pi(i)$ if it is available and $\vec{X}_v(\pi(i)) = 1$
 - 5: **if** Probe is successful (i.e., a match) **then**
 - 6: **break**
-

The procedure of our parameterized sampling algorithm TSGF_{KID} is shown in Algorithm 2. Specifically, when a vertex of type v arrives at any time step we run **PPDR**(\vec{x}_v^*), **PPDR**(\vec{y}_v^*), or **PPDR**(\vec{z}_v^*) with probabilities α, β , and γ , respectively. We do not run any of the **PPDR** subroutines and instead reject the vertex with probability $1 - (\alpha + \beta + \gamma)$. The LP constraint (4e) guarantees that $\forall v \in V : \sum_{e \in E_v} s_e^* \leq \Delta_v$ where s_e^* could be \vec{x}_v^* , \vec{y}_v^* , or \vec{z}_v^* . Therefore, when **PPDR** is invoked by the **degree preservation** property of dependent rounding the number of edges probed will not exceed Δ_v , i.e. it would be within the patience limit.

Algorithm 2 TSGF_{KID}(α, β, γ)

- 1: Let v be the vertex type arriving at time t .
 - 2: With probability α run the subroutine, **PPDR**(\vec{x}_v^*).
 - 3: With probability β run the subroutine, **PPDR**(\vec{y}_v^*).
 - 4: With probability γ run the subroutine, **PPDR**(\vec{z}_v^*).
 - 5: Reject the arriving vertex with probability $1 - (\alpha + \beta + \gamma)$.
-

Now we analyze TSGF_{KID} to prove Theorem 3.1. It would suffice to prove that for each edge e the expected num-

ber of successful probes is at least $\alpha \frac{x_e^*}{2e}, \beta \frac{y_e^*}{2e}$ and $\gamma \frac{z_e^*}{2e}$. And finally from the linearity of expectation we show that the worst case competitive ratio of the proposed online algorithm with parameters α, β and γ is at least $(\frac{\alpha}{2e}, \frac{\beta}{2e}, \frac{\gamma}{2e})$ for the operator's profit and group fairness objectives on the offline and online sides of the matching, respectively.

A critical step is to lower bound the probability that a vertex u is available (safe) at the beginning of round $t \in [T]$. Let us denote the indicator random variable for that event by $SF_{u,t}$. The following lemma enables us to lower bound for the probability of $SF_{u,t}$.

Lemma 4.2. $Pr[SF_{u,t}] \geq \left(1 - \frac{t-1}{T}\right) \left(1 - \frac{1}{T}\right)^{t-1}$.

Now that we have established a lower bound on $Pr[SF_{u,t}]$, we lower bound the probability that an edge e is probed by one of the **PPDR** subroutines conditioned on the fact that u is available (Lemma 4.3). Let $1_{e,t}$ be the indicator that $e = (u, v)$ is probed by the TSGF_{KID} Algorithm at time t . Note that event $1_{e,t}$ occurs when (1) a vertex of type v arrives at time t and (2) e is sampled by **PPDR**(\vec{x}_v), **PPDR**(\vec{y}_v), or **PPDR**(\vec{z}_v).

Lemma 4.3. $Pr[1_{e,t} | SF_{u,t}] \geq \alpha \frac{x_e^*}{2T}, Pr[1_{e,t} | SF_{u,t}] \geq \beta \frac{y_e^*}{2T}, Pr[1_{e,t} | SF_{u,t}] \geq \gamma \frac{z_e^*}{2T}$

Given the above lemmas Theorem 3.1 can be proved.

4.2 Group Fairness for the KAD Setting:

For the **KAD** setting, the distribution over V is time dependent and hence the probability of sampling a type v in round t is $p_{v,t} \in [0, 1]$ with $\sum_{v \in V} p_{v,t} = 1$. Further, we assume for the **KAD** setting that for every edge $e \in E$ we have $p_e = 1$. This means that whenever an incoming vertex v is assigned to a safe-to-add vertex u the assignment is successful. This also means that any non-trivial values for the patience parameters Δ_u and Δ_v become meaningless and hence we can WLOG assume that $\forall u \in U, \forall v \in V, \Delta_u = \Delta_v = 1$. From the above discussion, we have the following LP benchmarks for the operator's profit, the group fairness for the offline side and the group fairness for the online side:

$$\max \sum_{t \in [T]} \sum_{e \in E} w_e^O x_{e,t} \quad (5)$$

$$\max \min_{g \in \mathcal{G}} \frac{\sum_{t \in [T]} \sum_{u \in U(g)} \sum_{e \in E_u} w_e^U x_{e,t}}{|U(g)|} \quad (6)$$

$$\max \min_{g \in \mathcal{G}} \frac{\sum_{t \in [T]} \sum_{v \in V(g)} \sum_{e \in E_v} w_e^V x_{e,t}}{\sum_{v \in V(g)} n_v} \quad (7)$$

$$\text{s.t. } \forall e \in E, \forall t \in [T] : 0 \leq x_{e,t} \leq 1 \quad (8a)$$

$$\forall u \in U : \sum_{t \in [T]} \sum_{e \in E_u} x_{e,t} \leq 1 \quad (8b)$$

$$\forall v \in V, \forall t \in [T] : \sum_{e \in E_v} x_{e,t} \leq p_{v,t} \quad (8c)$$

Lemma 4.4. For the **KAD** setting, the optimal solutions of LP (5), LP (6) and LP (7) are upper bounds on the expected optimal that can be achieved by any algorithm for the operator's profit, the offline side group fairness objective, and the online side group fairness objective, respectively.

Note that in the above LP we have $x_{e,t}$ as the probability for successfully assigning an edge in round t (with an explicit dependence on t), unlike in the **KIID** setting where we had x_e instead to denote the expected number of times edge e is probed through all rounds. Similar to our solution for the **KIID** setting, we denote by $x_{e,t}^*$, $y_{e,t}^*$, and $z_{e,t}^*$ the optimal solutions of the LP benchmarks for the operator’s profit, offline side group fairness, and online side group fairness, respectively.

Having the optimal solutions to the LPs, we use algorithm TSGF_{KAD} shown in Algorithm 3. In TSGF_{KAD} new parameters are introduced, specifically λ and $\rho_{e,t}$ where $\rho_{e,t}$ is the probability that edge $e = (u, v)$ is safe to add in round t , i.e. the probability that u is unmatched at the beginning of round t . For now we assume that we have the precise values of $\rho_{e,t}$ for all rounds and discuss how to obtain these values at the end of this subsection. Now conditioned on v arriving at round t and $e = (u, v)$ being safe to add, it follows that e is sampled with probability $\alpha \frac{x_{e,t}^* \lambda}{p_{v,t} \rho_{e,t}} + \beta \frac{y_{e,t}^* \lambda}{p_{v,t} \rho_{e,t}} + \gamma \frac{z_{e,t}^* \lambda}{p_{v,t} \rho_{e,t}}$ which would be a valid probability (positive and not exceeding 1) if $\rho_{e,t} \geq \lambda$. This follows from the fact that $\alpha, \beta, \gamma \in [0, 1]$ and $\alpha + \beta + \gamma \leq 1$ and also by constraint (8c) which leads to $\frac{\sum_{e \in E_v} x_{e,t}^*}{p_{v,t}} \leq 1$. Further, if $\rho_{e,t} \geq \lambda$ then by constraint (8c) we have $\sum_{e \in E_v} \left(\alpha \frac{x_{e,t}^* \lambda}{p_{v,t} \rho_{e,t}} + \beta \frac{y_{e,t}^* \lambda}{p_{v,t} \rho_{e,t}} + \gamma \frac{z_{e,t}^* \lambda}{p_{v,t} \rho_{e,t}} \right) \leq 1$ and therefore the distribution is valid. Clearly, the value of λ is important for the validity of the algorithm, the following lemma shows that $\lambda = \frac{1}{2}$ leads to a valid algorithm.

Lemma 4.5. *Algorithm TSGF_{KAD} is valid for $\lambda = \frac{1}{2}$.*

Algorithm 3 $\text{TSGF}_{\text{KAD}}(\alpha, \beta, \gamma)$

- 1: Let v be the vertex type arriving at time t .
 - 2: **if** $E_{v,t} = \phi$ **then**
 - 3: Reject v
 - 4: **else**
 - 5: With probability α probe e with probability $\frac{x_{e,t}^* \lambda}{p_{v,t} \rho_{e,t}}$.
 - 6: With probability β probe e with probability $\frac{y_{e,t}^* \lambda}{p_{v,t} \rho_{e,t}}$.
 - 7: With probability γ probe e with probability $\frac{z_{e,t}^* \lambda}{p_{v,t} \rho_{e,t}}$.
 - 8: With probability $[1 - (\alpha + \beta + \gamma)]$ reject v .
-

We now return to the issue of how to obtain the values of $\rho_{e,t}$ for all rounds. This can be done by using the simulation technique as done in [Dickerson *et al.*, 2021; Adameczyk *et al.*, 2015]. To elaborate, we note that we first solve the LPs (5,6,7) and hence have the values of $x_{e,t}^*$, $y_{e,t}^*$, and $z_{e,t}^*$. Now, for the first round $t = 1$, clearly $\rho_{e,t} = 1, \forall e \in E$. To obtain $\rho_{e,t}$ for $t = 2$, we simulate the arrivals and algorithm a collection of times, and use the empirically estimated probability. More precisely, for $t = 1$ we sample the arrival of vertex v from $p_{v,t}$ with $t = 1$ ($p_{v,t}$ values are given as part of the model), then we run our algorithm for the values of α, β, γ that we have chosen. Accordingly, at $t = 2$ some vertex in U might be matched. We do this simulation a number of times and then we take $\rho_{e,t}$ for $t = 2$ to be the average of

all runs. Now having the values of $\rho_{e,t}$ for $t = 1$ and $t = 2$, we further simulate the arrivals and the algorithm to obtain $\rho_{e,t}$ for $t = 3$ and so on until we get $\rho_{e,t}$ for the last round T . We note that using the Chernoff bound [Mitzenmacher and Upfal, 2017] we can rigorously characterize the error in this estimation, however by doing this simulation a number of times that is polynomial in the problem size, the error in the estimation would only affect the lower order terms in the competitive ration analysis [Dickerson *et al.*, 2021] and hence for simplicity it is ignored. Now, with Lemma 4.5 Theorem 3.2 can be proved (see the appendix).

4.3 Individual Fairness KIID and KAD Settings:

For the case of Rawlsian (max-min) individual fairness, we simply consider each vertex of the offline side to belong to its own distinct group and the definition of group max-min fairness would simply lead to individual max-min fairness. On the other hand, for the online side a similar trick would not yield a meaningful criterion, we instead define the individual max-min fairness for the online side to equal $\min_{t \in [T]} \mathbb{E}[\text{util}(v_t)] = \min_{t \in [T]} \mathbb{E}[\sum_{e \in \mathcal{M}_{v_t}} w_e^V]$ where $\text{util}(v_t)$ is the utility received by the vertex arriving in round t . If we were to denote by $x_{e,t}$ the probability that the algorithm would successfully match e in round t , then it follows straightforwardly that $\mathbb{E}[\text{util}(v_t)] = \sum_{e \in E_{v_t}} w_e^V x_{e,t}$. We consider this definition to be the valid extension of max-min fairness for the online side as we are now concerned with the minimum utility across the online individuals (arriving vertices) which are T many. The following lemma shows that we can solve two-sided individual max-min fairness by a reduction to two-sided group max-min fairness in the **KAD** arrival setting:

Lemma 4.6. *Whether in the **KIID** or **KAD** setting, a given instance of two-sided individual max-min fairness can be converted to an instance of two-sided group max-min fairness in the **KAD** setting.*

The above Lemma with algorithm TSGF_{KAD} can be used to prove Theorem 3.3 as shown in the appendix.

5 Experiments

In this section we verify the performance of our algorithm and our theoretical lower bounds for the KIID and group fairness setting using algorithm $\text{TSGF}_{\text{KIID}}$ (section 4.1). We note that none of the previous work consider our three-sided setting. We use rideshare as an application example of online bipartite matching as done in [Dickerson *et al.*, 2021; Nanda *et al.*, 2020; Xu and Xu, 2020]. We expect similar results and performance to hold in other matching applications such as crowdsourcing.

Experimental Setup: As done in previous work, the drivers’ side is the offline (static) side whereas the riders’ side is the online side. We run our experiments over the widely used New York City yellow cabs dataset [Nanda *et al.*, 2020; Xu and Xu, 2020] which contains records of taxi in the NYC area from 2013. Each record contains a unique (anonymized) ID of the driver, the coordinates of start and end locations of the trip, distance of the trip and other additional metadata.

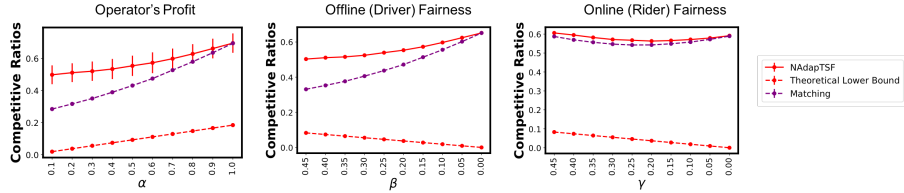


Figure 1: Competitive ratios for TSGF_{KIID} over the operator’s profit, offline (driver) fairness objective, and online (rider) fairness objective with different values of α, β, γ . Note that “matching” refers to the case where driver and rider utilities are set to 1 across all edges.

Following [Dickerson *et al.*, 2021; Nanda *et al.*, 2020], we bin the starting and ending latitudes and longitudes by dividing the latitudes from 40.4° to 40.95° and longitudes from -73° to -75° into equally spaced grids of step size 0.05. This enables us to define each driver and request type based on its starting and ending bins. We follow the same preprocessing technique as [Nanda *et al.*, 2020] to obtain a bipartite graph $G = (U, V, E)$ with $|U| = 49$ and $|V| = 24$. For a vertex type v , the expected number of arrival n_v is sampled from a Gaussian of mean 15 and variance 1 (i.e., $\mathcal{N}(15, 1)$), and then rounding the value to an integer. This leads to 365 total requests, i.e. $T = 365$. We set driver patience Δ_u to 3 for all our experiments. Following [Xu and Xu, 2020], we uniformly sample rider patience Δ_v from $\{1, 2\}$.

Since the dataset does not include demographic information, for each vertex we randomly sample the group membership [Nanda *et al.*, 2020]. Specifically, we randomly assign an “advantaged” or “disadvantaged” group in a 1:3 ratio for the drivers and a 1:1 ratio for the riders where both ratios are “advantaged” : “disadvantaged”. The value of p_e for $e = (u, v)$ depends on whether the vertices belong to the advantaged or disadvantaged group. Specifically, $p_e = 0.6$ if both vertices are advantaged, $p_e = 0.3$ if both are disadvantaged, and $p_e = 0.1$ for all other cases. We then set $p_e := \kappa + (1 - \kappa)p_e$ with $\kappa = 0.5$.

In addition to this, a key component of our work is the use of driver and rider specific utilities. We follow the work of [Sühr *et al.*, 2019] to set the utilities. In particular, we set the operator’s utility to the rider’s trip length $w_e^O = \text{tripLength}(v)$ —a rough proxy for profit. In addition, the rider’s utility over an edge $e = (u, v)$ is set to $w_e^V = -\text{dist}(u, v)$ where $\text{dist}(u, v)$ is the distance between the rider and the driver and the driver’s utility is set to $w_e^U = \text{tripLength}(v) - \text{dist}(u, v)$. Whereas the trip length $\text{tripLength}(v)$ is available in the dataset, the distance between the rider and the driver $\text{dist}(u, v)$ is not. We therefore simulate the distance, by creating an equally spaced grid with step size 0.005 around the starting coordinates of the trip. This results in 64 possible coordinates in the vicinity of the starting coordinates of the trip. We then randomly choose one of these 64 coordinates to be the location of the driver when the trip was requested. Then $\text{dist}(u, v)$ is simply the distance between this coordinate to the start coordinate of the trip. This is a reasonable approximation since the platform would not assign far away drivers to pickup a rider. As a final step we scale the utilities obtained to be positive and greater than 1. Our code will be released to aid the reproducibility of the reported results. The reported performance of any algorithm is

its average performance over 2,000 runs.

Performance of TSGF_{KIID} with Varied Parameters: Figure 1 shows the performance of our algorithm over the three objectives: operator’s profit, offline (driver) group fairness, and online (rider) group fairness. We notice that all objectives remain steadily above their theoretical lower bound. This indicates that this instance is particularly well-behaved and that theoretical guarantees are too pessimistic, nevertheless they are valid as we never encounter a situation where we achieve a competitive ratio that is below the theoretical prediction.

The previous works like [Nanda *et al.*, 2020], [Xu and Xu, 2020], and [Ma and Xu, 2022] only considered the matching size when optimizing the fairness objective for the offline (drivers) or online (riders) side. This is in contrast to our setting where we consider the matching quality. To see the effect of ignoring the matching quality and only considering the size, we run the same experiments with $w_e^U = w_e^V = 1, \forall e \in E$, i.e. the quality is ignored. The results are shown in the graph labelled “matching” in Figure 1, it is clear that ignoring the match quality leads to noticeably worse results.

Comparison to Heuristics: We also compare the performance of TSGF_{KIID} against three other heuristics. In particular, we consider Greedy-O which is a greedy algorithm that upon the arrival of an online vertex (rider) v picks the edge $e \in E_v$ with maximum value of $p_e w_e^O$ until it either results in a match or the patience quota is reached. We also consider Greedy-R which is identical to Greedy-O except that it greedily picks the edge with maximum value of $p_e w_e^V$ instead, therefore maximizing the rider’s utility in a greedy fashion. Moreover, we consider Greedy-D which is a greedy algorithm that upon the arrival of an online vertex v , first finds the group on the offline side with the lowest average utility so far, then it greedily picks an offline vertex (driver) $u \in E_v$ from this group (if possible) which has the maximum utility until it either results in a match or the patience limit is reached. Table 1 shows the comparison of TSGF_{KIID} to the Greedy heuristics defined above. With the exception of Greedy-D, the heuristics do not perform well. While Greedy-D, performs well, it under-performs our algorithm in two objectives and in general does not give the flexibility of TSGF_{KIID} that can place a higher weight on a given objective.

Table 1: Comparison of TSGF_{KIID} with $(\alpha, \beta, \gamma) = (0.1, 0.8, 0.1)$ with Greedy heuristics on the NYC dataset.

	Greedy-O	Greedy-D	Greedy-R	TSGF _{KIID}
Profit	0.1781	0.4954	0.1782	0.6177
Offline Fairness	0.1959	0.5483	0.196	0.6196
Online Fairness	0.2843	0.8126	0.2849	0.6277

Acknowledgments

This research was supported in part by NSF CAREER Award IIS-1846237, NSF Award CCF-1749864, NSF Award CCF-1852352, NSF Award SMA-2039862, NIST MSE Award #20126334, DARPA GARD #HR00112020007, DARPA SI3-CMD #S4761, DoD WHS Award #HQ003420F0035, ARPA-E DIFFERENTIATE Award #1257037, and gifts by research awards from Adobe, Amazon, and Google. We are grateful to Pan Xu for advice and comments on earlier versions of this work.

References

- [Adamczyk *et al.*, 2015] Marek Adamczyk, Fabrizio Grandoni, and Joydeep Mukherjee. Improved approximation algorithms for stochastic matching. In *Algorithms-ESA 2015*, pages 1–12. Springer, 2015.
- [Alaei *et al.*, 2013] Saeed Alaei, MohammadTaghi Hajiaghayi, and Vahid Liaghat. The online stochastic generalized assignment problem. In *Approximation, Randomization, and Combinatorial Optimization. Algorithms and Techniques*, pages 11–25. Springer, 2013.
- [Bansal *et al.*, 2010] Nikhil Bansal, Anupam Gupta, Jian Li, Julián Mestre, Viswanath Nagarajan, and Atri Rudra. When lp is the cure for your matching woes: Improved bounds for stochastic matchings. In *European Symposium on Algorithms*, pages 218–229. Springer, 2010.
- [Barocas *et al.*, 2019] Solon Barocas, Moritz Hardt, and Arvind Narayanan. *Fairness and Machine Learning*. fairmlbook.org, 2019. <http://www.fairmlbook.org>.
- [Brubach *et al.*, 2016] Brian Brubach, Karthik Abinav Sankararaman, Aravind Srinivasan, and Pan Xu. Online stochastic matching: New algorithms and bounds, 2016.
- [Cook, 2018] Gina Cook. Woman says uber driver denied her ride because of her wheelchair. 2018.
- [Dickerson *et al.*, 2019] John P Dickerson, Karthik Abinav Sankararaman, Aravind Srinivasan, and Pan Xu. Balancing relevance and diversity in online bipartite matching via submodularity. In *AAAI*, 2019.
- [Dickerson *et al.*, 2021] John P Dickerson, Karthik A Sankararaman, Aravind Srinivasan, and Pan Xu. Allocation problems in ride-sharing platforms: Online matching with offline reusable resources. *ACM Transactions on Economics and Computation (TEAC)*, 9(3):1–17, 2021.
- [Dwork *et al.*, 2012] Cynthia Dwork, Moritz Hardt, Toniann Pitassi, Omer Reingold, and Richard Zemel. Fairness through awareness. In *ITCS*, 2012.
- [Feldman *et al.*, 2009] Jon Feldman, Aranyak Mehta, Vahab Mirrokni, and S. Muthukrishnan. Online stochastic matching: Beating 1-1/e, 2009.
- [Galperin and Greppi, 2017] Hernan Galperin and Catrihel Greppi. Geographical discrimination in the gig economy. Available at SSRN 2922874, 2017.
- [Gandhi *et al.*, 2006] Rajiv Gandhi, Samir Khuller, Srinivasan Parthasarathy, and Aravind Srinivasan. Dependent rounding and its applications to approximation algorithms. *Journal of the ACM (JACM)*, 53(3):324–360, 2006.
- [Goel and Mehta, 2008] Gagan Goel and Aranyak Mehta. Online budgeted matching in random input models with applications to adwords. In *SODA*, 2008.
- [Ho and Vaughan, 2012] Chien-Ju Ho and Jennifer Vaughan. Online task assignment in crowdsourcing markets. In *AAAI*, 2012.
- [Lesmana *et al.*, 2019] Nixie S Lesmana, Xuan Zhang, and Xiaohui Bei. Balancing efficiency and fairness in on-demand ridesourcing. In *NeurIPS*, 2019.
- [Lowalekar *et al.*, 2018] Meghna Lowalekar, Pradeep Varakantham, and Patrick Jaillet. Online spatio-temporal matching in stochastic and dynamic domains. *Artificial Intelligence (AIJ)*, 261:71–112, 2018.
- [Ma and Xu, 2022] Will Ma and Pan Xu. Group-level fairness maximization in online bipartite matching. In *AA-MAS*, 2022.
- [Ma *et al.*, 2021] Will Ma, Pan Xu, and Yifan Xu. Fairness maximization among offline agents in online-matching markets. In *WINE*, 2021.
- [Mehta, 2013] Aranyak Mehta. Online matching and ad allocation. *Foundations and Trends in Theoretical Computer Science*, 8(4):265–368, 2013.
- [Mitzenmacher and Upfal, 2017] Michael Mitzenmacher and Eli Upfal. *Probability and computing: Randomization and probabilistic techniques in algorithms and data analysis*. Cambridge university press, 2017.
- [Nanda *et al.*, 2020] Vedant Nanda, Pan Xu, Karthik Abinav Sankararaman, John P Dickerson, and Aravind Srinivasan. Balancing the tradeoff between profit and fairness in rideshare platforms during high-demand hours. In *AAAI*, 2020.
- [Rosenblat *et al.*, 2016] Alex Rosenblat, Karen EC Levy, Solon Barocas, and Tim Hwang. Discriminating tastes: Customer ratings as vehicles for bias. Available at SSRN 2858946, 2016.
- [Sühr *et al.*, 2019] Tom Sühr, Asia J Biega, Meike Zehlike, Krishna P Gummadi, and Abhijnan Chakraborty. Two-sided fairness for repeated matchings in two-sided markets: A case study of a ride-hailing platform. In *KDD*, 2019.
- [Tong *et al.*, 2016] Yongxin Tong, Jieying She, Bolin Ding, Libin Wang, and Lei Chen. Online mobile micro-task allocation in spatial crowdsourcing. In *ICDE*, 2016.
- [White, 2016] Gillan B. White. Uber and lyft are failing black riders. 2016.
- [Wirtschafter, 2019] Eli Wirtschafter. Driver discrimination still a problem as uber and lyft prepare to go public. 2019.
- [Xu and Xu, 2020] Yifan Xu and Pan Xu. Trade the system efficiency for the income equality of drivers in rideshare. In *IJCAI*, 2020.

A Proofs

Here we include the missing proofs. Each lemma/theorem is restated followed by its proof.

A.1 Proofs for Section 4.1

Lemma 4.1. *For the **KIID** setting, the optimal solutions of LP (1), LP (2), and LP (3) are upper bounds on the expected optimal that can be achieved by any algorithm for the operator's profit, the offline side group fairness objective, and the online side group fairness objective, respectively.*

Proof. We follow a similar proof to that used in [Bansal *et al.*, 2010]. We shall focus on the operator's profit objective since the other objectives follow by very similar arguments. First, we note that LP(1) uses the expected values of the problem parameters, i.e. if we consider a specific graph realization G , then let N_v^G be the number of arrival for vertex type v , then it follows that LP(1) uses the expected values since $\mathbb{E}_{\mathcal{I}}[N_v^G] = 1, \forall v \in V$ where $\mathbb{E}_{\mathcal{I}}[\cdot]$ is an expectation over the randomness of the instance. We shall therefore refer to the value of LP(1) as $LP(\mathbb{E}_{\mathcal{I}}[G])$.

To prove that $LP(\mathbb{E}_{\mathcal{I}}[G])$ is a valid upper bound it suffices to show that $LP(\mathbb{E}_{\mathcal{I}}[G]) \geq \mathbb{E}_{\mathcal{I}}[LP(G)]$ where $LP(G)$ is the optimal LP value of a realized instance G and $\mathbb{E}_{\mathcal{I}}[LP(G)]$ is the expected value of that optimal LP value. Let us then consider a specific realization G' , its corresponding LP would be the following:

$$\max \sum_{e' \in E'} w_{e'}^O p_{e'} x_{e'} \quad (9)$$

$$\text{s.t. } \forall e' \in E' : 0 \leq x_{e'} \leq 1 \quad (10a)$$

$$\forall u \in U : \sum_{e' \in E'_u} x_{e'} p_{e'} \leq 1 \quad (10b)$$

$$\forall u \in U : \sum_{e' \in E'_u} x_{e'} \leq \Delta_u \quad (10c)$$

$$\forall v' \in V' : \sum_{e' \in E'_{v'}} x_{e'} p_{e'} \leq 1 \quad (10d)$$

$$\forall v' \in V' : \sum_{e' \in E'_{v'}} x_{e'} \leq \Delta_{v'} \quad (10e)$$

where V' is the realization of the online side. It is clear that for a given realization $G' = (U, V', E')$ the above LP(9) is an upper bound on the operator's objective value for that realization.

Now we prove that $LP(\mathbb{E}_{\mathcal{I}}[G]) \geq \mathbb{E}_{\mathcal{I}}[LP(G)]$. The dual of the LP for the realization G' is the following:

$$\min \sum_{u \in U} (\alpha_u + \Delta_u \beta_u) + \sum_{v' \in V'} (\alpha_{v'} + \Delta_{v'} \beta_{v'}) + \sum_{(u,v')} \gamma_{u,v'} \quad (11)$$

$$\text{s.t. } \forall u \in U, \forall v' \in V' :$$

$$\beta_u + \beta_{v'} + p_{(u,v')} (\alpha_u + \alpha_{v'}) + \gamma_{(u,v')} \geq w_{(u,v')}^O p_{(u,v')} \quad (12a)$$

$$\alpha_u, \alpha_{v'}, \beta_u, \beta_{v'}, \gamma_{(u,v')} \geq 0 \quad (12b)$$

Consider the graph with the expected number of arrival $\mathbb{E}_{\mathcal{I}}(G)$ it would have a dual of the above form, let $\vec{\alpha}^*, \vec{\beta}^*, \vec{\gamma}^*$ be the optimal solution of its corresponding dual. Then it follows by the strong duality of LPs that solution $\vec{\alpha}^*, \vec{\beta}^*, \vec{\gamma}^*$ would have a value of $LP(\mathbb{E}_{\mathcal{I}}[G])$. Now for the instance G' , we shall use the following dual solution $\vec{\alpha}, \vec{\beta}, \vec{\gamma}$ which is set as follows:

- $\forall u \in U : \hat{\alpha}_u = \alpha_u^*, \hat{\beta}_u = \alpha_u^*$.

- $\forall v' \in V'$ of type $v : \hat{\alpha}_{v'} = \alpha_v^*, \hat{\beta}_{v'} = \beta_v^*$.
- $\forall u \in U, \forall v' \in V'$ of type $v : \hat{\gamma}_{(u,v')} = \gamma_{(u,v)}^*$.

Note that the new solution $\vec{\alpha}, \vec{\beta}, \vec{\gamma}$ is a feasible dual solution since it satisfies constraints 12a and 12b. By weak duality the value of the solution $\vec{\alpha}, \vec{\beta}, \vec{\gamma}$ upper bounds $LP(G')$. Now if we were to denote the number of vertices of type v that arrived in instance G' by $n_v^{G'}$, then the value of the solution $\vec{\alpha}, \vec{\beta}, \vec{\gamma}$ satisfies:

$$\begin{aligned} & \sum_{u \in U} (\hat{\alpha}_u + \Delta_u \hat{\beta}_u) + \sum_{v' \in V'} (\hat{\alpha}_{v'} + \Delta_{v'} \hat{\beta}_{v'}) + \sum_{(u,v')} \hat{\gamma}_{u,v'} \\ &= \sum_{u \in U} (\alpha_u^* + \Delta_u \beta_u^*) + \sum_{v \in V} n_v^{G'} (\alpha_v^* + \Delta_v \beta_v^*) + \sum_{(u,v)} n_v^{G'} \gamma_{u,v}^* \geq LP(G') \end{aligned}$$

Now taking the expectation, we get:

$$\begin{aligned} & \mathbb{E}_{\mathcal{I}}[LP(G')] \\ & \leq \mathbb{E}_{\mathcal{I}} \left[\sum_{u \in U} (\hat{\alpha}_u + \Delta_u \hat{\beta}_u) + \sum_{v' \in V'} (\hat{\alpha}_{v'} + \Delta_{v'} \hat{\beta}_{v'}) + \sum_{(u,v')} \hat{\gamma}_{u,v'} \right] \\ &= \mathbb{E}_{\mathcal{I}} \left[\sum_{u \in U} (\alpha_u^* + \Delta_u \beta_u^*) + \sum_{v \in V} n_v^{G'} (\alpha_v^* + \Delta_v \beta_v^*) + \sum_{(u,v)} n_v^{G'} \gamma_{u,v}^* \right] \\ &= \sum_{u \in U} (\alpha_u^* + \Delta_u \beta_u^*) + \sum_{v \in V} \mathbb{E}_{\mathcal{I}}[n_v^{G'}] (\alpha_v^* + \Delta_v \beta_v^*) + \sum_{(u,v)} \mathbb{E}_{\mathcal{I}}[n_v^{G'}] \gamma_{u,v}^* \\ &= \sum_{u \in U} (\alpha_u^* + \Delta_u \beta_u^*) + \sum_{v \in V} (\alpha_v^* + \Delta_v \beta_v^*) + \sum_{(u,v)} \gamma_{u,v}^* \\ &= LP(\mathbb{E}_{\mathcal{I}}[G]) \end{aligned}$$

For the offline and online group fairness objectives, we use the same steps. The difference would be in the constraints of the dual program, however following a similar assignment as done from $\vec{\alpha}^*, \vec{\beta}^*, \vec{\gamma}^*$ to $\vec{\alpha}, \vec{\beta}, \vec{\gamma}$ is sufficient to prove the lemma for both fairness objectives. \square

Before we prove Lemma 4.2 for the lower bound on the probability of $SF_{u,t}$. We have to first introduce the following two lemmas. Specifically, let $A_{u,t}$ be the number of successful assignments that u received and accepted before round t . Then the following lemma holds.

Lemma A.1. *For any given vertex u at time $t \in [T]$, $P[A_{u,t} = 0] \geq \left(1 - \frac{1}{T}\right)^{t-1}$.*

Proof. Let $X_{e,k}$ be the indicator random variable for u receiving an arrival request of type v where $e \in E_u$ and $k < t$. Let $Y_{e,k}$ be the indicator random variable that the edge e gets sampled by the $\text{TSGF}_{\text{KIID}}(\alpha, \beta, \gamma)$ algorithm at time $k < t$. Let $Z_{e,k}$ be the indicator random variable that assignment $e = (u, v)$ is successful (a match) at time $k < t$. Then

$$\begin{aligned}
A_{u,t} &= \sum_{k < t} \sum_{e \in E_u} X_{e,k} Y_{e,k} Z_{e,k}. \\
Pr[A_{u,t} = 0] &= \Pi_{k < t} Pr \left[\sum_{e=(u,v) \in E_u} X_{e,k} Y_{e,k} Z_{e,k} = 0 \right] \\
&= \Pi_{k < t} \left(1 - Pr \left[\sum_{e \in E_u} X_{e,k} Y_{e,k} Z_{e,k} \geq 1 \right] \right) \\
&\geq \Pi_{k < t} \left(1 - \sum_{e \in E_u} \frac{1}{T} \cdot (\alpha x_e^* + \beta \frac{y_e^*}{q_v} + \gamma \frac{z_e^*}{q_v}) \cdot p_e \right) \\
&= \Pi_{k < t} \left(1 - \frac{1}{T} \cdot (\alpha \sum_{e \in E_u} x_e^* p_e + \beta \sum_{e \in E_u} y_e^* p_e + \gamma \sum_{e \in E_u} z_e^* p_e) \right) \\
&\geq \Pi_{k < t} \left(1 - \frac{1}{T} \cdot (\alpha \cdot 1 + \beta \cdot 1 + \gamma \cdot 1) \right) \\
&\geq \Pi_{k < t} \left(1 - \frac{1}{T} \right) = \left(1 - \frac{1}{T} \right)^{t-1}
\end{aligned}$$

□

Now we lower bound the probability that u was probed less than Δ_u times prior to t . Denote the number of probes received by u before t by $B_{u,t}$, then the following lemma holds:

Lemma A.2. $Pr[B_{u,t} < \Delta_u] \geq 1 - \frac{t-1}{T}$.

Proof. First it is clear that $B_{u,t} = \sum_{k < t} \sum_{e \in E_u} X_{e,k} Y_{e,k}$.

$$\begin{aligned}
\mathbb{E}[B_{u,t}] &= \sum_{k < t} \sum_{e \in E_u} \mathbb{E}[X_{e,k} Y_{e,k}] \\
&\leq \sum_{k < t} \sum_{e \in E_u} \frac{1}{T} (\alpha x_e^* + \beta y_e^* + \gamma z_e^*) \\
&\leq \sum_{k < t} \frac{1}{T} (\alpha \sum_{e \in E_d} x_e^* + \beta \sum_{e \in E_u} y_e^* + \gamma \sum_{e \in E_u} z_e^*) \\
&\leq \sum_{k < t} \frac{\Delta_u}{T} (\alpha + \beta + \gamma) \leq \frac{(t-1)\Delta_u}{T}
\end{aligned}$$

The inequality before the last follows from $(\alpha + \beta + \gamma) \leq 1$. Now using Markov's inequality: $Pr[B_{u,t} < \Delta_u] \geq 1 - \frac{\mathbb{E}[B_{u,t}]}{\Delta_u}$, we get $\implies Pr[B_{u,t} < \Delta_u] \geq 1 - \frac{t-1}{T}$. □

Now we restate Lemma 4.2 and prove it.

Lemma 4.2. $Pr[SF_{u,t}] \geq \left(1 - \frac{t-1}{T}\right) \left(1 - \frac{1}{T}\right)^{t-1}$.

Proof. Consider a given edge $e \in E_u$ where $k < t$

$$\begin{aligned}
\mathbb{E}[X_{e,k} Y_{e,k} | A_{u,t} = 0] &= \mathbb{E}[X_{e,k} Y_{e,k} | A_{u,k} = 0] \\
&= \frac{Pr[X_{e,k} = 1, Y_{e,k} = 1, Z_{e,k} = 0]}{Pr[A_{u,k} = 0]} \\
&\leq \frac{\frac{1}{T} \cdot (\alpha x_e^* + \beta y_e^* + \gamma z_e^*) \cdot (1 - p_e)}{1 - \sum_{e \in E_d} \frac{1}{T} \cdot (\alpha x_e^* + \beta y_e^* + \gamma z_e^*) \cdot p_e} \\
&= \frac{\frac{1}{T} \cdot (\alpha x_e^* + \beta y_e^* + \gamma z_e^*) \cdot (1 - p_e)}{1 - p_e + p_e \left(1 - \sum_{e \in E_d} \frac{1}{T} \cdot (\alpha x_e^* + \beta y_e^* + \gamma z_e^*) \right)} \\
&\leq \frac{1}{T} \cdot (\alpha x_e^* + \beta y_e^* + \gamma z_e^*).
\end{aligned}$$

The above inequality is due to the fact that $\sum_{e \in E_u} \frac{1}{T} (\alpha x_e^* + \beta y_e^* + \gamma z_e^*) \leq \frac{\Delta_u}{T} < 1$.

$$\begin{aligned}
\mathbb{E}[B_{u,t} | A_{u,t} = 0] &= \sum_{k < t} \sum_{e \in E_u} \mathbb{E}[X_{e,k} Y_{e,k} | A_{u,k} = 0] \\
&\leq \sum_{k < t} \sum_{e \in E_u} \frac{1}{T} (\alpha x_e^* + \beta y_e^* + \gamma z_e^*) \\
&\leq \sum_{k < t} \frac{1}{T} (\alpha \sum_{e \in E_u} x_e^* + \beta \sum_{e \in E_u} y_e^* + \gamma \sum_{e \in E_u} z_e^*) \\
&\leq \sum_{k < t} \frac{1}{T} (\alpha \cdot \Delta_u + \beta \cdot \Delta_d + \gamma \cdot \Delta_u) \\
&= \sum_{k < t} \frac{\Delta_u}{T} (\alpha + \beta + \gamma) \leq \frac{(t-1)\Delta_u}{T}
\end{aligned}$$

Therefore the expected number of assignments (probes) to vertex u until time t is at most $\frac{(t-1)\Delta_u}{T}$. Therefore, we have:

$$\begin{aligned}
Pr[B_{u,t} < \Delta_u | A_{u,t} = 0] &\geq 1 - \frac{\mathbb{E}[B_{u,t} | A_{u,t} = 0]}{\Delta_d} \\
&\geq 1 - \frac{(t-1)\Delta_u}{T\Delta_u} \geq 1 - \frac{t-1}{T}
\end{aligned}$$

It is to be noted that $B_{u,t}$ is the total number of probes u received before round t . Thus, we have that the events $(B_{u,t} < \Delta_u)$ and $(A_{u,t} = 0)$ are positively correlated. Therefore,

$$\begin{aligned}
Pr[SF_{u,t}] &\geq Pr[(B_{u,t} < \Delta_u) \wedge (A_{u,t} = 0)] \\
&\geq Pr[B_{u,t} < \Delta_d | A_{u,t} = 0] Pr[A_{u,t} = 0] \\
Pr[SF_{u,t}] &\geq \left(1 - \frac{t-1}{T}\right) \left(1 - \frac{1}{T}\right)^{t-1}
\end{aligned}$$

□

Lemma 4.3. $Pr[1_{e,t} | SF_{u,t}] \geq \alpha \frac{x_e^*}{2T}, Pr[1_{e,t} | SF_{u,t}] \geq \beta \frac{y_e^*}{2T}, Pr[1_{e,t} | SF_{u,t}] \geq \gamma \frac{z_e^*}{2T}$

Proof. In this part we prove that the probability that edge e is probed at time t is at least $\alpha \frac{x_e^*}{2T}$. Note that the probability that a vertex of type v arrives at time t and that Algorithm 2 calls the subroutine $\mathbf{PPDR}(\vec{x}_r)$ is $\alpha \frac{1}{T}$. Let $E_{v,\bar{e}}$ be the set of edges in E_v excluding $e = (u, v)$. For each edge $e' \in E_{v,\bar{e}}$ let $Y_{e'}$ be the indicator for e' being before e in the random order of π (in algorithm 1) and let $Z_{e'}$ be the probability that the assignment is successful for e' . It is clear that $\mathbb{E}[Y_{e'}] = 1/2$

and that $\mathbb{E}[Z_{e'}] = p_{e'}$. Now we have:

$$\Pr[1_{e,t} \mid SF_{u,t}] \quad (13)$$

$$\geq \alpha \frac{1}{T} \Pr[X_e = 1] \Pr\left[\sum_{e' \in E_{r,\bar{e}}} X_{e'} Y_{e'} Z_{e'} \mid X_e = 1\right] \quad (14)$$

$$= \alpha \frac{\Pr[X_e = 1]}{T} \left(1 - \Pr\left[\sum_{e' \in E_{v,\bar{e}}} X_{e'} Y_{e'} Z_{e'} \geq 1 \mid X_e = 1\right]\right) \quad (15)$$

$$\geq \alpha \frac{\Pr[X_e = 1]}{T} \left(1 - \mathbb{E}\left[\sum_{e' \in E_{v,\bar{e}}} X_{e'} Y_{e'} Z_{e'} \geq 1 \mid X_e = 1\right]\right) \quad (16)$$

$$\geq \alpha \frac{\Pr[X_e = 1]}{T} \left(1 - \sum_{e' \in E_{v,\bar{e}}} \mathbb{E}[X_{e'} Y_{e'} Z_{e'} \geq 1 \mid X_e = 1]\right) \quad (17)$$

$$\geq \alpha \frac{x_e^*}{T} \left(1 - \sum_{e' \in E_{v,\bar{e}}} x_{e'}^* \frac{1}{2} p_{e'}\right) \quad (18)$$

$$\geq \alpha \frac{x_e^*}{T} \left(1 - \frac{1}{2}\right) = \alpha \frac{x_e^*}{2T} \quad (19)$$

Applying Markov inequality we get the inequality (16). By linearity of expectation we get inequality (17). Since X_e and $X_{e'}$ are negatively correlated to each other from the Negative Correlation property of Dependent Rounding we have $\mathbb{E}[X_{e'} \mid X_e = 1] \leq x_{e'}^*$ and we get (18). The last inequality (19) is due the fact that for any feasible solution $\{x_e^*\}$ the constraints imply that $\sum_{e \in E_v} x_e^* p_e \leq 1$ for all $v \in V$. Using similar analysis we can also prove that $\Pr[1_{e,t} \mid SF_{u,t}] \geq \beta \frac{y_e^*}{2T}$ and $\Pr[1_{e,t} \mid SF_{u,t}] \geq \gamma \frac{z_e^*}{2T}$. \square

Now we restate and prove Theorem 3.1.

Theorem 3.1. *For the **KIID** setting, algorithm $\text{TSGF}_{\text{KIID}}(\alpha, \beta, \gamma)$ achieves a competitive ratio of $(\frac{\alpha}{2e}, \frac{\beta}{2e}, \frac{\gamma}{2e})^\dagger$ simultaneously over the operator's profit, the group fairness objective for the offline side, and the group fairness objective for the online side, where $\alpha, \beta, \gamma > 0$ and $\alpha + \beta + \gamma \leq 1$.*

Proof. Denote the expected number of probes on each edge $e \in E$ resulting from **PPDR**(\vec{x}_v^*) by n_e^x . It follows that:

$$\begin{aligned} n_e^x &\geq \sum_{t=1}^T \Pr[1_{e,t}] = \sum_{t=1}^T \Pr[1_{e,t} \mid SF_{u,t}] \Pr[SF_{u,t}] \\ &\geq \sum_{t=1}^T \left(1 - \frac{1}{T}\right)^{t-1} \left(1 - \frac{t-1}{T}\right) \left(\alpha \frac{x_e^*}{2T}\right) \xrightarrow{T \rightarrow \infty} \frac{\alpha x_e^*}{2e} \end{aligned}$$

Denote the optimal solution for the operator's profit LP by OPT_O . Let ALG_O be operator's profit obtained by our online algorithm. Using the linearity of expectation we get: $\text{ALG}_O = \mathbb{E}\left[\sum_{e \in E} w_e^O n_e^x p_e\right] \geq \sum_{e \in E} w_e^O p_e \frac{\alpha x_e^*}{2e} \geq$

\dagger Here, e denotes the Euler number, not an edge in the graph.

$\sum_{e \in E} w_e^O p_e \left(\frac{1}{e}\right)^{\frac{\alpha x_e^*}{2}} \geq \frac{\alpha}{2e} (\text{OPT}_O)$. Similarly, we can obtain $\frac{\beta}{2e}$ and $\frac{\gamma}{2e}$ competitive ratios for the expected max-min group fairness guarantees on the offline and online sides, respectively. \square

A.2 Proofs for Section 4.2

Lemma 4.4. *For the **KAD** setting, the optimal solutions of LP (5), LP (6) and LP (7) are upper bounds on the expected optimal that can be achieved by any algorithm for the operator's profit, the offline side group fairness objective, and the online side group fairness objective, respectively.*

Proof. We shall consider only the operator's profit objective as the other objectives follow through an identical argument. Let $1_{v,t}$ be the indicator random variable for the arrival for vertex type v in round t . Then we can obtain a realization and solve the corresponding LP and then take the expected value of LP as an upper bound on the operator's profit objective, i.e. the value $\mathbb{E}_{\mathcal{I}}[LP(G)]$ where $\mathbb{E}_{\mathcal{I}}$ is an expectation with respect to the randomness of the problem. This means replacing $1_{v,t}$ by its realization in the LP below:

$$\max \sum_{t \in [T]} \sum_{e \in E} w_e^O x_{e,t} \quad (20)$$

$$\text{s.t. } \forall e \in E, \forall t \in [T] : 0 \leq x_{e,t} \leq 1 \quad (21a)$$

$$\forall u \in U : \sum_{t \in [T]} \sum_{e \in E_u} x_{e,t} \leq 1 \quad (21b)$$

$$\forall v \in V, \forall t \in [T] : \sum_{e \in E_v} x_{e,t} \leq 1_{v,t} \quad (21c)$$

If we were to replace the random variables $1_{v,t}$ by their expected value, then we would retrieve LP(5) where $\mathbb{E}_{\mathcal{I}}[1_{v,t}] = p_{v,t}$. It suffices to show that the value of LP(5) which is the LP value over the ‘‘expected’’ graph (the parameters replaced by their expected value) which we now denote by $LP(\mathbb{E}_{\mathcal{I}}[G])$ is an upper bound to $\mathbb{E}_{\mathcal{I}}[LP(G)]$, i.e. $LP(\mathbb{E}_{\mathcal{I}}[G]) \geq \mathbb{E}_{\mathcal{I}}[LP(G)]$. Let $x_{e,t}^{*,G}$ be the optimal solution for a given realization G and $1_{v,t}^G$ be the realization of the random variables over the instance, then we have that $\sum_{e \in E_v} x_{e,t}^{*,G} \leq 1_{v,t}^G$. It follows that $\mathbb{E}_{\mathcal{I}}[x_{e,t}^{*,G}]$ is a feasible solution for LP(5), since $\mathbb{E}_{\mathcal{I}}[\sum_{e \in E_v} x_{e,t}^{*,G}] \leq \mathbb{E}_{\mathcal{I}}[1_{v,t}^G] = p_{v,t}$ and the rest of the constraints are satisfied as well since they are the same in every realization. However, we have that $\mathbb{E}_{\mathcal{I}}[LP(G)] = \mathbb{E}_{\mathcal{I}}\left[\sum_{t \in [T]} \sum_{e \in E} w_e^O x_{e,t}^{*,G}\right] = \sum_{t \in [T]} \sum_{e \in E} w_e^O \mathbb{E}_{\mathcal{I}}[x_{e,t}^{*,G}] \leq \sum_{t \in [T]} \sum_{e \in E} w_e^O x_{e,t}^* = LP(\mathbb{E}_{\mathcal{I}}[G])$ where $x_{e,t}^*$ is the optimal solution for LP(5) over the ‘‘expected’’ graph. The inequality followed since a feasible solution to a problem cannot exceed its optimal solution. \square

Lemma 4.5. *Algorithm TSGF_{KAD} is valid for $\lambda = \frac{1}{2}$.*

Proof. We prove the validity of the algorithm for $\lambda = \frac{1}{2}$ by induction. For the base case, it is clear that $\forall e \in E, \rho_{e,t} = 1$, hence $\rho_{e,t} \geq \lambda = \frac{1}{2}$. Assume for $t' < t$, that $\rho_{e,t'} \geq \lambda = \frac{1}{2}$,

then at round t we have:

$$\begin{aligned}
1 - \rho_{e,t} &= \Pr[e \text{ is not available at } t] \\
&= \Pr[e \text{ is matched in } [T - 1]] \\
&\leq \sum_{t' < t} \Pr[e \text{ is matched in } t'] \\
&= \sum_{t' < t} \Pr[(e \text{ is chosen by the algorithm}) \\
&\quad \wedge (u \text{ is unmatched at the beginning of } t) \\
&\quad \wedge (v \text{ arrives at } t)] \\
&= \sum_{t' < t} p_{v,t} \rho_{e,t} \left(\alpha \frac{x_{e,t}^*}{p_{v,t} \rho_{e,t}} \frac{\lambda}{\rho_{e,t}} + \beta \frac{y_{e,t}^*}{p_{v,t} \rho_{e,t}} \frac{\lambda}{\rho_{e,t}} + \gamma \frac{z_{e,t}^*}{p_{v,t} \rho_{e,t}} \frac{\lambda}{\rho_{e,t}} \right) \\
&= \sum_{t' < t} \lambda (\alpha x_{e,t'}^* + \beta y_{e,t'}^* + \gamma z_{e,t'}^*) \\
&\leq \lambda \sum_{t' < t} (\alpha x_{e,t'}^* + \beta y_{e,t'}^* + \gamma z_{e,t'}^*) \\
&\leq \lambda (\alpha + \beta + \gamma) \leq \lambda \leq \frac{1}{2}
\end{aligned}$$

where we used the fact that $x_{e,t'}^*, y_{e,t'}^*, z_{e,t'}^* \leq 1$ from constraint (8a) and the fact that $\alpha + \beta + \gamma \leq 1$. From the above, it follows that $\rho_{e,t} \geq \frac{1}{2} \geq \lambda$. \square

Now we restate and prove Theorem 3.2 using Lemma 4.5:

Theorem 3.2. *For the **KAD** setting, algorithm $\text{TSGF}_{\text{KAD}}(\alpha, \beta, \gamma)$ achieves a competitive ratio of $(\frac{\alpha}{2}, \frac{\beta}{2}, \frac{\gamma}{2})$ simultaneously over the operator's profit, the group fairness objective for the offline side, and the group fairness objective for the online side, where $\alpha, \beta, \gamma > 0$ and $\alpha + \beta + \gamma \leq 1$.*

Proof. For an edge e the probability that it is matched (successfully probed) is the following:

$$\begin{aligned}
&\Pr[e \text{ is successfully probed in round } t] \\
&= \Pr[(e \text{ is chosen by the algorithm}) \\
&\quad \wedge (u \text{ is unmatched at the beginning of } t) \wedge (v \text{ arrives at } t)] \\
&= p_{v,t} \rho_{e,t} \left(\alpha \frac{x_{e,t}^*}{p_{v,t} \rho_{e,t}} \frac{\lambda}{\rho_{e,t}} + \beta \frac{y_{e,t}^*}{p_{v,t} \rho_{e,t}} \frac{\lambda}{\rho_{e,t}} + \gamma \frac{z_{e,t}^*}{p_{v,t} \rho_{e,t}} \frac{\lambda}{\rho_{e,t}} \right) = \\
&= \alpha \lambda x_{e,t}^* + \beta \lambda y_{e,t}^* + \gamma \lambda z_{e,t}^*
\end{aligned}$$

Setting $\lambda = \frac{1}{2}$, it follows from the above that e is successfully matched with probability at least $\frac{1}{2} \alpha x_{e,t}^*$, at least $\frac{1}{2} \beta y_{e,t}^*$, and at least $\frac{1}{2} \gamma z_{e,t}^*$. Hence, the guarantees on the competitive ratios follow by linearity of the expectation. \square

A.3 Proofs for Section 4.3

We restate Lemma 4.6 and give its proof:

Lemma 4.6. *Whether in the **KIID** or **KAD** setting, a given instance of two-sided individual max-min fairness can be converted to an instance of two-sided group max-min fairness in the **KAD** setting.*

Proof. Given an instance with individual fairness, define $\mathcal{G} = \{g_1, \dots, g_T\} \cup \{g'_1, \dots, g'_{|U|}\}$ as the set of all groups, thus $|\mathcal{G}| = T + |U|$, i.e. one group for each time round and one group for each offline vertex. Further given the online side types V , create a new online side V' where $|V'| = T|V|$ and $V' = V'_1 \cup V'_2 \dots \cup V'_t \dots \cup V'_T$ where V'_t consists of the same types as V . Moreover, $\forall v' \in V'_t, p_{v',t} = p_{v,t}$ and $p_{v',\bar{t}} = 0, \forall \bar{t} \in [T] - \{t\}$, finally $\forall v' \in V'_t, g(v') = g_t$. For the offline side U , we let each vertex have its own distinct group membership, i.e. for vertex $u_i \in U, g(u_i) = g'_i$.

Based on the above, it is not difficult to see that both problems have the same operator profit, and that the individual max-min fairness objectives of the original instance equal the group max-min fairness objectives of the new instance. \square

From the above Lemma, applying algorithm TSGF_{KAD} to the reduced instance leads to the following corollary:

Corollary A.1. *Given an instance of two-sided individual max-min fairness, applying $\text{TSGF}_{\text{KAD}}(\alpha, \beta, \gamma)$ to the reduction from Theorem 4.6 leads to a competitive ratio of $(\frac{\alpha}{2}, \frac{\beta}{2}, \frac{\gamma}{2})$ simultaneously over the operator's profit, the individual fairness objective for the offline side, and the individual fairness objective for the online side, where $\alpha, \beta, \gamma > 0$ and $\alpha + \beta + \gamma \leq 1$.*

The proof of Theorem 3.3 is immediate from the above corollary.

A.4 Proofs for Theorems 3.4 and 3.5

We now restate and prove the hardness result of Theorem 3.4:

Theorem 3.4. *For all arrival models, given the three objectives: operator's profit, offline side group (individual) fairness, and online side group (individual) fairness. No algorithm can achieve a competitive ratio of (α, β, γ) over the three objectives simultaneously such that $\alpha + \beta + \gamma > 1$.*

Proof. We prove it for group fairness in the **KIID** setting, since the **KIID** setting is a special case of the **KAD** setting, then this also proves the upper bound for the **KAD** setting.

Consider the graph $G = (U, V, E)$ which consists of three offline vertices and three online vertex types, i.e. $|U| = |V| = 3$. Each vertex in U (V) belongs to its own distinct group. The time horizon T is set to an arbitrarily large value. The arrival rate for each $v \in V$ is uniform and independent of time, i.e. **KIID** with $p_v = \frac{1}{3}$. Further, the bipartite graph is complete, i.e. each vertex of U is connected to all of the vertices of V with $p_e = 1$ for all $e \in E$. We also let $\Delta_u = 1$ for each $u \in U, n_v = \frac{T}{3}$ and $\Delta_v = 1$ for each $v \in V$. We represent the utilities on the edges of E with matrices where the (i, j) element gives the utility of the edge connecting vertex $u_i \in U$ and vertex $v_j \in V$. The utility matrices for the platform operator, offline, and online sides are following, respectively:

$$M_O = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}, M_U = \begin{bmatrix} 0 & 0 & 1 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix}, M_V = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 1 & 0 & 0 \end{bmatrix}.$$

It can be seen that the utility assignments in the above example conflict between the three entities.

Let OPT_O , OPT_U , and OPT_V be the optimal values for the operator's profit, offline group fairness, and online group fairness, respectively. It is not difficult to see that $\text{OPT}_O = 3$, $\text{OPT}_U = 1$, and $\text{OPT}_V = 1$. Now, denote by A, B , and C the edges with values of 1 for M_O, M_U , and M_V in the graph, respectively. Further, for a given online algorithm, let a_j, b_k , and c_ℓ be the expected number of probes received by edges $j \in A, k \in B$, and $\ell \in C$, respectively. Moreover, denote the algorithm's expected value over the operator's profit, expected fairness for offline vertices, and expected fairness for online vertices by $\text{ALG}_O, \text{ALG}_U$, and ALG_V , respectively. We can upper bound the sum of the competitive ratios as follows:

$$\begin{aligned} & \frac{\text{ALG}_O}{\text{OPT}_O} + \frac{\text{ALG}_U}{\text{OPT}_U} + \frac{\text{ALG}_V}{\text{OPT}_V} \\ & \leq \frac{\sum_{j \in A} a_j}{3} + \frac{\min_{k \in B} b_j}{1} + \frac{\min_{\ell \in C} c_j}{1} \\ & \leq \frac{\sum_{j \in A} a_i}{3} + \frac{(\sum_{k \in B} b_i)/3}{1} + \frac{(\sum_{\ell \in C} c_i)/3}{1} \\ & \leq \frac{\sum_{j \in A} a_i + \sum_{k \in B} b_i + \sum_{\ell \in C} c_i}{3} \leq \frac{3}{3} = 1 \end{aligned}$$

in the above, the second inequality follows since the minimum value is upper bounded by the average. The last inequality follows since $\Delta_u = 1$ and therefore the expected number of probes any offline vertex receives cannot exceed 1 and we have $|U| = 3$ many vertices.

To prove the same result for individual fairness we use the same graph. We simply note that the arrival of vertices in V is **KAD** instead with the i^{th} vertex v_i having $p_{v_i, i} = 1$ and $p_{v_i, t} = 0, \forall t \neq i$. Then we follow an argument similar to the above. \square

The following proves Theorem 3.5 therefore showing that there is indeed a conflict between achieving group and individual fairness even if we were to consider only one side of the graph.

Theorem 3.5. *Ignoring the operator's profit and focusing either on the offline side alone or the online side alone. With α_G and α_I denoting the group and individual fairness competitive ratios, respectively. No algorithm can achieve competitive ratios (α_G, α_I) over the group and individual fairness objectives of one side simultaneously such that $\alpha_G + \alpha_I > 1$.*

Proof. Let us focus on the offline side, i.e. we consider α_G and α_I that are the competitive ratios for the group and individual fairness of the offline side.

Consider a graph which consists of two offline vertices and one online vertex, i.e. $|U| = 2$ and $|V| = 1$. Further, there is only one group. Let $p_e = 1, \forall e \in E$ and $\forall u \in U, \forall v \in V : \Delta_u = \Delta_v = 1$. U has two vertices u_1 and u_2 both connected to the same vertex $v \in V$. For edge (u_1, v) , we let $w_{(u_1, v)}^U = 1$ and for edge (u_2, v) , we let $w_{(u_2, v)}^U = L$ where L is an arbitrarily large number. Note that both of these weights are for the utility of the offline side. Finally, we only have one round so $T = 1$.

Let θ_1 and θ_2 be the expected number of probes edges (u_1, v) and (u_2, v) receive, respectively. Note that $\theta_1 =$

$1 - \theta_2$. It follows that the optimal offline group fairness objective is $\text{OPT}_G^U = \max_{\theta_1, \theta_2} (\theta_1 + L\theta_2) = \max_{\theta_2} ((1 - \theta_2) + L\theta_2) = L$.

Further, the optimal offline individual fairness objective is $\text{OPT}_I^U = \min\{\theta_1, L\theta_2\}$, it is not difficult to show that $\text{OPT}_I^U = \frac{L}{L+1}$. Now consider the sum of competitive ratios, we have:

$$\begin{aligned} \frac{\text{ALG}_G^U}{\text{OPT}_G^U} + \frac{\text{ALG}_I^U}{\text{OPT}_I^U} &= \frac{\theta_1 + L\theta_2}{L} + \frac{\min\{\theta_1, L\theta_2\}}{\frac{L}{L+1}} \\ &\leq \frac{\theta_1 + L\theta_2}{L} + \frac{\theta_1(L+1)}{L} \\ &= \frac{(L+2)\theta_1 + L\theta_2}{L} \\ &= (\theta_1 + \theta_2) + \frac{2\theta_1}{L} \\ &\leq 1 + \frac{2\theta_1}{L} \xrightarrow{L \rightarrow \infty} 1 \end{aligned}$$

this proves the result for the offline side of the graph.

To prove the result for the online side, we reverse the graph construction, i.e. having one vertex in U and two vertex types in V which arrive with equal probability. It now holds that $\text{OPT}_I^V = \min\{\theta_1, L\theta_2\}$ and by setting T to an arbitrarily large value $\text{OPT}_G^V = L$. Then we follow an identical argument to the above. \square