

RANK-ADAPTIVE TIME INTEGRATION OF TREE TENSOR NETWORKS

GIANLUCA CERUTI*, CHRISTIAN LUBICH*, AND DOMINIK SULZ*

Abstract. A rank-adaptive integrator for the approximate solution of high-order tensor differential equations by tree tensor networks is proposed and analyzed. In a recursion from the leaves to the root, the integrator updates bases and then evolves connection tensors by a Galerkin method in the augmented subspace spanned by the new and old bases. This is followed by rank truncation within a specified error tolerance. The memory requirements are linear in the order of the tensor and linear in the maximal mode dimension. The integrator is robust to small singular values of matricizations of the connection tensors. Up to the rank truncation error, which is controlled by the given error tolerance, the integrator preserves norm and energy for Schrödinger equations, and it dissipates the energy in gradient systems. Numerical experiments with a basic quantum spin system illustrate the behavior of the proposed algorithm.

Key words. Tree tensor network, tensor differential equation, dynamical low-rank approximation, rank adaptivity.

AMS subject classifications. 15A69, 65L05, 65L20, 65L70, 81Q05.

1. Introduction. A tree tensor network (TTN) is a tensor in a hierarchical data-sparse format, with correlations governed by the structure of the tree and by the tree rank, that is, by the multilinear ranks of the low-order connection tensors that correspond to the interior vertices of the tree. Our interest here is to use TTNs for the approximate solution of evolutionary tensor differential equations of high order d ,

$$\dot{A}(t) = F(t, A(t)), \quad A(t_0) = A^0 \in \mathbb{C}^{n_1 \times \dots \times n_d}. \quad (1.1)$$

In particular, though by no means exclusively, such problems arise in quantum dynamics, where (1.1) can represent a quantum spin system or a spatially discretized multi- to many-body Schrödinger equation. The multilayer MCTDH method in the chemical physics literature [28] and matrix product states and more general TTNs in the quantum physics literature [24] approximate the solution of (1.1) by TTNs with time-dependent bases and connection tensors. Their evolution is determined by the Dirac–Frenkel time-dependent variational principle [14, 17], which projects the right-hand side of (1.1) orthogonally onto the tangent space of the approximation manifold \mathcal{M} (here, TTNs of a fixed tree rank) at the current approximation $Y(t)$,

$$\dot{Y}(t) = P_{Y(t)} F(t, Y(t)), \quad Y(t_0) = Y^0 \in \mathcal{M}. \quad (1.2)$$

The numerical integration of (1.2) encounters substantial difficulties: first, the abstract differential equation (1.2) cannot be integrated as is but instead one needs differential equations for the basis matrices and connection tensors in the TTN representation. Such differential equations for the factors were derived from (1.2) in [28], but the resulting differential equations become near-singular in the typical presence of small singular values of matricizations of the connection tensors. This necessitates the use of tiny stepsizes for standard integrators applied to the differential equations of the factors; cf. [11]. This problem does not appear with the projector-splitting

*Mathematisches Institut, Universität Tübingen, Auf der Morgenstelle 10, D-72076 Tübingen, Germany. Email: {lubich,sulz}@na.uni-tuebingen.de

**Institute of Mathematics, EPF Lausanne, 1015 Lausanne, Switzerland. Email: gianluca.ceruti@epfl.ch

integrator, which splits the tangent space projection P_Y into an alternating sum of subprojections. This leads to an efficiently implementable integrator that has been shown to be robust to small singular values; see [19, 11] for low-rank matrix differential equations, [18, 21, 12] for the approximation of tensor differential equations by Tucker tensors of given multilinear rank, [20, 10, 11] for tensor trains / matrix product states of given ranks, and recently [3, 16] for general tree tensor networks of given tree rank.

In many situations, it is desirable not to fix the tree rank *a priori* but to choose it adaptively in every time step, because the optimal ranks required for a given approximation accuracy may vary strongly with time and within the tree. Moreover, rank adaptivity can indicate up to which time the solution can be approximated with a prescribed maximal rank. Various elaborate rank-adaptive versions of the projector-splitting integrator for tensor trains / matrix product states have recently been developed in [6, 7, 29].

Here we follow a different approach to a rank-adaptive TTN integrator, which is not based on the projector-splitting integrator. We extend the rank-adaptive integrator for dynamical low-rank approximation of matrix differential equations recently given in [1], which updates the left and right bases and then does a Galerkin approximation in the augmented space spanned by the old and new bases, followed by rank truncation with a prescribed error tolerance. This approach is conceptually and algorithmically simpler than rank adaptivity in the framework of the projector-splitting integrator, and it has been shown to retain the robustness to small singular values and to have favorable structure-preserving properties. Furthermore, it has a more parallel algorithmic structure and has no substeps with propagation backward in time, as opposed to the projector-splitting integrator. It is related to the basis-update & Galerkin fixed-rank integrator of [2], which however uses only the new bases in the Galerkin method. The novel rank-adaptive integrator was already extended to Tucker tensors in the same paper [1] where the matrix version was presented. Here we extend it to the more intricate situation of general TTNs and study its properties.

There are two preparatory sections: In Section 2 we recall TTNs in the formalism of [3], which was found useful for the formulation, implementation and analysis of numerical methods for TTNs. In Section 3 we recapitulate the rank-adaptive Tucker tensor integrator of [1] and give a simple extension to tuples of Tucker tensors with common basis matrices.

In Section 4 we formulate the algorithm of the rank-adaptive TTN integrator. The algorithm updates and augments the bases and augments and evolves the connection tensors by a Galerkin method in a recursion from the leaves to the root, and finally truncates the ranks adaptively by an SVD-based rotate-and-cut algorithm in a recursion from the root to the leaves.

Section 5 presents and proves two important lemmas, the first one about the starting tensors used in the integrator and the second one about the error of the recursive rank truncation algorithm. The latter result is of independent interest for TTN algorithms beyond time integration.

Section 6 briefly discusses the exactness property and robust error bound (independent of small singular values) of the new TTN integrator. We do not give a detailed presentation of these fundamental properties here, because the results are essentially the same as for the TTN integrator based on the projector-splitting integrator [3] and because the proof combines the proofs of the analogous results in [1, 2] and [3] in a direct way.

In Section 7 we show that, up to a multiple of the truncation tolerance, the rank-adaptive integrator conserves the norm and energy for Schrödinger equations and dissipates the energy for gradient systems.

Section 8 presents numerical experiments with a basic quantum spin system, the Ising model in a transverse field [25]. An interesting observation in one of our experiments is that for this model, the ranks required for a TTN on a binary hierarchical tree of minimal height turn out to be significantly smaller than those required for a matrix product state (MPS), which is a TTN on a binary tree of maximal height. This may come unexpected as the Ising model has only nearest-neighbor interactions, which are well represented by an MPS. However, MPSs appear to struggle with capturing long-range effects for this model. In any case, the rank-adaptive TTN integrator proves to be a useful tool to numerically study the influence of the tree structure in the TTN approximation of a quantum system.

2. Recap: Tree Tensor Networks. In this section we recall the tree tensor network formalism of [3], which gives a recursive construction of basis matrices and connection tensors in a concise mathematical notation. As a preparation for the TTN integrator, we also recapitulate how operators on tree tensor networks near a given starting value are reduced to operators on tensor networks on subtrees via suitable orthogonal restrictions and prolongations.

We write tensors in italic capitals and matrices in boldface capitals throughout the paper.

2.1. Tucker tensors. The i th matricization (see, e.g., [13]) of a tensor $A \in \mathbb{C}^{n_1 \times \dots \times n_d}$ is denoted as $\mathbf{Mat}_i(A) \in \mathbb{C}^{n_i \times n_{-i}}$, where $n_{-i} = \prod_{j \neq i}^d n_j$. Its k th row aligns all entries of A that have k as the i th subscript, usually with colexicographic ordering. The inverse operation to \mathbf{Mat}_i is called tensorization and is denoted by Ten_i . For a tensor A and a matrix $\mathbf{A}_{(i)}$ of compatible dimensions, we have $A = Ten_i(\mathbf{A}_{(i)})$ if and only if $\mathbf{A}_{(i)} = \mathbf{Mat}_i(A)$.

The multilinear rank (r_1, \dots, r_d) of a tensor A is defined as the d -tuple of ranks r_i of the i th matricization $\mathbf{Mat}_i(A)$. It is known from [5] that A has multilinear rank (r_1, \dots, r_d) if and only if it has a *Tucker decomposition*

$$A = C \mathbf{X}_{i=1}^d \mathbf{U}_i, \quad \text{i.e.,} \quad a_{k_1, \dots, k_d} = \sum_{l_1=1}^{r_1} \dots \sum_{l_d=1}^{r_d} c_{l_1, \dots, l_d} u_{k_1, l_1} \dots u_{k_d, l_d}, \quad (2.1)$$

where each *basis matrix* $\mathbf{U}_i \in \mathbb{C}^{n_i \times r_i}$ has orthonormal columns and the *core tensor* $C \in \mathbb{C}^{r_1 \times \dots \times r_d}$ has full multilinear rank (r_1, \dots, r_d) .

We recall the useful formula for the matricization of Tucker tensors, see [13],

$$\mathbf{Mat}_i \left(C \mathbf{X}_{j=1}^d \mathbf{U}_j \right) = \mathbf{U}_i \mathbf{Mat}_i(C) \bigotimes_{j \neq i} \mathbf{U}_j^\top. \quad (2.2)$$

2.2. Tree tensor networks. Tree tensor networks are constructed by hierarchical Tucker decompositions. For the precise formulation, we use the notation of [3] and work with the following class of trees that encode the hierarchical structure.

DEFINITION 2.1 (Ordered trees with unequal leaves).

Let \mathcal{L} be a given finite set, the elements of which are referred to as leaves. We define the set \mathcal{T} of trees τ with the corresponding set of leaves $L(\tau) \subseteq \mathcal{L}$ recursively as follows:

- (i) Leaves are trees: $\mathcal{L} \subset \mathcal{T}$, and $L(l) := \{l\}$ for each $l \in \mathcal{L}$.

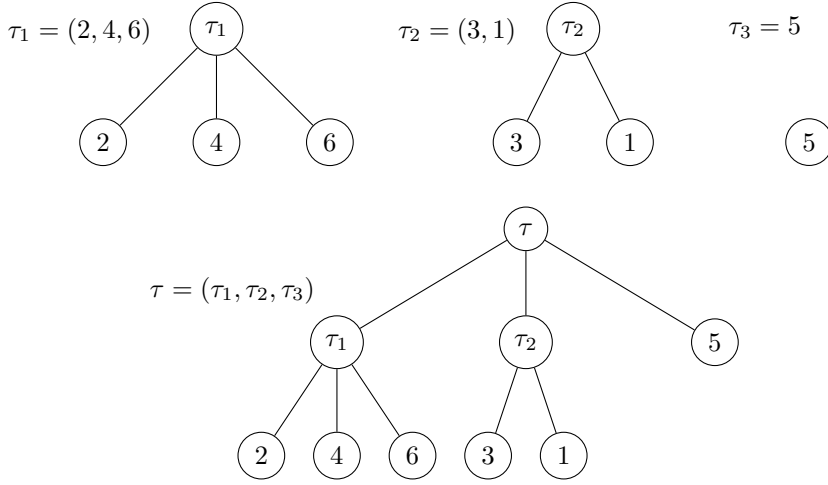


FIG. 2.1. Graphical representation of a tree and three subtrees with the set of leaves $\mathcal{L} = \{1, 2, 3, 4, 5, 6\}$.

(ii) Ordered m -tuples of trees with different leaves are again trees: *If, for some $m \geq 2$,*

$$\tau_1, \dots, \tau_m \in \mathcal{T} \quad \text{with} \quad L(\tau_i) \cap L(\tau_j) = \emptyset \quad \forall i \neq j,$$

then their ordered m -tuple is in \mathcal{T} :

$$\tau := (\tau_1, \dots, \tau_m) \in \mathcal{T}, \quad \text{and} \quad L(\tau) := \bigcup_{i=1}^m L(\tau_i).$$

The graphical interpretation is that leaves are trees and every other tree is obtained by connection a root to several trees; see Figure 2.2.

The trees τ_1, \dots, τ_m are called direct subtrees of the tree $\tau = (\tau_1, \dots, \tau_m)$, which together with direct subtrees of direct subtrees of τ etc. are called the *subtrees* of τ . The subtrees are in a bijective correspondence with the vertices of the tree, by assigning to each subtree its root.

A partial ordering of trees is obtained by setting for $\sigma, \tau \in \mathcal{T}$

$$\begin{aligned} \sigma &\leq \tau \text{ if and only if } \sigma \text{ is a subtree of } \tau, \\ \sigma &< \tau \text{ if and only if } \sigma \leq \tau \text{ and } \sigma \neq \tau. \end{aligned}$$

We fix $\bar{\tau} \in \mathcal{T}$ as a maximal tree, with $L(\bar{\tau}) = \mathcal{L}$. With each leaf $l \in \mathcal{L}$ we associate a *basis matrix* $\mathbf{U}_l \in \mathbb{C}^{n_l \times r_l}$ of rank $r_l \leq n_l$. With each tree $\tau = (\tau_1, \dots, \tau_m) \leq \bar{\tau}$ we associate a *connection tensor* $C_\tau \in \mathbb{C}^{r_\tau \times r_{\tau_1} \times \dots \times r_{\tau_m}}$ of full multilinear rank $(r_\tau, r_{\tau_1}, \dots, r_{\tau_m})$. A necessary condition for the connection tensor C_τ to have full multilinear rank is that (with $r_{\tau_0} := r_\tau$)

$$r_{\tau_i} \leq \prod_{j \neq i} r_{\tau_j}, \quad i = 0, \dots, m. \quad (2.3)$$

This compatibility of ranks will always be assumed in the following.

From the basis matrices \mathbf{U}_l ($l \in \mathcal{L}$) and connection tensors C_τ ($\tau \in \mathcal{T} \setminus \mathcal{L}$ with $\tau \leq \bar{\tau}$), a tree tensor network is defined recursively in the following way [3].

DEFINITION 2.2 (Tree tensor network). *For a given tree $\bar{\tau} \in \mathcal{T}$ and basis matrices \mathbf{U}_l and connection tensors C_τ as described above, we recursively define a tensor $X_{\bar{\tau}}$ with a tree tensor network representation (or briefly a tree tensor network) as follows:*

(i) *For each leaf $\tau = l \in \mathcal{L}$, we set*

$$X_l := \mathbf{U}_l^\top \in \mathbb{C}^{r_l \times n_l} .$$

(ii) *For each subtree $\tau = (\tau_1, \dots, \tau_m)$ (for some $m \geq 2$) of $\bar{\tau}$, we set $n_\tau = \prod_{i=1}^m n_{\tau_i}$ and \mathbf{I}_τ the identity matrix of dimension r_τ , and*

$$\begin{aligned} X_\tau &:= C_\tau \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \mathbf{U}_{\tau_i} \in \mathbb{C}^{r_\tau \times n_{\tau_1} \times \dots \times n_{\tau_m}} , \\ \mathbf{U}_\tau &:= \mathbf{Mat}_0(X_\tau)^\top \in \mathbb{C}^{n_\tau \times r_\tau} . \end{aligned}$$

The subscript 0 in \times_0 and $\mathbf{Mat}_0(X_\tau)$ refers to the mode 0 of dimension r_τ in $\mathbb{C}^{r_\tau \times r_{\tau_1} \times \dots \times r_{\tau_m}}$.

The tree tensor network $X_{\bar{\tau}}$ (more precisely, its representation in terms of the matrices \mathbf{U}_τ) is called orthonormal if for each subtree $\tau < \bar{\tau}$, the matrix \mathbf{U}_τ has orthonormal columns.

With $n = \max_\ell n_\ell$, $r = \max_\tau r_\tau$, and $m + 1$ the maximal order of the connection tensors, the basis matrices and connection tensors then have less than $dnr + dr^{m+1} \ll n^d$ entries.

In the mathematical literature, tree tensor networks are also called tensors in hierarchical Tucker format [9, 15]. They include Tucker tensors, tensor trains/matrix product states and binary hierarchical Tucker tensors as special cases. We define the height of a tree τ by 0 if $\tau = l$ is a leaf, and for $\tau = (\tau_1, \dots, \tau_m)$, we set $h(\tau) = 1 + \max\{h(\tau_1), \dots, h(\tau_m)\}$. Tensor trains are tree tensor networks of maximal height, Tucker tensors have height 1.

The set $\mathcal{M}_{\bar{\tau}} = \mathcal{M}(\bar{\tau}, (n_l)_{l \in \mathcal{L}}, (r_\tau)_{\tau \leq \bar{\tau}})$ of tree tensor networks on a tree $\bar{\tau} \in \mathcal{T}$ with given dimensions $(n_l)_{l \in \mathcal{L}}$ and tree rank $(r_\tau)_{\tau \leq \bar{\tau}}$ is known to be a smooth embedded manifold in the tensor space $\mathbb{C}^{\times_{l \in \mathcal{L}} n_l}$; see [26], where binary trees are considered, and also [8].

In this paper we will work with orthonormal tree tensor networks. The following key lemma localizes orthonormality at the (small) connection tensors C_τ instead of the computationally inaccessible (huge) matrices \mathbf{U}_τ .

LEMMA 2.3. [3, Lemma 2.4] *For a tree $\tau = (\tau_1, \dots, \tau_m) \in \mathcal{T}$, let the matrices \mathbf{U}_{τ_i} have orthonormal columns. Then, the matrix \mathbf{U}_τ has orthonormal columns if and only if the matricization $\mathbf{Mat}_0(C_\tau)^\top$ has orthonormal columns.* By the recursive definition of tree tensor networks and the lemma, we see that each tree tensor network has an orthonormal representation. One can obtain an orthonormal representation by performing multiple QR-decompositions recursively from the leaves to the root. At a leaf with $l = \tau_i$ and corresponding connection tensor C_τ , one computes the QR decomposition $\mathbf{U}_l = \mathbf{Q}_l \mathbf{R}_l$ and sets $\mathbf{U}_l = \mathbf{Q}_l$ and $C_\tau = C_\tau \times_i \mathbf{R}_l$. At a connection tensor one computes the QR decomposition $\mathbf{Mat}_0(C_{\tau_i})^\top = \mathbf{Q}_{\tau_i} \mathbf{R}_{\tau_i}$ and sets $C_{\tau_i} = \mathbf{Ten}_0(\mathbf{Q}_{\tau_i}^\top)$ and $C_\tau = C_\tau \times_i \mathbf{R}_{\tau_i}$.

The contraction product of two tree tensor networks $X_\tau, Y_\tau \in \mathbb{C}^{r_\tau \times n_{\tau_1} \times \dots \times n_{\tau_m}}$ is defined by

$$\langle X_\tau, Y_\tau \rangle := (\mathbf{Mat}_0(X_\tau)^\top)^* \mathbf{Mat}_0(Y_\tau)^\top \in \mathbb{C}^{r_\tau \times r_\tau} ,$$

where $*$ is the conjugate transpose. By formula (2.2), the product can be implemented recursively in an efficient way; see [3] for details. This allows us to compute the product without ever computing the full tensors.

For a maximal tree $\bar{\tau}$, we have $r_{\bar{\tau}} = 1$. Therefore the product of two tree tensor networks $\langle X_{\bar{\tau}}, Y_{\bar{\tau}} \rangle \in \mathbb{C}$, and $\sqrt{\langle X_{\bar{\tau}}, X_{\bar{\tau}} \rangle}$ is the Euclidean norm of the orthonormal tree tensor network $X_{\bar{\tau}}$ (i.e., the Euclidean norm of the vectorized tensor).

2.3. Reducing tree tensor network operators to subtrees. Suppose that on the maximal tree $\bar{\tau}$ we have a given tree tensor network $Y_{\bar{\tau}}^0$ and a (nonlinear) operator $F_{\bar{\tau}}$ that maps tensors in the tree tensor network representation corresponding to the tree $\bar{\tau}$ to tensors of the same type. We will need reduced versions Y_{τ}^0 and F_{τ} of the given $Y_{\bar{\tau}}^0$ and $F_{\bar{\tau}}$ on all subtrees $\tau < \bar{\tau}$, such that F_{τ} maps tensors in the tree tensor network representation corresponding to the subtree τ to tensors of the same type. In [3] it is described how Y_{τ}^0 and F_{τ} can be recursively constructed by (linear) prolongation and restriction operators. We briefly summarize the main results and refer to [3] for more details.

For a tree $\tau = (\tau_1, \dots, \tau_m)$ we introduce the space $\mathcal{V}_{\tau} = \mathbb{C}^{r_{\tau} \times n_{\tau_1} \times \dots \times n_{\tau_m}}$, and $\mathcal{M}_{\tau} = \mathcal{M}(\tau, (n_l)_{l \in L(\tau)}, (r_{\sigma})_{\sigma \leq \tau}) \subset \mathcal{V}_{\tau}$ denotes the manifold of tree tensor networks of full tree rank $(r_{\sigma})_{\sigma \leq \tau}$, which is embedded in \mathcal{V}_{τ} . The given nonlinear operator $F_{\bar{\tau}} : \mathcal{V}_{\bar{\tau}} \rightarrow \mathcal{V}_{\bar{\tau}}$ is considered near a tree tensor network $Y_{\bar{\tau}}^0 \in \mathcal{M}_{\bar{\tau}}$ (referred to as starting value). Assume by induction that $F_{\tau} : \mathcal{V}_{\tau} \rightarrow \mathcal{V}_{\tau}$ and a starting value $Y_{\tau}^0 \in \mathcal{M}_{\tau}$ are already constructed for some subtree $\tau = (\tau_1, \dots, \tau_m)$. We then construct the nonlinear operators $F_{\tau_i} : \mathcal{V}_{\tau_i} \rightarrow \mathcal{V}_{\tau_i}$ and the starting values $Y_{\tau_i}^0$ for the direct subtrees τ_i of τ .

Consider a tree tensor network $Y_{\tau}^0 = C_{\tau}^0 \times_0 \mathbf{I}_{\tau} \mathbf{X}_{j=1}^m \mathbf{U}_{\tau_j}^0$ and define

$$V_{\tau_i}^0 = \mathbf{Mat}_i(\mathit{Ten}_i(\mathbf{Q}_{\tau_i}^{0,\top}) \times_0 \mathbf{I}_{\tau} \mathbf{X}_{j \neq i}^m \mathbf{U}_{\tau_j}^0)^{\top},$$

where $\mathbf{Q}_{\tau_i}^0$ is the unitary factor in the QR decomposition $\mathbf{Mat}_0(C_{\tau_i}^0)^{\top} = \mathbf{Q}_{\tau_i}^0 \mathbf{R}_{\tau_i}^0$. Then, the *prolongation* $\pi_{\tau,i} : \mathcal{V}_{\tau_i} \rightarrow \mathcal{V}_{\tau}$ and *restriction* $\pi_{\tau,i}^{\dagger} : \mathcal{V}_{\tau} \rightarrow \mathcal{V}_{\tau_i}$ (which both depend on the starting value Y_{τ}^0) are defined as the linear operators

$$\begin{aligned} \pi_{\tau,i}(Y_{\tau_i}) &= \mathit{Ten}_i((V_{\tau_i}^0 \mathbf{Mat}_0(Y_{\tau_i}))^{\top}) \in \mathcal{V}_{\tau} \quad \text{for } Y_{\tau_i} \in \mathcal{V}_{\tau_i} \\ \pi_{\tau,i}^{\dagger}(Z_{\tau}) &= \mathit{Ten}_0((\mathbf{Mat}_i(Z_{\tau}) V_{\tau_i}^0)^{\top}) \in \mathcal{V}_{\tau_i} \quad \text{for } Z_{\tau} \in \mathcal{V}_{\tau}. \end{aligned}$$

It is shown in [3] that $\pi_{\tau,i}^{\dagger}$ is both a left inverse and the adjoint of $\pi_{\tau,i}$.

For the given (nonlinear) operator $F_{\bar{\tau}} = F : \mathcal{V}_{\bar{\tau}} \rightarrow \mathcal{V}_{\bar{\tau}}$ and a tree tensor network $Y_{\bar{\tau}}^0 \in \mathcal{M}_{\bar{\tau}}$, we then define recursively for each tree $\tau = (\tau_1, \dots, \tau_m) \leq \bar{\tau}$ and for $i = 1, \dots, m$

$$F_{\tau_i} := \pi_{\tau,i}^{\dagger} \circ F_{\tau} \circ \pi_{\tau,i} \tag{2.4}$$

$$Y_{\tau_i}^0 := \pi_{\tau,i}^{\dagger}(Y_{\tau}^0). \tag{2.5}$$

In [3] it is shown how to implement the prolongations and restrictions in an efficient recursive way. Moreover, the following two important properties about the prolongation and restriction are proved.

- (i) If the tree tensor network $Y_{\bar{\tau}}^0$ has full tree rank $(r_{\sigma})_{\sigma \leq \bar{\tau}}$, then Y_{τ}^0 has full tree rank $(r_{\sigma})_{\sigma \leq \tau}$ for every subtree $\tau \leq \bar{\tau}$.
- (ii) Let $\tau = (\tau_1, \dots, \tau_m) \in \mathcal{T}$ and $i \in \{1, \dots, m\}$. If $Y_{\tau_i} \in \mathcal{M}_{\tau_i}$, then the prolongation $\pi_{\tau,i}(Y_{\tau_i})$ is in \mathcal{M}_{τ} .

3. Rank-adaptive integrator for extended Tucker tensors. We recapitulate the rank-adaptive integrator for Tucker tensors of [1] in Section 3.1 and we extend

the algorithm to r -tuples of Tucker tensors with common basis matrices in Section 3.2. This extension will be important for formulating the rank-adaptive integrator for tree tensor networks.

3.1. Recap: rank-adaptive integrator for Tucker tensors. We start from a Tucker tensor

$$Y^0 = C^0 \mathbf{X}_{i=1}^d \mathbf{U}_i^0,$$

where the basis matrices $\mathbf{U}_i^0 \in \mathbb{C}^{n_i \times r_i^0}$ have orthonormal columns and $C^0 \in \mathbb{C}^{r_1^0 \times \dots \times r_d^0}$ is a tensor of full multilinear rank (r_1^0, \dots, r_d^0) .

In a time step of the rank-adaptive integrator for Tucker tensors proposed in [1], one first updates the basis matrices (in parallel), then updates the core tensor $C^0 \in \mathbb{C}^{r_1^0 \times \dots \times r_d^0}$ to an augmented tensor $\widehat{C}^1 \in \mathbb{C}^{\widehat{r}_1 \times \dots \times \widehat{r}_d}$ with $\widehat{r}_i \leq 2r_i^0$ (typically $\widehat{r}_i = 2r_i^0$) by a Galerkin method in the space spanned by the old *and* new basis matrices, and finally truncates \widehat{C}^1 to a reduced tensor $C^1 \in \mathbb{C}^{r_1^1 \times \dots \times r_d^1}$ of full multilinear rank with reduced ranks $r_i^1 \leq \widehat{r}_i$ that result from the given truncation error tolerance, and forms the corresponding reduced basis matrices $\mathbf{U}_i^1 \in \mathbb{C}^{n_i \times r_i^1}$. This procedure yields the updated Tucker tensor in factorized form,

$$Y^1 = C^1 \mathbf{X}_{i=1}^d \mathbf{U}_i^1,$$

which serves as the starting value for the next time step, and so on.

For the formulation of the algorithm, it is convenient to introduce subflows $\Phi^{(i)}$ and Ψ which correspond to the updates of the basis matrices and the core tensor, respectively. In addition, as formulated in [1], there is the rank truncation algorithm Θ depending on a given truncation tolerance ϑ .

The approximation Y^1 after one time step at time t_1 is then obtained by Algorithm 1, in which matrices and tensors with doubled rank carry a hat. The maps $\Phi^{(i)}$ and Ψ are defined in Algorithms 2 and 3, respectively. The algorithm can be written schematically as

$$Y^1 = \Theta \circ \Psi \circ (\Phi^{(1)}, \dots, \Phi^{(d)})(Y^0).$$

Algorithm 1: Rank-adaptive Tucker integrator

Data: Tucker tensor $Y^0 = C^0 \mathbf{X}_{i=1}^d \mathbf{U}_i^0$ in factorized form of multilinear rank (r_1^0, \dots, r_d^0) , function $F(t, Y)$, t_0, t_1 , tolerance parameter ϑ

Result: Tucker tensor $Y^1 = C^1 \mathbf{X}_{i=1}^d \mathbf{U}_i^1$ in factorized form of multilinear rank (r_1^1, \dots, r_d^1) , where $r_i^1 \leq 2r_i^0$

begin

for $i = 1 : d$ **in parallel do**

compute $[\widehat{\mathbf{U}}_i, \widehat{\mathbf{M}}_i] = \Phi^{(i)}(Y^0, F, t_0, t_1)$

% update and augment the i th basis matrix

end

compute $\widehat{C}^1 = \Psi(C^0, (\widehat{\mathbf{U}}_i)_{i=1}^d, (\widehat{\mathbf{M}}_i)_{i=1}^d, F, t_0, t_1)$

% augment and update the core tensor

set $\widehat{Y}^1 = \widehat{C}^1 \mathbf{X}_{i=1}^d \widehat{\mathbf{U}}_i$

compute $Y^1 = \Theta(\widehat{Y}^1, \vartheta)$ % rank truncation

end

Algorithm 2: Subflow $\Phi^{(i)}$ (update and augment the i th basis matrix)

Data: Tucker tensor $Y^0 = C^0 \mathbf{X}_{j=1}^d \mathbf{U}_j^0$ of multilinear rank (r_1, \dots, r_d) in factorized form, function $F(t, Y)$, t_0, t_1

Result: Updated and augmented basis matrix $\widehat{\mathbf{U}}_i \in \mathbb{C}^{n_i \times \widehat{r}_i}$ (typically $\widehat{r}_i = 2r_i$) with orthonormal columns, auxiliary matrix $\widehat{\mathbf{M}}_i$

begin

compute the QR-decomposition $\mathbf{Mat}_i(C^0)^\top = \mathbf{Q}_i^0 \mathbf{S}_i^{0, \top}$;
 solve the $n_i \times r_i$ matrix differential equation from t_0 to t_1

$$\dot{\mathbf{K}}_i(t) = \mathbf{F}_i(t, \mathbf{K}_i(t) \mathbf{V}_i^{0, \top}) \mathbf{V}_i^0, \quad \mathbf{K}_i(t_0) = \mathbf{U}_i^0 \mathbf{S}_i^0,$$

with $\mathbf{F}_i(t, \cdot) := \mathbf{Mat}_i \circ F(t, \cdot) \circ \text{Ten}_i$ and $\mathbf{V}_i^{0, \top} := \mathbf{Q}_i^{\top} \otimes_{j \neq i}^d \mathbf{U}_j^{0, \top}$;

compute $\widehat{\mathbf{U}}_i$ as an orthonormal basis of the range of the $n_i \times 2r_i$ matrix $(\mathbf{K}_i(t_1), \mathbf{U}_i^0)$;

set $\widehat{\mathbf{M}}_i = \widehat{\mathbf{U}}_i^* \mathbf{U}_i^0$.

end

Algorithm 3: Subflow Ψ (augment and update the core tensor)

Data: core tensor $C^0 \in \mathbb{C}^{r_1 \times \dots \times r_d}$, augmented basis matrices $\widehat{\mathbf{U}}_i \in \mathbb{C}^{n_i \times \widehat{r}_i}$ with orthonormal columns, auxiliary matrices $\widehat{\mathbf{M}}_i \in \mathbb{C}^{\widehat{r}_i \times r_i}$, function $F(t, Y)$, t_0, t_1

Result: core tensor $\widehat{C}^1 \in \mathbb{C}^{\widehat{r}_1 \times \dots \times \widehat{r}_d}$

begin

solve the $\widehat{r}_1 \times \dots \times \widehat{r}_d$ tensor differential equation from t_0 to t_1 ,

$$\dot{\widehat{C}}(t) = F(t, \widehat{C}(t) \mathbf{X}_{i=1}^d \widehat{\mathbf{U}}_i) \mathbf{X}_{i=1}^d \widehat{\mathbf{U}}_i^*, \quad \widehat{C}(t_0) = C^0 \mathbf{X}_{i=1}^d \widehat{\mathbf{M}}_i;$$

set $\widehat{C}^1 = \widehat{C}(t_1)$

end

3.2. Rank-adaptive integrator for extended Tucker tensors. Consider a tensor in Tucker format of multilinear rank (r_0, r_1, \dots, r_d) , where in the 0-mode only an $r_0 \times r_0$ identity matrix $\mathbf{I} = \mathbf{I}_{r_0}$ appears, i.e.,

$$Y^0 = C^0 \times_0 \mathbf{I} \mathbf{X}_{j=1}^d \mathbf{U}_j^0.$$

This can be viewed as an r_0 -tuple of Tucker tensors of order d with common basis matrices,

$$Y^0 = (C_1^0 \mathbf{X}_{j=1}^d \mathbf{U}_j^0, \dots, C_{r_0}^0 \mathbf{X}_{j=1}^d \mathbf{U}_j^0).$$

As described in Section 3.1, we obtain the approximation Y^1 by

$$Y^1 = \Theta \circ \Psi \circ (\Phi^{(0)}, \Phi^{(1)}, \dots, \Phi^{(d)})(Y^0).$$

The following lemma shows that the subflow $\Phi^{(0)}$ can be ignored in the algorithm.

LEMMA 3.1. *With an appropriate choice of orthogonalization, the action of the subflow $\Phi^{(0)}$ on Y^0 becomes trivial, i.e.,*

$$\Phi^{(0)}(Y^0) = [\widehat{\mathbf{U}}_0, \widehat{\mathbf{M}}_0] = [\mathbf{I}, \mathbf{I}].$$

Proof. In the subflow $\Phi^{(0)}$ we solve the $r_0 \times r_0$ matrix differential equation

$$\dot{\mathbf{K}}_0(t) = \mathbf{F}_i \left(t, \mathbf{K}_0(t) \mathbf{V}_0^{0,\top} \right) \mathbf{V}_0^0, \quad \mathbf{K}_0(t_0) = \mathbf{U}_0^0 \mathbf{S}_0^0.$$

We define $\mathbf{K}_0^1 = \mathbf{K}_0(t_1)$ as the solution at time t_1 . Obviously the matrix

$$(\mathbf{K}_0^1, \mathbf{U}_0^0) = (\mathbf{K}_0^1, \mathbf{I}) \in \mathbb{C}^{r_0 \times 2r_0}$$

has exactly rank r_0 . Therefore, the columns of $\widehat{\mathbf{U}}_0 = \mathbf{I}$ form an orthonormal basis of the range of this matrix. Moreover, $\widehat{\mathbf{M}}_0 = \widehat{\mathbf{U}}_0^* \mathbf{U}_0^0 = \mathbf{I}^* \mathbf{I} = \mathbf{I}$. \square

In view of Lemma 3.1, we write a step of the extended Tucker integrator schematically as

$$Y^1 = \Theta \circ \Psi \circ (\Phi^{(1)}, \dots, \Phi^{(d)})(Y^0).$$

4. Rank-adaptive tree tensor network integrator. We present a rank-adaptive integrator for orthonormal tree tensor networks, which evolves the basis matrices and connection tensors. If $F(t, Y)$ can be evaluated for a tree tensor network Y from its basis matrices and connection tensors, then the algorithm proceeds without ever computing a full tensor. The integrator relies on the extended rank-adaptive integrator of Section 3. It uses a recursive formulation that is notationally and conceptually similar to that of the tree tensor network integrator of [3]. While the latter algorithm is based on the projector-splitting Tucker tensor integrator of [21], the integrator considered here is based on the substantially different rank-adaptive basis update & Galerkin Tucker tensor integrator of [1]. As a consequence, the recursive TTN algorithm presented here is very different from that of [3] in the algorithmic structure and details. Among other differences, we mention that it is more parallel and does not use backward time evolutions, which are problematic for strongly dissipative problems. Rank-adaptivity is built in in a very simple way, which would not be possible for the projector-splitting TTN algorithm of [1].

4.1. Recursive rank-augmenting TTN integrator. Consider a tree $\tau = (\tau_1, \dots, \tau_m)$ and an extended Tucker tensor Y_τ^0 associated with the tree τ ,

$$Y_\tau^0 = C_\tau^0 \times_0 \mathbf{I}_\tau \times_{i=1}^m \mathbf{U}_{\tau_i}^0.$$

Applying the extended Tucker integrator with the function F_τ without rank truncation, we obtain

$$\widehat{Y}_\tau^1 = \Psi_\tau \circ (\Phi_\tau^{(1)}, \dots, \Phi_\tau^{(m)})(Y_\tau^0).$$

We recall that the subflow $\Phi_\tau^{(i)}$ gives the update process of the basis matrix $\mathbf{U}_{\tau_i}^0 \in \mathbb{R}^{n_{\tau_i} \times r_{\tau_i}}$. The extra subscript τ indicates that the subflow is computed for the function F_τ .

We have two cases:

- (i) If τ_i is a leaf, then we directly apply the subflow $\Phi_\tau^{(i)}$ and update and augment the basis matrix.
- (ii) Else, we apply the algorithm approximately and recursively. The procedure will still be called $\Phi_\tau^{(i)}$. We tensorize the basis matrix and we use new initial data $Y_{\tau_i}^0 = \pi_{\tau_i, i}^\dagger Y_\tau^0$ and the function $F_{\tau_i} = \pi_{\tau_i, i}^\dagger \circ F_\tau \circ \pi_{\tau_i, i}$ as described in Section 2.3.

We can now formulate the rank-adaptive integrator for tree tensor networks. It is composed of rank-augmenting integration steps (Algorithm 4 with Algorithms 5 and 6) followed by a final rank truncation (Algorithm 7).

Algorithm 4: Rank-augmenting TTN integrator

Data: tree $\tau = (\tau_1, \dots, \tau_m)$, TTN $Y_\tau^0 = C_\tau^0 \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \mathbf{U}_{\tau_i}^0$ in factorized form of tree rank $(r_\sigma^0)_{\sigma \leq \tau}$, function $F_\tau(t, Y_\tau)$, t_0, t_1

Result: TTN $\hat{Y}_\tau^1 = \hat{C}_\tau^1 \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \hat{\mathbf{U}}_{\tau_i}$ in factorized form of augmented tree rank $(\hat{r}_\sigma)_{\sigma \leq \tau}$ with $\hat{r}_\sigma \leq 2r_\sigma^0$, augmented connection tensor \hat{C}_τ^0

begin

- for** $i = 1 : m$ in parallel **do**
 - compute $[\hat{\mathbf{U}}_{\tau_i}, \hat{\mathbf{M}}_{\tau_i}] = \Phi_\tau^{(i)}(Y_\tau^0, F_\tau, t_0, t_1)$
 - % update and augment the basis matrix for subtree τ_i
- end**
- compute $[\hat{C}_\tau^1, \hat{C}_\tau^0] = \Psi_\tau(C_\tau^0, (\hat{\mathbf{U}}_{\tau_i})_{i=1}^m, (\hat{\mathbf{M}}_{\tau_i})_{i=1}^m, F_\tau, t_0, t_1)$
- % augment and update the connection tensor
- set $\hat{Y}_\tau^1 = \hat{C}_\tau^1 \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \hat{\mathbf{U}}_{\tau_i}$

end

The difference to the Tucker integrator is that now the subflow $\Phi_\tau^{(i)}$ uses the TTN integrator for the subtrees in a recursion from the leaves to the root. This approximate subflow is defined in close analogy to the subflow $\Phi^{(i)}$ for Tucker tensors, but the differential equation is solved only approximately by recurrence unless τ_i is a leaf.

Algorithm 5: Subflow $\Phi_\tau^{(i)}$ (update and augment a basis matrix)

Data: tree $\tau = (\tau_1, \dots, \tau_m)$, TTN $Y_\tau^0 = C_\tau^0 \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \mathbf{U}_{\tau_i}^0$ in factorized form of tree rank $(r_\sigma^0)_{\sigma \leq \tau}$, with $\mathbf{U}_{\tau_i}^0 = \mathbf{Mat}_0(X_{\tau_i}^0)^\top \in \mathbb{C}^{n_{\tau_i} \times r_{\tau_i}^0}$, function $F_\tau(t, Y_\tau)$, t_0, t_1

Result: $\widehat{\mathbf{U}}_{\tau_i} = \mathbf{Mat}_0(\widehat{X}_{\tau_i})^\top \in \mathbb{C}^{n_{\tau_i} \times \widehat{r}_{\tau_i}}$ (typically $\widehat{r}_{\tau_i} = 2r_{\tau_i}^0$) in factorized form, auxiliary matrix $\widehat{\mathbf{M}}_{\tau_i} \in \mathbb{C}^{\widehat{r}_{\tau_i} \times r_{\tau_i}^0}$

begin

compute a QR-decomposition $\mathbf{Mat}_i(C_\tau^0)^\top = \mathbf{Q}_{\tau_i}^0 \mathbf{S}_{\tau_i}^{0,\top}$;

set $Y_{\tau_i}^0 = X_{\tau_i}^0 \times_0 \mathbf{S}_{\tau_i}^{0,\top}$

if $\tau_i = l$ is a leaf **then**

solve the $n_l \times r_l^0$ matrix differential equation

$$\dot{Y}_l(t) = F_l(t, Y_l(t)), \quad Y_l(t_0) = Y_l^0 \in \mathbb{C}^{r_l^0 \times n_l};$$

compute $\widehat{\mathbf{U}}_l \in \mathbb{C}^{n_l \times \widehat{r}_l}$ with $\widehat{r}_l \leq 2r_l^0$ as an orthonormal basis of the range of the $n_l \times 2r_l^0$ matrix $(Y_l(t_1)^\top, \mathbf{U}_l^0)$;

set $\widehat{\mathbf{M}}_l = \widehat{\mathbf{U}}_l^* \mathbf{U}_l^0 \in \mathbb{C}^{\widehat{r}_l \times r_l^0}$

else

$[\widehat{Y}_{\tau_i}^1, \widehat{C}_{\tau_i}^0] = \text{Rank-augmenting TTN integrator}(\tau_i, Y_{\tau_i}^0, F_{\tau_i}, t_0, t_1)$;
 % recursive computation on subtrees

compute an orthonormal basis $\widehat{\mathbf{Q}}_{\tau_i}$ of rank $\widehat{r}_{\tau_i} \leq 2r_{\tau_i}^0$ of the range of $(\mathbf{Mat}_0(\widehat{C}_{\tau_i}^1)^\top, \mathbf{Mat}_0(\widehat{C}_{\tau_i}^0)^\top)$, where $\widehat{C}_{\tau_i}^1$ is the connection tensor of $\widehat{Y}_{\tau_i}^1$;

set $\widehat{\mathbf{U}}_{\tau_i} = \mathbf{Mat}_0(\widehat{X}_{\tau_i})^\top$, where the orthonormal TTN \widehat{X}_{τ_i} is obtained from $\widehat{Y}_{\tau_i}^1$ by replacing the connection tensor with $\widehat{C}_{\tau_i} = \text{Ten}_0(\widehat{\mathbf{Q}}_{\tau_i}^\top)$;

set $\widehat{\mathbf{M}}_{\tau_i} = \widehat{\mathbf{U}}_{\tau_i}^* \mathbf{U}_{\tau_i}^0 \in \mathbb{C}^{\widehat{r}_{\tau_i} \times r_{\tau_i}^0}$ (computed as $\langle \widehat{X}_{\tau_i}, X_{\tau_i}^0 \rangle$)

end

end

Algorithm 6: Subflow Ψ_τ (augment and update the connection tensor)

Data: tree $\tau = (\tau_1, \dots, \tau_m)$, connection tensor $C_\tau^0 \in \mathbb{C}^{r_\tau^0 \times r_{\tau_1}^0 \times \dots \times r_{\tau_m}^0}$, augmented basis matrices $\widehat{\mathbf{U}}_{\tau_i}$ in factorized form, auxiliary matrices $\widehat{\mathbf{M}}_{\tau_i} \in \mathbb{C}^{\widehat{r}_{\tau_i} \times r_{\tau_i}^0}$, function $F_\tau(t, Y)$, t_0, t_1

Result: connection tensors $\widehat{C}_\tau^1, \widehat{C}_\tau^0 \in \mathbb{C}^{r_\tau \times \widehat{r}_{\tau_1} \times \dots \times \widehat{r}_{\tau_m}}$

begin

set $\widehat{C}_\tau^0 = C_\tau^0 \mathbf{X}_{i=1}^m \widehat{\mathbf{M}}_i$;

solve the $r_\tau \times \widehat{r}_{\tau_1} \times \dots \times \widehat{r}_{\tau_m}$ tensor differential equation from t_0 to t_1

$$\dot{\widehat{C}}_\tau(t) = F_\tau(t, \widehat{C}_\tau(t) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^*, \quad \widehat{C}_\tau(t_0) = \widehat{C}_\tau^0;$$

% Galerkin method on the subspace generated by $\widehat{\mathbf{U}}_{\tau_i}$

set $\widehat{C}_\tau^1 = \widehat{C}_\tau(t_1)$

end

We emphasize that the huge matrices $\widehat{\mathbf{U}}_\tau$ (when the tree τ is not a leaf) are never computed as matrices but only their factors in the TTN representation: the connection tensors \widehat{C}_σ for subtrees $\sigma \leq \tau$ that are not leaves, and the basis matrices $\widehat{\mathbf{U}}_l$ for the leaves.

The low-dimensional matrix differential equations for $Y_l(t)$ and low-dimensional tensor differential equations $C_\tau(t)$ are solved approximately using a standard integrator, e.g., an explicit or implicit Runge–Kutta method or an exponential Krylov subspace method when F is linear; note that only linear differential equations appear in the algorithm for linear F .

4.2. Recursive adaptive rank truncation. For the truncation of a tree tensor network we perform a recursive root-to-leaf SVD-based truncation with a given tolerance ϑ . For the derivation and analysis of the algorithm we give a rotate-and-cut formulation in which the given TTN is first rotated (more precisely, the connection tensors are transformed using the unitary matrices that are built from the left singular vectors) and then cut (more precisely, entries of rotated connection tensors multiplying small singular values are set to zero).

One step of the rank-augmenting TTN integrator yields an orthonormal TTN $\widehat{X}_{\bar{\tau}}$ such that for each subtree $\tau = (\tau_1, \dots, \tau_m)$ of $\bar{\tau}$, the augmented connection tensors $\widehat{C}_\tau \in \mathbb{C}^{\widehat{r}_\tau \times \widehat{r}_{\tau_1} \times \dots \times \widehat{r}_{\tau_m}}$ and the basis matrices are related by

$$\widehat{X}_\tau = \widehat{C}_\tau \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i} \quad \text{with} \quad \widehat{\mathbf{U}}_{\tau_i} = \mathbf{Mat}_0(\widehat{X}_{\tau_i})^\top.$$

For $i = 1, \dots, m$, we compute the SVD of the i th matricization of \widehat{C}_τ :

$$\mathbf{Mat}_i(\widehat{C}_\tau) = \widehat{\mathbf{P}}_{\tau_i} \widehat{\Sigma}_{\tau_i} \widehat{\mathbf{Q}}_{\tau_i}^*$$

with the unitary matrix $\widehat{\mathbf{P}}_{\tau_i} \in \mathbb{C}^{\widehat{r}_{\tau_i} \times \widehat{r}_{\tau_i}}$, the diagonal matrix $\widehat{\Sigma}_{\tau_i}$ with decreasing nonnegative real diagonal entries, and the unitary matrix $\widehat{\mathbf{Q}}_{\tau_i}$. Moreover, we set $\widehat{\mathbf{P}}_{\bar{\tau}} = \mathbf{I}_{r_{\bar{\tau}}} = 1$ to start the recursion, which goes from $\bar{\tau}$ to the leaves.

(i) *Rotate.* We define

$$\widehat{C}_\tau^{\text{rot}} = \widehat{C}_\tau \times_0 \widehat{\mathbf{P}}_\tau^\top \mathbf{X}_{i=1}^m \widehat{\mathbf{P}}_{\tau_i}^* \quad \text{and} \quad \widehat{\mathbf{U}}_{\tau_i}^{\text{rot}} = \widehat{\mathbf{U}}_{\tau_i} \widehat{\mathbf{P}}_{\tau_i} \quad (i = 1, \dots, m),$$

for which

$$\mathbf{Mat}_i(\widehat{C}_\tau^{\text{rot}}) = \widehat{\mathbf{P}}_{\tau_i}^* \mathbf{Mat}_i(\widehat{C}_\tau) \bigotimes_{j \neq i} (\widehat{\mathbf{P}}_{\tau_j}^*)^\top \otimes \widehat{\mathbf{P}}_\tau = \widehat{\Sigma}_{\tau_i} \widehat{\mathbf{Q}}_{\tau_i}^* \bigotimes_{j \neq i} (\widehat{\mathbf{P}}_{\tau_j}^*)^\top \otimes \widehat{\mathbf{P}}_\tau,$$

and we set

$$\widehat{X}_\tau^{\text{rot}} = \widehat{X}_\tau \times_0 \widehat{\mathbf{P}}_\tau^\top = \widehat{C}_\tau^{\text{rot}} \times_0 \mathbf{I}_{\widehat{r}_\tau} \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^{\text{rot}}.$$

With these definitions we have

$$\widehat{\mathbf{U}}_{\tau_i}^{\text{rot}} = \widehat{\mathbf{U}}_{\tau_i} \widehat{\mathbf{P}}_{\tau_i} = \mathbf{Mat}_0(\widehat{X}_{\tau_i})^\top \widehat{\mathbf{P}}_{\tau_i} = (\widehat{\mathbf{P}}_{\tau_i}^\top \mathbf{Mat}_0(\widehat{X}_{\tau_i}))^\top = \mathbf{Mat}_0(\widehat{X}_{\tau_i} \times_0 \widehat{\mathbf{P}}_{\tau_i}^\top)^\top$$

so that finally

$$\widehat{X}_\tau^{\text{rot}} = \widehat{C}_\tau^{\text{rot}} \times_0 \mathbf{I}_{\widehat{r}_\tau} \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^{\text{rot}} \quad \text{with} \quad \widehat{\mathbf{U}}_{\tau_i}^{\text{rot}} = \mathbf{Mat}_0(\widehat{X}_{\tau_i}^{\text{rot}})^\top$$

and for $i = 1, \dots, m$,

$$\mathbf{Mat}_i(\widehat{C}_\tau^{\text{rot}}) = \widehat{\Sigma}_{\tau_i} \widehat{\mathbf{V}}_{\tau_i}^* \tag{4.1}$$

with a unitary matrix $\widehat{\mathbf{V}}_{\tau_i}$. Moreover, we have $\widehat{X}_{\bar{\tau}}^{\text{rot}} = \widehat{X}_{\bar{\tau}}$.

(ii) *Cut*. The reduced rank $r_{\tau_i} \leq \widehat{r}_{\tau_i}$ is chosen as the smallest integer such that the singular values σ_k in $\widehat{\Sigma}_{\tau_i}$ satisfy for a given tolerance $\vartheta > 0$

$$\left(\sum_{k=r_{\tau_i}+1}^{\widehat{r}_{\tau_i}} \sigma_k^2 \right)^{1/2} \leq \vartheta. \quad (4.2)$$

Let Σ_{τ_i} be the truncated diagonal matrix with the largest r_{τ_i} diagonal entries of $\widehat{\Sigma}_{\tau_i}$. For the truncated tensor $\widehat{C}_{\tau}^{\text{cut}}$ of the same dimension as $\widehat{C}_{\tau}^{\text{rot}}$ defined by

$$\widehat{C}_{\tau}^{\text{cut}}|_{(k_0, k_1, \dots, k_m)} = \begin{cases} \widehat{C}_{\tau}^{\text{rot}}|_{(k_0, k_1, \dots, k_m)} & \text{if } k_0 \leq r_{\tau}, k_i \leq r_{\tau_i} \ (i = 1, \dots, m) \\ 0 & \text{else,} \end{cases}$$

we then have

$$\mathbf{Mat}_i(\widehat{C}_{\tau}^{\text{cut}}) = \begin{pmatrix} \Sigma_{\tau_i} & 0 \\ 0 & 0 \end{pmatrix} \widehat{\mathbf{V}}_{\tau_i}^*, \quad (4.3)$$

where the $\widehat{r}_{\tau_i} - r_{\tau_i}$ smallest singular values of $\widehat{\Sigma}_{\tau_i}$ have been cut to 0 (but nothing else is changed). We approximate $\widehat{X}_{\tau}^{\text{rot}}$ by

$$\widehat{X}_{\tau}^{\text{cut}} = \widehat{C}_{\tau}^{\text{cut}} \times_0 \mathbf{I}_{r_{\tau}} \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^{\text{rot}}.$$

Since many entries of $\widehat{C}_{\tau}^{\text{cut}}$ are zero, this expression can be simplified. We define the dimension-reduced tensor $C_{\tau} \in \mathbb{C}^{r_{\tau} \times r_{\tau_1} \times \dots \times r_{\tau_m}}$ as the essential part of $\widehat{C}_{\tau}^{\text{cut}}$,

$$C_{\tau}|_{(k_0, k_1, \dots, k_m)} = \widehat{C}_{\tau}^{\text{cut}}|_{(k_0, k_1, \dots, k_m)} \quad \text{for } k_0 \leq r_{\tau}, k_i \leq r_{\tau_i} \ (i = 1, \dots, m).$$

Let $\mathbf{P}_{\tau} \in \mathbb{C}^{\widehat{r}_{\tau} \times r_{\tau}}$ be the matrix built of the first r_{τ} columns of $\widehat{\mathbf{P}}_{\tau}$. We then have

$$C_{\tau} = \widehat{C}_{\tau} \times_0 \mathbf{P}_{\tau}^{\top} \mathbf{X}_{i=1}^m \mathbf{P}_{\tau_i}^*.$$

Let $\widetilde{\mathbf{U}}_{\tau_i}$ be the matrix built of the first r_{τ_i} columns of $\widehat{\mathbf{U}}_{\tau_i}^{\text{rot}}$, i.e., $\widetilde{\mathbf{U}}_{\tau_i} = \widehat{\mathbf{U}}_{\tau_i} \mathbf{P}_{\tau_i}$. We obtain the reduced representation

$$\widehat{X}_{\tau}^{\text{cut}} \times_0 (\mathbf{I}_{r_{\tau}}, 0) = C_{\tau} \times_0 \mathbf{I}_{\tau} \mathbf{X}_{i=1}^m \widetilde{\mathbf{U}}_{\tau_i}.$$

We note that $\widetilde{\mathbf{U}}_{\tau_i} = \mathbf{Mat}_0(\widetilde{X}_{\tau_i})^{\top}$ with $\widetilde{X}_{\tau_i} = \widehat{X}_{\tau_i} \times_0 \mathbf{P}_{\tau_i}^{\top} = \widehat{X}_{\tau_i}^{\text{rot}} \times_0 (\mathbf{I}_{r_{\tau_i}}, 0)$, which differs from $\widehat{X}_{\tau_i}^{\text{rot}}$ with $\widehat{\mathbf{U}}_{\tau_i}^{\text{rot}} = \mathbf{Mat}_0(\widehat{X}_{\tau_i}^{\text{rot}})^{\top}$ only in that the connection tensor $\widehat{C}_{\tau_i}^{\text{rot}}$ is replaced by the smaller tensor $\widetilde{C}_{\tau_i} = \widehat{C}_{\tau_i}^{\text{rot}} \times_0 (\mathbf{I}_{r_{\tau_i}}, 0)$.

This procedure is done recursively from the root to the leaves, where we set $\mathbf{U}_l = \widetilde{\mathbf{U}}_l = \widehat{\mathbf{U}}_l \mathbf{P}_l$. In this way we obtain the rank-truncated TTN $X_{\bar{\tau}}$ with the reduced connection tensor C_{τ} for each subtree $\tau = (\tau_1, \dots, \tau_m)$ of $\bar{\tau}$ and the reduced basis matrix \mathbf{U}_l for each leaf l :

$$X_{\tau} = C_{\tau} \times_0 \mathbf{I}_{\tau} \mathbf{X}_{i=1}^m \mathbf{U}_{\tau_i} \quad \text{with} \quad \mathbf{U}_{\tau_i} = \mathbf{Mat}_0(X_{\tau_i})^{\top}.$$

We note that this representation of X_{τ} is in general not orthonormal, but as we show in the next section, the norms of the factors behave in a stable way. If orthonormality

is needed for output, the TTN can be reorthonormalized as described after Lemma 2.3. Orthonormality is, however, not needed for advancing with the next time step, as the integrator anyway computes new orthonormal bases in Algorithm 5.

With the above considerations we arrive at Algorithm 7, which arranges the computations in a different but mathematically equivalent way.

Algorithm 7: Rank truncation Θ_τ

Data: tree $\tau = (\tau_1, \dots, \tau_m)$, TTN in factorized form

$\widehat{X}_\tau = \widehat{C}_\tau \times_0 \widehat{\mathbf{I}}_\tau \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}$ of tree rank $(\widehat{r}_\sigma)_{\sigma \leq \tau}$

with $\widehat{\mathbf{U}}_{\tau_i} = \mathbf{Mat}_0(\widehat{X}_{\tau_i})^\top$ for a sub-TTN \widehat{X}_{τ_i} ,

tolerance parameter ϑ

Result: TTN in factorized form $X_\tau = C_\tau \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \mathbf{U}_{\tau_i}$
of tree rank $(r_\sigma)_{\sigma \leq \tau}$ with adaptively chosen $r_\sigma \leq \widehat{r}_\sigma$

begin

 set $C_\tau^0 = \widehat{C}_\tau$

for $i = 1 : m$ **do**

 compute the SVD $\mathbf{Mat}_i(C_\tau^{i-1}) = \widehat{\mathbf{P}}_{\tau_i} \widehat{\boldsymbol{\Sigma}}_{\tau_i} \widehat{\mathbf{Q}}_{\tau_i}^*$
 set r_{τ_i} to be the smallest integer such that

$$\left(\sum_{k=r_{\tau_i}+1}^{\widehat{r}_{\tau_i}} \sigma_k^2 \right)^{1/2} \leq \vartheta,$$

 where σ_k are the singular values from the SVD;
 set \mathbf{P}_{τ_i} and \mathbf{Q}_{τ_i} as the first r_{τ_i} columns of $\widehat{\mathbf{P}}_{\tau_i}$ and $\widehat{\mathbf{Q}}_{\tau_i}$, respectively;
 set $\boldsymbol{\Sigma}_{\tau_i}$ as the diagonal $r_{\tau_i} \times r_{\tau_i}$ matrix containing the largest r_{τ_i}

 singular values of $\widehat{\boldsymbol{\Sigma}}_{\tau_i}$;

 set $C_\tau^i = \mathit{Ten}_i(\boldsymbol{\Sigma}_{\tau_i} \mathbf{Q}_{\tau_i}^*)$

if $\tau_i = l$ is a leaf **then**

 | set $\mathbf{U}_l = \widehat{\mathbf{U}}_l \mathbf{P}_l$.

else

 | set $\widetilde{C}_{\tau_i} = \widehat{C}_{\tau_i} \times_0 \mathbf{P}_{\tau_i}^\top$, where \widehat{C}_{τ_i} is the connection tensor of \widehat{X}_{τ_i} ;

 | set \widetilde{X}_{τ_i} to be the TTN in which the connection tensor in \widehat{X}_{τ_i} is
 | replaced with \widetilde{C}_{τ_i} ;

 | compute $X_{\tau_i} = \Theta_{\tau_i}(\widetilde{X}_{\tau_i}, \vartheta)$ % recursive truncation

 | set $\mathbf{U}_{\tau_i} = \mathbf{Mat}_0(X_{\tau_i})^\top$

end

end

 set $C_\tau = C_\tau^m$.

end

With the rank augmentation and truncation, the integrator chooses its rank adaptively at each time step. For efficiency, it is reasonable to set a maximal rank.

4.3. Computational complexity. As in [3], counting the required operations and the required memory yields the following result.

LEMMA 4.1. *Let d be the order of the tensor $A(t)$ (i.e., the number of leaves of the tree $\bar{\tau}$), $l < d$ the number of levels (i.e., the height of the tree $\bar{\tau}$), and let $n = \max_{\ell} n_{\ell}$ be the maximal dimension, $r = \max_{\tau} r_{\tau}$ the maximal rank and m the maximal order of the connection tensors. We assume that for every tree tensor network $X_{\bar{\tau}}$ we have that $Z_{\bar{\tau}} = F(t, X_{\bar{\tau}})$ is again a tree tensor network, with ranks $s_{\tau} \leq cr$ for all subtrees $\tau \leq \bar{\tau}$ with a moderate constant c . Then, one time step of the tree tensor integrator given by Algorithms 4–7 requires*

- $O(dr(n + r^m))$ storage,
- $O(ld)$ tensorizations/matricizations of matrices/tensors with $\leq r^{m+1}$ entries,
- $O(ld^2r^2(n + r^m))$ arithmetical operations and
- $O(d)$ evaluations of the function F ,

provided the differential equations in Algorithms 5 and 6 are solved approximately using a fixed number of function evaluations per time step.

The bottleneck of the implementation is an efficient evaluation of the right-hand side function $F_{\bar{\tau}}(t, Y) \approx F(t, Y)$ of the differential equation (1.1). We refer to [15] for an efficient method of storing and applying linear operators to tree tensor networks. The operators F_{τ} for subtrees $\tau < \bar{\tau}$ are efficiently implemented via prolongation and restriction operators as described in [3]; see also Section 2.3 for their definition.

4.4. Alternative TTN integrators. Fixed-rank TTN integrator based on the ‘unconventional’ integrator of [2]. The rank-adaptive TTN integrator presented above extends the rank-adaptive integrator for low-rank matrices and Tucker tensors proposed and studied in [1], which in turn was conceptually based on the ‘unconventional’ basis-update & Galerkin low-rank integrator of [2]. The latter integrator can be extended to tree tensor networks in the same way as above. This yields a fixed-rank TTN integrator which differs from the presented algorithm only in that the matrices of doubled dimension $(Y_l(t_1)^{\top}, Y_l^{0,\top})$ and $(\mathbf{Mat}_0(\hat{C}_{\tau_i}^1)^{\top}, \mathbf{Mat}_0(\hat{C}_{\tau_i}^0)^{\top})$ in Algorithm 5, which contain new and old values, are replaced by taking instead only the new values $Y_l(t_1)^{\top}$ and $\mathbf{Mat}_0(\hat{C}_{\tau_i}^1)^{\top}$. The rank truncation Θ_{τ} is then not needed. We found, however, that the integrator presented above in Algorithms 4–7, even when taken as a fixed-rank integrator in which the augmented ranks are always truncated to the original ranks, is more accurate and has better conservation properties. Using in the Galerkin basis both the old and new values instead of only the new values appears to be distinctly favourable.

Comparison with the TTN integrator of [3] based on the projector-splitting integrator. A conceptually different fixed-rank TTN integrator was proposed and studied in [3]. That integrator is based on the projector-splitting integrator for low-rank matrices [19], which was previously extended to Tucker tensors [18, 21] and tensor trains / matrix product states [20, 10]. The TTN integrator of [3] has the same robustness to small singular values as the algorithm presented here. It differs in that some substeps use evolutions backward in time, which are problematic for strongly dissipative problems. It conserves, however, norm and total energy of Schrödinger equations exactly up to errors in the integration of the matrix and connection tensor differential equations in the substeps. The TTN integrator of [3] has a more serial structure and thus has less parallelism, and — of principal interest here — it does not so easily generalize to a rank-adaptive integrator. We mention, however, that elaborate suggestions for rank-adaptive extensions of the projector-splitting integrator were made in [6, 7, 29] in the case of tensor trains / matrix product states.

5. Two basic lemmas. In this section we give two lemmas that are essential in the following sections, one about the original and the actually used augmented initial tensors, and the other lemma about the rank-truncation error at the end of a time step.

5.1. Starting tensors. We first show that for each subtree $\tau = (\tau_1, \dots, \tau_m)$ of $\bar{\tau}$, the given starting tensor

$$Y_\tau^0 = C_\tau^0 \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \mathbf{U}_{\tau_i}^0$$

coincides with the corresponding tensor that has the augmented connection tensor and basis matrices $\widehat{\mathbf{U}}_{\tau_i}$ constructed in Algorithm 5,

$$\widehat{Y}_\tau^0 = \widehat{C}_\tau^0 \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i},$$

which is actually used in Algorithm 6.

LEMMA 5.1. $\widehat{Y}_\tau^0 = Y_\tau^0$.

Proof. Since $\widehat{C}_\tau^0 = C_\tau^0 \mathbf{X}_{i=1}^m \widehat{\mathbf{M}}_{\tau_i}$ in Algorithm 6 with $\widehat{\mathbf{M}}_{\tau_i} = \widehat{\mathbf{U}}_{\tau_i}^* \mathbf{U}_{\tau_i}^0$, we have

$$\begin{aligned} \widehat{Y}_\tau^0 &= (C_\tau^0 \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^* \mathbf{U}_{\tau_i}^0) \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i} \\ &= C_\tau^0 \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i} \widehat{\mathbf{U}}_{\tau_i}^* \mathbf{U}_{\tau_i}^0. \end{aligned}$$

We will show by induction over the height of the tree that

$$\text{Range}(\mathbf{U}_{\tau_i}^0) \subseteq \text{Range}(\widehat{\mathbf{U}}_{\tau_i}). \quad (5.1)$$

Since $\widehat{\mathbf{U}}_{\tau_i} \widehat{\mathbf{U}}_{\tau_i}^*$ is the orthogonal projection onto $\text{Range}(\widehat{\mathbf{U}}_{\tau_i})$, this implies

$$\widehat{\mathbf{U}}_{\tau_i} \widehat{\mathbf{U}}_{\tau_i}^* \mathbf{U}_{\tau_i}^0 = \mathbf{U}_{\tau_i}^0, \quad i = 1, \dots, m,$$

and hence we obtain

$$\widehat{Y}_\tau^0 = C_\tau^0 \times_0 \mathbf{I}_\tau \mathbf{X}_{i=1}^m \mathbf{U}_{\tau_i}^0 = Y_\tau^0.$$

It remains to prove (5.1). If $\tau_i = l$ is a leaf, then this is obvious from the definition of $\widehat{\mathbf{U}}_l$ in Algorithm 5. Else we write the tree τ_i as $\sigma = (\sigma_1, \dots, \sigma_k)$ with direct subtrees σ_j and use the induction hypothesis that $\text{Range}(\mathbf{U}_{\sigma_j}^0) \subseteq \text{Range}(\widehat{\mathbf{U}}_{\sigma_j})$ for all $j = 1, \dots, k$. This implies that

$$\mathbf{U}_{\sigma_j}^0 = \widehat{\mathbf{U}}_{\sigma_j} \widehat{\mathbf{U}}_{\sigma_j}^* \mathbf{U}_{\sigma_j}^0 = \widehat{\mathbf{U}}_{\sigma_j} \widehat{\mathbf{M}}_{\sigma_j}.$$

By the construction of the tree tensor network, we have

$$\mathbf{U}_\sigma^0 = \mathbf{Mat}_0(Y_\sigma^0)^\top \quad \text{with} \quad Y_\sigma^0 = C_\sigma^0 \times \mathbf{I}_\sigma \mathbf{X}_{j=1}^k \mathbf{U}_{\sigma_j}^0.$$

So we obtain from the matricization formula (2.2) that

$$\begin{aligned} \mathbf{U}_\sigma^0 &= \bigotimes_{j=1}^k \mathbf{U}_{\sigma_j}^0 \mathbf{Mat}_0(C_\sigma^0)^\top = \bigotimes_{j=1}^k \widehat{\mathbf{U}}_{\sigma_j} \widehat{\mathbf{M}}_{\sigma_j} \mathbf{Mat}_0(C_\sigma^0)^\top \\ &= \bigotimes_{j=1}^k \widehat{\mathbf{U}}_{\sigma_j} \mathbf{Mat}_0(C_\sigma^0 \mathbf{X}_{j=1}^k \widehat{\mathbf{M}}_{\sigma_j})^\top. \end{aligned}$$

Since we have $\widehat{C}_\sigma^0 = C_\sigma^0 \mathbf{X}_{j=1}^k \widehat{\mathbf{M}}_{\sigma_j}$ in Algorithm 6, we finally obtain

$$\mathbf{U}_\sigma^0 = \bigotimes_{j=1}^k \widehat{\mathbf{U}}_{\sigma_j} \mathbf{Mat}_0(\widehat{C}_\sigma^0)^\top.$$

On the other hand, in Algorithm 5 we construct

$$\widehat{\mathbf{U}}_\sigma = \bigotimes_{j=1}^k \widehat{\mathbf{U}}_{\sigma_j} \mathbf{Mat}_0(\widehat{C}_\sigma)^\top,$$

where the columns of $\mathbf{Mat}_0(\widehat{C}_\sigma)^\top$ form an orthogonal basis of the range of the augmented matrix $(\mathbf{Mat}_0(\widehat{C}_\sigma^1)^\top, \mathbf{Mat}_0(\widehat{C}_\sigma^0)^\top)$. We therefore have

$$\text{Range}(\mathbf{Mat}_0(\widehat{C}_\sigma^0)^\top) \subseteq \text{Range}(\mathbf{Mat}_0(\widehat{C}_\sigma)^\top),$$

and in view of the above formulas for \mathbf{U}_σ^0 and $\widehat{\mathbf{U}}_\sigma$, this implies the relation (5.1) for $\sigma = \tau_i$. \square

5.2. Error of the rank-truncation algorithm. Algorithms 4–6 compute, for each strict subtree $\tau = (\tau_1, \dots, \tau_m) < \bar{\tau}$, the rank-augmented orthonormal TTN

$$\widehat{X}_\tau = \widehat{C}_\tau \times_0 \mathbf{I}_{\widehat{r}_\tau} \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i} \quad \text{with} \quad \widehat{\mathbf{U}}_{\tau_i} = \mathbf{Mat}_0(\widehat{X}_{\tau_i})^\top, \quad (5.2)$$

where $\widehat{C}_\tau \in \mathbb{C}^{\widehat{r}_\tau \times \widehat{r}_{\tau_1} \times \dots \times \widehat{r}_{\tau_m}}$, and finally Algorithm 4 obtains the rank-augmented TTN approximation for the full tree $\bar{\tau} = (\bar{\tau}_1, \dots, \bar{\tau}_m)$ at time t_1 as

$$\widehat{Y}_{\bar{\tau}}^1 = \widehat{C}_{\bar{\tau}}^1 \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\bar{\tau}_i}, \quad (5.3)$$

where $\widehat{C}_{\bar{\tau}}^1 \in \mathbb{C}^{\widehat{r}_{\bar{\tau}} \times \dots \times \widehat{r}_{\bar{\tau}_m}}$. For notational convenience we set $\widehat{X}_{\bar{\tau}} = \widehat{Y}_{\bar{\tau}}^1$ and drop the superscript 1 on $\widehat{C}_{\bar{\tau}}^1$, so that (5.2) is valid also for $\tau = \bar{\tau}$ (with $\widehat{r}_{\bar{\tau}} = 1$).

For $\tau \neq \bar{\tau}$ the columns of $\mathbf{Mat}_0(\widehat{C}_\tau)$ and $\widehat{\mathbf{U}}_\tau$ are orthonormal, so that in particular their matrix 2-norms are equal to 1:

$$\|\mathbf{Mat}_0(\widehat{C}_\tau)\|_2 = 1, \quad \|\widehat{\mathbf{U}}_\tau\|_2 = 1 \quad \text{for } \tau < \bar{\tau}. \quad (5.4)$$

Algorithm 7 computes a rank-truncated TTN X_τ for $\tau \leq \bar{\tau}$,

$$X_\tau = C_\tau \times_0 \mathbf{I}_{r_\tau} \mathbf{X}_{i=1}^m \mathbf{U}_{\tau_i} \quad \text{with} \quad \mathbf{U}_{\tau_i} = \mathbf{Mat}_0(X_{\tau_i})^\top,$$

where $C_\tau \in \mathbb{C}^{r_\tau \times r_{\tau_1} \times \dots \times r_{\tau_m}}$. The reduced ranks $r_\tau \leq \widehat{r}_\tau$ depend on the given tolerance parameter ϑ . Then, the rank-truncated TTN (obtained in factorized form)

$$Y_{\bar{\tau}}^1 = X_{\bar{\tau}}$$

is the result after the full rank-adaptive time step and serves as the starting value for the next time step.

In the following error bound, the norm $\|X\|$ of a tensor X is the Euclidean norm of the vector of entries of X , and the integer d_τ is the number of connection tensors of a TTN on the tree τ (i.e., the number of vertices of τ that are not leaves).

LEMMA 5.2. $\|Y_{\bar{\tau}}^1 - \widehat{Y}_{\bar{\tau}}^1\| \leq c_{\bar{\tau}} \vartheta$ with $c_{\bar{\tau}} = \|C_{\bar{\tau}}\|(d_{\bar{\tau}} - 1) + 1$.

Proof. From the sub-TTNs \widehat{X}_τ with $\tau \leq \bar{\tau}$ we construct the rotated and cut TTNs $\widehat{X}_\tau^{\text{rot}}, \widehat{X}_\tau^{\text{cut}}$ as described in Section 4.2. For a tree $\tau = (\tau_1, \dots, \tau_m) \leq \bar{\tau}$ we then have the corresponding matrices

$$\begin{aligned}\widehat{\mathbf{U}}_\tau^{\text{rot}} &= \mathbf{Mat}_0(\widehat{X}_\tau^{\text{rot}})^\top, & \widehat{X}_\tau^{\text{rot}} &= \widehat{C}_\tau^{\text{rot}} \times_0 \mathbf{I}_{r_\tau} \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^{\text{rot}}, \\ \mathbf{U}_\tau &= \mathbf{Mat}_0(X_\tau)^\top, & X_\tau &= C_\tau \times_0 \mathbf{I}_{r_\tau} \mathbf{X}_{i=1}^m \mathbf{U}_{\tau_i}.\end{aligned}$$

With

$$\widetilde{\mathbf{U}}_\tau = \widehat{\mathbf{U}}_\tau^{\text{rot}} \begin{pmatrix} \mathbf{I}_{r_\tau} \\ 0 \end{pmatrix} = \mathbf{Mat}_0(\widetilde{X}_\tau)^\top, \quad \widetilde{X}_\tau = \widehat{X}_\tau^{\text{rot}} \times_0 (\mathbf{I}_{r_\tau}, 0),$$

we further have the intermediate tensor

$$\begin{aligned}\widetilde{X}_\tau^{\text{cut}} &= \widehat{X}_\tau^{\text{cut}} \times_0 (\mathbf{I}_{r_\tau}, 0) = \widehat{C}_\tau^{\text{cut}} \times_0 (\mathbf{I}_{r_\tau}, 0) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^{\text{rot}} \\ &= C_\tau \times_0 \mathbf{I}_{r_\tau} \mathbf{X}_{i=1}^m \widetilde{\mathbf{U}}_{\tau_i}.\end{aligned}$$

We prove the error bound

$$\|\mathbf{U}_\tau - \widetilde{\mathbf{U}}_\tau\|_2 \leq d_\tau \vartheta \quad \text{for } \tau < \bar{\tau} \quad (5.5)$$

using induction over the height of the tree. At leaves l we have $\mathbf{U}_l = \widetilde{\mathbf{U}}_l$ and $\|\widetilde{\mathbf{U}}_l\|_2 \leq 1$ by construction. We make the induction hypothesis

$$\|\mathbf{U}_{\tau_i}\|_2 \leq 1 \text{ and } \|\mathbf{U}_{\tau_i} - \widetilde{\mathbf{U}}_{\tau_i}\|_2 \leq d_{\tau_i} \vartheta.$$

We note that $\|\widetilde{\mathbf{U}}_{\tau_i}\|_2 \leq 1$ by (5.4) and by the construction of $\widetilde{\mathbf{U}}_{\tau_i}$ from $\widehat{\mathbf{U}}_{\tau_i}$. We further observe that

$$\begin{aligned}\|\mathbf{Mat}_0(C_\tau)\|_2 &= \|\mathbf{Mat}_0(\widehat{C}_\tau^{\text{cut}})\|_2 \leq \|\mathbf{Mat}_0(\widehat{C}_\tau^{\text{rot}})\|_2 = \|\mathbf{Mat}_0(\widehat{C}_\tau)\|_2 \quad \text{and} \\ \|\mathbf{U}_\tau\|_2 &= \|\mathbf{Mat}_0(X_\tau)\|_2 = \|\mathbf{Mat}_0(C_\tau) \bigotimes_{i=1}^m \mathbf{U}_{\tau_i}^\top\|_2 \leq \|\mathbf{Mat}_0(C_\tau)\|_2 \prod_{i=1}^m \|\mathbf{U}_{\tau_i}\|_2.\end{aligned}$$

By (5.4) and the induction hypothesis, we thus obtain

$$\|\mathbf{Mat}_0(C_\tau)\|_2 \leq 1 \quad \text{and} \quad \|\mathbf{U}_\tau\|_2 \leq 1. \quad (5.6)$$

We have $\|\mathbf{U}_\tau - \widetilde{\mathbf{U}}_\tau\|_2 = \|\mathbf{Mat}_0(X_\tau - \widetilde{X}_\tau)\|_2$ and write

$$X_\tau - \widetilde{X}_\tau = (X_\tau - \widetilde{X}_\tau^{\text{cut}}) + (\widehat{X}_\tau^{\text{cut}} - \widehat{X}_\tau^{\text{rot}}) \times_0 (\mathbf{I}_{r_\tau}, 0).$$

The first term on the right-hand side equals

$$X_\tau - \widetilde{X}_\tau^{\text{cut}} = C_\tau \times_0 \mathbf{I}_{r_\tau} \mathbf{X}_{i=1}^m \mathbf{U}_{\tau_i} - C_\tau \times_0 \mathbf{I}_{r_\tau} \mathbf{X}_{i=1}^m \widetilde{\mathbf{U}}_{\tau_i}$$

with the same connection tensor C_τ in both terms of the difference. We then have

$$\mathbf{Mat}_0(X_\tau - \widetilde{X}_\tau^{\text{cut}}) = \mathbf{Mat}_0(C_\tau) \left(\bigotimes_{i=1}^m \mathbf{U}_{\tau_i}^\top - \bigotimes_{i=1}^m \widetilde{\mathbf{U}}_{\tau_i}^\top \right).$$

Writing the difference of the Kronecker products as a telescoping sum, using that $\mathbf{Mat}_0(C_\tau)$ and \mathbf{U}_{τ_i} are bounded by 1 in the matrix 2-norm, and finally using the induction hypothesis, we obtain

$$\|\mathbf{Mat}_0(X_\tau - \widetilde{X}_\tau^{\text{cut}})\|_2 \leq \sum_{i=1}^m \|\mathbf{U}_{\tau_i} - \widetilde{\mathbf{U}}_{\tau_i}\|_2 \leq \sum_{i=1}^m d_{\tau_i} \vartheta = (d_\tau - 1) \vartheta.$$

On the other hand,

$$(\widehat{X}_\tau^{\text{cut}} - \widehat{X}_\tau^{\text{rot}}) \times_0 (\mathbf{I}_{r_\tau}, 0) = (\widehat{C}_\tau^{\text{cut}} - \widehat{C}_\tau^{\text{rot}}) \times_0 (\mathbf{I}_{r_\tau}, 0) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^{\text{rot}},$$

where $\|\widehat{\mathbf{U}}_{\tau_i}^{\text{rot}}\|_2 \leq 1$ by construction and (5.4). So we have

$$\begin{aligned} \|\mathbf{Mat}_0((\widehat{X}_\tau^{\text{cut}} - \widehat{X}_\tau^{\text{rot}}) \times_0 (\mathbf{I}_{r_\tau}, 0))\|_2 &\leq \|\mathbf{Mat}_0(\widehat{C}_\tau^{\text{cut}} - \widehat{C}_\tau^{\text{rot}})\|_2 \\ &\leq \|\mathbf{Mat}_0(\widehat{C}_\tau^{\text{cut}}) - \mathbf{Mat}_0(\widehat{C}_\tau^{\text{rot}})\|_F = \|\mathbf{Mat}_1(\widehat{C}_\tau^{\text{cut}}) - \mathbf{Mat}_1(\widehat{C}_\tau^{\text{rot}})\|_F \leq \vartheta, \end{aligned}$$

where we used (4.1)–(4.3) in the last inequality. Altogether we find

$$\begin{aligned} \|\mathbf{U}_\tau - \widetilde{\mathbf{U}}_\tau\|_2 &\leq \|\mathbf{Mat}_0(X_\tau - \widetilde{X}_\tau^{\text{cut}})\|_2 + \|\mathbf{Mat}_0((\widehat{X}_\tau^{\text{cut}} - \widehat{X}_\tau^{\text{rot}}) \times_0 (\mathbf{I}_{r_\tau}, 0))\|_2 \\ &\leq d_\tau \vartheta, \end{aligned}$$

which completes the proof of (5.5) by induction. Finally, for the full tree $\bar{\tau} = (\tau_1, \dots, \tau_m)$, where $\widehat{r}_{\bar{\tau}} = r_{\bar{\tau}} = 1$ but $\|C_{\bar{\tau}}\|$ is arbitrary, we use the same argument as above in estimating the norm of

$$X_{\bar{\tau}} - \widehat{X}_{\bar{\tau}} = X_{\bar{\tau}} - \widehat{X}_{\bar{\tau}}^{\text{rot}} = (C_{\bar{\tau}} \mathbf{X}_{i=1}^m \mathbf{U}_{\tau_i} - C_{\bar{\tau}} \mathbf{X}_{i=1}^m \widetilde{\mathbf{U}}_{\tau_i}) + (\widehat{C}_{\bar{\tau}}^{\text{cut}} - \widehat{C}_{\bar{\tau}}^{\text{rot}}) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^{\text{rot}}.$$

This yields $\|X_{\bar{\tau}} - \widehat{X}_{\bar{\tau}}\| \leq (\|C_{\bar{\tau}}\| (d_{\bar{\tau}} - 1) + 1) \vartheta$. \square

6. Exactness property and robust error bound. The rank-adaptive TTN integrator shares fundamental robustness properties with the TTN integrator of [3]. Since the formulation of these results is essentially the same as in [3] and since the proofs combine in a direct way the corresponding proofs in [1] for the rank-adaptive integrator for the case of matrices and Tucker tensors with the induction proofs in [3] for tree tensor networks, we do not present the details here.

6.1. Exactness property. The exactness property of Theorem 5.1 in [3] states that the TTN integrator exactly reproduces time-dependent tree tensor networks that are of the tree rank used by the integrator. This holds true also for the rank-adaptive TTN integrator without truncation (and also with truncation provided the truncation tolerance ϑ is sufficiently small). This is shown by using the exactness property of the rank-adaptive integrator for matrices and Tucker tensors as given in [1] in a proof by induction over the height of the tree in the same way as in the proof of Theorem 5.1 in [3].

6.2. Robust error bound. The error bound of Theorem 6.1 in [3], which is independent of small singular values of matricizations of the connection tensors, extends to the rank-adaptive TTN integrator with an extra term proportional to the truncation tolerance ϑ in the $O(h + \varepsilon)$ error bound as in Theorem 2 of [1]. This is shown by induction over the height of the tree in the same way as in [3], using the error bound of the rank-adaptive integrator for matrices and Tucker tensors given in [1], which in turn is based on [11] and relies on the exactness property.

7. Structure-preserving properties. We show that the augmented TTN integrator given by Algorithms 4–6 has remarkable conservation properties: It preserves norm and energy for Schrödinger equations, and it diminishes the energy for gradient systems. The rank-adaptive TTN integrator, which truncates the result of the rank-augmenting integrator, then has corresponding near-conservation properties up to a multiple of the truncation tolerance ϑ (and up to errors in the integration of

the low-dimensional differential equations in the substeps, which we disregard here). The proof of such properties relies on Lemmas 5.1 and 5.2. The following results extend conservation results in [1] from the dynamical low-rank approximation of matrix differential equations to the more intricate general TTN case.

In this section we write \widehat{Y}_τ^1 for the rank-augmented result \widehat{X}_τ after a time step with step size h , and Y_τ^1 for the rank-truncated result X_τ , which is used as the starting value for the next time step. (We mention that for $\tau \neq \bar{\tau}$ this notation is not consistent with the notation \widehat{Y}_τ^1 used in Algorithms 4 and 5, but here it serves us well in comparing quantities at times t_0 and t_1 .)

7.1. Norm conservation. If the function F on the right-hand side of the tensor differential equation (1.1) satisfies, with $\langle \cdot, \cdot \rangle$ denoting the Euclidean inner product of vectorizations,

$$\operatorname{Re}\langle Y, F(t, Y) \rangle = 0 \quad \text{for all } Y \in \mathbb{C}^{n_1 \times \dots \times n_d} \text{ and for all } t, \quad (7.1)$$

then the Euclidean norm of every solution $A(t)$ of (1.1) is conserved: $\|A(t)\| = \|A(t_0)\|$ for all t . Norm conservation also holds true for the rank-augmented TTN integrator, as is shown by the following result.

THEOREM 7.1. *If F satisfies (7.1), then a step of the rank-augmented TTN integrator preserves the norm: for every stepsize h and for every subtree τ of $\bar{\tau}$,*

$$\|\widehat{Y}_\tau^1\| = \|Y_\tau^0\|.$$

By Lemma 5.2, this implies near-conservation of the norm up to a multiple of the truncation tolerance ϑ for the rank-adaptive TTN integrator:

$$\|Y_\tau^0\| - c_\tau \vartheta \leq \|Y_\tau^1\| \leq \|Y_\tau^0\|,$$

with c_τ as specified in Lemma 5.2.

Proof. For every subtree $\tau = (\tau_1, \dots, \tau_m) \leq \bar{\tau}$, the reduced nonlinear operator F_τ is defined in Section 2.3 by the recursion (2.4) from the root to the leaves, starting from $F_\tau = F$. We first observe that

$$\operatorname{Re}\langle Y_\tau, F_\tau(t, Y_\tau) \rangle = 0 \quad \text{for all } Y_\tau \in \mathcal{V}_\tau \text{ and for all } t, \quad (7.2)$$

which follows by induction from the root to the leaves, noting

$$\langle Y_{\tau_i}, F_{\tau_i}(t, Y_{\tau_i}) \rangle = \langle Y_{\tau_i}, \pi_{\tau,i}^\dagger F_\tau(t, \pi_{\tau,i} Y_{\tau_i}) \rangle = \langle \pi_{\tau,i} Y_{\tau_i}, F_\tau(t, \pi_{\tau,i} Y_{\tau_i}) \rangle$$

and $\pi_{\tau,i} Y_{\tau_i} \in \mathcal{V}_\tau$.

We now turn to the differential equation in Algorithm 6. We have, for $k = 0$ and $k = 1$,

$$\widehat{Y}_\tau^k = \widehat{C}_\tau^k \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i} \quad \text{and hence} \quad \|\widehat{Y}_\tau^k\| = \|\widehat{C}_\tau^k\|,$$

since $\widehat{\mathbf{U}}_{\tau_i}$ have orthonormal columns for $i = 1, \dots, m$. We recall that \widehat{C}_τ^1 is the solution at t_1 of the differential equation

$$\dot{\widehat{C}}_\tau(t) = F_\tau\left(t, \widehat{C}_\tau(t) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}\right) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^*$$

with initial value $\widehat{C}_\tau(t_0) = \widehat{C}_\tau^0$. We then get

$$\begin{aligned} \frac{1}{2} \frac{d}{dt} \|\widehat{C}_\tau(t)\|^2 &= \operatorname{Re} \langle \widehat{C}_\tau(t), \dot{\widehat{C}}_\tau(t) \rangle = \operatorname{Re} \langle \widehat{C}_\tau(t), F_\tau(t, \widehat{C}_\tau(t) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^* \rangle \\ &= \operatorname{Re} \langle \widehat{C}_\tau(t) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}, F_\tau(t, \widehat{C}_\tau(t) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}) \rangle = 0 \quad \text{by (7.2)}. \end{aligned}$$

Therefore we have

$$\|\widehat{Y}_\tau^1\| = \|\widehat{C}_\tau^1\| = \|\widehat{C}_\tau(t_1)\| = \|\widehat{C}_\tau(t_0)\| = \|\widehat{C}_\tau^0\| = \|\widehat{Y}_\tau^0\| = \|Y_\tau^0\|,$$

where the last equality comes from Lemma 5.1. \square

7.2. Energy conservation for Schrödinger equations. Consider the tensor Schrödinger equation

$$i\dot{A}(t) = H[A(t)], \quad (7.3)$$

with a Hamiltonian $H : \mathbb{C}^{n_1 \times \dots \times n_d} \rightarrow \mathbb{C}^{n_1 \times \dots \times n_d}$ that is linear and self-adjoint, i.e., $\langle H[Y], Z \rangle = \langle Y, H[Z] \rangle$ for all $Y, Z \in \mathbb{C}^{n_1 \times \dots \times n_d}$. The energy

$$E(Y) = \langle Y, H[Y] \rangle$$

is preserved along solutions of (7.3): $E(A(t)) = E(A(t_0))$ for all t .

THEOREM 7.2. *The rank-augmented TTN integrator preserves the energy: for every stepsize h ,*

$$E(\widehat{Y}_\tau^1) = E(Y_\tau^0).$$

By the Cauchy–Schwarz inequality and Lemma 5.2, this implies for the rank-adaptive TTN integrator that

$$\begin{aligned} |E(Y_\tau^1) - E(Y_\tau^0)| &= |E(Y_\tau^1) - E(\widehat{Y}_\tau^1)| = |\operatorname{Re} \langle Y_\tau^1 - \widehat{Y}_\tau^1, H[Y_\tau^1 + \widehat{Y}_\tau^1] \rangle| \\ &\leq c_\tau \vartheta \|H[Y_\tau^1 + \widehat{Y}_\tau^1]\|. \end{aligned}$$

Proof. In Algorithm 6 we have for $\bar{\tau} = (\tau_1, \dots, \tau_m)$ and $\widehat{Y}_{\bar{\tau}}(t) = \widehat{C}_{\bar{\tau}}(t) \mathbf{X}_{j=1}^m \widehat{\mathbf{U}}_{\tau_j}$

$$\begin{aligned} \frac{d}{dt} E(\widehat{Y}_{\bar{\tau}}(t)) &= 2 \operatorname{Re} \langle H[\widehat{Y}_{\bar{\tau}}(t)], \dot{\widehat{C}}_{\bar{\tau}}(t) \mathbf{X}_{j=1}^m \widehat{\mathbf{U}}_{\tau_j} \rangle \\ &= 2 \operatorname{Re} \langle H[\widehat{Y}_{\bar{\tau}}(t)] \mathbf{X}_{j=1}^m \widehat{\mathbf{U}}_{\tau_j}^*, \dot{\widehat{C}}_{\bar{\tau}}(t) \rangle \\ &= 2 \operatorname{Re} \langle H[\widehat{Y}_{\bar{\tau}}(t)] \mathbf{X}_{j=1}^m \widehat{\mathbf{U}}_{\tau_j}^*, -iH[\widehat{Y}_{\bar{\tau}}(t)] \mathbf{X}_{j=1}^m \widehat{\mathbf{U}}_{\tau_j}^* \rangle \\ &= -2 \operatorname{Re} i \|H[\widehat{Y}_{\bar{\tau}}(t)] \mathbf{X}_{i=j}^m \widehat{\mathbf{U}}_{\tau_j}^*\|^2 = 0. \end{aligned}$$

Using $\widehat{Y}_\tau^1 = \widehat{Y}_\tau(t_1)$ and Lemma 5.1, we obtain

$$E(\widehat{Y}_\tau^1) = E(\widehat{Y}_\tau(t_1)) = E(\widehat{Y}_\tau(t_0)) = E(\widehat{Y}_\tau^0) = E(Y_\tau^0),$$

which is the stated result. \square We note further that for each subtree $\tau \leq \bar{\tau}$, the reduced operator F_τ of Section 2.3 that corresponds to $F_{\bar{\tau}}(Y) = -iH[Y]$, is again a Schrödinger operator $F_\tau(Y_\tau) = -iH_\tau[Y_\tau]$ with a self-adjoint linear operator $H_\tau : \mathcal{V}_\tau \rightarrow \mathcal{V}_\tau$, since we have recursively $H_{\tau_i} = \pi_{\tau_i}^\dagger H_\tau \pi_{\tau_i}$ for the i th subtree τ_i of τ . Hence, the integrator preserves the energy on the level of each subtree.

7.3. Energy decay for gradient systems. We now consider the case where the tensor differential equation (1.1) is a gradient system

$$\dot{A}(t) = -\nabla E(A(t)) \quad \text{with a given function } E : \mathbb{R}^{n_1 \times \dots \times n_d} \rightarrow \mathbb{R}.$$

Along every solution, we then have the energy decay

$$\frac{d}{dt} E(A(t)) = \langle \nabla E(A(t)), \dot{A}(t) \rangle = -\|\nabla E(A(t))\|^2.$$

THEOREM 7.3. *The rank-augmented TTN integrator diminishes the energy: for every stepsize $h > 0$,*

$$E(\widehat{Y}_{\bar{\tau}}^1) \leq E(Y_{\bar{\tau}}^0) - \alpha^2 h,$$

where $\alpha = \min_{0 \leq \mu \leq 1} \|\nabla E(\widehat{Y}_{\bar{\tau}}(t_0 + \mu h)) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^*\| = \|\nabla E(Y_{\bar{\tau}}^0) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^*\| + O(h)$.

By the mean value theorem and Lemma 5.2, this implies for the rank-adaptive TTN integrator that

$$E(Y_{\bar{\tau}}^1) \leq E(\widehat{Y}_{\bar{\tau}}^1) + \beta c_{\bar{\tau}} \vartheta \leq E(Y_{\bar{\tau}}^0) - \alpha^2 h + \beta c_{\bar{\tau}} \vartheta$$

with $\beta = \max_{0 \leq \mu \leq 1} \|\nabla E(\mu Y_{\bar{\tau}}^1 + (1 - \mu) \widehat{Y}_{\bar{\tau}}^1)\| = \|\nabla E(Y_{\bar{\tau}}^1)\| + O(\vartheta)$.

Proof. The proof has the same structure as the previous proof. In Algorithm 6 we have for $\bar{\tau} = (\tau_1, \dots, \tau_m)$ and $\widehat{Y}_{\bar{\tau}}(t) = \widehat{C}_{\bar{\tau}}(t) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}$

$$\begin{aligned} \frac{d}{dt} E(\widehat{Y}_{\bar{\tau}}(t)) &= \langle \nabla E(\widehat{Y}_{\bar{\tau}}(t)), \dot{\widehat{C}}_{\bar{\tau}}(t) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i} \rangle \\ &= \langle \nabla E(\widehat{Y}_{\bar{\tau}}(t)) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^*, \dot{\widehat{C}}_{\bar{\tau}}(t) \rangle \\ &= \langle \nabla E(\widehat{Y}_{\bar{\tau}}(t)) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^*, -\nabla E(\widehat{Y}_{\bar{\tau}}(t)) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^* \rangle \\ &= -\|\nabla E(\widehat{Y}_{\bar{\tau}}(t)) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^*\|^2 \leq -\alpha^2, \end{aligned}$$

with $\alpha = \min_{0 \leq \mu \leq 1} \|\nabla E(\widehat{Y}_{\bar{\tau}}(t_0 + \mu h)) \mathbf{X}_{i=1}^m \widehat{\mathbf{U}}_{\tau_i}^*\|$. By Lemma 5.1 we have $\widehat{Y}_{\bar{\tau}}^0 = Y_{\bar{\tau}}^0$ and with $\widehat{Y}_{\bar{\tau}}^1 = \widehat{Y}_{\bar{\tau}}(t_1)$, we obtain

$$E(\widehat{Y}_{\bar{\tau}}^1) = E(\widehat{Y}_{\bar{\tau}}(t_1)) \leq E(\widehat{Y}_{\bar{\tau}}(t_0)) - \alpha^2 h = E(Y_{\bar{\tau}}^0) - \alpha^2 h,$$

which is the stated result. \square

We note further that for each subtree $\tau \leq \bar{\tau}$, the reduced operator F_{τ} of Section 2.3 that corresponds to $F_{\bar{\tau}}(Y) = -\nabla E[Y]$, is again a gradient $F_{\tau}(Y_{\tau}) = -\nabla E_{\tau}[Y_{\tau}]$ with an energy function $E_{\tau} : \mathcal{V}_{\tau} \rightarrow \mathbb{R}$, defined recursively as $E_{\tau_i} = E_{\tau} \circ \pi_{\tau,i}$ for the i th subtree τ_i of τ . Hence, the integrator dissipates the energy on the level of each subtree.

8. Numerical experiments. We illustrate the use of the rank-adaptive TTN integrator for a problem in quantum physics. We consider a basic quantum spin system, the Ising model in a transverse field with next neighbor interaction; see e.g. [25]. Consider the discrete Schrödinger equation

$$i \partial_t \psi = H \psi \quad \text{with } H = -\Omega \sum_{k=1}^d \sigma_x^{(k)} - \sum_{k=1}^{d-1} \sigma_z^{(k)} \sigma_z^{(k+1)}, \quad (8.1)$$

where $\Omega \geq 0$, $\sigma_x = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}$ and $\sigma_z = \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix}$ are the first and third Pauli matrices, respectively, and $\sigma^{(j)} = (\mathbf{I} \otimes \dots \otimes \mathbf{I} \otimes \sigma \otimes \mathbf{I} \otimes \dots \otimes \mathbf{I})$, with σ acting on the j th particle. We take the initial value $\psi^0 = \bigotimes_{k=1}^d (1, 0)^\top \in \mathbb{C}^{2^d}$.

Error behavior for an observable. An observable of interest is the magnetization in z -direction, defined by

$$\langle \psi | M | \psi \rangle = \frac{1}{d} \sum_{k=1}^d \langle \psi | \sigma_z^{(k)} | \psi \rangle.$$

We solve (8.1) and compute the magnetization over time, i.e., $\langle M \rangle(t) = \langle \psi(t) | M | \psi(t) \rangle$, for $d = 10$, $\Omega = 1$, using the rank-adaptive integrator on a binary tree of height 4 with step-size $h = 0.01$ and different tolerance parameters ϑ ; see Figure 8.1. We used the classical fourth-order Runge–Kutta method for solving the low-dimensional differential equations appearing within the subflows $\Phi_\tau^{(i)}$ and Ψ_τ . This gave far better results than using just the explicit Euler method and also somewhat better results than using the second-order Heun method.

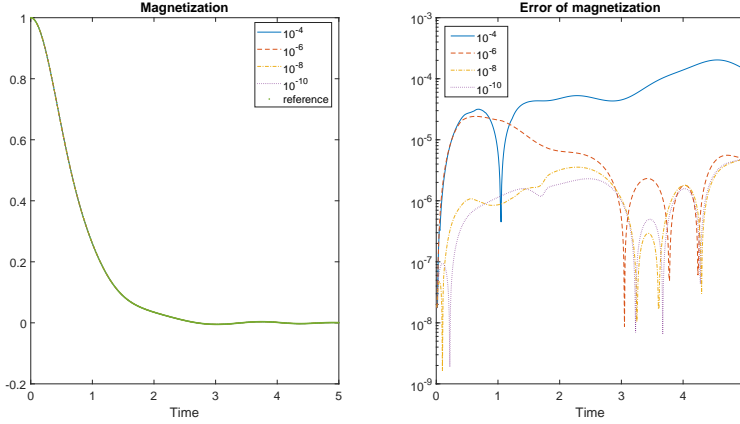


FIG. 8.1. Magnetization and error of magnetization for different tolerance parameters ϑ .

Note that decreasing ϑ further does not lead to better results, as we still have a time discretization error, which is of the order $\mathcal{O}(h)$ by the bound of Section 6.2. The pure time discretization error was actually observed to behave more like $\mathcal{O}(h^2)$ in numerical tests but this is beyond our current theoretical understanding.

Near-conservation of norm and energy. Further we illustrate the conservation properties of the rank-adaptive integrator. We again consider the differential equation (8.1) with $d = 10$, $\Omega = 1$, using the time step-size $h = 0.01$ and the tolerance parameter $\vartheta = 10^{-8}$.

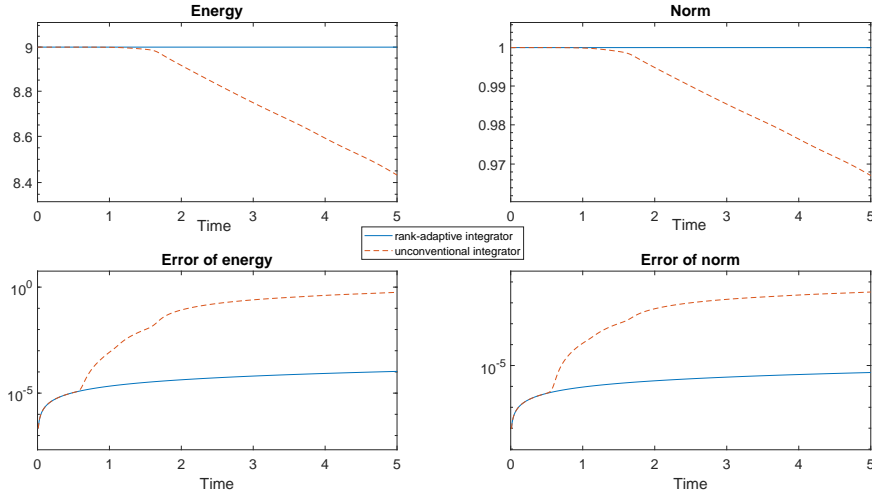


FIG. 8.2. Conservation of energy and norm.

In Figure 8.2 it is seen that the proposed rank-adaptive integrator conserves the energy and the norm very well (up to the order of the tolerance parameter ϑ according to our theory). Similar results are obtained also when choosing larger ϑ . In contrast, the TTN integrator based on the ‘unconventional’ integrator of [2] (see Section 4.4) has a significant drift in norm and energy.

Comparison of different tree structures. Each tensor can be approximated by TTNs on different trees. We compare the behavior of the rank-adaptive integrator applied to TTNs on binary trees of minimal and maximal height, see Figure 8.3. TTNs on binary trees of maximal height are matrix product states/tensor trains, which have become a standard computational tool in quantum physics; see e.g. [27, 23, 22, 4] and references therein.

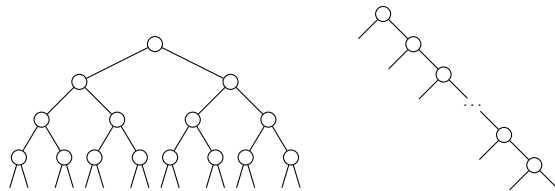


FIG. 8.3. Left: Binary tree of minimal height. Right: Binary tree of maximal height.

For the comparison we solve equation (8.1) for $d = 16$, $\Omega = 1$, with time step-size $h = 0.01$ and different tolerance parameters. After each time step we determine the maximal rank of both trees.

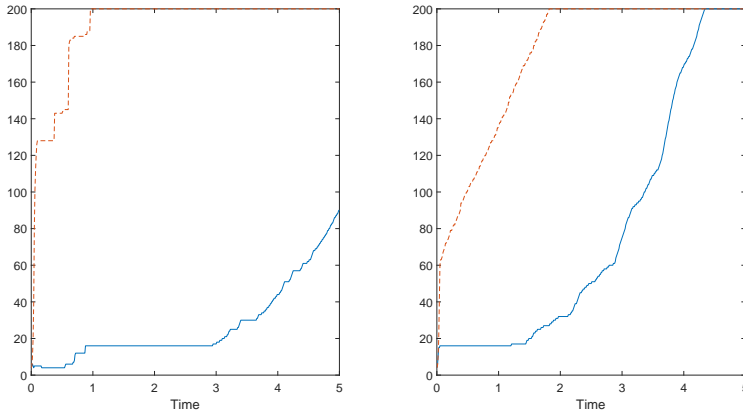


FIG. 8.4. The solid line shows the maximal rank for the binary tree of minimal height, while the dashed line shows the maximal rank for the binary tree of maximal height (MPS), each tree with $d = 16$ leaves. Left: Maximal ranks for $\vartheta = 10^{-4}$. Right: Maximal ranks for $\vartheta = 10^{-8}$.

In Figure 8.4 the maximal rank is plotted after each time step. We find that the TTN on the binary tree of minimal height can approximate the solution longer with relatively small ranks compared to the TTN on the binary tree of maximal height (matrix product state – MPS). This holds independently of the used tolerance parameter ϑ . While we observe that increasing ϑ reduces the maximal rank for the TTN on the binary tree of minimal height, this is not the case for the MPS. Although the Ising model (8.1) only has nearest-neighbor interactions that the MPS represents well, the MPS appears to need higher ranks to capture long-range effects in this model, compared with the TTN on the binary tree of minimal height.

Acknowledgments. This work was supported by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) – Project-ID 258734477 – SFB 1173. We thank Federico Carollo and Igor Lesanovsky for helpful discussions on quantum spin systems and for suggesting the Ising model as a first test example. We are grateful to Federico Carollo for providing a reference solution for this model.

REFERENCES

- [1] G. Ceruti, J. Kusch, and C. Lubich. A rank-adaptive robust integrator for dynamical low-rank approximation. *BIT Numer. Math.*, 2022.
- [2] G. Ceruti and C. Lubich. An unconventional robust integrator for dynamical low-rank approximation. *BIT Numer. Math.*, 2021.
- [3] G. Ceruti, C. Lubich, and H. Walach. Time integration of tree tensor networks. *SIAM J. Numer. Anal.*, 59(1):289–313, 2021.
- [4] J. I. Cirac, D. Perez-Garcia, N. Schuch, and F. Verstraete. Matrix product states and projected entangled pair states: Concepts, symmetries, theorems. *Reviews of Modern Physics*, 93(4):045003, 2021.
- [5] L. De Lathauwer, B. De Moor, and J. Vandewalle. A multilinear singular value decomposition. *SIAM J. Matrix Anal. Appl.*, 21(4):1253–1278, 2000.
- [6] A. Dektor, A. Rodgers, and D. Venturi. Rank-adaptive tensor methods for high-dimensional nonlinear PDEs. *J. Sci. Comput.*, 88(2):1–27, 2021.
- [7] A. J. Dunnett and A. W. Chin. Efficient bond-adaptive approach for finite-temperature open quantum dynamics using the one-site time-dependent variational principle for matrix product states. *Phys. Rev. B*, 104(21):214302, 2021.

- [8] A. Falcó, W. Hackbusch, and A. Nouy. Geometric structures in tensor representations (final release). *arXiv preprint arXiv:1505.03027*, 2015.
- [9] L. Grasedyck. Hierarchical singular value decomposition of tensors. *SIAM J. Matrix Anal. Appl.*, 31:2029–2054, 2010.
- [10] J. Haegeman, C. Lubich, I. Oseledets, B. Vandereycken, and F. Verstraete. Unifying time evolution and optimization with matrix product states. *Phys. Rev. B*, 94(16):165116, 2016.
- [11] E. Kieri, C. Lubich, and H. Walach. Discretized dynamical low-rank approximation in the presence of small singular values. *SIAM J. Numer. Anal.*, 54:1020–1038, 2016.
- [12] B. Kloss, I. Burghardt, and C. Lubich. Implementation of a novel projector-splitting integrator for the multi-configurational time-dependent Hartree approach. *J. Chem. Phys.*, 146(17):174107, 2017.
- [13] T. G. Kolda and B. W. Bader. Tensor decompositions and applications. *SIAM Review*, 51:455–500, 2009.
- [14] P. Kramer and M. Saraceno. *Geometry of the time-dependent variational principle in quantum mechanics*, volume 140 of *Lecture Notes in Physics*. Springer-Verlag, Berlin-New York, 1981.
- [15] D. Kressner and C. Tobler. Algorithm 941: **htucker**—a Matlab toolbox for tensors in hierarchical Tucker format. *ACM Trans. Math. Software*, 40(3):Art. 22, 22, 2014.
- [16] L. P. Lindoy, B. Kloss, and D. R. Reichman. Time evolution of ML-MCTDH wavefunctions. II. Application of the projector splitting integrator. *J. Chem. Phys.*, 155(17):174109, 2021.
- [17] C. Lubich. *From quantum to classical molecular dynamics: reduced models and numerical analysis*. Zurich Lectures in Advanced Mathematics. European Mathematical Society (EMS), Zürich, 2008.
- [18] C. Lubich. Time integration in the multiconfiguration time-dependent Hartree method of molecular quantum dynamics. *Appl. Math. Res. Express*, 2015:311–328, 2015.
- [19] C. Lubich and I. V. Oseledets. A projector-splitting integrator for dynamical low-rank approximation. *BIT Numer. Math.*, 54:171–188, 2014.
- [20] C. Lubich, I. V. Oseledets, and B. Vandereycken. Time integration of tensor trains. *SIAM J. Numer. Anal.*, 53:917–941, 2015.
- [21] C. Lubich, B. Vandereycken, and H. Walach. Time integration of rank-constrained Tucker tensors. *SIAM J. Numer. Anal.*, 56:1273–1290, 2018.
- [22] S. Paekel, T. Köhler, A. Swoboda, S. R. Manmana, U. Schollwöck, and C. Hubig. Time-evolution methods for matrix-product states. *Annals of Physics*, 411:167998, 2019.
- [23] U. Schollwöck. The density-matrix renormalization group in the age of matrix product states. *Annals of Physics*, 326(1):96–192, 2011.
- [24] Y.-Y. Shi, L.-M. Duan, and G. Vidal. Classical simulation of quantum many-body systems with a tree tensor network. *Phys. Rev. A*, 74(2):022320, 2006.
- [25] R. B. Stinchcombe. Ising model in a transverse field. I. Basic theory. *J. Phys. C: Solid State Physics*, 6(15):2459–2483, 1973.
- [26] A. Uschmajew and B. Vandereycken. The geometry of algorithms using hierarchical tensors. *Linear Algebra Appl.*, 439(1):133–166, 2013.
- [27] G. Vidal. Efficient classical simulation of slightly entangled quantum computations. *Physical review letters*, 91(14):147902, 2003.
- [28] H. Wang and M. Thoss. Multilayer formulation of the multiconfiguration time-dependent Hartree theory. *J. Chem. Phys.*, 119(3):1289–1299, 2003.
- [29] M. Yang and S. R. White. Time-dependent variational principle with ancillary Krylov subspace. *Phys. Rev. B*, 102(9):094315, 2020.