

---

# FEDQAS: PRIVACY-AWARE MACHINE READING COMPREHENSION WITH FEDERATED LEARNING

---

A PREPRINT

**Addi Ait-Mlouk**

Department of Information Technology  
Division of Scientific Computing  
Uppsala University, Sweden  
addi.ait-mlouk@it.uu.se \*

**Sadi Alawadi**

Department of Information Technology  
Division of Scientific Computing  
Uppsala University, Sweden  
sadi.alawadi@it.uu.se

**Salman Toor**

Department of Information Technology  
Division of Scientific Computing  
Uppsala University, Sweden  
Scaleout Systems, Sweden  
salman.toor@it.uu.se

**Andreas Hellander**

Department of Information Technology  
Division of Scientific Computing  
Uppsala University, Sweden  
Scaleout Systems, Sweden  
andreas.hellander@it.uu.se

February 11, 2022

## ABSTRACT

Machine reading comprehension (MRC) of text data is one important task in Natural Language Understanding. It is a complex NLP problem with a lot of ongoing research fueled by the release of the Stanford Question Answering Dataset (SQuAD) and Conversational Question Answering (CoQA). It is considered to be an effort to teach computers how to "understand" a text, and then to be able to answer questions about it using deep learning. However, until now large-scale training on private text data and knowledge sharing has been missing for this NLP task. Hence, we present FedQAS, a privacy-preserving machine reading system capable of leveraging large-scale private data without the need to pool those datasets in a central location. The proposed approach combines transformer models and federated learning technologies. The system is developed using the FEDn framework and deployed as a proof-of-concept alliance initiative. FedQAS is flexible, language-agnostic, and allows intuitive participation and execution of local model training. In addition, we present the architecture and implementation of the system, as well as provide a reference evaluation based on the SQUAD dataset, to showcase how it overcomes data privacy issues and enables knowledge sharing between alliance members in a Federated learning setting.

**Keywords** Machine reading comprehension · Natural Language Understanding · Question answering · Data privacy · Federated learning · Transformer

## 1 Introduction

Machine reading comprehension (MRC) is a sub-field of natural language understanding (NLU), it aims to teach machines to read and understand human languages (text). A user can ask the machine to answer questions based on a given paragraph or text document. Generally, MRC requires modeling complex interactions between the context and the query in a specific domain. It could be used in many NLP applications such as dialogue systems and search engines as shown in Figure 1 – a Google search engine with MRC techniques can directly return the correct answers to questions rather than a list of content and web pages. These kinds of techniques have been based on hand-crafted rules that need

---

\*Corresponding author.

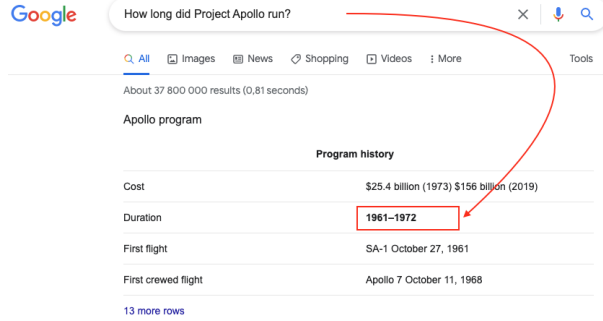


Figure 1: An example of Google search engine with machine reading comprehension techniques.

substantial human effort and resources. However, recently there has been an explosion of various MRC benchmark datasets that leads to a variety of models such as BiDAF [Seo et al., 2018] and other models based on BERT [Devlin et al., 2019], RoBERTa [Zhuang et al., 2021], XLNet [Yang et al., 2019], ELMo [Peters et al., 2018] and transformer [Vaswani et al., 2017].

Despite this rapid progress on MRC datasets and models, most of the existing work has focused on algorithms for improving model performance. At present, several MRC models have already surpassed human performance on many of the MRC datasets [Rajpurkar et al., 2016a], but there is still a limit in terms of data privacy, collaborative training, resource-consuming, and security. Hence, there is a need of extending existing MRC models to the context of federated learning and decentralized AI for system performance, collaborative privacy-preserving training, and knowledge sharing by participating in collaborative training. To address these gaps, we proposed a privacy-aware approach based on federated learning technology to learn new global models in a geographically distributed manner using FEDn framework [Ekmeffjord et al., 2021], build more challenging MRC models by integrating with private data generation and labeling for local accurate training as well as incremental learning approach to strengthening the model performances during collaborative training without compromising the data.

The remainder of this paper is organized as follows. Section 2 surveys related work. Section 3 details the proposed approach and architecture of FedQAS, with an emphasis on its privacy and scalability properties. In Section 4, we demonstrate the frameworks potential in an evaluation based on the SQUAD dataset. Finally, section 4 concludes the work and outlines future work.

## 2 Related work

Machine reading comprehension was proposed for the first time in 1977 by Lehnert, who built a question answering program called the QUALM [Lehnert, 1977]. In 1999, Hirschman et al. [Hirschman et al., 1999] built a reading comprehension system using a corpus of 60 development and 60 test stories of 3rd to 6th-grade material. Because of the lack of benchmark datasets in that period, most MRC systems were rule-based or statistical models [Riloff and Thelen, 2000, Charniak et al., 2000]. In recent years, many benchmark datasets have been released that focus on MRC by answering questions, see Table 1. Since these datasets were made available, there has been considerable progress on MRC tasks. The Stanford Question Answering Dataset (SQuAD) is one of the most well-known reading comprehension datasets, consisting of 100,000 questions posed by crowd-workers on Wikipedia articles, where the answer to every question is a segment of text, or span, from the corresponding reading context. Important progress based on SQUAD concerns include the attention method [Wang et al., 2017] and Bi-Directional Attention Flow (BiDAF) [Richardson et al., 2013] which improved considerably the question answering performance. These two methods compute Context to Question attention and Question to Context attention using a similarity matrix computed directly from context and question. Authors in [Wang et al., 2018] describe a novel hierarchical attention network for reading comprehension style question answering, which aims to answer questions for a given narrative paragraph. In their work, attention and fusion are conducted horizontally and vertically across layers at different levels of granularity between question and paragraph. In recent work in language modeling, authors in [Zhang et al., 2020] incorporate explicit contextual semantics from pre-trained semantic role labeling and introduce an improved language representation model, Semantics-aware BERT (SemBERT), which is capable of explicitly absorbing contextual semantics over a BERT backbone. Moreover, Zhuosheng et al. [Zhang et al., 2019] propose using syntax to guide the text modeling by incorporating explicit syntactic constraints into the attention mechanism for better linguistically motivated word repre-

Table 1: List of some existing MRC datasets

Dataset	Answer Type	Domain
MCTest [Richardson et al., 2013]	Multiple choice	Children’s stories
CNN/Daily Mail [Hermann et al., 2015]	Spans	News
Children’s book [Hill et al., 2016]	Spans	Children’s stories
MS MARCO [Bajaj et al., 2018]	Free-form text	Web Search
NewsQA [Trischler et al., 2017]	Spans	News
SearchQA [Dunn et al., 2017]	Spans	Jeopardy
TriviaQA [Joshi et al., 2017]	Spans	Trivia
SQuAD [Rajpurkar et al., 2016b]	Spans	Wikipedia
SQuAD 2.0 [Rajpurkar et al., 2018a]	Spans, Unanswerable	Wikipedia
CoQA [Reddy et al., 2019]	Free-form text,	News, Reddit Wikipedia

sentations. Other relevant works have been proposed including [Yamada et al., 2020, Lan et al., 2020, Zhang et al., 2021].

All these proposed approaches required a very large amount of data for training, which is not always available in some cases, in particular when the text data is sensitive, private (medical text, business, social media), and very big. In this context, we here propose the use of federated learning as a method for distributed and collaborative machine learning. Organizations maintain and govern their data locally and participate in learning a new global, federated model by sending only their model updates (model weights) to a server for aggregation into the global model. Hence, all participants (clients) can benefit from a newly trained model without exposing their data publicly.

Our contributions in this paper can be summarized as follows: (1) We propose federated learning models for MRC using a transformer architecture, (2) We design and develop the FedQAS system for collaborative training, (3) we preserve data privacy (4) we improve the local training with incremental learning scheme and private data generation (5) Our analyses of the models respect data privacy regulations and outperforms the baseline model on SQuAD.

### 3 Proposed approach

The overall architecture of our proposed FedQAS system is shown in Figure 2. The main modules are private data pipeline, federated learning settings, question answering, and incremental learning. The private data pipeline module allows local users (clients) to process and prepare their data locally to be used by federated learning algorithms. The federated learning module enables multiple private clients to form an alliance to collaboratively train machine learning/deep learning models and send parameters to the server for global model generation (aggregation of local models). Afterward, the system allows the client to add new data locally and train the model incrementally through a defined number of rounds to improve the performance using incremental learning techniques. Finally, participating clients can use the global model as a question answering system. The system is implemented using the FEDn federated learning framework [Ekmeffjord et al., 2021] and Flask<sup>2</sup>. FEDn provides a highly scalable federated learning run-time, and Flask is used to develop interactive and user-friendly interfaces for the different processes in the workflow. The list of available datasets related to question answering used for the demo is placed in the local data sources. Moreover, the developed system is scalable, flexible, and can be expanded with new clients/data sets on-demand (without the need to re-train the federated model).

#### 3.1 Data processing pipeline

Stanford Question Answering Dataset (SQuAD) [Rajpurkar et al., 2018b] is a machine reading comprehension dataset, consisting of questions posed by crowd-workers on a set of Wikipedia articles, where the answer to every question is a segment of text, or span, from the corresponding reading passage, alternatively the question might be unanswerable. SQuAD2.0 combines the 100,000 questions in SQuAD1.1 with over 50,000 unanswerable questions written adversarially by crowd-workers to look similar to answerable ones. To do well on SQuAD2.0, systems must not only answer questions

<sup>2</sup><https://flask.palletsprojects.com/>

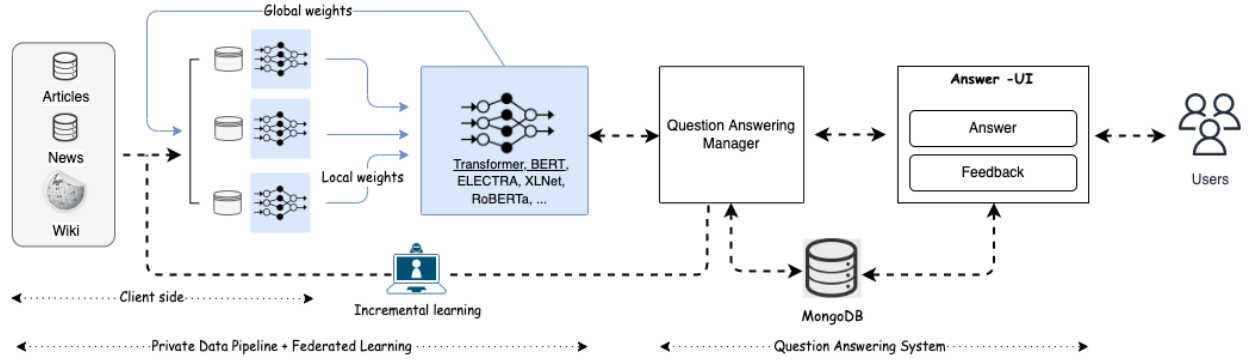


Figure 2: Overview of the FedQAS architecture. The FedQAS approach is organized in three main logical layers, the first one is for collaborative privacy-preserving training, the second one is a federated question answering manager, and the third is for incremental learning and private data generation.

Shell was vertically integrated and is active in every area of the oil and gas industry, including exploration and production, refining, distribution and marketing, petrochemicals, power generation and trading. It has minor renewable energy activities in the form of biofuels and **wind**. It has operations in **over 90** countries, produces around 3.1 million barrels of oil equivalent per day and has **44,000 service stations** worldwide. Shell Oil Company, its subsidiary in the United States, is one of its largest businesses.

Question 1: Aside from biofuels what other renewable energy activities is Shell involved with? **wind**  
 Question 2: How many countries does Shell operate in? **over 90**  
 Question 3: How many services stations does Shell have? **44,000 service stations**

Figure 3: A paragraph from Wikipedia and three associated questions together with their answers, taken from the SQuAD dataset.

when possible but also determine when no answer is supported by the paragraph and abstain from answering<sup>3</sup>, see Figure 3 for an example of text, questions, and answers.

### 3.2 Data privacy

To train a model with a high level of accuracy, machine reading comprehension models require large datasets to ‘learn’ from, however, data might be sensitive and private. To preserve data privacy, different anonymization techniques have been used. The most relevant are k-anonymity [Sweeney, 2002], l-diversity [Machanavajjhala et al., 2007], and t-closeness [Li et al., 2007]. In k-anonymity, specific columns (e.g., name, religion, sex) are removed or altered (e.g., replacing a specific age with an age span). L-diversity and t-closeness are extensions of k-anonymity, which are used to protect attribute disclosure, these anonymization techniques are applied before data is shared for training. However, with the rise of AI, this form of anonymizing personal data is not enough to protect privacy because the data can often be reverse-engineered using machine learning to re-identify individuals [Rocher L. and de Montjoye YA., 2019]. In question answering systems, there might be sensitive documents, personal data that needs to be processed for MRC task, without exposing data. To handle this issue, we propose a question answering system based on federated learning methodology to protect data leakage and ensure secure collaborative training. The proposed system follows a federated learning paradigm in which participating clients are required to train their local models and then share the gradient (model parameters) for an eventual aggregation strategy in a central server. This approach ensures input data privacy, enables collaborative training, low-cost training by distributing the workload across clients instead of training a large model individually, sharing the local learning model within the alliance (training clients) without compromising private data, and improving local learning by using incremental learning and local data generation pipeline.

<sup>3</sup><https://rajpurkar.github.io/SQuAD-explorer/>

### 3.3 Federated learning

Federated learning is an emerging technology enabling multiple parties to jointly train machine learning models on private data. These parties could be mobile and IoT devices (cross-device FL), or organizations (cross-silo). Data remain locally at each party, only the parameter updates are communicated with a server and other parties. In our system, we use FL to develop FedQAS based on transformer architectures for Question Answering. FedQAS trains a global model on large amounts of data from multiple geographically distributed parties. Each party trains a local transformer model on its data (Algorithm 2) and sends parameters to the central server for aggregation (FedAVG [McMahan et al., 2017]) instead of the whole model. In the aggregation part, the aggregator (running in the *combiner* in FEDn [Ekmefjord et al., 2021]) combines parameters (Algorithm 1) and generates a single global model for each round using federated incremental averaging [McMahan et al., 2017].

### 3.4 Incremental Learning

Incremental learning is a machine learning case in which input data is continuously used to extend the existing model’s knowledge i.e. to further train the model. It attempts to improve a model’s performance while adding the fewest samples possible. In the proposed system, adding data locally by clients is an important task to improve the local model performance first, then propagating these improvements into the global model after new training rounds in a privacy-preserving manner. We have engineered an intuitive process for each local client to contribute to the adding of new samples on top of their local data (Figure 4). The first step is to add a new data point that will remain on the local site, this allows the user to add their private data, questions, and correct answers. The incremental learning module will process and transform the private data locally and generate training points to be used in the local training. This process enables collaborative data generation between organizations in a private way in order to strengthen data protection and avoid unnecessary sharing within the alliance. In addition, a database layer is used to store user queries and global model predictions as feedback to enhance and improve the performance for further usage.

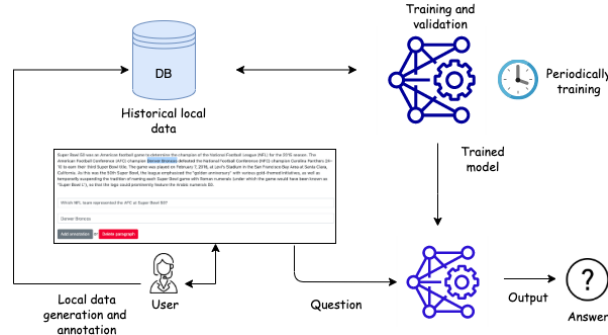


Figure 4: Federated incremental learning process. Clients can add data continuously to extend the existing model’s knowledge locally while training a global model, the generated data can be stored locally on the client-side.

**Algorithm 1:** Incremental FedAvg algorithm.  $\Gamma$ : Participants,  $k$ : number of clients,  $r$ : number of rounds,  $D_i$ : Datasets,  $W_i$ : model weights and  $M$ : Global models

---

**input** :  $D_i$   
**output** :  $M(W_t)$

---

```

1  $W_0 \leftarrow \emptyset$ ;
2 for  $t \leftarrow 1$  to  $r$  do
3    $S_t \leftarrow \Gamma(k, B)$ ;
4   for client  $k \in S_t$  do
5     In parallel;
6      $W_{t+1}^k \leftarrow \text{ClientUpdate}(k, W_t)$ ;
7      $W_{t+1} \leftarrow \sum_{k=1}^k \frac{n_k}{n} W_{t+1}^k$ 
8    $W_t \leftarrow (W_{t-1} + (W_t - W_{t-1})/t)$ 
9 return  $M(W_t)$ 

```

---

---

**Algorithm 2:** Local client update,  $k$ : number of clients,  $B$ : sample size,  $e$ : number of local epochs, and  $\eta$  is the learning rate

---

**Output:**  $W_t$

```

1 // Run on client k
2 Function ClientUpdate( $k, W_t$ ):
3    $B \leftarrow (\text{split } P_k \text{ into batches of size } B)$ 
4   for local epoch  $e_i \in 1, \dots, e$  do
5     for batch  $b \in B$  do
6        $W_t \leftarrow W_t - \eta \nabla l(W_t, b)$ 
7     end
8   end
9   return  $W_t$ 

```

---

Table 2: Federated training configuration

Rounds	Nbr of clients	Update size	Nbr of parameters
5	5	400 MB	109.483.776

## 4 Experiment and results

We conduct a validation experiment on the SQUAD 1.0 dataset, which contains 100.000+ question-answer pairs on 500+ articles. To ensure collaborative training, we randomly select and split data over 5 clients with 20% for validation dataset for all clients. We used the BERT base as an encoder to build our model and the implementations are based on the public TensorFlow implementation from Keras. For the fine-tuning in our task, we set the initial learning rate to  $5e-5$ . The batch size is set to 8. The maximum number of epochs is set to 1. Texts are tokenized using Wordpieces [Wu et al., 2016] with a maximum length of 384. More configuration is shown in Table 2.

### 4.1 Evaluation

For the evaluation, we used exact match (EM) and F1 score, the main metrics commonly used for question answering systems. These metrics are computed on individual (question, answer) pairs. In case of multiple correct answers for a given question, the maximum score over all possible correct answers is computed. In the EM metric, For each pair (question, answer), if the characters of the model’s prediction exactly match the characters of (one of) the True Answer(s),  $EM = 1$ , otherwise  $EM = 0$ .

The Accuracy represents the percentage of the questions that an MRC system accurately answers. Each question corresponds to one correct answer. For the span prediction task, the accuracy is the same as Exact Match and can be computed by the formula 1 as follows:

$$Accuracy = EM = \frac{\text{Number of correct answers}}{\text{Number of questions}} \quad (1)$$

The precision represents the percentage of token overlap between the tokens in the correct answer and the tokens in the predicted answer, while the recall is the percentage of tokens in a correct answer that have been correctly predicted in a question. The True Positive (TP) denotes the same tokens between the predicted answer and the correct answer, the False Positive (FP) denotes the tokens which are not in the correct answer but the predicted answer while the False Negative (FN) presents the tokens which are not in the predicted answer but the correct answer. Precision and Recall can be computed by the formulas 2 and 3 as follows:

$$Precision = \frac{N(TP)}{N(TP) + N(FP)} \quad (2)$$

$$Recall = \frac{N(TP)}{N(TP) + N(FN)} \quad (3)$$

The F1 score is a measure of a test’s accuracy. It is the weighted average between precision and recall. The formula for this score is given in 4. In our case, it’s computed over the individual words in the prediction against those in the True Answer. The number of shared words between the prediction and the truth is the basis of the F1 score.

$$F1\ score = 2 \times \frac{(Precision \times Recall)}{(Precision + Recall)} \quad (4)$$

To demonstrate the benefit of FedQAS, we partitioned the SQUAD dataset into 5 equal chunks, so that each client has "20%" of the total dataset. We then compare the federated scenario to centralized model training. Table 3 lists the available metrics for different training rounds of the global model. Our implemented model baselines show similar EM and F1 scores with the global model during the first rounds and slightly outperform the baseline with respect to data privacy and enabling knowledge sharing across participants. Overall, the result shows that question-answering in federated learning settings performs well compared to centralized settings, see Figure 5 for the convergence of accuracy (EM) and Figure 6 for the convergence of F1.

Table 3: Comparisons with equivalent parameters on the validation set of SQuAD1.0

Model	F1 score	Accuracy (EM)
Baseline	0.31	0.75
FedQAS	0.33	0.81

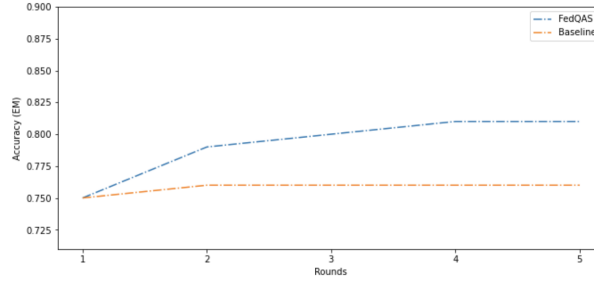


Figure 5: Convergence of accuracy (Exact Match) on the SQUAD dataset with 1 combiner, 5 clients and 5 rounds

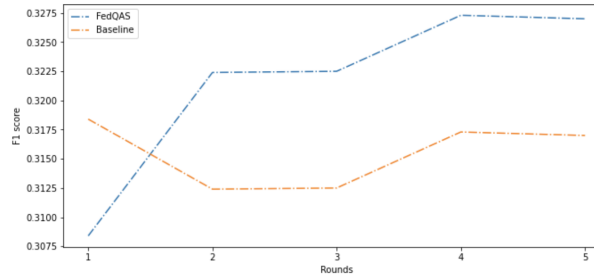


Figure 6: Convergence of F1 score on SQUAD dataset with 1 combiner, 5 clients and 5 rounds

In terms of resources, the result proves the fact that model architecture affects client training time and combiner round time. Hence, training a large model ( $\pm 400\text{MB}$ ) in a centralized way requires more resources than the federated setting. For demonstration, we consider a FEDn network consisting of a single, high-powered combiner (8 VCPU, 32GB RAM) with connected clients (8 VCPU, 32GB RAM) instances in SSC (SNIC Science Cloud [Toor et al., 2017]) and measure the average round time over 5 global rounds. Figure 7 shows round time for global model training.

To gain an intuitive observation of the predictions, we give a prediction example on SQuAD1.0 from both the baseline and federated model in Table 4, which shows that FedQAS works better at answering the question on a given passage. Hence, the proposed approach has contributed overall to a better understanding of QA, preserving data privacy, and contributed to low-cost training as well as a collaborative question answering system task using very large models.

Table 4: Comparison of answer prediction on test data

<b>Title:</b> Project Apollo
<b>Passage:</b> The Apollo program, also known as Project Apollo, was the third United States human spaceflight program carried out by the National Aeronautics and Space Administration(NASA), which accomplished landing the first humans on the Moon from 1969 to 1972. First conceived during Dwight D. Eisenhower’s administration as a three-man spacecraft to follow the one-man Project Mercury which put the first Americans in space, Apollo was later dedicated to President John F. Kennedy’s national goal of landing a man on the Moon and returning him safely to the Earth by the end of the 1960s, which he proposed in a May 25, 1961, address to Congress. Project Mercury was followed by the two-man Project Gemini. The first manned flight of Apollo was in 1968. Apollo ran from 1961 to 1972, and was supported by the two man Gemini program which ran concurrently with it from 1962 to 1966...
<b>Question 1:</b> How long did Project Apollo run?
<b>Gold answer (human):</b> 1961 to 1972 <b>Google search engine answer:</b> see Figure 1 <b>Baseline model answer:</b> 1961 to 1972 <b>FedQAS answer:</b> 1961 to 1972
<b>Question 2:</b> What program was created to carry out these projects and missions?
<b>Gold answer (human):</b> Apollo program <b>Baseline model answer:</b> National Aeronautics and Space Administration <b>FedQAS answer:</b> Apollo program
<b>Question 3:</b> What year did the first manned Apollo flight occur?
<b>Gold answer (human):</b> 1968 <b>Baseline model answer:</b> 1968 <b>FedQAS answer:</b> 1968
<b>Question 4:</b> What President is credited with the original notion of putting Americans in space?
<b>Gold answer (human):</b> John F. Kennedy <b>Baseline model answer:</b> John F. Kennedy <b>FedQAS answer:</b> John F. Kennedy
<b>Question 5:</b> Who did the U.S. collaborate with on an Earth orbit mission in 1975?
<b>Gold answer (human):</b> Soviet Union <b>Baseline model answer:</b> Soviet Union <b>FedQAS answer:</b> Soviet Union
<b>Question 6:</b> How long did Project Apollo run?
<b>Gold answer (human):</b> 1962 to 1966 <b>Baseline model answer:</b> 1961 to 1972, and was supported by the two man Gemini program which ran 1966 <b>FedQAS answer:</b> 1962 to 1966
<b>Question 7:</b> What program helped develop space travel techniques that Project Apollo used?
<b>Gold answer (human):</b> Gemini <b>Baseline model answer:</b> Gemini <b>FedQAS answer:</b> Gemini
<b>Question 8:</b> What space station supported three manned missions in 1973-1974?
<b>Gold answer (human):</b> Skylab <b>Baseline model answer:</b> Skylab <b>FedQAS answer:</b> Skylab



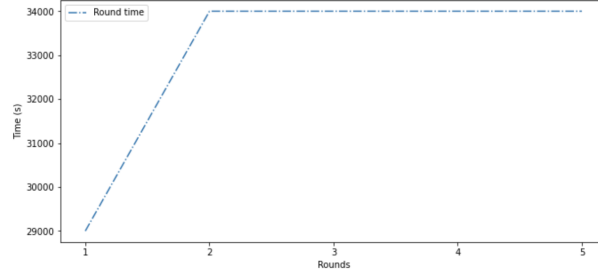


Figure 7: Round times for global model training (FEDn)

## 4.2 Implementation and demo environment

Designing and developing Question Answering in a privacy-aware manner is not a trivial task. It requires design strategies to comply with data governance and privacy regulations. Several third-party frameworks have been proposed for federated learning; providing open source building blocks that help to collaborate in training machine learning models. In the present QAS application such a framework need to provide scalability, large models training, and production-grade features such as robustness to failure. Based on these requirements, we chose to design and develop our proposed FedQAS system on top of private data using the FEDn framework [Ekmefjord et al., 2021]. FEDn is an open-source, modular, and model agnostic framework for federated machine learning. We developed interactive and user-friendly interfaces using Flask framework<sup>4</sup> which make it easy for a third party to contribute to data annotation and then participate in training global models directly from their location site. The proposed FedQAS has the following features:

- Privacy-preserving: sharing only model parameters with a central server (cloud) and keeping data private on client side,
- Incremental learning: improving the global models by attaching more clients and adding new data points,
- Robust: robust enough to deal with natural language tasks (e.g., question answering, chatbot, etc.) and large models in a geographically distributed manner,
- Multilingual: language agnostic, can be trained on any language,
- Standalone: multiple platforms (i.e., guarantee for low disk and memory footprint). It can be run production-grade on a standard laptop having two cores and 2GB of RAM,
- Accuracy and F1 score: achieve competitive performance compared with centralized training and the used baseline model (see experiment and evaluation section).

The proposed FedQAS is composed of three main components: FEDn for collaborative training, MongoDB [MongoDB, 2021] as a NoSQL [Pokorny, 2011] database and question answering UI for prediction and local incremental learning. The system is interactive, scalable, suitable for secure collaborative training and data privacy-preserving, and can be used both in the cloud, on edge nodes and in a standalone mode. It is accessible from different platforms to engage a wide range of users, and it is also optimized for both desktop and mobile. The source code is publicly available on Github via this link <https://github.com/aitmlouk/FEDn-client-FedQAS-tf.git>.

To summarise, FedQAS is, to the best of our knowledge, the only approach for question answering that supports data privacy and knowledge sharing. Its main value is to provide an environment to quickly ensure data privacy and low-cost training by collaborative training. Nearly every deep learning application can benefit from data privacy and knowledge sharing across a different client in a federated learning setting. The transformer model used in FedQAS can be improved by tuning parameters and using transfer learning for new pre-trained models (GPT-2 [Radford et al., 2019], GPT-3 [Brown et al., 2020], etc.)

## 5 Conclusion

In this paper, we have proposed FedQAS, a high-quality question answering approach, to address the data-sharing issue in machine learning. Validation experiments for FedQAS was implemented based on 5 rounds of training

<sup>4</sup><https://flask.palletsprojects.com>

with a transformer neural network. The system consists of several components including the private data pipeline, collaborative training and private incremental learning. Experiments on the SQUAD dataset using the transformer architecture demonstrate that our FedQAS significantly outperforms the baseline model performances, protecting data privacy and sharing knowledge within an alliance. The proposed FedQAS allows collaborators (collaborative training participants) to have overall control of their sensitive and private data while collaboratively training question answering models. The integration of federated learning within machine reading comprehension provides a sustainable solution by preserving data privacy and ensuring low-cost training. We conclude that the application of FL to NLP tasks such as question answering can contribute to solving the problem that arises when using machine learning in the context of data protection and privacy. The system actively supports end-users in joining training and improving the performance through incremental learning on a various range of local clients. In future work, we aim to extend the FedQAS to cover more question answering datasets and allow federated learning for large private documents.

## Availability

FedQAS is publicly available under the Apache2 license at <https://github.com/aitmlouk/FEDn-client-FedQAS-tf>.

## Acknowledgement

This research is funded by the Swedish eSENCE strategic collaboraion on eScience. Authors also would like to acknowledge SNIC for cloud resources.

## References

- Minjoon Seo, Aniruddha Kembhavi, Ali Farhadi, and Hannaneh Hajishirzi. Bidirectional attention flow for machine comprehension, 2018.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi:10.18653/v1/N19-1423. URL <https://aclanthology.org/N19-1423>.
- Liu Zhuang, Lin Wayne, Shi Ya, and Zhao Jun. A robustly optimized BERT pre-training approach with post-training. In *Proceedings of the 20th Chinese National Conference on Computational Linguistics*, pages 1218–1227, Huhhot, China, August 2021. Chinese Information Processing Society of China. URL <https://aclanthology.org/2021.cc1-1.108>.
- Zhilin Yang, Zihang Dai, Yiming Yang, Jaime Carbonell, Russ R Salakhutdinov, and Quoc V Le. Xlnet: Generalized autoregressive pretraining for language understanding. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019. URL <https://proceedings.neurips.cc/paper/2019/file/dc6a7e655d7e5840e66733e9ee67cc69-Paper.pdf>.
- Matthew E. Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. Deep contextualized word representations. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 2227–2237, New Orleans, Louisiana, June 2018. Association for Computational Linguistics. doi:10.18653/v1/N18-1202. URL <https://aclanthology.org/N18-1202>.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need, 2017.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. Squad: 100,000+ questions for machine comprehension of text, 2016a.
- Morgan Ekmefjord, Addi Ait-Mlouk, Sadi Alawadi, Mattias Åkesson, Desislava Stoyanova, Ola Spjuth, Salman Toor, and Andreas Hellander. Scalable federated machine learning with fedn, 2021.
- W.G. Lehnert. *The Process of Question Answering*. PhD thesis, USA, 1977.
- Lynette Hirschman, Marc Light, Eric Breck, and John D. Burger. Deep read: A reading comprehension system. In *Proceedings of the 37th Annual Meeting of the Association for Computational Linguistics on Computational*

- Linguistics*, ACL '99, page 325–332, USA, 1999. Association for Computational Linguistics. ISBN 1558606093. doi:10.3115/1034678.1034731. URL <https://doi.org/10.3115/1034678.1034731>.
- Ellen Riloff and Michael Thelen. A rule-based question answering system for reading comprehension tests. In *Proceedings of the 2000 ANLP/NAACL Workshop on Reading Comprehension Tests as Evaluation for Computer-Based Language Understanding Systems - Volume 6*, ANLP/NAACL-ReadingComp '00, page 13–19, USA, 2000. Association for Computational Linguistics. doi:10.3115/1117595.1117598. URL <https://doi.org/10.3115/1117595.1117598>.
- Eugene Charniak, Yasemin Altun, Rodrigo de Salvo Braz, Benjamin Garrett, Margaret Kosmala, Tomer Moscovich, Lixin Pang, Changhee Pyo, Ye Sun, Wei Wy, Zhongfa Yang, Shawn Zeiler, and Lisa Zorn. Reading comprehension programs in a statistical-language-processing class. In *ANLP-NAACL 2000 Workshop: Reading Comprehension Tests as Evaluation for Computer-Based Language Understanding Systems*, 2000. URL <https://aclanthology.org/W00-0601>.
- Zhiguo Wang, Wael Hamza, and Radu Florian. Bilateral multi-perspective matching for natural language sentences. In *Proceedings of the Twenty-Sixth International Joint Conference on Artificial Intelligence, IJCAI-17*, pages 4144–4150, 2017. doi:10.24963/ijcai.2017/579. URL <https://doi.org/10.24963/ijcai.2017/579>.
- Matthew Richardson, Christopher J.C. Burges, and Erin Renshaw. MCTest: A challenge dataset for the open-domain machine comprehension of text. In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing*, pages 193–203, Seattle, Washington, USA, October 2013. Association for Computational Linguistics. URL <https://www.aclweb.org/anthology/D13-1020>.
- Wei Wang, Ming Yan, and Chen Wu. Multi-granularity hierarchical attention fusion networks for reading comprehension and question answering. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1705–1714, Melbourne, Australia, jul 2018. Association for Computational Linguistics. doi:10.18653/v1/P18-1158. URL <https://www.aclweb.org/anthology/P18-1158>.
- Zhuosheng Zhang, Yuwei Wu, Hai Zhao, Zuchao Li, Shuailiang Zhang, Xi Zhou, and Xiang Zhou. Semantics-aware bert for language understanding, 2020.
- Zhuosheng Zhang, Yuwei Wu, Junru Zhou, Sufeng Duan, Hai Zhao, and Rui Wang. Sg-net: Syntax-guided machine reading comprehension, 2019.
- Ikuya Yamada, Akari Asai, Hiroyuki Shindo, Hideaki Takeda, and Yuji Matsumoto. Luke: Deep contextualized entity representations with entity-aware self-attention, 2020.
- Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. Albert: A lite bert for self-supervised learning of language representations, 2020.
- Zhuosheng Zhang, J. Yang, and Hai Zhao. Retrospective reader for machine reading comprehension. In *AAAI*, 2021.
- Karl Moritz Hermann, Tomáš Kočiský, Edward Grefenstette, Lasse Espeholt, Will Kay, Mustafa Suleyman, and Phil Blunsom. Teaching machines to read and comprehend, 2015.
- Felix Hill, Antoine Bordes, Sumit Chopra, and Jason Weston. The goldilocks principle: Reading children’s books with explicit memory representations, 2016.
- Payal Bajaj, Daniel Campos, Nick Craswell, Li Deng, Jianfeng Gao, Xiaodong Liu, Rangan Majumder, Andrew McNamara, Bhaskar Mitra, Tri Nguyen, Mir Rosenberg, Xia Song, Alina Stoica, Saurabh Tiwary, and Tong Wang. Ms marco: A human generated machine reading comprehension dataset, 2018.
- Adam Trischler, Tong Wang, Xingdi Yuan, Justin Harris, Alessandro Sordani, Philip Bachman, and Kaheer Suleman. NewsQA: A machine comprehension dataset. In *Proceedings of the 2nd Workshop on Representation Learning for NLP*, pages 191–200, Vancouver, Canada, August 2017. Association for Computational Linguistics. doi:10.18653/v1/W17-2623. URL <https://www.aclweb.org/anthology/W17-2623>.
- Matthew Dunn, Levent Sagun, Mike Higgins, V. Ugur Guney, Volkan Cirik, and Kyunghyun Cho. Searchqa: A new qa dataset augmented with context from a search engine, 2017.
- Mandar Joshi, Eunsol Choi, Daniel S. Weld, and Luke Zettlemoyer. Triviaqa: A large scale distantly supervised challenge dataset for reading comprehension, 2017.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. SQuAD: 100,000+ questions for machine comprehension of text. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 2383–2392, Austin, Texas, November 2016b. Association for Computational Linguistics. doi:10.18653/v1/D16-1264. URL <https://www.aclweb.org/anthology/D16-1264>.

- Pranav Rajpurkar, Robin Jia, and Percy Liang. Know what you don't know: Unanswerable questions for SQuAD. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 784–789, Melbourne, Australia, July 2018a. Association for Computational Linguistics. doi:10.18653/v1/P18-2124. URL <https://www.aclweb.org/anthology/P18-2124>.
- Siva Reddy, Danqi Chen, and Christopher D. Manning. CoQA: A conversational question answering challenge. *Transactions of the Association for Computational Linguistics*, 7:249–266, March 2019. doi:10.1162/tacl\_a\_00266. URL <https://www.aclweb.org/anthology/Q19-1016>.
- Pranav Rajpurkar, Robin Jia, and Percy Liang. Know what you don't know: Unanswerable questions for SQuAD. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 784–789, Melbourne, Australia, July 2018b. Association for Computational Linguistics. doi:10.18653/v1/P18-2124. URL <https://www.aclweb.org/anthology/P18-2124>.
- Latanya Sweeney. K-anonymity: A model for protecting privacy. *Int. J. Uncertain. Fuzziness Knowl.-Based Syst.*, 10(5):557–570, oct 2002. ISSN 0218-4885. doi:10.1142/S0218488502001648. URL <https://doi.org/10.1142/S0218488502001648>.
- Ashwin Machanavajjhala, Daniel Kifer, Johannes Gehrke, and Muthuramakrishnan Venkitasubramaniam. L-diversity: Privacy beyond k-anonymity. *ACM Trans. Knowl. Discov. Data*, 1(1):3–es, mar 2007. ISSN 1556-4681. doi:10.1145/1217299.1217302. URL <https://doi.org/10.1145/1217299.1217302>.
- Ninghui Li, Tiancheng Li, and Suresh Venkatasubramanian. t-closeness: Privacy beyond k-anonymity and l-diversity. In *2007 IEEE 23rd International Conference on Data Engineering*, pages 106–115, 2007. doi:10.1109/ICDE.2007.367856.
- Hendrickx JM Rocher L. and de Montjoye YA. Estimating the success of re-identifications in incomplete datasets using generative models. *Nature Communications*, 10, 2019. ISSN 2041-1723. doi:10.1038/s41467-019-10933-3.
- H. Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Agüera y Arcas. Communication-efficient learning of deep networks from decentralized data, 2017.
- Yonghui Wu, Mike Schuster, Zhifeng Chen, Quoc V. Le, Mohammad Norouzi, Wolfgang Macherey, Maxim Krikun, Yuan Cao, Qin Gao, Klaus Macherey, Jeff Klingner, Apurva Shah, Melvin Johnson, Xiaobing Liu, Łukasz Kaiser, Stephan Gouws, Yoshikiyo Kato, Taku Kudo, Hideto Kazawa, Keith Stevens, George Kurian, Nishant Patil, Wei Wang, Cliff Young, Jason Smith, Jason Riesa, Alex Rudnick, Oriol Vinyals, Greg Corrado, Macduff Hughes, and Jeffrey Dean. Google's neural machine translation system: Bridging the gap between human and machine translation, 2016.
- Salman Toor, Mathias Lindberg, Ingemar Falman, Andreas Vallin, Olof Mohill, Pontus Freyhult, Linus Nilsson, Martin Agback, Lars Viklund, Henric Zazzik, Ola Spjuth, Marco Capuccini, Joakim Möller, Donal Murtagh, and Andreas Hellander. Snic science cloud (ssc): A national-scale cloud infrastructure for swedish academia. In *2017 IEEE 13th International Conference on e-Science (e-Science)*, pages 219–227, 2017. doi:10.1109/eScience.2017.35.
- MongoDB. Mongodb, 2021. URL <https://www.mongodb.com/>.
- Jaroslav Pokorný. Nosql databases: A step to database scalability in web environment. iiWAS '11, page 278–283, New York, NY, USA, 2011. Association for Computing Machinery. ISBN 9781450307840. doi:10.1145/2095536.2095583. URL <https://doi.org/10.1145/2095536.2095583>.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. 2019.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020.