DWIFOB: A Dynamically Weighted Inertial Forward–Backward Algorithm for Monotone Inclusions

Hamed Sadeghi^{*}

Sebastian Banert^{*}

Pontus Giselsson*

Abstract

We propose a novel dynamically weighted inertial forward-backward algorithm (DWIFOB) for solving structured monotone inclusion problems. The scheme exploits the globally convergent forward-backward algorithm with deviations in [26] as the basis and combines it with the extrapolation technique used in Anderson acceleration to improve local convergence. We also present a globally convergent primal-dual variant of DWIFOB and numerically compare its performance to the primal-dual method of Chambolle–Pock and a Tikhonov regularized version of Anderson acceleration applied to the same problem. In all our numerical evaluations, the primal-dual variant of DWIFOB outperforms the Chambolle–Pock algorithm. Moreover, our numerical experiments suggest that our proposed method is much more robust than the regularized Anderson acceleration, which can fail to converge and be sensitive to algorithm parameters. These numerical experiments highlight that our method performs very well while still being robust and reliable.

Key words. forward-backward splitting, monotone inclusions, acceleration method, inertial forward-backward method, inertial primal-dual algorithm.

1 Introduction

We consider structured monotone inclusion problems of the form

$$0 \in Ax + Cx,\tag{1}$$

where $A : \mathcal{H} \to 2^{\mathcal{H}}$ is a maximally monotone operator, $C : \mathcal{H} \to \mathcal{H}$ is a cocoercive operator, and \mathcal{H} is a real Hilbert space. This fundamental problem emerges in many areas such as optimization [13, 24] and variational analysis [5, 10, 32].

^{*}Email: {hamed.sadeghi, sebastian.banert, pontus.giselsson}@control.lth.se. Affiliation: Department of Automatic Control, Lund University, Lund, Sweden.

Forward–backward (FB) splitting [7, 20, 23] has been widely used to solve structured monotone inclusions of the form (1). The FB splitting method is given by

$$x_{n+1} = (\mathrm{Id} + \gamma_n A)^{-1} \circ (\mathrm{Id} - \gamma_n C)(x_n),$$

where $\gamma_n > 0$ is a step-size parameter. It involves evaluating the operator C in a forward (explicit) step, followed by computing the resolvent of the operator Ain a backward (implicit) step. The FB splitting has many well-known special instances, such as the gradient method, the proximal point algorithm [25], and the proximal-gradient method [12].

The inertial proximal point algorithm in [1, 2] improves convergence by exploiting previous information in a momentum term. By incorporating an additional cocoercive operator to the inertial proximal point algorithm, several variations of inertial FB algorithms have been proposed to solve monotone inclusions [4, 11, 21]. These algorithms provide enhanced performance, but are limited to FB splitting algorithms.

Anderson acceleration [3] is an acceleration scheme that is aimed at expediting the convergence of fixed-point iterations including the FB algorithm. This algorithm was originally developed to solve nonlinear integral equations and was later used to solve fixed-point problems [16, 33]. Lately, Anderson acceleration has gained considerable attention in the optimization community [19, 22, 27, 28, 34].

Local convergence of Anderson acceleration has been studied recently. For instance, the authors of [31] showed that Anderson acceleration, if applied to a contractive fixed-point map, exhibits linear convergence provided that the coefficients in the linear combination remain bounded. Along the same line, it was shown in [14] that applying Anderson acceleration to a linearly convergent fixed-point iteration improves the convergence rate in the vicinity of a fixed point. Despite recent studies that investigate local convergence properties of Anderson acceleration, yet, to the best of our knowledge, no global convergence result for Anderson acceleration (and its regularized variants) has been reported in the literature.

Recently, the FB algorithm with deviations was proposed in [26] to solve the inclusion problem (1). This algorithm uses two auxiliary terms—called *deviations*—which are added to the iterates in order to define extrapolated iterates. The algorithm uses a safeguarding *norm condition* in the form of an iteration-dependent constraint on the norm of the deviations that has to be satisfied at each iteration in order to guarantee convergence. As long as this norm constraint is satisfied, the deviations can be chosen freely and point in any direction. In [26], one suggestion is to define the deviations along the momentum direction as $a_n(x_n - x_{n-1})$, which gives an inertial-type method. An upper bound to the momentum coefficient a_n is directly obtained by the norm condition.

In this work, inspired by the extrapolation technique of Anderson acceleration, we propose a method to generate the deviation vectors of [26] by linearly combining multiple momentum terms. The aim is to construct a version of FB splitting that exhibits fast local convergence while maintaining global convergence of the algorithm, thanks to the norm condition. This is in contrast to Anderson acceleration and its regularized variants [28, 29] that are only locally convergent. We call our proposed algorithm *dynamically weighted inertial forward–backward* method (DWIFOB).

The notion of safeguarding has been used also in other works to ensure global convergence of nonlinear acceleration algorithms [17, 27, 30, 34]. These are hybrid methods that can select between a basic globally convergent and a locally fast converging method, as decided by a safeguarding condition in every iteration. Although having the same objective of achieving global convergence and fast local convergence, these safeguarding conditions are completely different compared to what we use in DWIFOB.

Besides the DWIFOB scheme itself, we also propose a primal–dual version of the DWIFOB scheme which is derived by a direct translation of the DWIFOB algorithm into a primal–dual framework. We have compared the primal–dual DWIFOB algorithm with the Chambolle–Pock algorithm in numerical experiments, which show a significant advantage of our proposed method in both convergence rate and overall computational cost. Moreover, our numerical evaluations show that regularized Anderson acceleration, in addition to being only locally convergent, is very sensitive to variations in the choice of parameters, while DWIFOB is more robust to parameter selection with the significant added benefit of having global convergence guarantees. The aforementioned robustness and global convergence property along with fast local convergence make the DWIFOB algorithm well-performing and reliable.

The paper is outlined as follows. In Section 2, after presenting the notations and stating the problem under consideration, we review two algorithms that our algorithm is built upon. Section 3 describes our proposed DWIFOB algorithm and Section 4 extends the DWIFOB algorithm to the primal-dual setting and suggests a novel algorithm in this framework. Numerical evaluations are provided in Section 5 and concluding remarks are presented in Section 6.

2 Problem statement and preliminaries

In this section, we present our notation and state the monotone inclusion problem and the associated assumptions. We then briefly review two methods [26, 33] that can be used to solve the problem at hand. These methods come with their own sets of weaknesses and strengths. Our proposed method combines these two methods to benefit from their individual strengths and avoid their drawbacks.

2.1 Notation

Throughout the paper, \mathbb{R} and \mathbb{R}^d indicate the sets of real numbers and *d*dimensional real column vectors respectively. Additionally, \mathcal{H} and \mathcal{K} denote real Hilbert spaces that are equipped with inner products $\langle \cdot, \cdot \rangle$ and induced norms $\|\cdot\| = \sqrt{\langle \cdot, \cdot \rangle}$. A linear, bounded, self-adjoint operator $M: \mathcal{H} \to \mathcal{H}$ is said to be strongly positive if there exists $\rho > 0$ such that $\langle x, Mx \rangle \geq \rho ||x||^2$ for all $x \in \mathcal{H}$. We denote the set of such operators $\mathcal{M}(\mathcal{H})$. For $M \in \mathcal{M}(\mathcal{H})$, the *M*-induced inner product and norm are defined by $\langle x, y \rangle_M = \langle x, My \rangle$ and $||x||_M = \sqrt{\langle x, Mx \rangle} \ (x, y \in \mathcal{H})$, respectively.

By $2^{\mathcal{H}}$, we denote the *power set* of \mathcal{H} . A map $A : \mathcal{H} \to 2^{\mathcal{H}}$ is characterized by its graph $\operatorname{gra}(A) = \{(x, u) \in \mathcal{H} \times \mathcal{H} : u \in Ax\}$. An operator $A : \mathcal{H} \to 2^{\mathcal{H}}$ is *monotone*, if $\langle u - v, x - y \rangle \geq 0$ for all $(x, u), (y, v) \in \operatorname{gra}(A)$. A monotone operator A is *maximally monotone* if there exists no monotone operator $B : \mathcal{H} \to 2^{\mathcal{H}}$ such that $\operatorname{gra}(B)$ properly contains $\operatorname{gra}(A)$. The zero-set of the operator Ais defined as $\operatorname{zer}(A) := \{x \in \mathcal{H} : 0 \in Ax\}$.

For $\beta > 0$, a single-valued operator $T: \mathcal{H} \to \mathcal{H}$ is said to be $\frac{1}{\beta}$ -cocoercive with respect to $\|\cdot\|_M$ with $M \in \mathcal{M}(\mathcal{H})$ if

$$\langle Tx - Ty, x - y \rangle \ge \frac{1}{\beta} \|Tx - Ty\|_{M^{-1}}^2 \qquad (\forall x, y \in \mathcal{H}).$$

2.2 Problem statement

We consider structured monotone inclusion problems of the form

$$0 \in Ax + Cx,\tag{2}$$

that satisfy the following assumption.

Assumption 1. Assume that

- (i) $A: \mathcal{H} \to 2^{\mathcal{H}}$ is maximally monotone.
- (ii) $C: \mathcal{H} \to \mathcal{H}$ is $\frac{1}{\beta}$ -cocoercive with respect to $\|\cdot\|_M$ with $M \in \mathcal{M}(\mathcal{H})$.
- (iii) The solution set $\operatorname{zer}(A+C)$ is nonempty.

This assumption implies that the operator A + C is maximally monotone [6, Corollary 25.5].

2.3 Forward–backward splitting with deviations

The FB algorithm with deviations is an extension of the standard FB algorithm and was introduced recently in [26]. In its most general form, two additive terms called deviations—are added to the basic FB method to form extrapolations to the iterate. The algorithm uses the extrapolated points in the evaluation of the forward and the backward steps. If the deviations are chosen wisely, this can exhibit an improved convergence compared to standard FB splitting. Algorithm 1 presents an instance of the FB algorithm with only one deviation vector.

To ensure convergence of Algorithm 1, the deviation u_{n+1} must satisfy the iteration-dependent norm bound in Line 6 at each iteration [26]. This bound is referred to as a *norm condition*. The requirements on the parameters λ_n , γ_n , and ζ_n are collected in Assumption 2.

Algorithm 1

1: Input: $x_0 \in \mathcal{H}$; and the sequences $(\gamma_n)_{n \in \mathbb{N}}, (\lambda_n)_{n \in \mathbb{N}}$, and $(\zeta_n)_{n \in \mathbb{N}}$ according to Assumption 2; and the metric $\|\cdot\|_M$ with $M \in \mathcal{M}(\mathcal{H})$. 2: set: $y_0 = x_0$ and $u_0 = 0$. 3: for n = 0, 1, 2, ... do 4: $p_n = (M + \gamma_n A)^{-1} \circ (M - \gamma_n C)(y_n)$ 5: $x_{n+1} = x_n + \lambda_n (p_n - y_n)$ 6: choose u_{n+1} such that $\|u_{n+1}\|_M^2 \leq \zeta_n^2 \frac{\lambda_n (4 - 2\lambda_n - \gamma_n \beta)(4 - 2\lambda_{n+1} - \gamma_{n+1} \beta)}{4\lambda_{n+1}} \|p_n - x_n + \frac{2\lambda_n + \gamma_n \beta - 2}{4 - 2\lambda_n - \gamma_n \beta} u_n\|_M^2$ 7: $y_{n+1} = x_{n+1} + u_{n+1}$ 8: end for

Assumption 2. Choose $\epsilon \in \left(0, \min\left\{1, \frac{4}{3+\beta}\right\}\right)$, and assume that, for all $n \in \mathbb{N}$, the following hold:

(i) $0 \le \zeta_n \le 1 - \epsilon;$ (ii) $\epsilon \le \gamma_n \le \frac{4-3\epsilon}{\beta};$ and (iii) $\epsilon \le \lambda_n \le 2 - \frac{\gamma_n \beta}{2} - \frac{\epsilon}{2}.$

The following result, which is adopted from [26], provides a convergence guarantee for the iterates that are obtained from Algorithm 1.

Theorem 1. Consider the monotone inclusion problem (2) and suppose that Assumptions 1 and 2 hold. Let $(x_n)_{n \in \mathbb{N}}$ be the sequence generated by Algorithm 1. Then, the sequence $(x_n)_{n \in \mathbb{N}}$ converges weakly to a point in $\operatorname{zer}(A + C)$.

Proof. In the FB splitting with deviations [26, Algorithm 1], set $z_n = y_n$. This gives the relation

$$v_n = \frac{2 - \gamma_n \beta}{2 - \lambda_n \gamma_n \beta} u_n$$

between u_n and v_n , which yields Algorithm 1. Therefore, Algorithm 1 is an instance of the FB splitting algorithm with deviations; consequently, Theorem 1 is a direct consequence of [26, Theorem 1].

There is a great flexibility in the choice of deviation vector u_{n+1} . This flexibility has not been fully explored in [26, Section 6], where only a simple momentum direction has been considered. Our proposed method is an instance of Algorithm 1 from [26], where the deviations are chosen based on ideas from the extrapolation step of Anderson acceleration with the goal of improving local performance while benefiting from the global convergence properties of Algorithm 1.

2.4 Regularized Anderson acceleration

Consider the following fixed-point problem

find
$$x \in \mathcal{H}$$
 such that $x = T(x)$, (3)

where $T: \mathcal{H} \to \mathcal{H}$ is a nonexpansive mapping. One way to solve this problem is to use Anderson acceleration [3, 33]. Anderson acceleration is easy to implement and often improves the convergence of fixed-point iterations, particularly in their terminal phase of convergence, i.e., when close to a solution. However, Anderson acceleration (in its original form [3, 33]) suffers from numerical instability. This issue can, to some extent, be addressed by adding a Tikhonov regularization term to its inner least-squares problem. A regularized formulation of Anderson acceleration is given in Algorithm 2 [28, 29]. In spite of their popularity and benefits, there are not yet any global convergence results for the pure Anderson acceleration or its regularized variant, to the best of our knowledge.

Algorithm 2 Regularized Anderson acceleration

1: Input: $y_0 \in \mathcal{H}; m \ge 1$; and the regularization parameter ξ . 2: for n = 0, 1, 2, ... do 3: $m_n = \min\{m, n\}$ 4: $x_n = T(y_n)$ 5: find $\alpha^{(n)} = (\alpha_0^{(n)}, ..., \alpha_{m_n}^{(n)})$ that solves $\begin{array}{c} \min_{\alpha^{(n)} \in \mathbb{R}^{m_n+1}} & \left\|\mathcal{R}_n \alpha^{(n)}\right\|_2^2 + \xi \left\|\mathcal{R}_n^T \mathcal{R}_n\right\|_F \left\|\alpha^{(n)}\right\|_2^2 \\ & \text{subject to} \quad \mathbf{1}^T \alpha^{(n)} = 1 \end{array}$ where $\mathcal{R}_n = (r_{n-m_n}, ..., r_n)$ and $r_j = y_j - x_j$ for $j \in \{n - m_n, ..., n\}$ 6: $y_{n+1} = \sum_{i=0}^{m_n} \alpha_i^{(n)} x_{n-m_n+i}$ 7: end for

Anderson acceleration is retrieved from Algorithm 2 by setting $\xi = 0$. The original formulation of Anderson acceleration [3] is more general as it allows for the following damped (mixed) step to be taken

$$y_{n+1} = \mu_n \sum_{i=0}^{m_n} \alpha_i^{(n)} x_{n-m_n+i} + (1-\mu_n) \sum_{i=0}^{m_n} \alpha_i^{(n)} y_{n-m_n+i},$$

instead of Line 6, in which $\mu_n > 0$ is the damping (mixing) parameter. In this work, we consider the regularized variant of Anderson acceleration, given in Algorithm 2, and refer to it as RAA.

Remark 1. Anderson acceleration (Algorithm 2 with $\xi = 0$) can be viewed as a quasi-Newton method [15, 16, 33, 34]. To see this, first observe that the inner optimization problem of Anderson acceleration can be written as the following

unconstrained least-squares problem

$$\min_{\omega^{(n)} \in \mathbb{R}^{m_n}} \left\| r_n - \Delta \mathcal{R}_n \omega^{(n)} \right\|_2, \tag{4}$$

where $\Delta \Re_n = (r_{n-m_n+1} - r_{n-m_n}, \dots, r_n - r_{n-1})$ and $\omega^{(n)} = (\omega_0^{(n)}, \dots, \omega_{m_n-1}^{(n)})$ with $\omega_i^{(n)} = \sum_{j=0}^i \alpha_j^{(n)}$ for $i \in \{0, \dots, m_n - 1\}$. Then, defining $\Delta \mathcal{Y}_n = (y_{n-m_n+1} - y_{n-m_n}, \dots, y_n - y_{n-1})$, the extrapolation step of AA can be cast as

$$y_{n+1} = y_n - G_n r_n$$

where $G_n = \mathrm{Id} + (\Delta \mathcal{Y}_n - \Delta \mathcal{R}_n) (\Delta \mathcal{R}_n^T \Delta \mathcal{R}_n)^{-1} \Delta \mathcal{R}_n^T$. In this framework, Anderson acceleration can be seen a quasi-Newton method where G_n is an approximate inverse Jacobian of x - T(x) that minimizes $||G_n - I||_F$ subject to the inverse multi-secant condition $G_n \Delta \mathcal{Y}_n = \Delta \mathcal{R}_n$.

3 Dynamically weighted inertial FB scheme

In this section, we present a dynamically weighted inertial forward–backward (DWIFOB) scheme to solve the problem introduced in Section 2.2. It is based on Algorithm 1 with a choice of deviation vectors inspired by RAA (Algorithm 2).

The DWIFOB scheme exploits a history of search directions similar to RAA to find a deviation vector, and it uses the norm condition in Line 6 of Algorithm 1 to bound the norm of the deviation. This results in an algorithm that addresses the drawbacks of Algorithm 1 (slow local convergence) and RAA (no global convergence guarantee) and benefits from their favorable properties; namely, global convergence of Algorithm 1 and the often fast local convergence of RAA.

The convergence of DWIFOB follows from Theorem 1, that shows the convergence of Algorithm 1, of which DWIFOB is a special instance with a specific class of deviations.

Corollary 1. Consider the monotone inclusion problem (2) and suppose that Assumptions 1 and 2 hold. Let $(x_n)_{n \in \mathbb{N}}$ be the sequence generated by Algorithm 3. Then, the sequence $(x_n)_{n \in \mathbb{N}}$ converges weakly to a point in the solution set $\operatorname{zer}(A + C)$.

4 Primal-dual variant of DWIFOB

In this section, we consider a specific type of monotone inclusion problems that, after being translated to a primal-dual framework, can be efficiently tackled by DWIFOB. We propose a primal-dual algorithm based on Algorithm 3 for solving such problems.

Algorithm 3 DWIFOB

- 1: **Input:** $x_0 \in \mathcal{H}$; $m \geq 1$; the sequences $(\lambda_n)_{n \in \mathbb{N}}$, $(\gamma_n)_{n \in \mathbb{N}}$, and $(\zeta_n)_{n \in \mathbb{N}}$ as defined in Assumption 2; the regularization parameter ξ ; the metric $\|\cdot\|_M$ with $M \in \mathcal{M}(\mathcal{H})$; and $\varepsilon \geq 0$.
- 2: set $y_0 = x_0$ and $u_0 = 0$.
- 3: for $n = 0, 1, 2, \dots$ do
- 4: $m_n = \min(m, n)$
- 5: $p_n = (M + \gamma_n A)^{-1} \circ (M \gamma_n C) y_n$

$$6: \qquad x_{n+1} = x_n + \lambda_n (p_n - y_n)$$

7: find $\alpha^{(n)} = (\alpha_0^{(n)}, \dots, \alpha_{m_n}^{(n)})$ that solves

$$\begin{array}{ll} \underset{\alpha^{(n)} \in \mathbb{R}^{m_n+1}}{\text{minimize}} & \left\| \mathcal{R}_n \alpha^{(n)} \right\|_2^2 + \xi \left\| \mathcal{R}_n^T \mathcal{R}_n \right\|_F \left\| \alpha^{(n)} \right\|_2^2 \\ \text{subject to} & \mathbf{1}^T \alpha^{(n)} = 1 \end{array}$$

where
$$\mathcal{R}_n = (r_{n-m_n}, \dots, r_n)$$
 and $r_j = x_{j+1} - y_j$

8:
$$u_{n+1} = x_{n+1} - \sum_{i=0}^{\infty} \alpha_i x_{n-m_n+i+1}$$
9:
$$\ell_n^2 = \frac{\lambda_n (4-2\lambda_n - \gamma_n \beta)(4-2\lambda_{n+1} - \gamma_{n+1} \beta)}{4\lambda_{n+1}} \left\| p_n - x_n + \frac{2\lambda_n + \gamma_n \beta - 2}{4-2\lambda_n - \gamma_n \beta} u_n \right\|_M^2$$
10:
$$u_{n+1} = \zeta_n |\ell_n| \frac{\hat{u}_{n+1}}{\varepsilon + \|\hat{u}_{n+1}\|_M}$$
11:
$$y_{n+1} = x_{n+1} + u_{n+1}$$
12: end for

Problem statement. We consider primal inclusion problems of finding $x \in \mathcal{H}$ such that

$$0 \in Ax + L^*B(Lx) + Cx \tag{5}$$

with the following assumptions.

Assumption 3. Assume that

- (i) $A: \mathcal{H} \to 2^{\mathcal{H}}$ is a maximally monotone operator;
- (ii) $B: \mathcal{K} \to 2^{\mathcal{K}}$ is a maximally monotone operator;
- (iii) $L: \mathcal{H} \to \mathcal{K}$ is a bounded linear operator;
- (iv) $C: \mathcal{H} \to \mathcal{H}$ is a $\frac{1}{\beta}$ -cocoercive operator with respect to the metric $\|\cdot\|$;
- (v) The solution set $\operatorname{zer}(A + L^*BL + C)$ is nonempty.

Translation to a primal-dual framework. The inclusion problem (5) can be translated to a primal-dual setting [18] to get the inclusion problem

$$0 \in \mathcal{A}z + \mathcal{C}z \tag{6}$$

in which, with some abuse of notation,

$$\mathcal{A} = \begin{bmatrix} A & L^* \\ -L & B^{-1} \end{bmatrix} \qquad \qquad \mathcal{C} = \begin{bmatrix} C & 0 \\ 0 & 0 \end{bmatrix} \tag{7}$$

and $z := (x, \mu) \in \mathcal{H} \times \mathcal{K}$ is a primal-dual pair. It holds that x is a solution to (5) if and only if there exists some $\mu \in \mathcal{K}$ such that $z = (x, \mu)$ is a solution to (6).

In this setting, the operator \mathcal{A} is a maximally monotone [6, Proposition 26.32] and the operator \mathcal{C} is $1/\beta$ -cocoercive with respect to the norm $\|\cdot\|_M$, with

$$M = \begin{bmatrix} I & -\tau L^* \\ -\tau L & \tau \sigma^{-1} I \end{bmatrix},$$
(8)

where $\tau > 0$ and $\sigma > 0$ are chosen such that $\sigma \tau ||L||^2 < 1$, which ensures that M is strictly positive. Therefore, the inclusion problem (6) can be solved using the DWIFOB algorithm. Algorithm 4 describes our primal–dual DWIFOB algorithm which is derived by a straightforward application of DWIFOB to (6). With C = 0 and m = 1, this algorithm is equivalent to [26, Algorithm 4], an inertial primal–dual algorithm.

The following is a result on weak convergence of the iterates generated by Algorithm 4. It is based on showing that Algorithm 4 is a special case of the weakly convergent Algorithm 1.

Corollary 2. Consider the monotone inclusion problem (5) under Assumption 3 and suppose that Assumption 2 holds. Then the sequence $(x_n)_{n \in \mathbb{N}}$ in Algorithm 4 converges weakly to a point in $\operatorname{zer}(A + L^*BL + C)$.

Proof. Comparing Algorithm 4 with Algorithm 1, we set $p_n = (p_{x,n}, p_{\mu,n})$, $y_n = (\hat{x}_n, \hat{\mu}_n)$, define \mathcal{A} and \mathcal{C} as in (7), and let M be defined as in (8). Then, we have the following update

$$\begin{split} p_n &= (p_{x,n}, p_{\mu,n}) = (M + \tau \mathcal{A})^{-1} (My_n - \tau \mathcal{C}y_n) \\ &= \begin{bmatrix} I + \tau A & 0 \\ -2\tau L & \tau \sigma^{-1}I + \tau B^{-1} \end{bmatrix}^{-1} \begin{bmatrix} \hat{x}_n - \tau L^* \hat{\mu}_n - \tau C \hat{x}_n \\ -\tau L \hat{x}_n + \tau \sigma^{-1} \hat{\mu}_n \end{bmatrix} \\ &= \begin{bmatrix} (I + \tau A)^{-1} (\hat{x}_n - \tau L^* \hat{\mu}_n - \tau C \hat{x}_n) \\ (I + \sigma B^{-1})^{-1} (\hat{\mu}_n + \sigma L(2p_{x,n} - \hat{x}_n)) \end{bmatrix} \\ &= \begin{bmatrix} J_{\tau A} (\hat{x}_n - \tau L^* \hat{\mu}_n - \tau C \hat{x}_n) \\ J_{\sigma B^{-1}} (\hat{\mu}_n + \sigma L(2p_{x,n} - \hat{x}_n)) \end{bmatrix}, \end{split}$$

which gives the resolvent steps of Algorithm 4 (Lines 5 and 6). Moreover, it is also straightforward to verify that, by substituting (x_{n+1}, μ_{n+1}) in place of x_{n+1} in Algorithm 1, the relaxation steps of Algorithm 4 (Lines 7 and 8) are equivalent to that of Algorithm 1. Additionally, with the devised choice of $u_{n+1} = (u_{x,n+1}, u_{\mu,n+1})$ in Algorithm 4, the norm condition of Algorithm 1 holds. Therefore, since Algorithm 4 is a special instance of Algorithm 1 and due to equivalence of (5) and (6), a direct application of Theorem 1 concludes the proof.

Algorithm 4

1: Input: $(x_0, \mu_0) \in \mathcal{H} \times \mathcal{K}; m \ge 1$; the sequences $(\lambda_n)_{n \in \mathbb{N}}$ and $(\zeta_n)_{n \in \mathbb{N}}$ as defined in Assumption 2; the regularization parameter ξ ; $\sigma > 0, \tau > 0$ such that $\sigma \tau \|L\|^2 < 1$; and $\varepsilon \geq 0$. 2: set $(\hat{x}_0, \hat{\mu}_0) = (x_0, \mu_0)$ and $(u_{x,0}, u_{\mu,0}) = (0, 0)$ 3: for $n = 0, 1, 2, \dots$ do $m_n = \min(m, n)$ 4: $p_{x,n} = J_{\tau A}(\hat{x}_n - \tau L^* \hat{\mu}_n - \tau C \hat{x}_n)$ 5: $p_{\mu,n} = J_{\sigma B^{-1}} \left(\widehat{\mu}_n + \sigma L(2p_{x,n} - \widehat{x}_n) \right)$ 6: $x_{n+1} = x_n + \lambda_n (p_{x,n} - \hat{x}_n)$ 7: $\mu_{n+1} = \mu_n + \lambda_n(p_{\mu,n} - \widehat{\mu}_n)$ find $\alpha^{(n)} = (\alpha_0^{(n)}, \dots, \alpha_{m_n}^{(n)})$ that solves 8: 9: $\underset{\boldsymbol{\alpha}^{(n)} \in \mathbb{R}^{m_n+1}}{\text{minimize}} \quad \left\| \mathcal{R}_n \boldsymbol{\alpha}^{(n)} \right\|_2^2 + \xi \left\| \mathcal{R}_n^T \mathcal{R}_n \right\|_F \left\| \boldsymbol{\alpha}^{(n)} \right\|_2^2$ subject to $\mathbf{1}^T \alpha^{(n)} = 1$ where $\mathcal{R}_{n} = (r_{n-m_{n}}, \dots, r_{n})$ where $r_{j} = (x_{j+1} - \hat{x}_{j}, \mu_{j+1} - \hat{\mu}_{j})$ $\begin{bmatrix} \hat{u}_{x,n+1} \\ \hat{u}_{\mu,n+1} \end{bmatrix} = \begin{bmatrix} x_{n+1} \\ \mu_{n+1} \end{bmatrix} - \sum_{i=0}^{m_{n}} \alpha_{i}^{(n)} \begin{bmatrix} x_{n-m_{n}+i+1} \\ \mu_{n-m_{n}+i+1} \end{bmatrix}$ $\ell_{n}^{2} = \frac{\lambda_{n}(4-2\lambda_{n}-\tau\beta)(4-2\lambda_{n+1}-\tau\beta)}{4\lambda_{n+1}} \left\| \begin{bmatrix} p_{x,n} \\ p_{\mu,n} \end{bmatrix} - \begin{bmatrix} x_{n} \\ \mu_{n} \end{bmatrix} + \frac{2\lambda_{n}+\tau\beta-2}{4-2\lambda_{n}-\tau\beta} \begin{bmatrix} u_{x,n} \\ u_{\mu,n} \end{bmatrix} \right\|_{M}^{2}$ $\begin{bmatrix} u_{x,n+1} \\ u_{\mu,n+1} \end{bmatrix} = \frac{\zeta_{n}|\ell_{n}|}{\varepsilon+\|(\hat{u}_{x,n+1},\hat{u}_{\mu,n+1})\|_{M}} \begin{bmatrix} \hat{u}_{x,n+1} \\ \hat{u}_{\mu,n+1} \end{bmatrix}$ 10: 11:12: $\widehat{x}_{n+1} = x_{n+1} + u_{x,n+1}$ 13:14: $\widehat{\mu}_{n+1} = \mu_{n+1} + u_{\mu,n+1}$ 15: **end for**

Remark 2. For the choice of $\lambda_n = 1$, $u_{x,n} = 0$ and $u_{\mu,n} = 0$ for all $n \in \mathbb{N}$ and C = 0, Algorithm 4 reduces to the standard Chambolle–Pock iteration [8], that is

$$(x_{n+1}, \mu_{n+1}) = \begin{bmatrix} J_{\tau A} (x_n - \tau L^* \mu_n) \\ J_{\sigma B^{-1}} (\mu_n + \sigma L(2x_{n+1} - x_n)) \end{bmatrix}$$

4.1 Efficient evaluation of the *M*-induced norm

In Algorithm 4, we need to evaluate two M-induced norms per iteration, where M is given by (8). This means that, in addition to evaluating L and L^* in the resolvent steps, two extra evaluations each of L and L^* are needed due the M-induced norms. These extra evaluations can be computationally expensive, which would make the algorithm computationally inefficient. However, by utilizing a similar approach as in [26, Section 6.1], the extra evaluations can be efficiently done by reusing some of the previous computations.

We next show that we only need to apply L and L^* once per iteration (except for the first) in Algorithm 4. Observe that, by applying the operator L on

Lines 7, 10 and 13 (after substitution of Line 12) of Algorithm 4, we obtain the following relations

$$Lx_{n+1} = Lx_n + \lambda_n (Lp_{x,n} - L\hat{x}_n),$$

$$L\hat{u}_{x,n+1} = Lx_{n+1} - \sum_{i=0}^{m_n} \alpha_i^{(n)} Lx_{n-m_n+i+1},$$

$$L\hat{x}_{n+1} = Lx_{n+1} + \frac{\zeta_n |\ell_n|}{\varepsilon + \|(\hat{u}_{x,n+1}, \hat{u}_{\mu,n+1})\|_M} L\hat{u}_{x,n+1}.$$
(9)

In these relations, for all n > 0, we only need to evaluate $Lp_{x,n}$. The rest of the quantities to the right-hand sides of the above relations are already computed and can be reused. This means that, in practice, we only need to only evaluate one of each L (for $Lp_{x,n}$) and L^* (for $L^*\hat{\mu}_n$) at each iteration, except for the first. Therefore, since the most computationally expensive part of our algorithm often is evaluating L and L^* , exploiting this technique keeps the computational cost of our algorithm similar to that of the Chambolle–Pock method. However, in order to use this approach, one needs to store $m_n + 4$ vectors of the same dimension as the dual variable. Hence, in applications where storage is a bottleneck, using a large m_n might be restrictive.

Evaluation of the *M*-induced norm of, for instance, $\|(\hat{u}_{x,n}, \hat{u}_{\mu,n})\|_M$ can be done as

$$\|(\widehat{u}_{x,n},\widehat{u}_{\mu,n})\|_{M}^{2} = \|\widehat{u}_{x,n}\|^{2} + \frac{\tau}{\sigma}\|\widehat{u}_{\mu,n}\|^{2} - 2\tau \langle \widehat{u}_{\mu,n}, L\widehat{u}_{x,n} \rangle,$$
(10)

where $L\hat{u}_{x,n}$ is already available from the stored set of quantities. The other M-induced norm in Line 11 of Algorithm 4 can be computed in the same way as above without extra evaluations of L or L^* .

5 Numerical experiments

In this section, we evaluate the performance of the primal–dual variant of the DWIFOB algorithm and compare it with the Chambolle–Pock primal–dual method and RAA.

We consider a support vector machine (SVM) problem with l_1 -norm regularization for classification of the form

$$\underset{(w,b)\in\mathbb{R}^d\times\mathbb{R}}{\text{minimize}} \quad \sum_{i=1}^N \max\left(0, 1 - \phi_i(w^T\theta_i + b)\right) + \delta \|w\|_1 \tag{11}$$

given a labeled training data set $\{(\theta_i, \phi_i)\}_{i=1}^N$, where $\theta_i \in \mathbb{R}^d$ and $\phi_i \in \{-1, 1\}$ are training data and labels respectively, $\delta > 0$ is the regularization parameter, and x = (w, b) with $b \in \mathbb{R}$ and $w \in \mathbb{R}^d$ is the decision variable. This problem can be reformulated as

$$\underset{x \in \mathbb{R}^{d+1}}{\operatorname{minimize}} f(Lx) + g(x) \tag{12}$$

$$f(y) = \sum_{i=1}^{N} \max\left(0, 1 - y_i\right), \qquad g(x) = \delta \|\omega\|_1, \qquad L = \begin{bmatrix} \phi_1 \theta_1^T & \phi_1 \\ \vdots & \vdots \\ \phi_N \theta_N^T & \phi_N \end{bmatrix},$$

where $f, g: \mathbb{R}^{d+1} \to \mathbb{R}$ are proper, closed, and convex (and non-smooth) functions with full domain and L is a bounded linear operator. A point $x^* \in \mathbb{R}^{d+1}$ solves problem (12) if and only if

$$0 \in L^* \partial f(Lx) + \partial g(x), \tag{13}$$

where ∂f and ∂g are the subdifferentials of f and g, respectively [6, Proposition 16.42]. By [6, Theorem 20.25], ∂f and ∂g are maximally monotone. Therefore, we solve the monotone inclusion (13) in order to find a solution to problem (12), which, by setting $A = \partial g$, $B = \partial f$, and C = 0, fits into the framework of problem (6). We use the following algorithms to solve the problem:

- Chambolle and Pock's primal-dual method (CP) [8];
- The primal-dual DWIFOB method in Algorithm 4 (Alg4);
- Regularized Anderson acceleration (RAA), Algorithm 2, [28, 33], applied to the fixed-point map of Chambolle–Pock, see Remark 2.

In the algorithms listed above, evaluating L and L^* in the resolvent steps and solving the least-squares problem, if there is one, are the computationally intensive parts. Since the Chambolle–Pock algorithm does not involve solving a least-squares problem, it has a cheaper per-iteration cost compared to the other algorithms. To provide a fair comparison, we compare the methods using *scaled iterations*. Let $C_{\rm CP}$ and $C_{\rm alg}$ be the average per-iteration computational cost of the Chambolle–Pock method and one of the algorithms mentioned above (alg \in {CP, Alg4, RAA}), respectively. The scaled iteration is the iteration count scaled by the ratio $\frac{C_{\rm alg}}{C_{\rm CP}}$. The iteration costs $C_{\rm CP}$ and $C_{\rm alg}$ are numerically approximated by measuring the average per-iteration elapsed time of the individual algorithms. The benefits of using the notion of scaled iteration are two-fold. In addition to considering the relative per-iteration computational cost of the algorithms, it eliminates the impact of computational capacity/power of the platform that the algorithms are implemented on, which makes the results more reproducible.

The experiments are done using three different benchmark datasets; the *breast cancer* dataset with 683 samples and 10 features, the *sonar* dataset with 208 samples and 60 features, and *colon cancer* dataset with 62 samples and 2000 features, all from [9]. The numerical experiments are done on a laptop with a 1.4 GHz Quad-core Intel Core i5 processor with 16 GB of memory. The algorithms are implemented using the Julia programming language (Version 1.3.1).

In all experiments, the primal and the dual step-size parameters are chosen as $\tau = \sigma = 0.99/||L||^2$, $\zeta_n = 0.99$ for all $n \in \mathbb{N}$, $\varepsilon = 0$, and a fixed relaxation parameter $\lambda = 1.0$ for Algorithm 4 is used. Unless otherwise stated, the

with

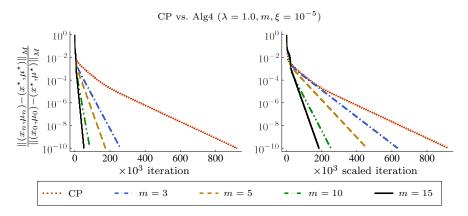


Figure 1: Normalized *M*-induced distance to the solution vs. iteration number (*left*) and scaled iteration number (*right*) for the l_1 -norm regularized SVM, problem (11), with $\delta = 0.5$, on the *breast cancer* dataset [9] with 683 samples and 10 features. Solved using the Chambolle–Pock algorithm and Alg4 ($\lambda = 1.0$, $m, \xi = 10^{-5}$) for several memory sizes m, all with $\tau = \sigma = 0.99/||L||$.

algorithms are initialized at $(x_0, \mu_0) = 0$. We report results from the numerical experiments in a sequence of figures. The *M*-induced distance to a solution is used as the convergence measure where the individual underlying solutions are found by running the standard Chambolle–Pock algorithm until $||x_n - x_{n-1}|| \leq 10^{-15}$ and $||\mu_n - \mu_{n-1}|| \leq 10^{-15}$. All algorithms that converge do so to the same solution. Moreover, all evaluations of L, L^* , and $||\cdot||_M$ are done using the proposed recursive method of Section 4.1, unless otherwise stated.

Figures 1 to 3 provide a comparison between the Chambolle–Pock method and Algorithm 4 for several memory size values using different datasets. The figures show that for the considered different values of the memory size m, Algorithm 4 outperforms the Chambolle–Pock method. It can also be seen that increasing the memory size m in Algorithm 4 improves the local convergence rate. However, by increasing m in Algorithm 4, the computational cost of solving the least-squares problem increases, while the computational cost of the resolvent steps is fixed. Therefore, it is expected that there is an optimal memory size beyond which increasing m degrades the performance (compared to the optimal one). This can be better seen in Fig. 4, which shows the number of scaled iterations until the M-scaled distance of (x_n, μ_n) to the solution is less than some value tol, against the memory size. It is seen that we get good performance for a wide range of memory sizes (typically $10 \le m \le 25$). It is also good to mention that even for small or large m, we still see a considerable improvement compared to the Chambolle–Pock method.

Figure 5 shows the impact of using direct evaluation of L, L^* , and $\|\cdot\|_M$ instead of the proposed recursive method of Section 4.1, on the convergence pattern of Algorithm 4. The experiment is done with the same setting as in the one reported in Fig. 3 for the case of m = 25. The top right plot shows that the

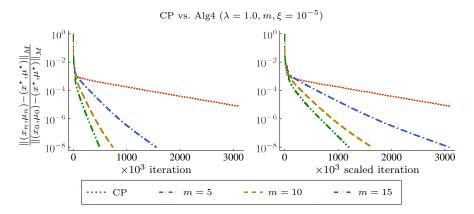


Figure 2: Normalized *M*-induced distance to the solution vs. iteration number (*left*) and scaled iteration number (*right*) for the l_1 -norm regularized SVM, problem (11), with $\delta = 1.0$, on the *sonar* dataset [9] with 208 samples and 60 features. Solved using the Chambolle–Pock algorithm and Alg4 ($\lambda = 1.0, m, \xi = 10^{-5}$) for several memory sizes *m*, all with $\tau = \sigma = 0.99/||L||$.

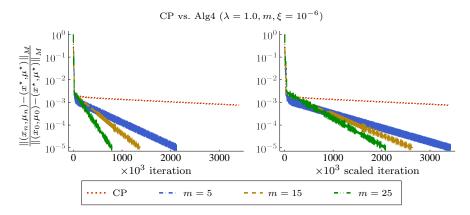


Figure 3: Normalized *M*-induced distance to the solution vs. iteration number (*left*) and scaled iteration number (*right*) for the l_1 -norm regularized SVM, problem (11), with $\delta = 0.1$, on the *colon cancer* dataset [9] with 62 samples and 2000 features. Solved using the Chambolle–Pock algorithm and Alg4 ($\lambda = 1.0$, $m, \xi = 10^{-6}$) for several memory sizes, m, all with $\tau = \sigma = 0.99/||L||$.

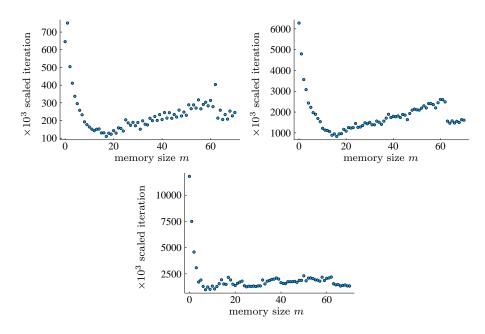


Figure 4: Number of scaled iterations until the normalized *M*-induced distance to the solution gets smaller than some value *tol* vs. memory size with the settings in the experiments of Fig. 1 (*tol*= 10^{-8} , *top left* panel), Fig. 2 (*tol*= 10^{-6} , *top right* panel), and Fig. 3 (*tol*= 10^{-4} , *bottom* panel); using Algorithm 4, where m = 0 corresponds to the Chambolle–Pock method and m = 1 corresponds to the inertial primal–dual method of [26].

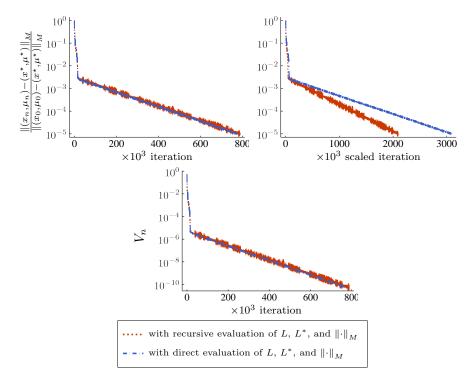


Figure 5: Comparing the impact of *recursive* and *direct* evaluation of L, L^* , and $\|\cdot\|_M$ on the convergence pattern of Alg4 ($\lambda = 1.0, m = 25, \xi = 10^{-6}$) for problem (11) with $\delta = 0.1$, on the *colon cancer* dataset [9]; *Top panels:* normalized *M*-induced distance to the solution vs. iteration number (*top left*) and scaled iteration number (*top right*); *bottom panel:* V_n (defined in (14)) vs. iteration number.

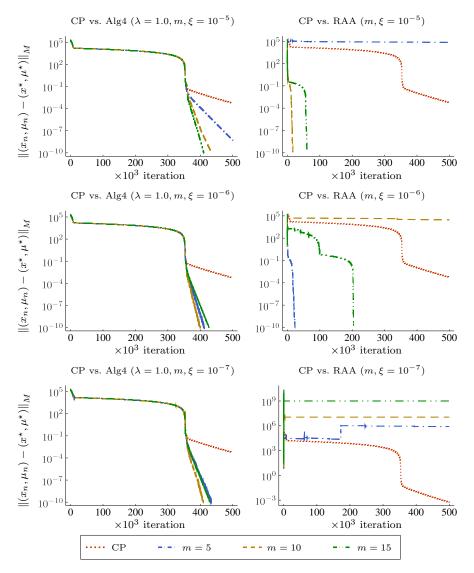


Figure 6: Normalized *M*-induced distance to the solution vs. iteration number for the l_1 -norm regularized SVM problem (11) with $\delta = 0.5$ on the breast cancer dataset [9] with 683 samples and 10 features. Solved using the Chambolle– Pock algorithm, Alg4 ($\lambda = 1.0, m, \xi$) (left-hand side plots), and RAA (m, ξ) (right-hand side plots) for several memory sizes and Tikhonov regularization parameters, all with $\tau = \sigma = 0.99/||L||$. In this case, the initial point is set far from the origin, namely, at a distance of approximately 2.6×10^5 to the origin.

suggested method of recursive evaluation of Algorithm 4 considerably decreases the overall computational cost, in this instance by about 30%. Additionally, it is observed that by using the suggested recursive evaluation of L, L^* , and $\|\cdot\|_M$, we might see some unexpected spikes in the plots, which are caused by accumulated errors due to recursive evaluations, while using the direct evaluation method does not result in such spikes. The bottom plot in Fig. 5 compares

$$V_{n} := \left\| \begin{bmatrix} x_{n+1} \\ \mu_{n+1} \end{bmatrix} - \begin{bmatrix} x^{*} \\ \mu^{*} \end{bmatrix} \right\|_{M}^{2} + \lambda_{n}(2 - \lambda_{n}) \left\| \begin{bmatrix} p_{x,n} \\ p_{\mu,n} \end{bmatrix} - \begin{bmatrix} x_{n} \\ \mu_{n} \end{bmatrix} + \frac{\lambda_{n} - 1}{2 - \lambda_{n}} \begin{bmatrix} u_{x,n} \\ u_{\mu,n} \end{bmatrix} \right\|_{M}^{2}$$
(14)

for the case of direct and recursive evaluation methods. According to [26, Lemma 1] with exact evaluation of L, L^* , and M, this quantity should be decreasing, which is confirmed by the figure. However, this is not the case for the recursive evaluation method due to accumulated errors.

The results of experiments with the Chambolle–Pock method, Algorithm 4, and RAA are shown in Fig. 6. The plots on the left-hand side compare the Chambolle–Pock algorithm and Algorithm 4 and the plots on the right-hand side show the convergence of RAA versus the Chambolle–Pock algorithm. For these experiments, the algorithms are initialized far from the origin (at $(x_0, \mu_0) =$ $10^4 \times \mathbf{1}_{694}$, where $\mathbf{1}_{694}$ is a vector of ones with 694 elements). We see that RAA is not globally convergent; however, when it converges, it does so fast. It is also seen that RAA is really sensitive to parameter variations; and besides that, for it to perform well, there should be a reasonable match between the regularization parameter and its memory size (see the middle plot of RAA). On the other hand, Algorithm 4 is more robust against variations in parameters. These results suggest that Algorithm 4 is more reliable than RAA in the sense of robustness against variations in parameters and also predictability of its behavior.

The distances to a solution for RAA that do not converge to zero in Fig. 6 have not converged although they seem to have flat asymptotes. In fact, consecutive iterates differ a lot and the primal iterate inserted into the objective function (12) gives values that are several orders of magnitude larger than the optimal value, also at the end of the simulation. This rules out that the algorithm converges to a different solution (if it exists) than all the other methods do.

6 Conclusion

We have proposed a novel scheme to solve structured monotone inclusion problems. By combining a variant of FB splitting with deviations with an extrapolation technique similar to that of Anderson acceleration, we introduced the DWIFOB algorithm. Using the flexibility that the FB algorithm with deviations provides, we introduced a primal-dual variant of the DWIFOB algorithm. Numerical experiments on an l_1 -norm regularized SVM problem showed that the primal-dual variant of the DWIFOB algorithm outperforms the Chambolle–Pock primal-dual method. Additionally, we compared the performance of the primaldual variation of DWIFOB to the regularized Anderson acceleration on the same benchmark problem. The results showed that, in addition to only being locally (though fast) convergent, Anderson acceleration is very sensitive to the variations in choice of parameters while primal-dual DWIFOB is much more robust against them. This makes the behavior of the DWIFOB algorithm more reliable and predictable.

Acknowledgement. The authors would like to thank Bo Bernhardsson (Department of Automatic Control, Lund University) for his valuable feedback on this work. This research was partially supported by Wallenberg AI, Autonomous Systems and Software Program (WASP) funded by the Knut and Alice Wallenberg Foundation. Sebastian Banert was partially supported by ELLIIT.

References

- Alvarez, F. "On the minimizing property of a second order dissipative system in Hilbert spaces". In: SIAM Journal on Control and Optimization 38.4 (2000), pp. 1102–1119. DOI: 10.1137/s0363012998335802.
- [2] Alvarez, F. and Attouch, H. "An inertial proximal method for maximal monotone operators via discretization of a nonlinear oscillator with damping". In: Set-Valued Analysis 9.1–2 (2001), pp. 3–11. DOI: 10.1023/a: 1011253113155.
- [3] Anderson, D. G. "Iterative procedures for nonlinear integral equations". In: Journal of the ACM 12.4 (1965), pp. 547–560. DOI: 10.1145/321296. 321305.
- [4] Attouch, H. and Cabot, A. "Convergence of a relaxed inertial proximal algorithm for maximally monotone operators". In: *Mathematical Programming* 184.1 (2020), pp. 243–287. DOI: 10.1007/s10107-019-01412-0.
- [5] Attouch, H., Czarnecki, M.-O., and Peypouquet, J. "Coupling forwardbackward with penalty schemes and parallel splitting for constrained variational inequalities". In: *SIAM Journal on Optimization* 21.4 (2011), pp. 1251–1274. DOI: 10.1137/110820300.
- [6] Bauschke, H. H. and Combettes, P. L. Convex analysis and monotone operator theory in Hilbert spaces. CMS Books in Mathematics. Springer, 2017. DOI: 10.1007/978-1-4419-9467-7.
- Bruck, R. E. "An iterative solution of a variational inequality for certain monotone operators in Hilbert space". In: *Bulletin of the American Mathematical Society* 81.5 (1975), pp. 890–892. DOI: 10.1090/S0002-9904-1975-13874-2.

- [8] Chambolle, A. and Pock, T. "A first-order primal-dual algorithm for convex problems with applications to imaging". In: *Journal of Mathematical Imaging and Vision* 40.1 (2011), pp. 120–145. DOI: 10.1007/s10851-010-0251-1.
- Chang, C.-C. and Lin, C.-J. "LIBSVM: A library for support vector machines". In: ACM Transactions on Intelligent Systems and Technology 2 (3 2011). Software available at http://www.csie.ntu.edu.tw/~cjlin/ libsvm, 27:1-27:27. DOI: 10.1145/1961189.1961199.
- [10] Chen, G. H.-G. and Rockafellar, R. T. "Convergence Rates in Forward-Backward Splitting". In: SIAM Journal on Optimization 7.2 (1997), pp. 421– 444. DOI: 10.1137/S1052623495290179.
- [11] Cholamjiak, W., Cholamjiak, P., and Suantai, S. "An inertial forward-backward splitting method for solving inclusion problems in Hilbert spaces". In: Journal of Fixed Point Theory and Applications 20.1 (2018). DOI: 10.1007/s11784-018-0526-5.
- [12] Combettes, P. L. and Pesquet, J.-C. "Proximal splitting methods in signal processing". In: *Fixed-point algorithms for inverse problems in science and engineering*. Ed. by Bauschke, H. H. et al. Springer New York, 2011, pp. 185–212. DOI: 10.1007/978-1-4419-9569-8_10.
- [13] Eckstein, J. "Splitting methods for monotone operators with applications to parallel optimization". PhD thesis. Massachusetts Insitute of Technology, 1989. URL: http://hdl.handle.net/1721.1/14356.
- [14] Evans, C. et al. "A Proof That Anderson Acceleration Improves the Convergence Rate in Linearly Converging Fixed-Point Methods (But Not in Those Converging Quadratically)". In: SIAM Journal on Numerical Analysis 58.1 (2020), pp. 788–810. DOI: 10.1137/19M1245384.
- [15] Eyert, V. "A comparative study on methods for convergence acceleration of iterative vector sequences". In: *Journal of Computational Physics* 124.2 (1996), pp. 271–285. DOI: 10.1006/jcph.1996.0059.
- [16] Fang, H.-r. and Saad, Y. "Two classes of multisecant methods for nonlinear acceleration". In: Numerical Linear Algebra with Applications 16.3 (2009), pp. 197–221. DOI: 10.1002/nla.617.
- Giselsson, P., Fält, M., and Boyd, S. "Line search for averaged operator iteration". In: 2016 IEEE 55th Conference on Decision and Control (CDC). IEEE. 2016, pp. 1015–1022. DOI: 10.1109/CDC.2016.7798401.
- [18] He, B. and Yuan, X. "Convergence analysis of primal-dual algorithms for a saddle-point problem: from contraction perspective". In: SIAM Journal on Imaging Sciences 5.1 (2012), pp. 119–149. DOI: 10.1137/100814494.
- [19] He, H. et al. Solve minimax optimization by Anderson acceleration. 2021. arXiv: 2110.02457v2 [cs.LG].
- [20] Lions, P. L. and Mercier, B. "Splitting Algorithms for the Sum of Two Nonlinear Operators". In: SIAM Journal on Numerical Analysis 16.6 (1979), pp. 964–979. DOI: 10.1137/0716071.

- [21] Lorenz, D. A. and Pock, T. "An inertial forward-backward algorithm for monotone inclusions". In: *Journal of Mathematical Imaging and Vision* 51.2 (2015), pp. 311–325. DOI: 10.1007/s10851-014-0523-2.
- [22] Ouyang, W. et al. "Anderson acceleration for nonconvex ADMM based on Douglas-Rachford splitting". In: Computer Graphics Forum 39.5 (2020), pp. 221–239. DOI: 10.1111/cgf.14081.
- [23] Passty, G. B. "Ergodic convergence to a zero of the sum of monotone operators in Hilbert space". In: *Journal of Mathematical Analysis and Applications* 72.2 (1979), pp. 383–390. DOI: 10.1016/0022-247x(79) 90234-8.
- [24] Raguet, H. and Landrieu, L. "Preconditioning of a generalized forwardbackward splitting and application to optimization on graphs". In: SIAM Journal on Imaging Sciences 8.4 (2015), pp. 2706–2739. DOI: 10.1137/ 15m1018253.
- [25] Rockafellar, R. T. "Monotone operators and the proximal point algorithm". In: SIAM Journal on Control and Optimization 14.5 (1976), pp. 877–898. DOI: 10.1137/0314056.
- [26] Sadeghi, H., Banert, S., and Giselsson, P. Forward-backward splitting with deviations for monotone inclusions. 2021. arXiv: 2112.00776v1 [math.OC].
- [27] Sadeghi, H. and Giselsson, P. Hybrid acceleration scheme for variance reduced stochastic optimization algorithms. 2021. arXiv: 2111.06791v1 [math.OC].
- [28] Scieur, D., d'Aspremont, A., and Bach, F. "Regularized nonlinear acceleration". In: *Mathematical Programming* 179.1–2 (2020), pp. 47–83. DOI: 10.1007/s10107-018-1319-8.
- [29] Shi, W. et al. "Regularized Anderson acceleration for off-policy deep reinforcement learning". In: Advances in Neural Information Processing Systems. Vol. 32. Curran Associates, Inc., 2019. URL: https://proceedings. neurips.cc/paper/2019/file/bb1443cc31d7396bf73e7858cea114e1-Paper.pdf.
- [30] Themelis, A. and Patrinos, P. "SuperMann: a superlinearly convergent algorithm for finding fixed points of nonexpansive operators". In: *IEEE Transactions on Automatic Control* 64.12 (2019), pp. 4875–4890. DOI: 10.1109/TAC.2019.2906393.
- [31] Toth, A. and Kelley, C. T. "Convergence analysis for Anderson acceleration". In: SIAM Journal on Numerical Analysis 53.2 (2015), pp. 805–819.
 DOI: 10.1137/130919398.
- [32] Tseng, P. "A modified forward-backward splitting method for maximal monotone mappings". In: SIAM Journal on Control and Optimization 38.2 (2000), pp. 431–446. DOI: 10.1137/S0363012998338806.

- [33] Walker, H. F. and Ni, P. "Anderson acceleration for fixed-point iterations". In: SIAM Journal on Numerical Analysis 49.4 (2011), pp. 1715–1735. DOI: 10.1137/10078356X.
- [34] Zhang, J., O'Donoghue, B., and Boyd, S. "Globally convergent type-I Anderson acceleration for nonsmooth fixed-point iterations". In: SIAM Journal on Optimization 30.4 (2020), pp. 3170–3197. DOI: 10.1137/ 18M1232772.