On the complexity of the word problem of the R. Thompson group V

J.C. Birget

16 iii 2022

Abstract

We analyze the proof by Lehnert and Schweitzer that the word problem of the Thompson group V is co-context-free, and we show that this word problem is the complement of the cyclic closure of a union of reverse deterministic context-free languages. For certain finite generating sets, this word problem is the complement of the cyclic closure of the union of four deterministic context-free languages. It follows that the deterministic time-complexity of the word problem of V is at most quadratic.

1 Introduction

We will use the following notation. For an alphabet A, the set of all words over A is denoted by A^* ; this includes the empty word ε . The set on non-empty words is denoted by A^+ (= $A^* \setminus \{\varepsilon\}$). The length of $w \in A^*$ is denoted by |w|. A language over A is any subset of A^* ; more rigorously, a language is a pair (A, L) where A is a finite alphabet and $L \subseteq A^*$. The complement of a language L over A is $A^* \setminus L$. The following language classes are used:

 $\mathsf{DTime}(T)$, or $\mathsf{DTime}(T(n))$, is the class of languages accepted by multitape deterministic Turing machines with time-complexity function $\leq T(.)$ [11, 16];

CF is the class of *context-free* languages [11, 9, 6, 16];

coCF is the class of co-context-free languages, i.e., the languages with context-free complement;

DCF is the class of deterministic context-free languages [11, 9];

DCF^{rev} is the class of *reverse deterministic context-free* languages, i.e., the languages whose reverse is in DCF;

 \cup_{ℓ} DCF is the class of languages that are the union of $\leq \ell$ deterministic context-free languages.

1.1 Overview

The group V of Richard Thompson is a well known finitely presented infinite simple group [17, 18, 5, 10, 2]. Lehnert and Schweitzer [12] proved that the word problem of the Higman-Thompson groups $G_{n,r}$, and in particular the Thompson group $V (= G_{2,1})$, over any finite monoid generating set, is co-context-free. It follows that the word problem of V over any finite monoid generating set is in $\mathsf{DTime}(n^{2,38})$, using Valiant's algorithm for CF and fast boolean matrix multiplication; there exist slightly smaller and more complicated upper bounds than 2,38 (see the literature on fast matrix multiplication); since $\mathsf{DTime}(T(n))$ is closed under complementation, this result also applies to coCF . It had previously been proved that the word problem of V over any finite generating set is in the complexity classes AC_1 and $\mathsf{DTime}(n^3)$ [2]. By the deep results of Muller and Schupp [14], context-free word problems of groups are in $\mathsf{DTime}(n)$, since they are actually in DCF . So for word problems of groups, CF is a (strict)

subclass of coCF. For languages in general, CF and coCF are subclasses of logCF (the class of languages reducible to CF languages by many-one log-space reductions); logCF is closed under complementation [4], and has a nice circuit characterisation [19] that explicitly places logCF between NC_1 and AC_1 .

Results: We prove that the complement of the word problem of V, over any finite monoid generating set, is the cyclic closure of a union of reverse deterministic context-free languages. I.e., $\mathsf{wp}(V)$ belongs to $\mathsf{co}(\mathsf{cyc}(\cup_\ell \mathsf{DCF}^{\mathrm{rev}}))$; ℓ is a constant that can be as low as 4, depending on the generating set of V. For certain finite generating sets, $\mathsf{wp}(V) = (\mathsf{wp}(V))^{\mathrm{rev}}$, and $\mathsf{wp}(V)$ belongs to $\mathsf{co}(\mathsf{cyc}(\cup_4 \mathsf{DCF}))$. It follows that the word problem of V over any finite generating set is in $\mathsf{DTime}(n^2)$.

1.2 Definitions

Classes versus sets

All finite alphabets and all countable sets that we use are assumed to be subsets of some fixed countable set; this does not lead to any significant restriction. Hence the class of finitely generated groups, as well as all complexity classes such as P, DTime(T), CF, coCF, DCF, etc., are sets.

The word problem for groups

For an alphabet A, let A^{-1} be a (not necessarily disjoint) copy of A. The elements of A^{-1} are called the *inverse letters*. Inversion of letters is treated notationally as an involution, i.e., $(a^{-1})^{-1}$ denotes a. We denote $A \cup A^{-1}$ by $A^{\pm 1}$.

A generating set (also called a group generating set) of a group G is a subset $A \subseteq G$ such that every element of G can be expressed as the product of a sequence of elements of $A^{\pm 1}$ (where for all $a \in A$: a^{-1} is the inverse of a in G). A monoid generating set of a group G is a subset $A \subseteq G$ such that every element of G can be expressed as the product of a sequence of elements of A. Hence, if A is a group generating set then $A^{\pm 1}$ is a monoid generating set. If G has a finite group generating set then G also has a finite monoid generating set, and conversely. By default, for groups, "generating set" means group generating set (here and in most of the literature). We explicitly say "monoid" when a monoid generating set is used. In this note we mainly use monoid generating sets, since Turing machines do not have an inverse operation. Note that here we only use "interior" generating sets A; i.e., A, $A^{\pm 1} \subseteq G$, and a^{-1} is the inverse of a in G.

Let G be a finitely generated group, with finite monoid generating set A. If $u, v \in A^*$ represent the same element of G we denote this by $u =_G v$. The word problem of G over A is defined to be the set $\mathsf{wp}_A(G) = \{w \in A^* : w =_G \varepsilon\}$.

The word problem is therefore a formal language over the alphabet A. The languages that arise as word problems of groups have special properties, some of which appear in the next lemma, and in Section 2.

Lemma 1.1 Let $L = wp_A(G) \subseteq A^*$ be the word problem of any group G with finite monoid generating set A. Then L has the following properties:

- (1) L contains ε and is closed under concatenation; i.e., L is a submonoid of A^* .
- (2) L has a unique-factorization property: every $w \in L \setminus \{\varepsilon\}$ can be written in a unique way as a concatenation of elements of $L \setminus \{\varepsilon\}$ that can themselves not be factored. In other words, L is a free submonoid of A^* .
- (3) The set of free generators of $wp_A(G)$ is a bifix code (i.e., it is both a prefix code and a suffix code).

PROOF. (1) is straightforward by the definition of the word problem.

(2) Suppose $w \in L \setminus \{\varepsilon\}$ has two maximal factorizations $w = u_1 u_2 \dots u_m = v_1 v_2 \dots v_n$, where $u_i, v_j \in L \setminus \{\varepsilon\}$. Either $u_1 = v_1$, or u_1 is a strict prefix of v_1 , or v_1 is a strict prefix of u_1 . If $u_1 = v_1$

then $u_2 ... u_m = v_2 ... v_n$, since A^* is cancellative; so the result follows by induction. If u_1 is a strict prefix of v_1 then $v_1 = u_1 x$ for some $x \in A^+$; since $u_1 =_G \varepsilon =_G v_1$, it follows that $x =_G \varepsilon$. Hence, v_1 has a factorization $v_1 = u_1 x$; this contradicts maximality of the factorization $v_1 v_2 ... v_n$ of w. If v_1 is a strict prefix of u_1 , the reasoning is similar.

(3) Assume u is a strict prefix of v, where u, v are free generators of L. Then v = ux for some $x \in A^+$, so since $u =_G \varepsilon =_G v$, it follows that $x =_G \varepsilon$. Hence, v = ux with $u, x \in L \setminus \{\varepsilon\}$, which contradicts the assumption that v is a free generator. Hence, no free generator is a prefix of another free generator. In a similar way one proves that no free generator is a suffix of another free generator.

2 Cyclic closure and reverse of word problems of groups

The co-word-problem of a group G over the finite monoid generating set A is defined by

$$cowp_A(G) = A^* \setminus wp_A(G).$$

(About the spelling: We write "co-word-problem", and not "co-word problem", because there is no such thing as a "co-word".)

The cyclic closure of a word $w \in A^*$, or of a language $L \subseteq A^*$, or of a class \mathcal{C} , is defined by

$$\begin{aligned} &\operatorname{cyc}(w) = \{yx \,:\, x,y \in A^* \text{ and } w = xy\}, \\ &\operatorname{cyc}(L) \,=\, \bigcup_{w \in L} \operatorname{cyc}(w), \\ &\operatorname{cyc}(\mathcal{C}) \,=\, \{\operatorname{cyc}(L) : L \in \mathcal{C}\}. \end{aligned}$$

This is also called the closure under cyclic permutations.

A language L is said to be *cyclically closed* iff $L = \mathsf{cyc}(L)$. A class $\mathcal C$ of languages is said to be cyclically closed iff $\mathsf{cyc}(\mathcal C) \subseteq \mathcal C$.

The reverse w^{rev} of a word $w \in A^*$ is defined by induction on length as follows:

$$\varepsilon^{\mathrm{rev}} = \varepsilon$$
, and $(va)^{\mathrm{rev}} = a \, v^{\mathrm{rev}}$ for all $a \in A$ and $v \in A^*$.

For a language $L \subseteq A^*$, or a class \mathcal{C} , we define

$$L^{\text{rev}} = \{ w^{\text{rev}} : w \in L \}, \text{ and } \mathcal{C}^{\text{rev}} = \{ L^{\text{rev}} : L \in \mathcal{C} \}.$$

A language is said to be closed under reversal iff $L = L^{rev}$. A class \mathcal{C} of languages is said to be closed under reversal iff $\mathcal{C}^{rev} \subseteq \mathcal{C}$.

(About terminology: reversal is an action, the result or outcome of which is the reverse; i.e., applying reversal to L leads to the reverse of L. Compare with complementation versus complement.)

Lemma 2.1.

- (1) If $L \subseteq A^*$ is cyclically closed then so is the complement $A^* \setminus L$.
- (2) For any $L_1, L_2 \subseteq A^*$: $cyc(L_1 \cup L_2) = cyc(L_1) \cup cyc(L_2)$.
- (3) For any $L, L_1, L_2 \subseteq A^*$: $(A^* \setminus L)^{\text{rev}} = A^* \setminus L^{\text{rev}}$, and $(L_1 \cup L_2)^{\text{rev}} = L_1^{\text{rev}} \cup L_2^{\text{rev}}$.

PROOF. (1) Let $A^* \setminus L = \overline{L}$. If $L = A^*$, then $\overline{L} = \emptyset$ is closed under cyc(.). Otherwise, consider $w \in \overline{L}$. If $\text{cyc}(w) \nsubseteq \overline{L}$ then there exists $u \in \text{cyc}(w) \cap L$. Since L is closed under cyc(.), this implies $\text{cyc}(u) \subseteq L$, hence $\text{cyc}(w) = \text{cyc}(w) \subseteq L$. This contradicts $w \in \overline{L}$.

- (2) If $x \in \text{cyc}(L_1 \cup L_2)$ then there exists $u \in L_1 \cup L_2$ such that $x \in \text{cyc}(u)$. If $u \in L_1$ then $x \in \text{cyc}(L_1)$; if $u \in L_2$ then $x \in \text{cyc}(L_2)$. So, $x \in \text{cyc}(L_1) \cup \text{cyc}(L_2)$. The converse is straightforward since $L_1 \subseteq L_2$ implies $\text{cyc}(L_1) \subseteq \text{cyc}(L_1 \cup L_2)$, and similarly for L_2 .
 - (3) is straightforward.

Lemma 2.2 (cyc(.) and (.)rev commute).

For any $L \subseteq A^*$: $\operatorname{cyc}(L^{\operatorname{rev}}) = (\operatorname{cyc}(L))^{\operatorname{rev}}$.

PROOF. For any $x \in A^*$: $x \in \mathsf{cyc}(L^{\mathsf{rev}})$ iff there exists $u \in \mathsf{cyc}(x)$ such that $u \in L^{\mathsf{rev}}$. This means that for some α , $\beta \in A^*$: $x = \beta \alpha$ and $u = \alpha \beta \in L^{\mathsf{rev}}$. Equivalently, $x^{\mathsf{rev}} = \alpha^{\mathsf{rev}}\beta^{\mathsf{rev}}$ and $u^{\mathsf{rev}} = \beta^{\mathsf{rev}}\alpha^{\mathsf{rev}} \in L$, which is equivalent to $u^{\mathsf{rev}} = v \in \mathsf{cyc}(x^{\mathsf{rev}})$ such that $v \in L$. This means $x^{\mathsf{rev}} \in \mathsf{cyc}(L)$, i.e., $x \in (\mathsf{cyc}(L))^{\mathsf{rev}}$. \square

It is a non-trivial fact that the class CF is closed under cyc(.) (Oshiba [15], Maslov [13]; see also the solved Ex. 6.4c in [11]). This fact plays an essential role in [12].

It is easy to prove that CF is closed under (.)^{rev} (by using grammars); hence, coCF is closed under (.)^{rev}. It easy to show that DTime(T) is closed under reversal. It is well known that DCF is not closed under (.)^{rev} [11, 9]. An example is $L = \{ac^ndc^n : n \ge 1\} \cup \{bc^ndc^{2n} : n \ge 1\}$, over the alphabet $\{a,b,c,d\}$; then $L \in DCF$, but $L^{rev} \notin DCF$. This example also shows that DCF is not closed under union.

DCF is not closed under cyc(.). An example is again $L = \{ac^ndc^n : n \ge 1\} \cup \{bc^ndc^{2n} : n \ge 1\}$. Then $\text{cyc}(L) \cap \{c,d\}^* \cdot \{a,b\} = \{c^ndc^na : n \ge 1\} \cup \{c^ndc^{2n}b : n \ge 1\}$, which is not in DCF. Hence, cyc(L) is not in DCF, since DCF is closed under intersection with finite-state languages.

The following is straightforward and well known.

Proposition 2.3 (cyclic closure for groups). For every group G with finite monoid generating set A, wp_A(G) is cyclically closed.

From Lem. 2.1(1) and Prop. 2.3 we obtain:

Corollary 2.4 For any group G with finite monoid generating set A, $\mathsf{cowp}_A(G)$ is cyclically closed. \square

The following is possibly known, but a reference is hard to find.

Proposition 2.5 (non-closure under reversal).

- (1) For any finitely generated group G the following are equivalent:
 - For every finite monoid generating set A of G, the word problem $wp_A(G)$ is closed under reversal.
 - The group G is commutative.
- (2) Every non-commutative finitely generated group has a finite monoid generating set for which the word problem is not closed under reversal.

PROOF. (1) If G is commutative, then $wp_A(G)$ is obviously closed under reversal.

Conversely, let G be any finitely generated group, with finite generating set A; if G is 1-generated, it is commutative, so let us assume $|A| \ge 2$. For any two generators $a, b \in A$ we have $abb^{-1}a^{-1} =_G \varepsilon$. By a Tietze transformation we can add a new generator c and the relation $c = b^{-1}a^{-1}$, i.e., $abc =_G \varepsilon$. If $\mathsf{wp}_{A \cup \{c\}}(G) = \left(\mathsf{wp}_{A \cup \{c\}}(G)\right)^{\mathsf{rev}}$, then we also have $cba =_G \varepsilon$, i.e., $b^{-1}a^{-1}ba =_G \varepsilon$, which implies ba = ab. Hence, all generators in A commute two-by-two; it follows that G is commutative.

(2) This construction also shows that if $a, b \in G$ do not commute then $\{a, b, c\}$ can be added to the generating set, together with the relation $abc = \varepsilon$. Then G with the new generating set (with at most three more generators) has a word problem that is not closed under reversal.

Example. The finitely presented one-relator group $G = \langle \{a, b, c\} : \{abc\} \rangle$ has a word problem over $A = \{a, b, c\}$ that is not closed under reversal.

Indeed, if $\mathsf{wp}_A(G)$ were closed under reversal, then G would be equal to the group $G^\# = \langle \{a,b,c\} : \{abc,\,cba\} \rangle$. But we can show that $G^\#$ is commutative, whereas G is not commutative.

Claim 1: G is isomorphic to the 2-generated free group FG_2 .

Proof: The generator c and the relation can be eliminated by a Tietze transformation. So G is isomorphic to FG_2 . [End, Proof.]

Claim 2: $G^{\#}$ is the abelianisation of G, so it is isomorphic to $\mathbb{Z} \times \mathbb{Z}$.

Proof: The relations $abc =_G \varepsilon =_G cba$ imply $a^{-1} =_G bc =_G cb$ and $c^{-1} =_G ab =_G ba$. By cyclic permutation we also have $cab =_G \varepsilon =_G bac$, hence $b^{-1} =_G ca =_G ac$. Hence the generators commute in $G^{\#}$, so $G^{\#}$ is commutative. [End, Proof.]

We conclude from Claims 1 and 2 that $cba \neq_G \varepsilon$, hence the word problem of G over $\{a, b, c\}$ is not closed under reversal. [End, Example.]

By Prop. 2.5, if a finitely generated group G is non-commutative then there exists a finite generating set of G for which the word problem $\mathsf{wp}_A(G)$ is not closed under reversal. However, we also have the following:

Proposition 2.6 There exist finitely generated non-commutative groups whose word problem is closed under reversal for some finite generating set (and not closed for some other finite generating set).

PROOF. An example is the two-generated free group $\mathsf{FG}_{\{a,b\}}$, where the word problem is taken over the monoid generating set $\{a,b\}^{\pm 1}$. The word problem is the well-known Two-sided Dyck language, which is closed under reversal (and belongs to DCF). The above example shows that the same group with generating set $\{a,b,c\}$ has a word problem that is not closed under reversal.

Another example is the dihedral group $D_{2n} = \langle \{a,b\} : \{a^n,b^2,abab^{-1}\} \rangle$, with $|D_{2n}| = 2n$ (see e.g. [8, p. 19]), which is non-commutative when $n \geq 3$. One can check that the word problem of D_{2n} over $\{a,b\}$ is closed under reversal. The proof of Prop. 2.5 yields another generating set for D_{2n} for which the word problem is not closed under reversal.

A third example is the *Thompson group V* with the Higman generating set Γ_H ; see Cor. 2.11. More generally, any non-commutative group that has a finite *generating set of involutions* is an example; see Prop. 2.10. This includes many finite (simple) groups, and Coxeter groups. \square

Problem: Does *every* finitely generated non-commutative group G have some finite generating set A such that $wp_A(G)$ is closed under reversal?

Although in general the word problem is not equal to its reverse, both the word problem and its reverse have the same complexity. To make this precise, we give some definitions.

Definition 2.7 (alphabet morphism). Let A and B be two finite alphabets. An alphabet morphism is a total function $h: A^* \to B^*$ such that for all $u, v \in A^*$: h(uv) = h(u)h(v).

It follows from the definition that $h(\varepsilon) = \varepsilon$ and that h is uniquely determined by the restriction $h|_A$ of h to A.

We have the following fact: An alphabet morphism h is *injective* iff $h|_A$ is injective and $\{h(a): a \in A\}$ $(\subseteq B^*)$ is a code (see [1]). Hence, an injective alphabet morphism is also called an alphabetic encoding.

For an alphabet morphism $h: A^* \to B^*$ and a language $L \subseteq A^*$ we define $h(L) = \{h(w) : w \in L\}$; and for a language $L \subseteq B^*$ we define $h^{-1}(L) = \{x \in A^* : h(x) \in L\}$.

Definition 2.8 A set of languages C is is closed under (injective) alphabet morphisms iff for every alphabet A, every $L \subseteq A^*$ with $L \in C$, and every (injective) alphabet morphism h with domain A^* : $h(L) \in C$.

The set \mathcal{C} is is closed under inverse (injective) alphabet morphisms iff for every alphabet B^* , every $L \subseteq B^*$ with $L \in \mathcal{C}$, and every (injective) alphabet morphism h with image in B^* : $h^{-1}(L) \in \mathcal{C}$.

The commonly used language classes are closed under injective alphabet morphisms and under inverse injective alphabet morphisms: P, NP, coNP, CF, coCF, DCF, DTime (n^k) , etc.

Proposition 2.9 (reversal and complexity). Let C be a language class that is closed under inverse injective alphabet morphisms. (We do not assume that $C = C^{rev}$.) Then for every finitely generated group G with a finite monoid generating set $A \subseteq G$:

$$\operatorname{wp}_A(G) \in \mathcal{C} \quad iff \quad (\operatorname{wp}_A(G))^{\operatorname{rev}} \in \mathcal{C}.$$

PROOF. Obviously, $w =_G \varepsilon$ iff $\varepsilon =_G w^{-1}$.

Let us first consider the case where $A = A^{-1}$. Let $h : A^* \to A^*$ be the alphabet morphism defined by $h(a) = a^{-1}$, for every $a \in A$. Then h and h^{-1} are injective alphabet morphisms, and $h = h^{-1}$. And for all $w \in A^* : w^{-1} = h(w^{\text{rev}})$. Hence, $(\text{wp}_A(G))^{\text{rev}} = h(\text{wp}_A(G))$; and this belongs to \mathcal{C} if \mathcal{C} is closed under injective alphabet morphisms, or under inverse injective alphabet morphisms.

If $A \neq A^{-1}$, we first consider an alphabet morphism $a \in A \longmapsto i_a \in A^*$, where i_a is such that $i_a =_G a^{-1}$, and i_a has no subsegment that is $=_G \varepsilon$. Since $i_a = i_b$ implies $a^{-1} =_G b^{-1}$, hence a = b, it follows that $a \mapsto i_a$ is injective. (We use the fact that A is an interior generating set, so different elements of A are also different in G.)

Next we define the alphabet morphism $h: A^* \to A^*$ by

$$h(a) = a i_a i_a.$$

Then $\{a\,i_a\,i_a:a\in A\}\ (\subseteq A^+)$ is a prefix code, since for any $a,b\in A$ with $a\neq b,\ a\,i_a\,i_a$ and $b\,i_b\,i_b$ have no common prefix in A^+ . Hence, h is an injective alphabet morphism, and for all $w\in A^*$: $(w^{\mathrm{rev}})^{-1}=_Gh(w)$. Then, $x\in \left(\mathsf{wp}_A(G)\right)^{\mathrm{rev}}$ iff $\varepsilon=_Gx^{\mathrm{rev}}$ iff $\varepsilon=_G(x^{\mathrm{rev}})^{-1}=_Gh(x)$ iff $h(x)\in \mathsf{wp}_A(G)$. So, $\left(\mathsf{wp}_A(G)\right)^{\mathrm{rev}}=h^{-1}\left(\mathsf{wp}_A(G)\right)$. Hence, since $\mathcal C$ is closed under inverse injective alphabet morphisms, $\left(\mathsf{wp}_A(G)\right)^{\mathrm{rev}}$ belongs to $\mathcal C$. \square

Note that Prop. 2.9 does not assume nor conclude that $\mathcal{C} = \mathcal{C}^{rev}$, nor that $\mathsf{wp}_A(G) = \left(\mathsf{wp}_A(G)\right)^{rev}$.

It follows from Prop. 2.9 that if $\mathsf{wp}_A(G)$ is in DCF then it is also in DCF^{rev} (despite the fact that DCF \neq DCF^{rev}). However, this was already known from the work of Muller and Schupp on groups with context-free word problem.

Proposition 2.10 If a group G has a finite generating set A consisting of involutions (i.e., $a = a^{-1}$ for all $a \in A$), then $\operatorname{wp}_A(G) = (\operatorname{wp}_A(G))^{\operatorname{rev}}$.

PROOF. For every $w = a_n \dots a_1 \in A^*$ we have: $w =_G \varepsilon$ iff $\varepsilon =_G w^{-1} = a_1^{-1} \dots a_n^{-1} = a_1 \dots a_n = w^{\text{rev}}$; the last equality follows from $a_i = a_i^{-1}$. \square

Corollary 2.11 The Thompson group has a finite generating set Γ_H , consisting of involutions. Hence, $\mathsf{wp}_{\Gamma_H}(V) = \left(\mathsf{wp}_{\Gamma_H}(V)\right)^{\mathrm{rev}}$.

PROOF. We use the set Γ_H of Higman generators for V (see [10, p. 49]), given by the tables

$$\begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix}, \quad \begin{bmatrix} 00 & 01 & 1 \\ 00 & 1 & 01 \end{bmatrix}, \quad \begin{bmatrix} 0 & 10 & 11 \\ 10 & 0 & 11 \end{bmatrix}, \quad \begin{bmatrix} 00 & 01 & 10 & 11 \\ 00 & 10 & 01 & 11 \end{bmatrix}.$$

Clearly, $\gamma = \gamma^{-1}$ for every $\gamma \in \Gamma_H$.

3 The deterministic complexity of the word problem of V

Let Γ be a finite monoid generating set of the Thompson group V (i.e., every element of V is a product of elements of Γ). For any $\varphi \in V$ we define

$$\operatorname{maxlen}(\varphi) = \operatorname{max}\{|z| : z \in \operatorname{domC}(\varphi) \cup \operatorname{imC}(\varphi)\};$$

here we follow the definition of V from [2], based on the prefix codes $\operatorname{domC}(\varphi)$ and $\operatorname{imC}(\varphi)$; $\operatorname{domC}(\varphi)$ is the maximal prefix code that generates the domain $\operatorname{Dom}(\varphi)$ of φ as a right ideal, and $\operatorname{imC}(\varphi)$ is the maximal prefix code that generates the image $\operatorname{Im}(\varphi)$ of φ as a right ideal. For a finite set $S \subseteq V$ we define

$$\max \{ \max \{ \max \{ (\varphi) : \varphi \in S \} \}.$$

Remark. The element of V generated by $w \in \Gamma^+$ is denoted by w(.); this is a maximally extended right-ideal morphism of $\{0,1\}^*$ (by the definition of V in [2, Prop. 2.1 and Def. 2.6]). By [2, Cor. 3.7]: $\max(w(.)) \leq |w| \max(\Gamma)$. Hence, if $x \in \{0,1\}^*$ satisfies $|x| \geq |w| \max(\Gamma)$, then not only is w(x) defined, but w(x) can be computed by successively applying the generators in w (without applying extensions to maximum right-ideal morphisms).

The following Lemma plays a crucial role in the proof by Lehnert and Schweitzer that the word problem of V is in coCF; the Lemma is intuitive and does not appear explicitly in [12].

Lemma 3.1 (narrow point). For any $w = a_n \dots a_1 \in \Gamma^+$ (with $a_i \in \Gamma$ for $1 \le i \le n$), and any $x \in \{0,1\}^*$, let

$$x = x_0 \xrightarrow{a_1} x_1 \xrightarrow{a_2} \dots \xrightarrow{a_{i-1}} x_{i-1} \xrightarrow{a_i} x_i \xrightarrow{a_{i+1}} \dots \xrightarrow{a_n} x_n = w(x)$$

be the computation of w on input x, where $x_i = a_i(x_{i-1})$ for $1 \le i \le n$.

Then there exist $s, z_0, z_1, \ldots, z_n \in \{0, 1\}^*$ such that

- (1) $x_i = z_i s$ and $|z_i| \leq |w| \operatorname{maxlen}(\Gamma)$, for $0 \leq i \leq n$.
- (2) The following is a computation of w:

$$z_0 \xrightarrow{a_1} z_1 \xrightarrow{a_2} \dots \xrightarrow{a_{i-1}} z_{i-1} \xrightarrow{a_i} z_i \xrightarrow{a_{i+1}} \dots \xrightarrow{a_n} z_n = w(z_0),$$

with z_{i+1} such that $z_{i+1} = a_{i+1}(z_i)$, for $0 \le i \le n-1$.

(3) There exists $k \in \{0, 1, ..., n\}$ such that $|z_k| \leq \text{maxlen}(\Gamma)$.

Since $x_0 = z_0 s$ and $x_n = z_n s$: $w(x) \neq x$ and v(x) is defined for every suffix v of w iff $w(z_0) \neq z_0$ and $v(z_0)$ is defined for every suffix v of w.

PROOF OF LEM. 3.1. Whenever an element $a_i \in V$ is applied to a word $x \in \text{Dom}(a_i)$, a prefix of x of length $\leq \text{maxlen}(a_i)$ is modified (see the Remark before Lem. 3.1). So, after n = |w| steps, a prefix of x of length $\leq n \, \text{maxlen}(\Gamma)$ is modified. This implies items (1) and (2).

(3) is obtained by choosing the prefixes z_i of x_i to have minimal length, subject to (1) and (2). Indeed, if all z_i were such that $|z_i| > \max(\Gamma)$, then every step $z_i \stackrel{a_{i+1}}{\longmapsto} z_{i+1}$ would change only a strict prefix of z_i (for all $i = 0, 1, \ldots, n-1$). So s could be lengthened, and all z_i could be shortened, while (1) and (2) would still hold. See Figure 1. \square

There could be more than one location k in $a_n \ldots a_1$ at which $|z_k|$ reaches the minimum. Moreover, those minimum locations depend on the input z_0 .

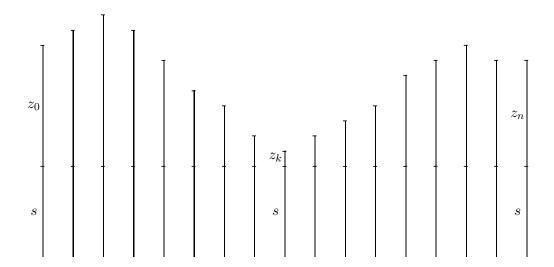


Figure 1: Illustration of a computation $a_n \dots a_1$ (): $z_0 s \in \{0,1\}^* \longmapsto z_n s \in \{0,1\}^*$ in V, with minimum length at z_k , where $|z_k| \leq \max(\Gamma)$.

Remark about the Brin-Thompson group 2V: Item (3) of Lem. 3.1 is actually subtle, as an attempt to apply it to 2V shows. We follow [3] for the definition of 2V. Let Γ_2 be a finite monoid generating set of 2V, and let us define length by $|x| = \max\{|x^{(1)}|, |x^{(2)}|\}$ for any $x = (x^{(1)}, x^{(2)}) \in 2\{0,1\}^*$. Then the reasoning in the proof of Lem. 3.1 seems to work, at first look. But this would lead (via a proof similar to the one for Prop. 3.5) to the conclusion that the word problem of 2V is in P (while it is also coNP-complete by [3]). In fact Lem. 3.1(3) does not hold in 2V, because the minimum of $|z_i^{(1)}|$ (1st coordinate) can be in a different location in $a_n \dots a_1$ than the minimum of $|z_j^{(2)}|$ (2nd coordinate); this is illustrated in Figure 2. This can also be seen in the example of the shift $\sigma \in 2V$, where $\sigma^n(.)$: $(\varepsilon, u) \mapsto (u^{\text{rev}}, \varepsilon)$ for any word $u \in \{0, 1\}^+$ with |u| = n.

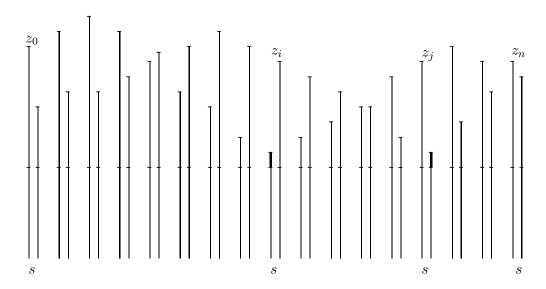


Figure 2: Illustration of a computation $a_n \dots a_1(): z_0 s \in 2\{0,1\}^* \longmapsto z_n s \in 2\{0,1\}^*$ in 2V, with minimum length in coordinate 1 at z_i , and minimum length in coordinate 2 at z_j , where $|z_i^{(1)}|, |z_j^{(2)}| \leq \max(\Gamma)$.

Definition 3.2 For any $\ell \geqslant 1$ we define \cup_{ℓ} DCF to be the set of formal languages that are the union of $\leqslant \ell$ deterministic context-free languages.

Obviously, $\cup_{\ell} \mathsf{DCF} \subseteq \mathsf{CF}$, since CF is closed under union. And $\cup_{\ell} \mathsf{DCF} \neq \mathsf{CF}$, since every language in $\cup_{\ell} \mathsf{DCF}$ has bounded degree of ambiguity.

And $\cup_{\ell} \mathsf{DCF} \subseteq \mathsf{DTime}(n)$. Indeed, every deterministic context-free language can be parsed in linear time by a deterministic push-down automaton (dpda) [11, 9]; and $\mathsf{DTime}(n)$ is closed under finite union.

Let Γ is any finite monoid generating set of V. For any $w \in \Gamma^+$, let w(.) be the element of V represented by w. This is a maximally extended right-ideal morphism of $\{0,1\}^*$ [2, Prop. 2.1 and Def. 2.6], which can be further extended to permutation of the *Cantor space* $\{0,1\}^\omega$: if w(x) is defined for $w \in \Gamma^*$ and $x \in \{0,1\}^*$, then w(xt) = w(x)t for every $t \in \{0,1\}^\omega$. Conversely, if for some $y \in \{0,1\}^*$ and all $t \in \{0,1\}^\omega$, w(xt) = yt, then w(x) = yt, then w(x) = yt is defined. The partial action of v on v

The following Lemma is straightforward.

Lemma 3.3 For any $z \in \{0, 1\}^+$ and $s \in \{0, 1\}^*$ we have: $s0^{\omega} \neq z0^{\omega}$ iff

- (1) $|s| \le |z| \text{ and } z \ne s0^{|z|-|s|}; \text{ or }$
- (2.1) $|s| \ge |z|$ and z is not a prefix of s; or
- $(2.2) |s| \geqslant |z| and s = zt for some t \in \{0,1\}^+ \setminus 0^+.$

The following Lemma is a stronger form of [12, Step 2 in Sect. 5]; there, a nondeterministic pda is described, while (.)rev is ignored (as CF is closed under reversal).

Lemma 3.4 For any $z \in \{0,1\}^+$, we define the language

$$L_z = \{ w \in \Gamma^+ : w(z0^\omega) \neq z0^\omega \}.$$

Then $L_z \subseteq \mathsf{cowp}_{\Gamma}(V)$; and L_z^{rev} is deterministic context-free.

PROOF. The fact that $L_z \subseteq \mathsf{cowp}_{\Gamma}(V)$ is obvious.

The reason why L_z^{rev} is in DCF (and not L_z) is that in $w(.) = a_n \dots a_1(.)$, the functions a_i are applied from right to left, since V acts on $\{0,1\}^*$ and $\{0,1\}^\omega$ on the left. Below, the action of V will be simulated by a deterministic push-down automaton (dpda), which reads the letters in the order in which V acts on $\{0,1\}^*$, i.e., starting with a_1 and ending with a_n .

A preliminary note: An endmarker language consists of an alphabet Γ , a letter $\neg \notin \Gamma$ (called input endmarker), and a subset of $\Gamma^* \neg$; hence the language has the form $L \neg$ over the alphabet $\Gamma \cup \{\neg\}$, with $L \subseteq \Gamma^*$. It is known that $L \neg$ is in DCF iff L is in DCF; see e.g., [9, Thm. 11.2.2], [16, (3rd. ed.) Thm. 2.43]. This is a special case of the closure of DCF under right quotient by finite-state languages (since $L = (L \neg) \{\neg\}^{-1}$, and $\{\neg\}$ is of course a finite-state language), due to Ginsburg and Greibach [7]; see also [11, Thm. 10.2], [9, Section 11.2].

We now construct a deterministic push-down automaton (dpda) that accepts the endmarker language $L_z^{\text{rev}}\Box$; by the results of Ginsburg and Greibach, we conclude that L_z^{rev} is in DCF. See the Appendix of for information about the pda's used here.

The dpda has state set $\{q_0, q_1, q_a\}$. The input alphabet is the chosen monoid generating set Γ of V, and the stack alphabet is $\{0, 1, \bot\}$, where \bot is the bottom marker of the stack. The start configuration is $(q_0, z\bot)$, where z is the word in $\{0, 1\}^+$ that defines L_z . The dpda accepts the input read so far iff it reaches the accept state q_a (acceptance by final state).

A transition of the dpda applies the next input letter $\gamma \in \Gamma$ to the current stack content $x \perp$ where $x \in \{0,1\}^*$. The action in the Thompson group is based on prefix replacements in a bitstring, and this

is very similar to what a pda does on the stack; the Thompson group elements treat their argument like a stack. A complication arises from the possibility that x might be too short to belong to $\text{Dom}(\gamma)$; in that case the dpda treats x as $x0^m$ where m is just large enough so that $x0^m \in \text{domC}(\gamma)$. The set $\text{domC}(\gamma)$ is a maximal prefix code; hence for every x that is too short to belong to $\text{domC}(\gamma)$, there is exactly one $m \in \mathbb{N}$ such that $x0^m \in \text{domC}(\gamma)$. (See [2, Section 1] for the concept of domain code $\text{domC}(\gamma)$.)

When the endmarker \Box is encountered in the input, the dpda starts a process, based on Lemma 3.3, that checks whether the current stack content $s\bot$, with $s\in\{0,1\}^*$, satisfies $s0^\omega\neq z0^\omega$. The dpda uses transitions that can read several letters deep into the stack (but by a bounded amount, since the set of transitions is finite and fixed). There are three cases:

- (1) Suppose $|s| \leq |z|$: If $z \neq s0^{|z|-|s|}$ (which can be checked by looking into the stack down to depth |z|), the dpda goes to state q_a by a transition on input \Box ; if $z = s0^{|z|-|s|}$ then the dpda rejects, by having no transition.
- (2.1) Suppose |s| > |z|: If z is not a prefix of s (which can be checked by looking into the stack down to depth |z|), then the dpda goes to state q_a by a transition on input \Box .
- (2.2) Still assuming |s| > |z|: If z is prefix of s, i.e., s = zt for some $t \in \{0,1\}^*$, then the dpda pops z on input \neg and goes to state q_1 ; then in state q_1 the dpda pops all the letters of t one at a time (with ε -transitions), to check whether t contains at least one letter 1 (and accepts in that case) or encounters \bot after finding that $t \in 0^*$ (and rejects in that case by not having a transition).

In state q_a the dpda does not have any transitions, hence no word in $L_z \, \Box \, \Gamma^+$ will be accepted.

In detail, the set of transitions of the dpda is

$$\{ (q_{0}, r) \xrightarrow{\gamma} (q_{0}, \gamma(r)) : \gamma \in \Gamma, r \in \text{domC}(\gamma) \}$$

$$\cup \{ (q_{0}, x \perp) \xrightarrow{\gamma} (q_{0}, \gamma(x0^{m}) \perp) : \gamma \in \Gamma, m \geqslant 1, x0^{m} \in \text{domC}(\gamma) \}$$

$$\cup \{ (q_{0}, s \perp) \xrightarrow{\Box} (q_{a}, s \perp) : s \in \{0, 1\}^{*}, |s| \leqslant |z|, z \neq s0^{|z| - |s|} \}$$

$$\cup \{ (q_{0}, sa) \xrightarrow{\Box} (q_{a}, a) : s \in \{0, 1\}^{*}, |s| = |z|, a \in \{0, 1\}, z \neq s \}$$

$$\cup \{ (q_{0}, za) \xrightarrow{\Box} (q_{1}, a) : a \in \{0, 1\} \}$$

$$\cup \{ (q_{1}, 0) \xrightarrow{\varepsilon} (q_{1}, \varepsilon) \}$$

$$\cup \{ (q_{1}, 1) \xrightarrow{\varepsilon} (q_{a}, \varepsilon) \}.$$

The first two sets of transitions provide a simulation of the action of V. The remaining sets enable the dpda to recognize whether the stack content $s\perp$ satisfies $s0^{\omega}=z0^{\omega}$, when the input endmarker \Box is read.

Verification that this dpda accepts $L_z^{\text{rev}} \square$: On input $w^{\text{rev}} \square$ with $w \in \Gamma^*$, the dpda first reads w^{rev} and reaches a configuration $w^{\text{rev}}(q_0, w(z0^k) \perp)$, for some $k \in \mathbb{N}$. And $w(z0^k0^\omega) = w(z0^\omega)$, which is equal to $w(z0^k) 0^\omega$. When \square is read, the dpda checks whether $w(z0^k) 0^\omega \neq z0^\omega$, i.e., whether $w^{\text{rev}} \in L_z^{\text{rev}}$. \square

Proposition 3.5.

- (1) There exists a finite monoid generating set Γ_H of V for which $\mathsf{cowp}_{\Gamma_H}(V)$ belongs to the cyclic closure of $\cup_4 \mathsf{DCF}^{\mathrm{rev}}$, and also to the cyclic closure of $\cup_4 \mathsf{DCF}$.
- (2) For any finite monoid generating set Γ , $\mathsf{cowp}_{\Gamma}(V)$ belongs to the cyclic closure of $\cup_{\ell} \mathsf{DCF}^{\mathrm{rev}}$, for some constant ℓ that depends on Γ .

Since $\cup_{\ell} \mathsf{DCF}^{\mathrm{rev}} \subseteq \mathsf{CF}$ and CF is closed under $\mathsf{cyc}(.)$, the Proposition implies that $\mathsf{cowp}_{\Gamma}(V) \subseteq \mathsf{cyc}(\cup_{\ell} \mathsf{DCF}^{\mathrm{rev}}) \subseteq \mathsf{CF}.$

Since the operations \cup , (.)^{rev}, and cyc(.) commute, it does not matter in what order they are written in cyc(\cup_{ℓ} DCF^{rev}).

PROOF of Prop. 3.5. (1) We use the set Γ_H of Higman generators for V, as described in Cor. 2.11. So, maxlen(Γ_H) = 2. Moreover, every element of Γ_H is an involution, so $\Gamma_H = \Gamma_H^{\pm 1}$; hence Γ_H is a monoid generating set.

By Lem. 3.1, we have for any $w = a_n \dots a_1 \in \Gamma_H^+$: $w \in \mathsf{cowp}_{\Gamma_H}(V)$ iff there exists $z_0 \in \mathsf{Dom}(w(.))$ with $|z_0| \leq 2|w|$, such that $w(z_0) \neq z_0$.

Remark: For $z_j = a_j \dots a_1(z_0)$ with $1 \le j \le n$, $w(z_0) \ne z_0$ is equivalent to $a_j \dots a_1 a_n \dots a_{j+1}(z_j)$ $\ne z_j$, provided that $a_j \dots a_1 a_n \dots a_{j+1}(z_j)$ is defined; but we actually do not know whether $z_j \in \text{Dom}(a_j \dots a_1 a_n \dots a_{j+1}(.))$. To avoid the problem of undefinedness of the action on $\{0, 1\}^*$, we use the total action of V on $\{0, 1\}^{\omega}$. [End, Remark.]

Now,

$$w(z_0) \neq z_0$$
 iff for all $t \in \{0, 1\}^{\omega}$: $w(z_0 t) \neq z_0 t$;

and for all j with $1 \le j \le n$, and all $t \in \{0, 1\}^{\omega}$:

$$w(z_0t) \neq z_0t$$
 iff $a_i \dots a_1 a_n \dots a_{i+1}(z_it) \neq z_it$.

In particular, for all j:

$$w(z_0) \neq z_0$$
 implies $a_j \dots a_1 a_n \dots a_{j+1}(z_j 0^{\omega}) \neq z_j 0^{\omega}$.

By Lem. 3.1(3), for every $z_0 \in \text{Dom}(w(.))$ there exists $k \in [1, n]$ such that $|z_k| = 2 = \text{maxlen}(\Gamma_H)$; in case $|z_k| < 2$ we can restrict the domain of $a_k \dots a_1 a_n \dots a_{k+1}(.)$ and lengthen $z_k = a_k \circ \dots \circ a_1(z_0)$ so that $|z_k| = 2$. Hence, for this z_0 and this cyclic permutation $a_k \dots a_1 a_n \dots a_{k+1} \in \text{cyc}(w)$, we have:

$$|z_k| = 2$$
, and $a_k \dots a_1 a_n \dots a_{k+1} (z_k 0^{\omega}) \neq z_k 0^{\omega}$.

Therefore, $w \in \mathsf{cowp}_{\Gamma_H}(V)$ implies $(\exists z \in \{00, 01, 10, 11\})[a_k \dots a_1 a_n \dots a_{k+1}(z0^\omega) \neq z0^\omega]$, which implies that there exists $u \in \mathsf{cyc}(w)$ such that $(\exists z \in \{00, 01, 10, 11\})[u(z0^\omega) \neq z0^\omega]$.

This is equivalent to

there exists
$$u \in \operatorname{cyc}(w)$$
 such that $(\exists z \in \{00, 01, 10, 11\})[u \in L_z]$,

where $L_z = \{u \in \Gamma_H^* : u(z0^\omega) \neq z0^\omega\}$, as in Lem. 3.4. Therefore:

$$\mathsf{cowp}_{\Gamma_{\mathcal{U}}}(V) \subseteq \mathsf{cyc}(L_{00}) \cup \mathsf{cyc}(L_{01}) \cup \mathsf{cyc}(L_{10}) \cup \mathsf{cyc}(L_{11}).$$

Moreover, $L_z \subseteq \mathsf{cowp}_{\Gamma_H}(V)$. And by Lem. 2.1(2):

$$\mathsf{cyc}(L_{00}) \cup \mathsf{cyc}(L_{01}) \cup \mathsf{cyc}(L_{10}) \cup \mathsf{cyc}(L_{11}) = \mathsf{cyc}(L_{00} \cup L_{01} \cup L_{10} \cup L_{11}).$$

Therefore,

$$L_{00} \cup L_{01} \cup L_{10} \cup L_{11} \ \subseteq \ \mathsf{cowp}_{\Gamma_{\! H}}\!(V) \ \subseteq \ \mathsf{cyc}(L_{00} \cup L_{01} \cup L_{10} \cup L_{11}).$$

Since the word problem and the co-word-problem of a group are cyclically closed (by Prop. 2.3), we finally obtain:

$$cowp_{\Gamma_H}(V) = cyc(L_{00} \cup L_{01} \cup L_{10} \cup L_{11}).$$

For every $z \in \{0,1\}^+$ the set L_z is in DCF^{rev}, by Lem. 3.4. Hence, $L_{00} \cup L_{01} \cup L_{10} \cup L_{11}$ is in \cup_4 DCF^{rev}; and $\mathsf{cowp}_{\Gamma_H}(V)$ belongs to $\mathsf{cyc}(\cup_4 \mathsf{DCF}^{\mathsf{rev}})$.

By Cor. 2.11, the co-word-problem of V over Γ_H is closed under reversal, and over Γ_H , $L_z = L_z^{\text{rev}}$. Hence, $\mathsf{cowp}_{\Gamma_H}(V)$ belongs to $\mathsf{cyc}(\cup_4 \mathsf{DCF})$.

(2) In a similar way as for Γ_H , we can show that for any finite monoid generating set $\Gamma \subseteq V$ of V: $\mathsf{cowp}_{\Gamma}(V) \in \mathsf{cyc}(\cup_{\ell} \mathsf{DCF}^{\mathrm{rev}})$, where $\ell = |\{z \in \{0,1\}^+ : |z| = \mathsf{maxlen}(\Gamma)\}| = 2^{\mathsf{maxlen}(\Gamma)}$.

Corollary 3.6 The word problem of V over any finite generating set is in $\mathsf{DTime}(n^2)$.

PROOF. We saw already that $\cup_{\ell} \mathsf{DCF}$ and $\cup_{\ell} \mathsf{DCF}^{\mathrm{rev}}$ are in $\mathsf{DTime}(n)$. And if $L \in \mathsf{DTime}(n^d)$ then $\mathsf{cyc}(L) \in \mathsf{DTime}(n^{d+1})$; this follows from the fact that a word w has at most |w| cyclic permutation images. Since $\mathsf{DTime}(n^2)$ is closed under complement, it contains a word problem iff it contains the co-word-problem. \square

Since the Higman-Thompson groups $G_{n,r}$ are finitely generated subgroups of V (see [10]), it follows that their word problem is also in $\mathsf{DTime}(n^2)$.

Problem: For the Brin-Thompson group 2V over any finite generating set, prove that wp(2V) is not in coCF. (This is probably true, since otherwise P = NP, by [3].)

4 Appendix: Push-down automata

A push-down automaton (pda) is an algebraic structure $\mathcal{A} = (Q, A, \Sigma, \mathcal{T}, q_0, s_0, Q_a)$, where Q (state set), A (input alphabet), Σ (stack alphabet), \mathcal{T} (set of transitions), and $Q_a \subseteq Q$ (set of accept states), are finite sets; $q_0 \in Q$ is the start state; and $s_0 \in \Sigma^+$ is the initial content of the stack.

The current configuration of \mathcal{A} (a.k.a. the instantaneous description) is of the form w(q, s), where $q \in Q$ is the current state, $s \in \Sigma^*$ is the current stack content, and w is the input that has been read so far. A pda has one start configuration, namely (q_0, s_0) , where q_0 and s_0 are as above. No input has been read at this point, so w is ε in the start configuration. An accept configuration is of the form w(q, s), such that $q \in Q_a$.

Remark: Our definition of configuration is different from the one in the literature [11, 9, 6]. There a configuration is of the form $(q, x, s) \in Q \times A^* \times \Sigma^*$, where q and s are the same as for us, but x is a future input.

A transition in \mathcal{T} has the form $(q,s) \xrightarrow{a} (p,s')$, where $(q,s) \in Q \times \Sigma^+$, $(p,s') \in Q \times \Sigma^*$, and $a \in A \cup \{\varepsilon\}$. When $a = \varepsilon$, this is called an ε -transition: the state and the stack may change, but no next input letter is being read. There is no transition on an empty stack, since in a transition as above, $s \in \Sigma^+$. A pda has a finite set \mathcal{T} of transitions.

The above transition is applicable to a configuration $w(r',t') \in Q \times \Sigma^+$ iff r' = q, s is a prefix of t', and either $a \in A$ and the next input letter is a, or $a = \varepsilon$ (and then there is no requirement on the input). When this transition is applied to the configuration w(q,st) then the next configuration is wa(p,s't) (where a can be ε , in an ε -transition). We extend the transition notation to configurations: when the transition $(q,s) \stackrel{a}{\to} (p,s')$ is applied to the configuration w(q,st), we write $w(q,st) \stackrel{a}{\to} wa(p,s't)$.

Our transitions are a little more general than the ones commonly used in the literature, but they do not lead to the acceptance of more languages [11, 9, 6, 16].

A computation of a pda \mathcal{A} on input $w = a_1 a_2 \dots a_n \in A^*$ is a sequence of configurations and applications of transitions

$$(q, s_0) \xrightarrow{\varepsilon^*} (q'_1, s'_1) \xrightarrow{a_1} a_1(q_1, s_1) \xrightarrow{\varepsilon^*} a_1(q'_2, s'_2) \xrightarrow{a_2} a_1 a_2(q_2, s_2) \xrightarrow{\varepsilon^*} \dots$$

$$\dots \xrightarrow{\varepsilon^*} a_1 a_2 \dots a_{n-1}(q'_n, s'_n) \xrightarrow{a_n} a_1 a_2 \dots a_{n-1} a_n(q_n, s_n) \xrightarrow{\varepsilon^*} a_1 a_2 \dots a_{n-1} a_n(p, s),$$

where $\stackrel{\varepsilon^*}{\longrightarrow}$ denotes a (possibly empty) sequence of ε -transitions.

An accepting computation is a computation whose last configuration is a accept configuration.

The same pda can be used as a \exists pda or a \forall pda; it depends on the acceptance rule. The acceptance rule determines what inputs in A^* are accepted by the pda.

A pda \mathcal{A}' is used as a \exists pda iff the following acceptance rule is used: $w \in A^*$ is accepted iff there exists a computation of \mathcal{A}' that reads the whole input w, that starts with the start configuration (q_0, s_0) , and ends with a configuration of the form w(q, t) where $q \in Q_a$.

A pda \mathcal{A} is used as a \forall pda iff the following acceptance rule is used: w is accepted iff every computation of \mathcal{A} that reads the whole input w, starting with the start configuration (q_0, s_0) , ends in a configuration w(q, t) where $q \in Q_a$.

A deterministic pda (dpda) is a pda such that in every configuration, at most one transition is applicable. The acceptance rule is then the same as in a $\exists pda$ or a $\forall pda$.

We call a stack symbol $\bot \in \Sigma$ a bottom marker iff (1) the start configuration is $(q_0, p_0\bot)$ for some $p_0 \in (\Sigma \setminus \{\bot\})^*$; (2) every transition with left-side $(q, s\bot)$ has a right-side $(p, s'\bot)$, for some $q, p \in Q$ and $s, s' \in (\Sigma \setminus \{\bot\})^*$; (3) every transition with left-side (q, s) where $s \in (\Sigma \setminus \{\bot\})^+$, has a right-side (p, s') for some $s' \in (\Sigma \setminus \{\bot\})^*$.

It is well known that the ∃pda's accept exactly the languages in CF. Similarly, the ∀pda's accept exactly the languages in coCF. By definition, DCF is the class of languages accepted by dpda's.

References

- [1] J. Berstel, D. Perrin, *Theory of codes*, Academic Press (1985).
- [2] J.C. Birget, "The groups of Richard Thompson and complexity", *International J. of Algebra and Computation* 14(5,6) (Dec. 2004) 569-626. Preprint: https://arxiv.org/abs/math/0204292
- [3] J.C. Birget, "The word problem of the Brin-Thompson groups is coNP-complete", J. of Algebra 553 (July 2020) 268-318. Preprint https://arxiv.org/abs/1902.03852
- [4] A. Borodin, S.A. Cook, P.W. Dymond, W.L. Ruzzo, M.L. Tompa, "Two applications of inductive counting for complementation problems", SIAM J. on Computing 18 (1989) 559-578.
- [5] J.W. Cannon, W.J. Floyd, W.R. Parry, "Introductory notes on Richard Thompson's groups", L'Enseignement Mathématique 42 (1996) 215-256.
- [6] S. Ginsburg, The mathematical theory of context-free languages, McGraw-Hill (1966).
- [7] S. Ginsburg, S. Greibach, "Deterministic context-free languages", Information and Control 9.6 (1966) 563-582.
- [8] M. Hall, The Theory of Groups, Macmillan (1959), and Chelsea Publishing.
- [9] M.A. Harrison, Introduction to formal language theory, Addison-Wesley (1978).
- [10] G. Higman, "Finitely presented infinite simple groups", Notes on Pure Mathematics 8, The Australian National University, Canberra (1974).
- [11] J.E. Hopcroft, J.D. Ullman, *Introduction to automata theory, languages, and computation*, Addison-Wesley (1979 edition).
- [12] J. Lehnert, P. Schweitzer, "The co-word problem for the Higman-Thompson group is context-free", Bulletin of the London Mathematical Society 39.2 (2007) 235-241.
- [13] A.N. Maslov, "Cyclic shift operation for languages", *Problemy Peredatshi Informatsii* 9.4 (1973) 81-87 (in Russian). (English: Problems in Information Transmission 9.4 (1973) 333–338.)
- [14] D.E. Muller, P.E. Schupp, "Groups, the theory of ends, and context-free languages", J. of Computer and System Sciences 26.3 (1983) 295–310.
- [15] T. Oshiba, "Closure property of the family of context-free languages under the cyclic shift operation", Transactions of the IECE of Japan, 55.D (1972) 119–122.
- [16] M. Sipser, Introduction to the Theory of Computation, Cengage Learning, 3rd ed. (2013).
- [17] Richard J. Thompson, Manuscript (1960s).

- [18] R.J. Thompson, "Embeddings into finitely generated simple groups which preserve the word problem", in Word Problems II (S. Adian, W. Boone, G. Higman, editors), North-Holland (1980) pp. 401-441.
- [19] H. Venkateswaran, "Properties that characterize logCFL", J. of Computer and System Sciences 43 (1991) 380-404.

J.C. Birget birget@camden.rutgers.edu