
STRATEGYPROOF AND PROPORTIONAL CHORE DIVISION FOR PIECEWISE UNIFORM PREFERENCES

A PREPRINT

David Francis

Department of Computer Science
University of Toronto
delta.david.john.francis@gmail.com

April 4, 2022

ABSTRACT

Chore division is the problem of fairly dividing some divisible, undesirable bad, such as a set of chores, among a number of players. Each player has their own valuation of the chores, and must be satisfied they did not receive more than their fair share. In this paper, I consider the problem of strategyproof chore division, in which the algorithm must ensure that each player cannot benefit from mis-representing their position. I present an algorithm that performs proportional and strategyproof chore division for any number of players given piecewise uniform valuation functions.

Keywords Cake cutting · Strategy-proofness · Chore division · Mechanism design · Fair division

1 Introduction

Cake cutting is the problem of dividing a heterogeneous, divisible good such as a cake among some number of players such that each player is satisfied with their piece. A valid algorithm must ensure that each player must value their piece at at least $\frac{1}{n}$ the value of the whole cake (the proportionality condition). The two-player solution “I cut, you choose” is ancient. Solutions for any number of players date back to at least 1949 (Steinhaus [1949]).

Chore division is the inverse problem to cake cutting, in which the object to be divided is undesirable and each player must receive at most their fair share (confusingly, the term chore division is also used to refer to the division of indivisible bads, the inverse of the estate division problem). Chore division might model the allocation of chores within a household, work shifts at a hospital, or liabilities in a bankrupt company. Chore division and cake cutting are surprisingly distinct problems; algorithms from one cannot easily be applied to the other. For most questions in cake cutting there exist parallel questions in chore division; for instance, an n -person envy-free cake cutting algorithm, in which each player is satisfied that no other player has received a bigger piece in their estimation, was found by Brams and Taylor [1995], while the equivalent chore-division result was found by Peterson and Su [2009]. There have also been some work in the modeling of mixed manna or burnt cakes: goods which may have positive or negative value, such as the existence results of Bogomolnaia et al. [2017] and Segal-Halevi [2017].

Strategyproofness is a concept in mechanism design for many problems of group decision making. A strategyproof algorithm (also known as a truthful or incentive compatible algorithm) is one in which no player can improve their position by lying about their preferences. For example, a strategyproof voting algorithm would not allow voters to change the result of the election to a more preferred candidate by submitting a ballot containing anything other than their true ranking of the candidates.

To apply strategyproofness to cake cutting and chore division algorithms, some restrictions must be placed on the players’ valuations. The standard model of cake cutting is to treat the interval $[0,1]$ as the cake and have the pieces of cake allocated to each player be subsets of that interval. Under this model, a players’ preferences can be represented by a valuation function, which assigns a marginal value (or cost, in the case of chore division) to each real number in the cake interval.

Two common restricted classes of valuation function are piecewise constant and piecewise uniform. A piecewise constant valuation function divides the cake into some number of intervals, with the marginal value constant in each interval. A piecewise uniform valuation function is the same, with the additional restriction that the marginal values in each interval must either be 0 or 1. In other words, a piecewise uniform valuation function divides the cake into two sections: one with uniformly distributed value and one with zero value. These kinds of restricted valuation functions are necessary in the discussion of strategyproof algorithms; Mossel and Tamuz [2010] proved that for arbitrary valuation functions, no deterministic strategyproof cake cutting algorithm exists.

Maya and Nisan [2012] characterized the problem of strategyproof cake cutting with piecewise uniform valuation functions, finding a bound on the social welfare. Chen et al. [2013] found the first strategyproof algorithm for cake cutting with piecewise uniform valuation functions, which was extended by Aziz and Ye [2014]. The algorithm in Chen et al. [2013] is also envy-free.

As cake cutting and chore division algorithms have continuous inputs and outputs, a specialized complexity model is needed to measure their complexity. The standard approach is the model of Robertson and Webb [1998]. This treats an algorithm as a series of cut and evaluate queries. A cut query asks a player to divide some piece of cake into two pieces such that the values of the pieces in that player's estimation are in some given ratio. An evaluate query asks a player to give their valuation of some given piece of cake.

There is an important distinction between bounded algorithms and unbounded algorithms. A bounded algorithm is one for which there is some function $f(n)$ such that running the algorithm with n players will never take more than $f(n)$ queries. The envy-free allocation algorithms found by Brams and Taylor [1995] and Peterson and Su [2009] are unbounded. Bounded envy-free algorithms for cake cutting and chore division were found by Aziz and Mackenzie [2016] and Dehghani et al. [2018] respectively. The algorithm from Chen et al. [2013] is unbounded; in fact Kurokawa et al. [2013] proved that there is no cake cutting algorithm that is strategyproof, bounded, and envy-free.

1.1 My Results

I present a deterministic algorithm for chore division with piecewise uniform valuation functions that is strategyproof and proportional. The algorithm allocates all of the chores with no overlap between assignments. It is pareto-efficient, but not envy-free.

2 Preliminaries

The chores to be divided will be represented by intervals of the real numbers. A *segment of chores* is the union of a finite number of finitely large disjoint intervals. The length of the segment of chores C , written $|C|$, is the sum of the lengths of its component intervals $\sum_{[x_i, y_i] \in C} y_i - x_i$. The union of or intersection of two segments of chores is itself a segment of chores. I will use $\bar{C}$ to denote the set of real numbers not in C .

There is a segment of chores C that must be divided among n players $\{P_1, P_2, \dots, P_n\}$. C must be partitioned into n segments of chores $\{D_1, D_2, \dots, D_n\}$.

Each player has their own valuation of the chores; they might consider some chores deeply unpleasant and want to avoid them at all costs, while seeing other chores as relatively painless. In the general case, this can be represented by a valuation function that assigns a real marginal cost to each point in C . However, in this paper I will consider only the case of *piecewise uniform* valuations. Each player divides the chores into two segments: a segment to which they assign uniformly distributed cost and a segment to which they assign zero cost.

The segment of chores that the player P_i assigns positive cost to is P_i 's valuation set V_i , a (possibly empty) subset of C . If P_i is assigned the segment D_i , the cost to P_i is $|D_i \cap V_i|$ of a possible $|V_i|$.

The canonical version of the problem has each player trying to receive at most $\frac{1}{n}$ of the chores in their estimation, but it will be convenient to define the problem more generally, with each player having an assigned workload of the chores w_i , with the $\{w_1, w_2, \dots, w_n\}$ positive and summing to 1.

A *chore division algorithm* is a function f . The arguments to the function are a segment of chores to be divided C , an integer number of players n , $n \geq 2$, a valuation set for each player $V = \{V_1, V_2, \dots, V_n\}$, with each valuation set a segment and a subset of C , and an assigned workload for each player $w = \{w_1, w_2, \dots, w_n\}$, with each workload a positive real number and the workloads all summing to 1. The result of the function is a partition of C into n segments $\{D_1, D_2, \dots, D_n\}$.

An algorithm is *proportional* if each player receives at most w_i of the chores they wanted to avoid. For all i , $|V_i \cap D_i| \leq w_i |V_i|$.

Given some result of the algorithm $f(C, n, V, w) = \{D_1, D_2, D_3, \dots, D_i, \dots\}$, player P_i might attempt to improve their standing by reporting a false valuation set V_i^* . If V^* is the list of valuation sets that is the same as V except that V_i is replaced by V_i^* , the result of the deception is the new partition $f(C, n, V^*, w) = \{D_1^*, D_2^*, D_3^*, \dots, D_i^*, \dots\}$. An algorithm f is *strategyproof* if, for any C, n, V, p , and V_i^* , $|V_i \cap D_i| \leq |V_i^* \cap D_i^*|$.

3 The Split Rulership Algorithm

The algorithm has as its input a segment of chores to be divided C , an integer number of players n , $n \geq 2$, a valuation set for each player $V = \{V_1, V_2, \dots, V_n\}$, with each valuation set a segment and a subset of C , and an assigned workload for each player $w = \{w_1, w_2, \dots, w_n\}$, with each workload a positive real number and the workloads all summing to 1. The algorithm is recursive and asymmetrical; the ordering of the players is relevant.

The first two players, P_1 and P_2 , split the chores C at a point k into two segments. P_1 rules the left segment $(-\infty, k) \cap C$, and P_2 rules the right segment $[k, \infty) \cap C$.

P_1 is exempted from doing any of the chores they marked as having cost within the segment they rule. In exchange, they are assigned all of the chores within the segment they rule that they did not mark. Similarly, P_2 is exempted from $[k, \infty) \cap C \cap V_2$ but must take $[k, \infty) \cap C \cap \bar{V}_2$.

k is chosen such that P_1 and P_2 exempt themselves from equal length of chores, weighted by their assigned workload.

$$\text{Let } k \text{ be the lowest real number such that } w_1|(-\infty, k) \cap V_1| = w_2|[k, \infty) \cap V_2|$$

Call the chores P_1 has exempted themselves from C_L and the chores P_2 has exempted themselves from C_R .

$$\begin{aligned} C_L &= (-\infty, k) \cap V_1 \\ C_R &= [k, \infty) \cap V_2 \end{aligned}$$

C_L must be divided among the $n - 1$ players other than P_1 , and C_R among the $n - 1$ players other than P_2 .

If $n = 2$, there is only one player remaining for C_L and for C_R . That player is assigned all of that segment.

$$\begin{aligned} \text{If } n = 2, D_1 &= ((-\infty, k) \cap \bar{V}_1 \cap C) \cup C_R \\ \text{If } n = 2, D_2 &= ([k, \infty) \cap \bar{V}_2 \cap C) \cup C_L \end{aligned}$$

Otherwise P_2 , who ruled the right segment in the division of C , will rule the right segment in the division of C_L , with the next player in line P_3 ruling the left segment. Similarly P_1 will rule the left segment in the division of C_R , with P_3 ruling the right segment.

$$\begin{aligned} V_L &= \{V_3 \cap C_L, V_2 \cap C_L, V_4 \cap C_L, \dots\} \\ V_R &= \{V_1 \cap C_R, V_3 \cap C_R, V_4 \cap C_R, \dots\} \end{aligned}$$

Since P_1 is not participating in the division of C_L , someone must take on their assigned workload w_1 to keep the workloads adding to 1. P_2 will do so; their assigned workload in C_L will be $w_1 + w_2$. All other players' workloads are unchanged. Symmetrically, in C_R P_1 will instead take on P_2 's workload.

$$\begin{aligned} w_L &= \{w_3, w_1 + w_2, w_4, \dots\} \\ w_R &= \{w_1 + w_2, w_3, w_4, \dots\} \end{aligned}$$

The algorithm is then run recursively on C_L and on C_R .

$$\begin{aligned} \{D_3^L, D_2^L, D_4^L, \dots\} &= f(C_L, n - 1, V_L, w_L) \\ \{D_1^R, D_3^R, D_4^R, \dots\} &= f(C_R, n - 1, V_R, w_R) \end{aligned}$$

$$\begin{aligned} \text{If } n > 2, D_1 &= ((-\infty, k) \cap \bar{V}_1 \cap C) \cup D_1^R \\ \text{If } n > 2, D_2 &= ([k, \infty) \cap \bar{V}_2 \cap C) \cup D_2^L \\ \text{If } n > 2, \text{ for any } i > 2, D_i &= D_i^L \cup D_i^R \end{aligned}$$

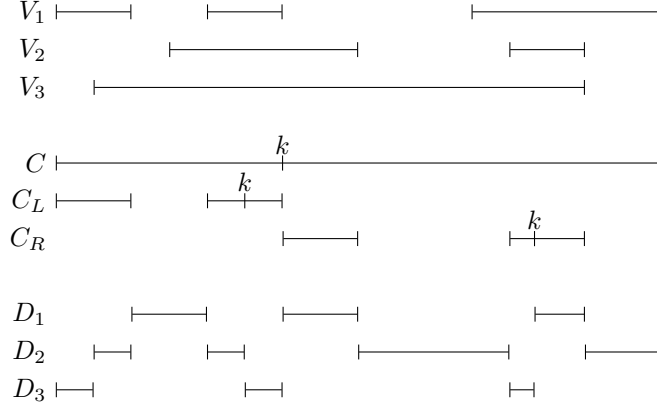


Figure 1: A sample run of the split rulership algorithm. $w_1 = w_2 = w_3 = \frac{1}{3}$

3.1 Proportionality

Lemma 1. *The split rulership algorithm is proportional for $n = 2$*

First, consider the case of P_1 . D_1 , the chores assigned to P_1 , consist of the chores to the left of k that P_1 has not marked and the chores to the right of k that P_2 has marked.

$$D_1 = (\bar{V}_1 \cap (-\infty, k) \cap C) \cup (V_2 \cap [k, \infty))$$

The cost paid by P_1 in their own estimation is $|V_1 \cap D_1|$. As P_1 is exempted from all chores they have marked to the left of k , $V_1 \cap D_1$ lies entirely to the right of k .

$$\begin{aligned} |V_1 \cap D_1| &= |V_1 \cap ((\bar{V}_1 \cap (-\infty, k) \cap C) \cup (V_2 \cap [k, \infty)))| \\ |V_1 \cap D_1| &= |V_1 \cap V_2 \cap [k, \infty)| \end{aligned}$$

These chores are a subset of C_R .

$$|V_1 \cap D_1| \leq |V_2 \cap [k, \infty)|$$

We have that $w_1|V_1 \cap (-\infty, k)| = w_2|V_2 \cap [k, \infty)|$

$$|V_1 \cap D_1| \leq \frac{w_1}{w_2}|V_1 \cap (-\infty, k)|$$

Adding $\frac{w_1}{w_2}|V_1 \cap D_1|$ to each side,

$$(1 + \frac{w_1}{w_2})|V_1 \cap D_1| \leq \frac{w_1}{w_2}(|V_1 \cap (-\infty, k)| + |V_1 \cap D_1|)$$

Since $V_1 \cap D_1$ is entirely to the right of k , $V_1 \cap (-\infty, k)$ and $V_1 \cap D_1$ are non-intersecting subsets of V_1 .

$$(1 + \frac{w_1}{w_2})|V_1 \cap D_1| \leq \frac{w_1}{w_2}|V_1|$$

Using the fact that, if $n = 2$, $w_1 + w_2 = 1$.

$$\begin{aligned} \frac{1}{w_2}|V_1 \cap D_1| &\leq \frac{w_1}{w_2}|V_1| \\ |V_1 \cap D_1| &\leq w_1|V_1| \end{aligned}$$

A similar, symmetrical argument holds for P_2 .

Theorem 2. *The split rulership algorithm is proportional*

Since the $n = 2$ case is already taken care of, we may assume $n > 2$. Beginning with P_1 , D_1 consists of the chores to the left of k that P_1 did not mark and P_1 's assigned chores from the division of C_R , D_1^R .

$$|V_1 \cap D_1| = |V_1 \cap ((\bar{V}_1 \cap (-\infty, k)) \cup D_1^R)|$$

Once again, all of $V_1 \cap D_1$ lies entirely to the right of k .

$$|V_1 \cap D_1| = |V_1 \cap D_1^R|$$

The division of C_R was between $n - 1$ players. By induction on the number of players, we may take as given that the algorithm is proportional when dividing among $n - 1$ players. P_1 's assigned workload within C_R is $w_1 + w_2$, so P_1 must have received at most $w_1 + w_2$ of $V_1 \cap C_R$.

$$|V_1 \cap D_1^R| \leq (w_1 + w_2)|V_1 \cap V_2 \cap [k, \infty)|$$

$V_1 \cap V_2 \cap [k, \infty)$ is a subset of C_R , and $|C_R| = \frac{w_1}{w_2}|C_L|$

$$|V_1 \cap V_2 \cap [k, \infty)| \leq |V_2 \cap [k, \infty)| = \frac{w_1}{w_2}|V_1 \cap (-\infty, k)|$$

Adding $\frac{w_1}{w_2}|V_1 \cap V_2 \cap [k, \infty)|$ to each side,

$$(1 + \frac{w_1}{w_2})|V_1 \cap V_2 \cap [k, \infty)| \leq \frac{w_1}{w_2}(|V_1 \cap (-\infty, k)| + |V_1 \cap V_2 \cap [k, \infty)|)$$

Since $|V_1 \cap (-\infty, k)|$ and $|V_1 \cap V_2 \cap [k, \infty)|$ are non-intersecting subsets of V_1 ,

$$\begin{aligned} (1 + \frac{w_1}{w_2})|V_1 \cap V_2 \cap [k, -\infty)| &\leq \frac{w_1}{w_2}|V_1| \\ (w_1 + w_2)|V_1 \cap V_2 \cap [k, \infty)| &\leq w_1|V_1| \\ |V_1 \cap D_1| &\leq w_1|V_1| \end{aligned}$$

Symmetrically, the same argument holds for P_2 .

All that remains is the case of players other than P_1 and P_2 . For any P_i , $i > 2$, D_i consists of P_i 's assigned portions from the division of C_L and C_R , D_i^L and D_i^R .

$$|V_i \cap D_i| = |V_i \cap D_i^L| + |V_i \cap D_i^R|$$

P_i 's assigned workload in both of those division is w_i . By induction, we may take as given that both of these divisions were proportional, and that P_i received at most w_i of their marked chores in each of those segments.

$$|V_i \cap D_i| \leq w_i(|V_i \cap V_1 \cap [-\infty, k)| + |V_i \cap V_2 \cap [k, \infty)|)$$


Since those two segments are non-intersecting subsets of V_i ,

$$|V_i \cap D_i| \leq w_i|V_i|$$

3.2 Strategyproofness

Consider first the case of P_1 , the first player. For some input to the split rulership algorithm (C, n, V, w) and some alternate valuation set for P_1 V_1^* , let V^* be the same as V except V_1 is replaced by V_1^* , $\{D_1, D_2, \dots, D_n\} = f(C, n, V, w)$, and $\{D_1^*, D_2^*, \dots, D_n^*\} = f(C, n, V^*, p)$.

P_1 rules the left segment of C and so is exempted from C_L , but must participate in the division of C_R . If C_{RL} and C_{RR} are the left and right exempted segments in the division of C_R , P_1 is exempted from C_{RL} and participates in the division of C_{RR} . P_1 also exempts itself from C_{RRL} , C_{RRRL} , and so on for all $n - 1$ rounds. In the $n - 1$ th round of division, P_1 and P_n will be the only two players remaining, and P_1 will be assigned some of the chores P_n rules.

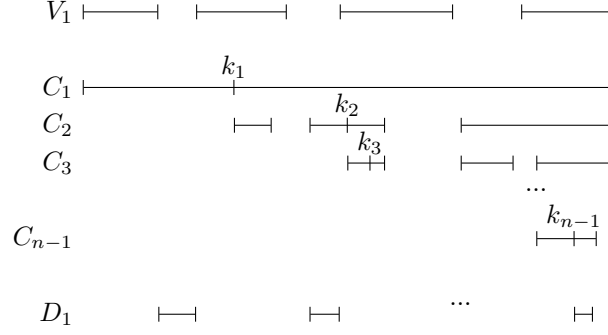Figure 2: The split rulership algorithm as seen by P_1

Let us introduce some more convenient notation. Let C_1 be the original C , and k_1 the k where it is divided. Let C_2 be the C_R in the division of C , C_3 the C_R in the division of C_2 , and so on. We may ignore the division of the C_L of each of these iterations, as P_1 is not assigned any of them.

$$C_1 = C$$

$$C_{j+1} = C_j \cap V_{j+1} \cap [k_j, \infty)$$

Or, non-recursively defined,

$$C_j = C \cap V_2 \cap V_3 \cap \dots \cap V_j \cap [k_{j-1}, \infty)$$

With $C_1^*, C_2^*, \dots, C_{n-1}^*$ and $k_1^*, k_2^*, \dots, k_{n-1}^*$ defined equivalently for the algorithm as run on V^* . Note that all the valuation sets except P_1 's are unchanged in this case.

$$C_j^* = C \cap V_2 \cap V_3 \cap \dots \cap V_j \cap [k_{j-1}^*, \infty)$$

From C_1 up to C_{n-1} , P_1 is assigned the chores to the left of k_i that are outside of V_1 . In the division of C_{n-1} , P_1 is also assigned the chores that P_n exempts themselves from to the right of k_{n-1} .

$$D_1 = (C_1 \cap (-\infty, k_1) \cap \bar{V}_1) \cup (C_2 \cap [k_1, k_2) \cap \bar{V}_1) \cup \dots \cup (C_{n-1} \cap [k_{n-2}, k_{n-1}) \cap \bar{V}_1) \cup (C_{n-1} \cap [k_{n-1}, \infty) \cap V_n)$$

All the chores P_1 is assigned that P_1 assigns cost to are to the right of k_{n-1} .

$$V_1 \cap D_1 = C_{n-1} \cap [k_{n-1}, \infty) \cap V_n \cap V_1$$

These are precisely the chores that all players marked that lie to the right of k_{n-1} .

$$V_1 \cap D_1 = V_1 \cap V_2 \cap \dots \cap V_n \cap [k_{n-1}, \infty)$$

Lemma 3. If $k_{n-1}^* < k_{n-1}$, $|V_1 \cap D_1| \leq |V_1 \cap D_1^*|$

Suppose $k_{n-1}^* < k_{n-1}$. P_1 will be assigned all chores to the right of k_{n-1}^* that all players other than P_1 marked.

$$D_1^* \supseteq C_{n-1}^* \cap [k_{n-1}^*, \infty) \cap V_n$$

$$D_1^* \supseteq V_2 \cap V_3 \cap \dots \cap V_n \cap [k_{n-1}^*, \infty)$$

$$|V_1 \cap D_1^*| \geq |V_1 \cap V_2 \cap \dots \cap V_n \cap [k_{n-1}^*, \infty)|$$

As k_{n-1}^* is to the left of k_{n-1}

$$|V_1 \cap D_1^*| \geq |V_1 \cap V_2 \cap \dots \cap V_n \cap [k_{n-1}, \infty)|$$

$$|V_1 \cap D_1^*| \geq |V_1 \cap D_1|$$

Then, for P_1 to get any advantage from their deception, $k_{n-1}^* \geq k_{n-1}$, and from this point on I will assume that this is true. Some of the k_i^* may be less than the equivalent k_i , some may be greater, and some may be the same. Let k_q^* be the first of these k_i^* for which all the k_i^* from k_q^* up to k_{n-1}^* are greater than or equal to their respective k_i .

$$k_{q-1}^* < k_{q-1} \text{ or } q = 1$$

$$\text{For all } j \geq q, k_j^* \geq k_j$$

If $q = 1$, the argument proceeds slightly differently. In that case, replace k_{q-1} and k_{q-1}^* with $-\infty$ wherever they appear below.

The portion of D_1 that lies within C_q is

$$D_1 \cap C_q = (C_q \cap [k_{q-1}, k_q) \cap \bar{V}_1) \cup (C_{q+1} \cap [k_q, k_{q+1}) \cap \bar{V}_1) \cup \dots \cup (C_{n-1} \cap [k_{n-2}, k_{n-1}) \cap \bar{V}_1) \cup (C_{n-1} \cap [k_{n-1}, \infty) \cap V_n)$$

$$D_1 \cap C_q = (\bar{V}_1 \cap ((C_q \cap [k_{q-1}, k_q)) \cup (C_{q+1} \cap [k_q, k_{q+1})) \cup \dots \cup (C_{n-1} \cap [k_{n-2}, k_{n-1}))) \cup (C_{n-1} \cap [k_{n-1}, \infty) \cap V_n)$$

Let C_H be defined as follows

$$C_H = (C_q \cap [k_{q-1}, k_q)) \cup (C_{q+1} \cap [k_q, k_{q+1})) \cup \dots \cup (C_{n-1} \cap [k_{n-2}, k_{n-1}))$$

$$D_1 \cap C_q = (\bar{V}_1 \cap C_H) \cup (C_{n-1} \cap [k_{n-1}, \infty) \cap V_n)$$

And similarly,

$$C_H^* = (C_q^* \cap [k_{q-1}^*, k_q^*)) \cup (C_{q+1}^* \cap [k_q^*, k_{q+1}^*)) \cup \dots \cup (C_{n-1}^* \cap [k_{n-2}^*, k_{n-1}^*))$$

$$D_1^* \cap C_q^* = (\bar{V}_1^* \cap C_H^*) \cup (C_{n-1}^* \cap [k_{n-1}^*, \infty) \cap V_n)$$

Lemma 4. $C_H \subseteq C_H^*$

Suppose h is a real number in C_H . $k_{q-1} < h < k_{n-1}$, and there is some integer i , $q \leq i \leq n-1$, for which $k_{i-1} \leq h < k_i$.

$$h \in C_i \cap [k_{i-1}, k_i)$$

$$h \in C \cap V_2 \cap V_3 \cap \dots \cap V_i$$

$k_{q-1}^* \leq k_{q-1}$ and $k_{n-1}^* > k_{n-1}$, so $k_{q-1}^* < h < k_{n-1}^*$. Then there is also some integer j , $q \leq j \leq n-1$, for which $k_{j-1}^* \leq h < k_j^*$. Because all of the k_j^* are to the right of their respective k_j , $i \leq j$.

$$h \in C \cap V_2 \cap V_3 \cap \dots \cap V_j$$

$$h \in C_j^* \cap [k_{j-1}^*, k_j^*)$$

$$h \in C_H^*$$

As this is true for any real number in C_H ,

$$C_H \subseteq C_H^*$$

Lemma 5. $C_{n-1} \cap [k_{n-1}, k_{n-1}^*) \subseteq C_H^* \cap [k_{n-1}, k_{n-1}^*)$

Suppose g is a real number in $C_{n-1} \cap [k_{n-1}, k_{n-1}^*)$.

$$g \in C_{n-1} \cap [k_{n-1}, k_{n-1}^*)$$

$$g \in C \cap V_2 \cap V_3 \cap \dots \cap V_{n-1} \cap [k_{n-1}, k_{n-1}^*)$$

Since $k_{q-1}^* < g < k_{n-1}^*$, there must be some $j \leq n-1$ such that $k_{j-1}^* \leq g < k_j^*$

$$\begin{aligned}
g &\in C \cap V_2 \cap V_3 \cap \dots \cap V_j \cap [k_{n-1}, k_{n-1}^*) \\
g &\in C_j^* \cap [k_{j-1}^*, k_j^*) \cap [k_{n-1}, k_{n-1}^*) \\
g &\in C_H^* \cap [k_{n-1}, k_{n-1}^*)
\end{aligned}$$

As this is true for any real number in $C_{n-1} \cap [k_{n-1}, k_{n-1}^*)$,

$$C_{n-1} \cap [k_{n-1}, k_{n-1}^*) \subseteq C_H^* \cap [k_{n-1}, k_{n-1}^*)$$

Lemma 6. For any integer j , if $q \leq j \leq n-1$, $|[k_{j-1}^*, k_j^*) \cap V_1^* \cap C_j^*| \leq |[k_{j-1}, k_j) \cap V_1 \cap C_j|$

For any integer j , $q \leq j \leq n-1$, we have from the split decision algorithm applied to the division of C_j

$$\begin{aligned}
|[k_{j-1}, k_j) \cap V_1 \cap C_j| &= \frac{w_{j+1}}{w_1^j} |[k_j, \infty) \cap C_j \cap V_{j+1}| \\
|[k_{j-1}^*, k_j^*) \cap V_1^* \cap C_j^*| &= \frac{w_{j+1}}{w_1^j} |[k_j^*, \infty) \cap C_j^* \cap V_{j+1}|
\end{aligned}$$

Where w_1^j is the workload assigned to P_1 in the division of C_j .

$$\begin{aligned}
|[k_{j-1}, k_j) \cap V_1 \cap C_j| &= \frac{w_{j+1}}{w_1^j} |[k_j, \infty) \cap V_2 \cap V_3 \cap \dots \cap V_j \cap V_{j+1}| \\
|[k_{j-1}^*, k_j^*) \cap V_1^* \cap C_j^*| &= \frac{w_{j+1}}{w_1^j} |[k_j^*, \infty) \cap V_2 \cap V_3 \cap \dots \cap V_j \cap V_{j+1}|
\end{aligned}$$

As $k_j^* \geq k_j$, $[k_j^*, \infty) \subseteq [k_j, \infty)$, and we have

$$|[k_{j-1}^*, k_j^*) \cap V_1^* \cap C_j^*| \leq |[k_{j-1}, k_j) \cap V_1 \cap C_j|$$

Lemma 7. $|V_1 \cap \bar{V}_1^* \cap C_H^* \cap [k_{q-1}, k_{n-1})| \geq |V_1^* \cap C_H^* \cap [k_{n-1}, k_{n-1}^*)|$

Using lemma 4, we have

$$\begin{aligned}
|[k_{q-1}, k_{n-1}) \cap V_1 \cap C_H^*| &\geq |[k_{q-1}, k_{n-1}) \cap V_1 \cap C_H| \\
|[k_{q-1}, k_{n-1}) \cap V_1 \cap C_H^*| &\geq |V_1 \cap C_q \cap [k_{q-1}, k_q)| + |V_1 \cap C_{q+1} \cap [k_q, k_{q+1})| + \dots + |V_1 \cap C_{n-1} \cap [k_{n-2}, k_{n-1})|
\end{aligned}$$

Using lemma 6 on each of those terms,

$$\begin{aligned}
|[k_{q-1}, k_{n-1}) \cap V_1 \cap C_H^*| &\geq |V_1^* \cap C_q^* \cap [k_{q-1}^*, k_q^*)| + |V_1^* \cap C_{q+1}^* \cap [k_q^*, k_{q+1}^*)| + \dots + |V_1^* \cap C_{n-1}^* \cap [k_{n-2}^*, k_{n-1}^*)| \\
|[k_{q-1}, k_{n-1}) \cap V_1 \cap C_H^*| &\geq |V_1^* \cap C_H^* \cap [k_{q-1}^*, k_{n-1}^*)|
\end{aligned}$$

Using the fact that $k_{q-1}^* < k_{q-1}$

$$|[k_{q-1}, k_{n-1}) \cap V_1 \cap C_H^*| \geq |V_1^* \cap C_H^* \cap [k_{q-1}, k_{n-1}^*)|$$

Splitting the right side at k_{n-1} ,

$$\begin{aligned}
|[k_{q-1}, k_{n-1}) \cap V_1 \cap C_H^*| &\geq |V_1^* \cap C_H^* \cap [k_{q-1}, k_{n-1})| + |V_1^* \cap C_H^* \cap [k_{n-1}, k_{n-1}^*)| \\
|[k_{q-1}, k_{n-1}) \cap V_1 \cap C_H^*| - |V_1^* \cap C_H^* \cap [k_{q-1}, k_{n-1})| &\geq |V_1^* \cap C_H^* \cap [k_{n-1}, k_{n-1}^*)|
\end{aligned}$$

For any two segments A and B , $|A \cap \bar{B}| \geq |A| - |B|$.

$$|V_1 \cap \bar{V}_1^* \cap C_H^* \cap [k_{q-1}, k_{n-1})| \geq |V_1^* \cap C_H^* \cap [k_{n-1}, k_{n-1}^*)|$$

Lemma 8. *If $k_{n-1}^* \geq k_{n-1}$, $|V_1 \cap D_1| \leq |V_1 \cap D_1^*|$*

Now we can put it all together.

$$\begin{aligned} |V_1 \cap D_1| &= |[k_{n-1}, \infty) \cap C_{n-1} \cap V_n \cap V_1| \\ |V_1 \cap D_1| &= |[k_{n-1}, k_{n-1}^*) \cap C_{n-1} \cap V_n \cap V_1| + |[k_{n-1}^*, \infty) \cap C_{n-1} \cap V_n \cap V_1| \\ |V_1 \cap D_1| &\leq |[k_{n-1}, k_{n-1}^*) \cap C_{n-1} \cap V_1| + |[k_{n-1}^*, \infty) \cap C_{n-1} \cap V_n \cap V_1| \end{aligned}$$

Using lemma 5,

$$\begin{aligned} |V_1 \cap D_1| &\leq |[k_{n-1}, k_{n-1}^*) \cap C_H^* \cap V_1| + |[k_{n-1}^*, \infty) \cap C_{n-1} \cap V_n \cap V_1| \\ |V_1 \cap D_1| &\leq |[k_{n-1}, k_{n-1}^*) \cap C_H^* \cap V_1 \cap \bar{V}_1^*| + |[k_{n-1}, k_{n-1}^*) \cap C_H^* \cap V_1 \cap V_1^*| + |[k_{n-1}^*, \infty) \cap C_{n-1} \cap V_n \cap V_1| \\ |V_1 \cap D_1| &\leq |[k_{n-1}, k_{n-1}^*) \cap C_H^* \cap V_1 \cap \bar{V}_1^*| + |[k_{n-1}, k_{n-1}^*) \cap C_H^* \cap V_1^*| + |[k_{n-1}^*, \infty) \cap C_{n-1} \cap V_n \cap V_1| \end{aligned}$$

Using lemma 7,

$$\begin{aligned} |V_1 \cap D_1| &\leq |[k_{n-1}, k_{n-1}^*) \cap C_H^* \cap V_1 \cap \bar{V}_1^*| + |[k_{q-1}, k_{n-1}) \cap C_H^* \cap V_1 \cap \bar{V}_1^*| + |[k_{n-1}^*, \infty) \cap C_{n-1} \cap V_n \cap V_1| \\ |V_1 \cap D_1| &\leq |[k_{q-1}, k_{n-1}^*) \cap C_H^* \cap V_1 \cap \bar{V}_1^*| + |[k_{n-1}^*, \infty) \cap C_{n-1} \cap V_n \cap V_1| \end{aligned}$$

$C_{n-1} \cap V_n \cap V_1$ is the intersection of $[k_{n-1}, \infty)$ with all n valuation sets. $C_{n-1}^* \cap V_n \cap V_1$ is the same but to the right of k_{n-1}^* . As $k_{n-1}^* \geq k_{n-1}$, $[k_{n-1}^*, \infty) \cap C_{n-1} \cap V_n \cap V_1 = [k_{n-1}^*, \infty) \cap C_{n-1}^* \cap V_n \cap V_1$.

$$\begin{aligned} |V_1 \cap D_1| &\leq |[k_{q-1}, k_{n-1}^*) \cap C_H^* \cap V_1 \cap \bar{V}_1^*| + |[k_{n-1}^*, \infty) \cap C_{n-1}^* \cap V_n \cap V_1| \\ |V_1 \cap D_1| &\leq |V_1 \cap (([k_{q-1}, k_{n-1}^*) \cap C_H^* \cap \bar{V}_1^*) \cup ([k_{n-1}^*, \infty) \cap C_{n-1}^* \cap V_n))| \\ |V_1 \cap D_1| &\leq |V_1 \cap D_1^*| \end{aligned}$$

With both the $k_{n-1}^* < k_{n-1}$ and $k_{n-1}^* \geq k_{n-1}$ cases covered, we have that no matter the V_1^* , P_1 can never benefit from deception.

Lemma 9. *For any input to the split decision algorithm C, n, V, w and any valuation set V_2^* , if V^* is the same as V except that V_2 is replaced by V_2^* , if $\{D_1, D_2, \dots, D_n\} = f(C, n, V, w)$, and $\{D_1^*, D_2^*, \dots, D_n^*\} = f(C, n, V^*, w)$, $|V_2 \cap D_2| \leq |V_2 \cap D_2^*|$*

The same argument as for P_1 applies for P_2 , with left and right swapped.

Theorem 10. *The split rulership algorithm is strategyproof*

As we have solved the cases of P_1 and P_2 , all that remains is the other $n - 2$ players. Suppose that P_i submits some V_i^* , $i > 2$, with V^* the same as V except V_i is replaced by V_i^* . In the split decision algorithm, only V_1 and V_2 are used in the choice of k and creation of C_L and C_R , and so when the algorithm is run with V^* as input the same C_L and C_R are produced. Let D_i^L and D_i^R be the chores assigned to P_i in the divisions of C_L and C_R when the input is V , and D_i^{L*} and D_i^{R*} be the same but with V^* as input. We may proceed by induction on the number of players. Taking as given that the split decision algorithm is strategyproof when dividing among $n - 1$ players, we have that

$$\begin{aligned} |V_i \cap D_i^L| &\leq |V_i \cap D_i^{L*}| \text{ and } |V_i \cap D_i^R| \leq |V_i \cap D_i^{R*}| \\ |V_i \cap D_i| &\leq |V_i \cap D_i^*| \end{aligned}$$

4 Discussion

A chore division algorithm is *envy-free* if, when run with $w = \{\frac{1}{n}, \frac{1}{n}, \dots, \frac{1}{n}\}$ each player believes that, not only is their assigned chores at most $\frac{1}{n}$ of the total chores, but they have the least costly assigned chores among all players. That is, for any two players P_i and P_j , $|V_i \cap D_i| \leq |V_i \cap D_j|$. The split rulership algorithm is not envy-free. In general, envy-freeness is harder to achieve for chore division than for cake division, and I suspect that envy-freeness and strategyproofness are incompatible for chore division.

A chore division algorithm is *Pareto efficient* if there is no alternate way the chores could be divided in which at least one player is more satisfied and no players are less satisfied. That is, if the algorithm produces the division $\{D_1, D_2, \dots, D_n\}$, for any other partition of $C \setminus \{D_1, D_2, \dots, D_n\}$, if there is some player P_i such that $|V_i \cap D_i| > |V_i \cap D'_i|$, there must also be some player P_j such that $|V_j \cap D_j| < |V_j \cap D'_j|$. The split rulership algorithm is Pareto efficient. The only chores in the $V_i \cap D_i$ are those chores that all players have marked, so the total cost paid by all players is $|V_1 \cap V_2 \cap \dots \cap V_n|$. Any other partition of the chores must have a total cost at least this great. However, if at least one player paid less cost and no players paid more cost, the total cost paid would be lower.

Piecewise uniform valuation functions are the most restrictive class of valuation functions for which chore division as a problem makes sense. Other classes of valuation functions that have been proposed include piecewise constant (in which each interval has a constant marginal cost, but those marginal costs need not be equal) and piecewise linear (in which each interval has a marginal cost that is a linear function). A very simple extension might have players' marginal valuations restricted to a finite set of values. No deterministic strategyproof algorithms have been found for these less restrictive class of valuation functions for either cake cutting or chore division.

The split rulership algorithm is incompatible with the Robertson-Webb query model of algorithm complexity (Robertson and Webb [1998]). The placement of k is dependent on both P_1 and P_2 's valuations; no finite number of cut and evaluation queries is guaranteed to find it. Kurokawa et al. [2013] found that no strategyproof, envy-free algorithm for cake cutting with piecewise uniform valuation functions using a bounded number of queries exists; it is possible a similar result is true for chore division.

References

- Hugo Steinhaus. The problem of fair division. *Econometrica*, 17:315–319, 1949.
- Steven J Brams and Alan D Taylor. An envy-free cake division protocol. *The American Mathematical Monthly*, 102(1):9–18, 1995.
- Elisha Peterson and Francis Edward Su. N-person envy-free chore division. *arXiv preprint arXiv:0909.0303*, 2009.
- Anna Bogomolnaia, Hervé Moulin, Fedor Sandomirskiy, and Elena Yanovskaya. Competitive division of a mixed manna. *Econometrica*, 85(6):1847–1871, 2017.
- Erel Segal-Halevi. Fairly dividing a cake after some parts were burnt in the oven. *arXiv preprint arXiv:1704.00726*, 2017.
- Elchanan Mossel and Omer Tamuz. Truthful fair division. In *International Symposium on Algorithmic Game Theory*, pages 288–299. Springer, 2010.
- Avishay Maya and Noam Nisan. Incentive compatible two player cake cutting. In *International Workshop on Internet and Network Economics*, pages 170–183. Springer, 2012.
- Yiling Chen, John K Lai, David C Parkes, and Ariel D Procaccia. Truth, justice, and cake cutting. *Games and Economic Behavior*, 77(1):284–297, 2013.
- Haris Aziz and Chun Ye. Cake cutting algorithms for piecewise constant and piecewise uniform valuations. In *International conference on web and internet economics*, pages 1–14. Springer, 2014.
- Jack Robertson and William Webb. *Cake-cutting algorithms: Be fair if you can*. AK Peters/CRC Press, 1998.
- Haris Aziz and Simon Mackenzie. A discrete and bounded envy-free cake cutting protocol for any number of agents. In *2016 IEEE 57th Annual Symposium on Foundations of Computer Science (FOCS)*, pages 416–427. IEEE, 2016.
- Sina Dehghani, Alireza Farhadi, MohammadTaghi HajiAghayi, and Hadi Yami. Envy-free chore division for an arbitrary number of agents. In *Proceedings of the Twenty-Ninth Annual ACM-SIAM Symposium on Discrete Algorithms*, pages 2564–2583. SIAM, 2018.
- David Kurokawa, John Lai, and Ariel Procaccia. How to cut a cake before the party ends. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 27, pages 555–561, 2013.