

An intuition for physicists: information gain from experiments

Johannes Buchner¹

¹Max Planck Institute for Extraterrestrial Physics, Giessenbachstrasse, 85741 Garching, Germany

Abstract

How much one has learned from an experiment is quantifiable by the information gain, also known as the Kullback-Leibler divergence. The narrowing of the posterior parameter distribution $P(\theta|D)$ compared with the prior parameter distribution $\pi(\theta)$, is quantified in units of bits, as:

$$D_{\text{KL}}(P|\pi) = \int \log_2 \left(\frac{P(\theta|D)}{\pi(\theta)} \right) P(\theta|D) d\theta$$

This research note gives an intuition what one bit of information gain means. It corresponds to a Gaussian shrinking its standard deviation by a factor of three.

GAUSSIAN UPDATE

Consider for the posterior a Gaussian with standard deviation σ , and for the prior a Gaussian at the same mean, but wider by a factor k , $\sigma' = k\sigma$. The inset of Figure 1 illustrates this scenario. After some computation we find:

$$\begin{aligned} D_{\text{KL}} &= \int (2\pi\sigma^2)^{-\frac{1}{2}} e^{-\frac{\theta^2}{2\sigma^2}} \times \left(-\frac{1}{2} \log_2 (2\pi\sigma^2) - \frac{\theta^2}{2\sigma^2} + \frac{1}{2} \log_2 (2\pi\sigma^2 k^2) + \frac{\theta^2}{2\sigma^2 k^2} \right) d\theta \\ &= \log_2 k + (k^{-2} - 1) / 2 / \ln 2 \end{aligned}$$

This relation between the more intuitive ‘‘Gaussian shrinkage factor k ’’ and bits is illustrated in Figure 1.

The update of a flat prior distribution to a flat posterior distribution narrowed by a shrinkage factor k gives $D_{\text{KL}}(P|\pi) = k \log_2 k$. In this case, two (eight) bits corresponds to $k = 2$ (4).

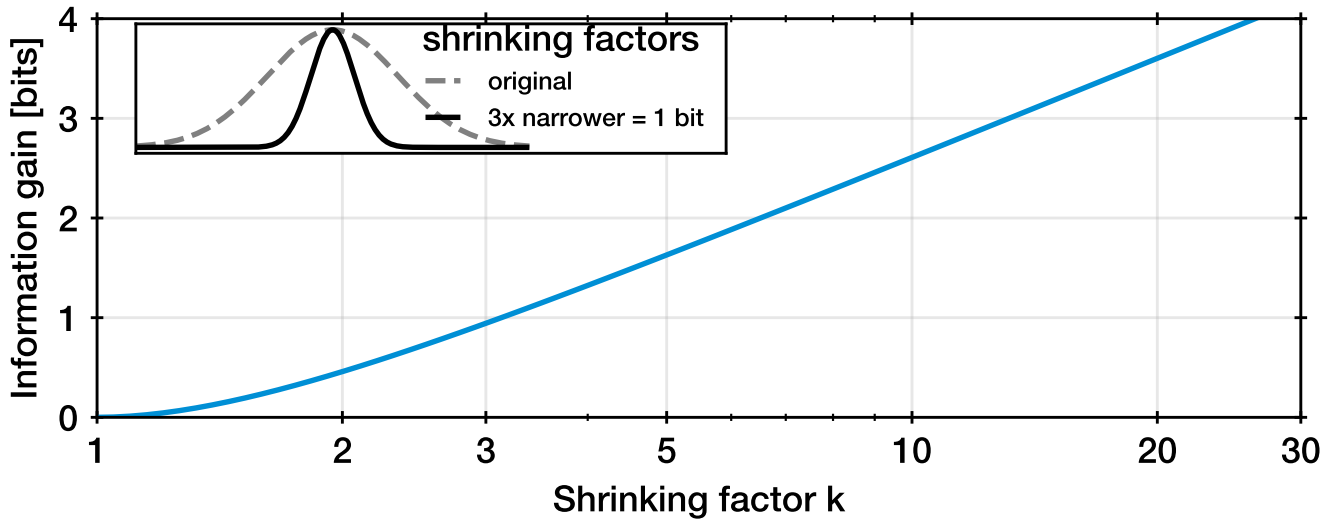


Figure 1. The more the Gaussian shrinks (x-axis), the higher the information gain (y-axis, in bits). The inset illustrates a shrinkage factor $k = 3$ between prior (dashed) and posterior (solid curve).

ESTIMATION FROM POSTERIOR SAMPLES

The information gain can be computed easily from one-dimensional histograms of posterior samples as:

$$D_{\text{KL}}(P|\pi) \approx \sum_i \frac{n_i}{N} \log_2 \frac{n_i/N}{m_i/M},$$

where n_i (m_i) are posterior (prior) samples within bin i , out of N (M) total samples. If the bin widths are sized to contain equal prior mass (e.g., equal size for uniform priors), the formula simplifies to: $D_{\text{KL}}(P|\pi) \approx \sum_{i=1}^B n_i/N \log_2 (n_i B/N)$. Empty bins should be skipped. Negative D_{KL} are numerical artifacts and should be set to zero.

The general-purpose Bayesian inference package UltraNest ([Buchner 2021](#)) computes the information gain overall (using the method of [Skilling 2004](#)) and for each parameter.

REFERENCES

- Buchner, J. 2021, The Journal of Open Source Software, 6, 3001
 Skilling, J. 2004, AIP Conference Proceedings, 735, 395