# Gigs with Guarantees: Achieving Fair Wage for Food Delivery Workers

# Ashish Nair, Rahul Yadav, Anjali Gupta, Abhijnan Chakraborty, Sayan Ranu and Amitabha Bagchi

Indian Institute of Technology Delhi

{Ashish.R.Nair.cs517, Rahul.Yadav.cs517, anjali, abhijnan, sayanranu, bagchi}@cse.iitd.ac.in

# Abstract

With the increasing popularity of food delivery platforms, it has become pertinent to look into the working conditions of the 'gig' workers in these platforms, especially providing them fair wages, reasonable working hours, and transparency on work availability. However, any solution to these problems must not degrade customer experience and be cost-effective to ensure that platforms are willing to adopt them. We propose WORK4FOOD, which provides income guarantees to delivery agents, while minimizing platform costs and ensuring customer satisfaction. WORK4FOOD ensures that the income guarantees are met in such a way that it does not lead to increased working hours or degrade environmental impact. To incorporate these objectives, WORK4FOOD balances supply and demand by controlling the number of agents in the system and providing dynamic payment guarantees to agents based on factors such as agent location, ratings, etc. We evaluate WORK4FOOD on a real-world dataset from a leading food delivery platform and establish its advantages over the state of the art in terms of the multi-dimensional objectives at hand.

### 1 Introduction and Related Work

Food delivery platforms like Swiggy, Zomato, GrubHub or Deliveroo have become an extremely popular choice among customers to order and get food delivered to them. Alongside offering increased business to the restaurants, they also provide a livelihood to thousands of delivery agents, who pick the ordered food from the restaurants and deliver them at the customers' doorsteps. In developing countries with high unemployment rates, despite the 'gig' nature of delivery jobs, these platforms have become the only source of income for the majority of delivery agents [Fairwork, 2021; Khumalo, 2022]. However, a range of issues are presently plaguing the food delivery industry – poor working conditions of the agents, pressure of on-time delivery while navigating heavy traffic, opaque job assignments, etc. [Zhou and others, 2020]. Specifically, a major concern of the delivery




Figure 1: Work distribution in FAIRFOODY, FOODMATCH and our proposal WORK4FOOD (at a specific configuration  $g = \omega$  described in Section 3.2) in city B of the dataset. An agent is said to be working if it is servicing an order.

agents is their inadequate income against the backdrop of rising cost of fuel and maintenance<sup>1</sup>, forcing many agents to go on repeated strikes to demand better pay [Mitra, 2022; Wilks, 2022]. In fact, a non-profit labor watchdog organization Fairwork (fair.work) found that none of the food delivery platforms in India ensures legal minimum wage, even if an agent works for more than 10 hours a day [Fairwork, 2021].

Earlier works in this space have mostly attempted to minimize the order delivery time alone [Kottakki et al., 2020; Ulmer et al., 2021], by pre-placing delivery agents in different parts of the city anticipating demand [Xue et al., 2021], or by minimizing delivery agents' waiting time [Weng and Yu, 2021]. FOODMATCH [Joshi et al., 2022; Joshi et al., 2021] overcame many simplifying assumptions made in prior works (e.g., perfect order arrival information [Yildiz and Savelsbergh, 2019], neglecting the road network [Reyes et al., 2018] and food preparation time [Zeng et al., 2019]), and proposed a realistic and scalable solution. While FOODMATCH minimized the delivery time, [Gupta et al., 2022] showed that such one-sided optimization leads to unfair work distribution among delivery agents, resulting in unequal incomes. They further proposed a multi-objective algorithm FAIRFOODY to provide fair distribution of income opportunities among the

<sup>&</sup>lt;sup>1</sup>A delivery agent typically gets a small delivery fee per order, except occasional tips and incentives [Sodhi, 2021].

Property	FAIRFOODY	FOODMATCH	Work4Food $g = \omega$	
Avg. Delivery Time	16.08 mins	15.91 mins	$16.68 \text{ mins} \\ 0.11 \\ 2.19 \text{ hrs} \\ 1.85 = 1.64 + 0.21$	
Gini Income/log-in Time	0.09	0.63		
Avg. Work per Agent	3.26 hrs	2.31 hrs		
Cost (in 10E6 p units)	2.46	1.75		

Table 1: Performance of FAIRFOODY, FOODMATCH, and our proposal WORK4FOOD in city B of the dataset. An order's delivery time is the time between the order being placed and delivered. We measure inequality among agent incomes (per unit of log-in time) with Gini scores. The lower the Gini score, the better the fairness. p is the pay of an agent per hour worked. Cost for WORK4FOOD includes handouts = 0.21 10E6 (Def. 5). For FAIRFOODY and FOODMATCH, cost here is the total payment for work.

agents, while ensuring minimal increase in delivery times. To our knowledge, FAIRFOODY is the only prior work looking into the fairness of delivery agents' incomes.

FAIRFOODY tries to ensure that all agents get the same amount of work for every unit of time they are working for the platform. We plot the work distribution in FOODMATCH and FAIRFOODY in Fig. 1 when run on an identical stream of orders. In FAIRFOODY, all agents get concentrated around the same work per unit log-in time (0.3 - 0.4). In sharp contrast, FOODMATCH creates an allocation where some agents get most of the work, and a large number get very little work.

"Work" on a food delivery platform consists of three components: (1) driving to the restaurant (*first-mile*), (2) *waiting* at the restaurant while food is being prepared, and (3) driving from restaurant to the customer's location (*last-mile*). Note that the first-mile time and food preparation time can proceed in parallel. While FOODMATCH pre-dominantly assigns an order to the closest delivery agent from the restaurant's location, FAIRFOODY assigns work to a relatively far-away driver so that the driver reaches the restaurant within the waiting time, and therefore, minimally affect the final delivery time. Through this design, the location of an agent plays a less central role in determining the chances of being allocated an order, and consequently provides FAIRFOODY more flexibility in attaining equitable work distribution.

While the distribution of work certainly looks fairer in FAIRFOODY, there is a downside to this. As shown in Table 1, FAIRFOODY makes agents work significantly more to deliver the same set of orders to ensure fairness. Thus, higher work to deliver the same set of orders increases the platform's cost in terms of delivery payments, fuel costs for agents, and has a negative environmental impact.

In this context, we ask an important question: *Can equitable distribution be achieved without the pitfalls of additional greenhouse emissions, higher cost to the delivery platform, and a more relaxed work distribution among agents?* We design an algorithm called WORK4FOOD, which shows that the above objective can indeed be achieved (See Fig. 1 and Table 1). Our key contributions are as follows:

• Novel problem: We propose a more realistic approach to provide fair incomes by ensuring that all agents get income guarantees based on government-mandated minimum wage. In addition, the proposed formulation provides sufficient control to the platform to decide the number of agents to on-board so that the income guarantee can be met, which includes the provision of agent-personalized guarantees (§ 2).

- Algorithm design: We design an algorithm called WORK4FOOD, which allows us to set a payment guarantee that is *provably optimal* for minimizing cost for the platform. Powered by a novel combination of *minimum weight bipartite matching* with *Gaussian process regression*, WORK4FOOD analyzes the demand-supply dynamics in the system and generates an allocation that balances the *triple* needs of minimizing delivery time, minimizing cost for the platform, and ensuring payment guarantees for the delivery agents (§ 3).
- Evaluation: We evaluate WORK4FOOD on a real food delivery dataset from a large food delivery platform. Our experiments reveal that WORK4FOOD ensures the minimum wage guarantee with high probability, improves cost margin of the platform and achieves fairness without inflating work per unit time. More importantly, WORK4FOOD empowers policymakers with a tool that can be deployed to regulate this business (§ 4).

# 2 Preliminaries and Problem Formulation

The food delivery problem involves four parties: customers, restaurants, delivery agents, and the delivery platform (a.k.a. the 'system'). The platform receives a stream of orders, which it then assigns to the agents. While doing so, we keep a few constraints in mind – agents have a fixed capacity to carry orders, and the platform does not assign orders that cannot get delivered within the service level agreement (SLA). The SLA is the maximum delivery time that the platform promises customers. Each agent logs into the platform and informs how long they plan to stay.

# 2.1 Dataset

We use a licensed food delivery dataset released by [Joshi *et al.*, 2021]<sup>2</sup>. The dataset is sourced from a leading food delivery service in India and consists of eighteen days worth of delivery data from three large metropolitan cities. Table 2 provides a summary of the same. The dataset comprises of:

- The **Road network** of the three cities, obtained from OpenStreetMap.org along with the average speed in each road segment at different times of the day.
- **GPS pings** of delivery agents, which are *map-matched* to the road network to obtain network-aligned trajectories [Newson and Krumm, 2009].
- **Order information** such as customer and restaurant locations and average food preparation time in restaurants.

# 2.2 Formulation

We now define some terms useful for our proposal. Table 3 has a summary of the frequently used notations in the paper.

 $<sup>^{2}</sup>$ An anonymized version of the proprietary dataset can be obtained from https://www.cse.iitd.ac.in/~sayan/files/foodmatch.txt. The name of the cities have not been revealed by the service provider.

City	# Rest- aurants	# Vehicles (avg./day)	# Orders (avg./day)	# Nodes	# Edges	Popu- lation
A	2085	2454	23442	39k	97k	>5M
В	6777	13429	159160	116k	299k	> 8M
С	8116	10608	112745	183k	460k	> 8M

Table 2: Overview of the dataset.

**Definition 1** (Delivery Times – EDT, SDT, XDT). The expected delivery time EDT(o, v) of an order o is the expected time it would take to be delivered if it is assigned to agent v.

The shortest delivery time SDT(o) of order o is the fastest it can be delivered if some vehicle could serve it with no wait time or other detour delays. It is the sum of the food preparation time and the shortest travel time between the restaurant and customer's location.

The excess delivery time XDT(o, v) of an order o with respect to an agent v is the difference between EDT(o, v) and SDT(o). We compute these delivery times using standard graph algorithms as in [Joshi et al., 2021].

**Problem 1** (Minimizing delivery time). Given a set of agents  $V^t$  and unallocated orders  $O^t$  at timestamp t, find an allocation of orders to agents so that  $\sum_{\forall o \in O^t} XDT(o, A(o))$  is minimized. A(o) denotes the agent allocated to order o.

FOODMATCH [Joshi *et al.*, 2021] studies the above problem and proposes an effective solution.

**Definition 2** (Work and Active Times). Work time  $W_v^t$  is the time spent by a delivery agent v till time t servicing orders, *i.e.*, either traveling or waiting for assigned orders. The active time  $A_v^t$  (in hours) of the agent is the time for which they log in to the system till time t.  $W_v$  and  $A_v$  are the total work time and total active time of agent v over their entire shift.

In all of the models we compare, the agent incomes are proportional to their work times. So in order to guarantee income to agents, our new proposed algorithm guarantees that they get enough work.

**Definition 3** (Work Guarantee Ratio). The work guarantee ratio  $g_v$  of a delivery agent v is the amount of work time guaranteed by the system to agent v per unit active time. Note a work guarantee naturally translates into an income guarantee since the payment is a function of the work.

**Definition 4** (Work Guarantee). *The* work guarantee  $G_v^t$  for a delivery agent v is the amount of work (in hours) the platform guarantees to the agent till time t, i.e.,  $G_v^t = g_v \times A_v^t$ . The total work guarantee  $G_v$  of agent v is given by  $G_v = g_v \times A_v$ .

**Definition 5** (Work Payment, Handout and Platform Cost). All agents are paid the same rate p for every hour worked in our models. So, the work payment  $P_v$  for any agent v is given by  $P_v = p \times W_v$ .

We envision a system where the platform hands out money to agents in lieu of any unmet work guarantees. So, the handout  $H_v$  for any agent v is given by:

$$H_v = p \times \max(0, G_v - W_v) \tag{1}$$

The platform  $\cot C$  is the total money the platform has to pay the agents for their work and any unsatisfied work guar-

Notation	Description
$W_v^t, W_v$	Work time of agent $v$ till time $t$ , total work time of agent $v$
$A_v^{\tilde{t}}, A_v$	Active time of agent $v$ till time $t$ , total active time of agent $v$
$g, g_v$	Fixed work guarantee ratio for all agents, work guarantee ratio for agent v
$G_v^t, G_v$	Work guarantee of agent $v$ till time $t$ , total work guarantee of agent $v$
	Rate of pay for every hour worked
$\stackrel{p}{H_v}$	Total handout of agent v
$P_v \\ C$	Total work payment of agent v
C	Platform cost
$P_{min}$	Hourly minimum wage guarantee
ω	Ratio of total work time to total active time
$V^t$	Set of active agents at window t
$O^t$	Set of orders waiting for agent assignment at window t
$B^t$	Set of batched orders waiting for agent assignment at window t
e(v, b)	Weight of edge between agent $v$ and order batch $b$ in bipartite matching graph
EDT(o, v)	The expected delivery time of order o if it is assigned to agent v
SDT(o)	The shortest delivery time of order o
XDT(o, v)	The excess delivery time of order $o$ if it is assigned to agent $v$

Table 3: Summary of frequently used notations.

antee. It is given by:

$$C = \sum_{v} pW_v + \sum_{v} H_v \tag{2}$$

**Problem 2** (Minimize Platform Cost). Devise an order to vehicle allocation algorithm such that C is minimized. Note that due to the handout component in C (Eq. 2), all agents are guaranteed to get their promised income.

In this work, we propose to not only minimize food delivery time (Prob 1), but also the cost to platform (Prob 2).

**Problem 3** (Work Guarantee Problem). *Find order to vehicle allocation such that both platform cost C and total excess delivery time are minimized while ensuring guaranteed income to all agents.* 

The proposed problem is therefore a *multi-objective optimization* problem. Moreover, Prob 3 is NP-hard since Prob 1 is NP-hard [Joshi *et al.*, 2021]. Hence, we explore heuristics in the form of bipartite matching.

# **3** WORK4FOOD: Proposed Algorithm

WORK4FOOD aggregates all incoming orders in a window of size  $\Delta = 3$  minutes and any unassigned orders from past windows. As in FOODMATCH, we batch orders together if they can be picked and delivered efficiently by the same agent. We use the same batching algorithm as in FOODMATCH. We then assign each batch to an active agent. The pseudocode of WORK4FOOD is provided in Alg.1.

# 3.1 Order Matching

To assign orders to agents, we perform matching on a *weighted bipartite graph* between order batches  $B^t$  and active vehicles  $V^t$  in the current window using the *Hungarian* algorithm [Kuhn, 1955; Munkres, 1957].

Edge weights in matching graph: The weight of the edges in the bipartite matching graph at time t between order batches  $b \in B^t$  and vehicles  $v \in V^t$  is given by

$$e(v,b) = \begin{cases} max \left\{ W_v^t + w_v^b - G_v^t, 0 \right\} & G_v^t > W_v^t \\ w_v^b & G_v^t \le W_v^t \end{cases}$$
(3)

 $w_v^b$  denotes the extra work agent v will do to deliver batch b. The edge weight captures the additional cost to deliver batch

#### Algorithm 1 WORK4FOOD

8
Input: Order stream O, Agents and their active intervals V
Parameter: Work guarantee g
1: unassignedOrders $\leftarrow \emptyset$
2: for each window t do
3: $O^t \leftarrow \text{GetNewOrders}(t) \cup \text{unassignedOrders}.$
4: $V^t \leftarrow \text{GetActiveAgents}(t)$ . 5: if agent rejection or dynamic guarantee is on then 6: for all $v \in V^t - V^{t-1}$ do
5: if agent rejection or dynamic guarantee is on then
6: for all $v \in V^t - V^{t-1}$ do
7: $v.predictedPay \leftarrow GPRegression(v, t)$
8: if agent rejection is on then
9: for all $v \in V^t \setminus V^{t-1}$ do
10: if v predicted Pay $< gA_v$ then
11: Reject agent v since payment guarantee cannot be met.
12: for all $v \in V^t$ do
13: if dynamic guarantee is on then
14: $g_v \leftarrow v. predicted Pay/A_v$
15: else
$\begin{array}{ll} 16: & g_v \leftarrow g\\ 17: & B^t \leftarrow \text{BatchOrders}(O^t). \end{array}$
17: $B^t \leftarrow \text{BatchOrders}(O^t)$ .
18: $\mathcal{B} \leftarrow \text{Complete bipartite graph } (B^t, V^t)$ . Edge weights defined as in Eq. 3.
19: assignments $\leftarrow$ Hungarian( $\mathcal{B}$ ).
20: unassignedOrders $\leftarrow O^t$ – assignments.orders

b using agent v given the work guarantee. Any work below the work guarantee comes at no extra cost to the platform, as it needs to pay unmet guarantees through handouts. Thus, the edge weights equal the extra work beyond the guarantee.

The above edge weight does not explicitly optimize delivery times, so we add an extra term corresponding to FOOD-MATCH's edge weight [Joshi *et al.*, 2021].

If  $O_v$  is the batch (set) of orders already being carried by agent v, then the edge weight in FOODMATCH is given by

$$e_{fm}(v,b) = \sum_{o \in b} XDT(o,v) + \sum_{o' \in O_v} \Delta_{XDT}(v,o',b)$$
 (4)

where  $\Delta_{XDT}(v, o', b)$  is the change in XDT of order  $o' \in O_v$  if batch b is assigned to agent v.

**Theorem 1** (Equivalence to FOODMATCH). When batching is turned off, i.e., each agent has a capacity of only one order, and the platform provides no work guarantee to the agents, then FOODMATCH and WORK4FOOD compute the same batch-agent assignments.

*Proof.* When batching is turned off, then each batch has only one order, i.e.,  $b = \{o\}$ . Further, if the platform provides no work guarantee to the agents, Eq. 3 reduces to:

$$e(v,b) = w_v^b = EDT(o,v) \tag{5}$$

Also, if each agent's capacity is one, Eq. 4 reduces to

$$e_{fm}(v,b) = \sum_{o \in b} XDT(o,v) = XDT(o,v)$$
(6)

$$= EDT(o, v) - SDT(o) \tag{7}$$

Since SDT(o) does not depend on the assignment, finding the minimum weight maximal matching with Eq. 5 and Eq. 6 leads to the same assignment.

#### **3.2** Setting the Work Guarantee Ratio

A key component in determining the edge weights of the bipartite graph is the work guarantee to be provided to delivery agents (Eq. 3). This guarantee needs to be determined based on the demand-supply dynamics. To determine this guarantee, we initiate our analysis under the equitability assumption that the same guarantee is provided to all agents, i.e., the guarantee is a function of only the demand-supply and not attributes of the agent. We discuss agent-personalized guarantee in the subsequent section.

Let us denote the fixed work guarantee ratio by g (Def. 3), pay per hour worked by p and, the hourly minimum wage guarantee by  $P_{min}$ . Then, we want  $p \times g \ge P_{min}$ . For every g, the platform can set an appropriate pay per hour worked  $p = p(g) = P_{min}/g$  such that the wage guarantee is met with minimum cost.

**Theorem 2** (Optimal value of g). If  $\omega = \sum_{v} W_v / \sum_{v} A_v$ is the ratio of the total work time to the total active time of the system with the current set of orders and agents, then we claim that  $g = \omega$  minimizes the platform cost C.

*Proof.* This choice of g is explained by analysing the platform cost C for different g values. We can rewrite Eq. 2 as:

$$C(g) = \frac{P_{min}}{g} \sum_{v} W_v + \frac{P_{min}}{g} \sum_{v} \max(0, gA_v - W_v)$$
(8)

We consider two cases,  $g \leq \omega$  and  $g > \omega$  assuming WORK4FOOD works ideally, i.e., (i) the total work in the system  $\sum_{v} W_v$  does not depend on g; (ii) WORK4FOOD meets guarantees whenever there is sufficient work; (iii) when work is scarce, agents are not assigned more work than the guarantee as agents with unmet guarantees are preferred by Eq. 3.

**Case 1:**  $g \leq \omega$ . Here, there is enough work available for all the agents to be able to meet the fixed work guarantee since  $\sum_{v} gA_{v} \leq \omega \sum_{v} A_{v} = \sum_{v} W_{v}$ . So, the second term in Eq. 8 would be equal to zero and we have  $C(g) \propto 1/g$ . Hence, C(g) is minimized when  $g = \omega$ .

**Case 2:**  $g > \omega$ . As there is not enough work for all guarantees to be met, agents will not cross their guarantees, and Eq. 8 would reduce to:

$$C(g)_{|g>\omega} = \frac{P_{min}}{g} \sum_{v} W_v + \frac{P_{min}}{g} \sum_{v} (gA_v - W_v) \quad (9)$$
$$= P_{min} \sum A_v \quad (10)$$

So, if  $g > \omega$  then, C is independent of g. However, in this case, the distribution of work assigned to the agents may be unequal even though they end up earning equally (proportional to their active times). This is not desirable. Hence, we set  $g = \omega$ .

Fig. 2 shows the graph of various measures as a function of work guarantee g for city A. The platform cost behaves as we argued in Theorem 2, falling initially and then stagnating at  $g = \omega$ . On the other hand, the total handouts keep rising as g increases. We also analyze the fairness with respect to (i) work provided per unit active time, (ii) work done to get the guaranteed wage (some agents may achieve guaranteed wage with the help of handouts), and (iii) pay (including handouts)

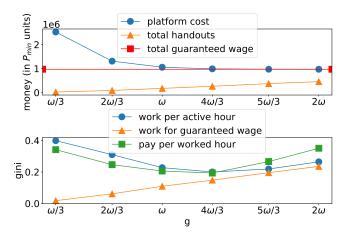


Figure 2: Platform cost and Gini score v/s g in city A.




Figure 3: Total work to total active time at different hours in city B.

for every unit of time worked. We can see that these fairness measures get affected if the guarantee is not in sync with the total work in the system, i.e., when g is away from  $\omega$ . This happens because the algorithm does not try to distribute work among agents above the guarantee fairly (when  $g < \omega$ ) or among agents below the guarantee (when  $g > \omega$ ). However, if the guarantee is close to the available work, agents have little leeway to work more or less than the guarantee, as explained in the two case analyses in Theorem 2.

# **3.3** Estimating $\omega_v$ for Each Agent

From Theorem 2, setting  $g = \omega$  is the optimal choice when all agents get the same guarantee. However, the total work time to total active time varies with time of the day (See Fig. 3) since it is a function of several variable factors such as the location of agents, number of agents in the system, and orderdensity. Hence, it is important to *predict*  $\omega_v$ , i.e., the ratio of expected work to active time when an agent v wants to on-board. Towards that end, we use *Gaussian Process Regression* [Williams and Rasmussen, 2006] to model available work  $W_v$  of agent v. As input, the agent provides its active time  $A_v$  on joining the system. So, we have  $\omega_v = W_v/A_v$  and the work guarantee ratio is set as  $g_v = \omega_v$  to provide a dynamic guarantee.

#### **Gaussian Process Regression**

Gaussian process regression (GPR) is a *Bayesian regression model* used in geo-spatial and time series interpolation tasks. It makes predictions based on the similarity between known points and unknown points.

For a given train dataset  $(\mathbf{X}, Y)$  and test points  $\mathbf{X}_*$ , GPR predicts the underlying function f. In the basic GPR model, we have:

$$\begin{bmatrix} f(\mathbf{X}_*) \\ f(\mathbf{X}) \end{bmatrix} \sim \mathcal{N} \left( 0, \begin{bmatrix} k(\mathbf{X}_*, \mathbf{X}_*) & k(\mathbf{X}_*, \mathbf{X}) \\ k(\mathbf{X}_*, \mathbf{X})^T & k(\mathbf{X}, \mathbf{X}) \end{bmatrix} \right)$$
(prior)  
$$y(\mathbf{X}) \sim \mathcal{N} \left( f(\mathbf{X}), \eta^2 I \right)$$
(likelihood)

 $y(\mathbf{X})$  and  $f(\mathbf{X})$  are random variable vectors. Training data Y is modeled as samples of  $y(\mathbf{X})$ .  $k(x, x') = \sigma^2 \cdot exp(-(x - x')^2/2l^2)$  is the *kernel function* and  $\eta^2 I$  is the noise covariance.  $\sigma$ , l and  $\eta$  are model parameters *learned* using gradient descent to best explain the training data  $(\mathbf{X}, Y)$ . The predictions of the GPR model are made by computing  $p(f(\mathbf{X}_*) \mid y)$  by marginalizing  $f(\mathbf{X})$  from  $p(f(\mathbf{X}_*), f(\mathbf{X}) \mid y)$ . We use the Sparse Variational version of the GPR (with Cholesky Variational Distribution) for better running times on the large dataset. Variational inference uses a new distribution  $q(f(\mathbf{X}_*), f(\mathbf{X}))$ , called the variational distribution, to approximate  $p(f(\mathbf{X}_*), f(\mathbf{X}) \mid y)$ ). In Sparse GPR, inducing locations  $X_s$  are found to summarize the training data.

In our setting, the GPR predicts the total work  $W_v = \mathbf{X}_*$  an agent v will get during its active time, which is used for getting  $\omega_v$ . We characterize each agent  $v \in V^t$  with the feature set  $\mathbf{X} = {\mathbf{X}^v \mid v \in V^t}$ , where  $\mathbf{X}^v$  is a vector containing log-in/log-off time, log-in location coordinates in terms of latitude and longitude, number of agents currently in the system, and the number of orders per window. Other features may also be used based on the factors influencing allocation (ex. driver rating).

We note that we only need an estimate of the available work to provide a guarantee that can be met. Getting the prediction exactly correct is not required. Hence, GPR is an appropriate choice. In addition, GPR does not require us to set the functional form of the prediction model or to tune any hyper-parameters.

**Balancing agent-order dynamics:** FOODMATCH [Joshi *et al.*, 2021] shows that platforms tend to engage more agents than required particularly, on slots that do not correspond to lunch and dinner hours. Over-provisioning drivers results in lower guarantees and consequently may violate the minimum wage guarantee as mandated by law. The prediction from GPR enables platforms to on-board the optimal number of drivers. Specifically, the system would on-board drivers as long as the expected pay per hour, i.e.,  $\omega_v \times p$ , is higher than the minimum pay per hour.

# 4 Empirical Evaluation

In this section, we benchmark WORK4FOOD against the baselines of FOODMATCH [Joshi *et al.*, 2021] and FAIR-FOODY [Gupta *et al.*, 2022] and establish that:

- **Practicality:** Compared to FOODMATCH and FAIR-FOODY, WORK4FOOD provides a more practical balance between delivery times and cost-efficiency of the platform.
- Fairness and sustainability: WORK4FOOD generates fair allocations without the pitfalls of strenuous work distribution among agents or additional greenhouse emissions.

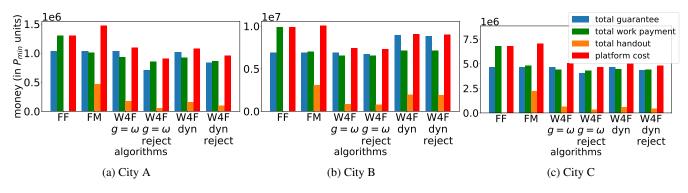


Figure 4: Cost analysis of different algorithms.

Our codebase is available at https://github.com/idea-iitd/ Work4Food. Algorithm and simulation implementations are in C++ and the Gaussian process regression training is in Python. Our experiments are performed on a machine with Intel(R) Xeon(R) CPU @ 2.10GHz with 252GB RAM on Ubuntu 18.04.3 LTS. The datasets are described in § 2.1. We take two days (one weekday and one weekend day) of data to train the GPR model in each city. We consider both a weekday and a weekend day to learn under different order densities.

# 4.1 Cost to Platform

Fig. 4 analyses the monetary cost of each baseline and WORK4FOOD under several payment guarantees across all three cities. The work guarantees (and therefore payment guarantee) used to evaluate FAIRFOODY (FF) and FOOD-MATCH (FM) are set to  $g_v = \omega$  (Recall Theorem 2). Hence, the "total guarantee" bars for the first three algorithms are the same in Fig. 4. Recall, any unmet payment guarantees are compensated through handouts.

The platform cost (red bar) is up to 25% lower with WORK4FOOD (with  $g = \omega$ ) compared to FOODMATCH and FAIRFOODY. This highlights the efficacy of WORK4FOOD in keeping platform cost low through explicit modeling of pay gap in edge weights (Eq. 3). The cost is highest in FOOD-MATCH since its allocations are skewed towards a minority of agents resulting in large handouts to the remaining agents.

We next focus on the variations of WORK4FOOD where agents are rejected if payment guarantees are predicted to not be met (reject) as per GPR and setting  $\omega$  dynamically through GPR. We note that when driver rejection is allowed, the handout component decreases by up to 70%, and thereby making the system even more cost-efficient. When g is set dynamically based on demand and supply, the income for agents increases. While this naturally leads to an increase in cost to platform (although remains substantially lower than FOOD-MATCH and FAIRFOODY), dynamic guarantees provide a more transparent working environment for agents.

# 4.2 Delivery Times, Equitability and Environmental Impact

Table 4 evaluates WORK4FOOD and baselines on the above mentioned metrics. The below analysis establishes that WORK4FOOD provides the best balance between cost-

Property	FF	$\mathbf{W4F}$ $g = 4\omega/3$
Avg. Delivery Time	15.98 mins	16.14 mins
Gini Income/log-in Time	0.07	0.02
Avg. Work per Agent	2.36 hrs	1.89 hrs

Table 5: Performance of FAIRFOODY v/s WORK4FOOD in city A.

efficiency, delivery time, equitability of work and income, and environmental impact.

**Delivery time:** FOODMATCH has the lowest delivery times since it specifically minimizes this factor. However, WORK4FOOD does not perform poorly. Specifically, all of its variations across all cities are within 1.5 mins of FOOD-MATCH. The agent reject versions of WORK4FOOD have only slightly higher delivery times, even with a reduced set of agents available for delivery. It points to how the platform keeps under-worked agents in the system even when there is no real impact on customer experience.

Typically, the food delivery platform provides service level agreements (SLAs), which mandate the time within which each order must be delivered. In our dataset, the SLA was 45 minutes. We measure the number of SLA violations by each algorithm. As visible in Table 4, SLA violation is not a concern for any algorithm since it is always below 1%.

Equitability: Inequality among agents is measured using the Gini score. Lower the Gini, better the equality among agents. We calculate Gini across two component distributions: (1) agents' incomes per unit active time and (2) work done by agents to get to the minimum payment guarantee. The results reveal several interesting insights. First, FOODMATCH has a highly unequal distribution of work and pay, as seen from the Gini Scores. The Gini income per active time scores of WORK4FOOD with a fixed guarantee is close to that of FAIRFOODY, which specifically optimizes the income distribution. However, as well see later, while the excellent Gini of FAIRFOODY comes at the cost high CO2 emissions and strenuous workload, WORK4FOOD does not suffer from these issues. Finally, we note that rejecting agents predicted to get low work leads to better equality among agents in terms of the work they do to earn minimum wage.

**Environmental impact:** Even as FAIRFOODY fairly distributes work, it forces agents to work 30-40% more on aver-

City	Property	FF	FM	W4F			
City		ГГ		$g=\omega$	$g=\omega \text{ reject}$	dynamic	dynamic reject
	Avg. Delivery Time	15.98 mins	15.65 mins	16.45 mins	17.1 mins	16.48 mins	16.97 mins
	SLA Violations (%)	0.12	0.02	0.15	0.34	0.13	0.28
	Gini Income/Active Time	0.07	0.6	0.1	0.24	0.25	0.36
Α	Gini Work for Min. Wage	0	0.31	0.11	0.05	0.11	0.04
	Avg. Work per Agent	2.36 hrs	1.83 hrs	1.7 hrs	1.94 hrs	1.68 hrs	1.98 hrs
	CO <sub>2</sub> Emission	68 tonnes	46 tonnes	46 tonnes	41 tonnes	46 tonnes	42 tonnes
	Running Time per Window	3.3 s	0.7 s	2.6 s	2.5 s	2.2 s	2.1 s
	Window Overflows (%)	0	0	0	0	0	0
	Avg. Delivery Time	16.08 mins	15.91 mins	16.68 mins	16.7 mins	16.51 mins	16.51 mins
	SLA Violations (%)	0.19	0.15	0.26	0.27	0.27	0.27
	Gini Income/Active Time	0.09	0.63	0.11	0.12	0.33	0.33
В	Gini Work for Min. Wage	0.01	0.29	0.09	0.08	0.08	0.07
	Avg. Work per Agent	3.26 hrs	2.31 hrs	2.19 hrs	2.21 hrs	2.37 hrs	2.40 hrs
	CO <sub>2</sub> Emission	364 tonnes	245 tonnes	239 tonnes	238 tonnes	256 tonnes	255 tonnes
	Running Time per Window	25.5 s	11.4 s	19.8 s	19.5 s	19.2 s	19.1 s
	Window Overflows (%)	0	0	0	0	0	0
	Avg. Delivery Time	16.82 mins	16.53 mins	17.35 mins	17.47 mins	17.28 mins	17.34 mins
	SLA Violations (%)	0.39	0.28	0.56	0.60	0.55	0.57
	Gini Income/Active Time	0.1	0.65	0.1	0.17	0.25	0.31
С	Gini Work for Min. Wage	0	0.32	0.1	0.06	0.1	0.06
	Avg. Work per Agent	2.90 hrs	2.06 hrs	1.90 hrs	1.92 hrs	1.92 hrs	1.96 hrs
	CO <sub>2</sub> Emission	293 tonnes	186 tonnes	183 tonnes	178 tonnes	184 tonnes	182 tonnes
	Running Time per Window	31.9 s	8.9 s	23.1 s	23.1 s	22.2 s	21.6 s
	Window Overflows (%)	0	0	0	0	0	0

Table 4: Performance analysis.




Figure 5: Comparing WORK4FOOD with no guarantee in city B.

age than FOODMATCH, thus making the system highly inefficient. It also leads to higher fuel costs for agents and causes a negative environmental impact. We measure the environmental impact using  $CO_2$  emissions calculated from the total distance traveled by agents [Moran, 2018]. WORK4FOOD, on the other hand, does not lead to higher work times or  $CO_2$ emissions to achieve better wage fairness and guarantees.

**Efficiency:** In any stream processing algorithm, the number of requests processed per unit of time should be higher than the number of incoming requests in the same period. All three algorithms of FOODMATCH, FAIRFOODY and WORK4FOOD process the stream in windows of length 3 minutes. We therefore call a window *overflown* if the time taken to process all requests in a window is longer than 3 minutes. In Table 4, we observe that the number of overflown windows is 0 across all algorithms in all three cities. Hence, efficiency is not a cause of concern for all three algorithms.

### 4.3 Flexibility of WORK4FOOD

Fine-tuning the work guarantee parameter g allows customization of WORK4FOOD towards various needs. In the next discussion, we highlight some of these aspects.

**Fairness:** The work to active time ratio on average in FAIRFOODY is 4/3 times that of WORK4FOOD. We run WORK4FOOD at  $g = 4\omega/3$  and compare the results with FAIRFOODY in Table 5 (Recall  $\omega$  from Theorem 2). We observe that WORK4FOOD at  $g = 4\omega/3$  not only provides better income equality, but also more relaxed agent workload. These benefits of WORK4FOOD do not come at the cost of delivery time as it only increases by a minuscule 9 seconds.

**Platform Cost:** What happens if we provide no work guarantee, i.e., g = 0? Fig. 5 answers the question. With no guarantees, WORK4FOOD is 20% cheaper than FOODMATCH but has 1 min 45 s higher average delivery time. This variation of the algorithm can reduce the platform cost and is the cheapest of all algorithms compared.

**Ratings-based work guarantee:** One could argue that income equitability is *not* fair. Rather, it should be proportional to the service quality of the agent. We next demonstrate that WORK4FOOD can easily adapt to this need.

Unfortunately, our dataset does not contain any rating information. Hence, we simulate ratings by assigning each agent a score uniformly at random from 1 to 5. Based on their ratings, agents are provided a higher or lower work guarantee around the mean  $\omega$  with the formula:  $g_v = (1 + 0.1 \times (v.rating - 3)) \times \omega$ . More simply, the highest-rated agents get a 20% higher guarantee than the mean, and the

Rating	1	2	3	4	5
$g_v$ of agents	0.2	0.225	$0.25 = \omega$	0.275	0.3
Average $W_v/A_v$	0.212	0.232	0.249	0.273	0.293

Table 6: Performance of WORK4FOOD with ratings in city B.

lowest-rated agents get a 20% lower guarantee. We then run WORK4FOOD with these rating-based agent-specific work guarantees and check whether we are able to satisfy them. Table 6 presents the results. As we can see, the guarantee and the eventual work per unit time are very closely aligned and thereby validating the efficacy of WORK4FOOD.

# 5 Conclusion

WORK4FOOD provides a mechanism for food delivery platforms to control and guarantee agent wages while at the same time optimizing their costs and maintaining reasonable delivery times. Optimizing platform cost also leads to a more efficient system with agents not being forced to work more to earn fair wages. It leads to savings in fuel costs and avoids negative environmental impact in order to provide better wages to agents. We also show that by tuning the work guarantee parameter of WORK4FOOD, it can be customized to address various objectives including minimizing cost, optimizing delivery times, or providing guarantees based on agent performance. Most importantly, WORK4FOOD injects transparency into the system where agents know the income promised to them and the service provider is assured that cost would be minimized without hampering delivery times.

# References

- [Fairwork, 2021] Fairwork. Fairwork India ratings 2020: Labour standards in the platform economy. https://fair.work/wp-content/uploads/sites/131/2021/01/ Fairwork\_India\_2020\_report.pdf, 2021.
- [Gupta *et al.*, 2022] Anjali Gupta, Rahul Yadav, Ashish Nair, Abhijnan Chakraborty, Sayan Ranu, and Amitabha Bagchi. Fairfoody: Bringing in fairness in food delivery. In *Proc. AAAI*, 2022.
- [Joshi *et al.*, 2021] Manas Joshi, Arshdeep Singh, Sayan Ranu, Amitabha Bagchi, Priyank Karia, and Puneet Kala. Batching and matching for food delivery in dynamic road networks. In *Proc. ICDE*, 2021.
- [Joshi *et al.*, 2022] Manas Joshi, Arshdeep Singh, Sayan Ranu, Amitabha Bagchi, Priyank Karia, and Puneet Kala. Foodmatch: Batching and matching for food delivery in dynamic road networks. *ACM Trans. Spatial Algorithms Syst.*, 8(1), mar 2022.
- [Khumalo, 2022] Sibongile Khumalo. Food delivery apps bring new hope to SA's jobless, but it's not always a piece of cake. https://www.news24.com/fin24/companies/fooddelivery-apps-bring-new-hope-to-sas-jobless-but-its-notalways-a-piece-of-cake-20220205, 2022.
- [Kottakki *et al.*, 2020] Krishna Kumar Kottakki, Sunil Rathee, Kranthi Mitra Adusumilli, Jose Mathew, Bharath Nayak, and Saket Ahuja. Customer experience driven assignment logic for online food delivery. In *Proc. IEEE IEEM*, 2020.
- [Kuhn, 1955] Harold W Kuhn. The Hungarian method for the assignment problem. *Naval research logistics quarterly*, 2(1-2):83–97, 1955.
- [Mitra, 2022] Debraj Mitra. Food delivery chain partners strike in Kolkata, seek higher pay and bar on outsourcing. https://www.telegraphindia.com/my-kolkata/news/fooddelivery-chain-partners-strike-in-parts-of-kolkata-seekhigher-pay-and-bar-on-outsourcing/cid/1848505, 2022.
- [Moran, 2018] Greg Moran. Emissions 101: A two-wheeler takedown. *Economic Times*, 2018.
- [Munkres, 1957] James Munkres. Algorithms for the assignment and transportation problems. *Journal of the society for industrial and applied mathematics*, 5(1):32–38, 1957.
- [Newson and Krumm, 2009] Paul Newson and John Krumm. Hidden Markov map matching through noise and sparseness. In *Proc. ACM SIGSPATIAL*, 2009.
- [Reyes et al., 2018] Damián Reyes, Alan L. Erera, Martin W. P. Savelsbergh, Sagar Sahasrabudhe, and Ryan J. O'Neil. The meal delivery routing problem. Optimization Online, 2018.
- [Sodhi, 2021] Tanishka Sodhi. We are slaves to them: Zomato, Swiggy delivery workers speak up against unfair practices. https://www.newslaundry.com/2021/08/14/weare-slaves-to-them-zomato-swiggy-delivery-workersspeak-up-against-unfair-practices, 2021.

- [Ulmer *et al.*, 2021] Marlin W. Ulmer, Barrett W. Thomas, Ann Melissa Campbell, and Nicholas Woyak. The restaurant meal delivery problem: Dynamic pickup and delivery with deadlines and random ready times. *Transp. Sci.*, 55:75–100, 2021.
- [Weng and Yu, 2021] Wentao Weng and Yang Yu. Laborright protecting dispatch of meal delivery platforms. In *Proc. IEEE CDC*, 2021.
- [Wilks, 2022] Andrew Wilks. Turkey's food delivery couriers latest to strike amid economic crisis. https://www.al-monitor.com/originals/2022/02/turkeys-food-delivery-couriers-latest-strike-amid-economic-crisis, 2022.
- [Williams and Rasmussen, 2006] C. K. Williams and C. E. Rasmussen. Gaussian processes for Machine Learning. 2(3), 2006.
- [Xue *et al.*, 2021] Guiqin Xue, Zheng Wang, and Guangwei Wang. Optimization of rider scheduling for a food delivery service in o2o business. *Journ. of Adv. Trans.*, 2021.
- [Yildiz and Savelsbergh, 2019] Baris Yildiz and Martin Savelsbergh. Provably high-quality solutions for the meal delivery routing problem. *Transportation Science*, 53, 07 2019.
- [Zeng *et al.*, 2019] Yuxiang Zeng, Yongxin Tong, and Lei Chen. Last-mile delivery made practical: An efficient route planning framework with theoretical guarantees. *Proc. VLDB Endow.*, 13(3):320–333, 2019.
- [Zhou and others, 2020] Irene Zhou et al. Digital labour platforms and labour protection in China. Technical report, International Labour Organization, 2020.