

Reasoning in the Description Logic \mathcal{ALC} under Category Semantics

Ludovic Brielle, Chan Le Duc, and Pascal Vaillant

Université Sorbonne Paris Nord, LIMICS, INSERM, U1142, F-93000, Bobigny, France

Abstract. We present in this paper a reformulation of the usual set-theoretical semantics of the description logic \mathcal{ALC} with general TBoxes by using categorical language. In this setting, \mathcal{ALC} concepts are represented as objects, concept subsumptions as arrows, and memberships as logical quantifiers over objects and arrows of categories. Such a category-based semantics provides a more modular representation of the semantics of \mathcal{ALC} . This feature allows us to define a sublogic of \mathcal{ALC} by dropping the interaction between existential and universal restrictions, which would be responsible for an exponential complexity in space. Such a sublogic is undefinable in the usual set-theoretical semantics. We show that this sublogic is PSPACE by proposing a deterministic algorithm for checking concept satisfiability which runs in polynomial space.

1 Introduction

Languages based on Description Logics (DLs) [1] such as OWL [2], OWL2 [3], are widely used to represent ontologies in semantics-based applications. \mathcal{ALC} is the smallest DL involving roles which is closed under negation. It is a suitable logic for a first attempt to replace the usual set-theoretical semantics by another one. A pioneer work by Lawvere [4] provided an appropriate axiomatization of the category of sets by replacing set membership with the composition of functions. However, it was not indicated whether the categorical axioms are “semantically” equivalent to the axioms based on set membership. As pointed out by Goldblatt [5], this may lead to a very different semantics for negation. In this paper, we propose a rewriting of the usual set-theoretical semantics of \mathcal{ALC} by using objects and arrows, the two fundamental elements of category theory, to represent concepts and subsumptions respectively.

It is well known that \mathcal{ALC} with general TBoxes is EXPTIME-complete [6,7] while \mathcal{ALC} without TBox is PSPACE-complete [8]. Hence, the interaction between existential and universal restrictions with general TBoxes would be responsible for an intractable space complexity if $\text{PSPACE} \subsetneq \text{EXPTIME}$. The main motivation of this work consists in identifying a sublogic of \mathcal{ALC} with general TBoxes which allows to reduce the reasoning complexity without losing too much of the expressive power.

To reduce space complexity when reasoning with \mathcal{ALC} under the usual set-theoretical semantics, one can restrict expressiveness of TBoxes by preventing them from having cyclic axioms [9]. This restriction may be too strong for those who wish to express simple knowledge of cyclic nature such as $\text{Human} \sqsubseteq \exists \text{hasParent. Human}$.

However, we can find a sublogic of \mathcal{ALC} under category-theoretical semantics such that it allows to fully express general TBoxes and only needs to drop a part of the semantics of universal restrictions. Such a sublogic is undefinable in the usual set-theoretical semantics. Indeed, a universal restriction $\forall R.C$ in \mathcal{ALC} can be defined under category-theoretical semantics by using the following two informal properties (that will be developed in more detail below, Section 4, Definition 8): (i) $\forall R.C$ is “very close” to $\neg\exists R.\neg C$; and (ii) $\exists R.C \sqcap \forall R.D$ is “very close” to $\exists R.(C \sqcap D)$.

We can observe that Property (ii) is a (weak) representation of the interaction between universal and existential restrictions.

As will be shown below (Section 5), if we may just remove this interaction from the categorical semantics of universal restriction, we obtain a new logic, namely \mathcal{ALC}_{∇} , in which reasoning will be tractable in space.

The semantic loss caused by this removal might be tolerable in certain cases. We illustrate it with the example below.

Example 1. Consider for instance the following \mathcal{ALC} TBox:

HappyChild \sqsubseteq $\exists \text{eatsFood.Dessert} \sqcap \forall \text{eatsFood.HotMeal}$
Dessert \sqsubseteq $\neg \text{HotMeal}$

As in the usual set-theoretical semantics, nobody can be a HappyChild under category-theoretical semantics: the concept is unsatisfiable in this world. Indeed, according to the first axiom if somebody is a HappyChild, then they must simultaneously (1) have some Dessert to eat, and (2) eat only HotMeal, which contradicts the second axiom.

Now, if the second axiom is removed from the TBox, under set-theoretical semantics, the first axiom entails that if somebody is a HappyChild, then they eat HotMeal. In fact, the first subconcept ($\exists \text{eatsFood.Dessert}$) ensures that there exists at least one food item that they eat, and the second one ($\forall \text{eatsFood.HotMeal}$) that this food is necessarily HotMeal.

Under the category-theoretical semantics that we will define in this paper (\mathcal{ALC}_{∇}), the first axiom alone does not allow to entail that if somebody is a HappyChild then they eat HotMeal. This is due to the fact that the element of the definition of universal quantification that was there to represent Property (ii) has been dropped, and that unlike set-theoretical semantics, we no longer have a set of individuals providing an extensional “support” for the second subconcept.

The paper is organized as follows. We begin by translating semantic constraints related to each \mathcal{ALC} constructor into arrows between objects. Then, we check whether the obtained arrows allow to restore usual properties. If it is not the case, we add new arrows and objects to capture the missing properties without going beyond the set-theoretical semantics. For instance, it is not sufficient to define category-theoretical semantics of negation $\neg C$ by stating $C \sqcap \neg C \longrightarrow \perp$ and $\top \longrightarrow C \sqcup \neg C$ because it is not possible to obtain arrows such as $C \xleftrightarrow{\quad} \neg\neg C$ from this definition [10]. In Section 5, we begin by identifying a sublogic of \mathcal{ALC} , namely \mathcal{ALC}_{∇} , by dropping a property from the categorical semantics of universal restriction which would lead to an intractable complexity in space. We show that this sublogic is strictly different from \mathcal{ALC} and propose a PSPACE deterministic algorithm for checking concept satisfiability in \mathcal{ALC}_{∇} .

2 Related Work

In this section, we discuss some results on PSPACE algorithms for Description Logics that are slightly more expressive than \mathcal{ALC} . A PSPACE algorithm [11] was presented for the logic \mathcal{SIL} (\mathcal{ALC} with inverse and transitive roles) without TBox. Tableau method is used in this algorithm to build a tree to represent a model. Since TBox is not allowed, the depth of such trees is bounded by a polynomial function in the size of input. When extending this method to a general TBox, the depth of such trees may be exponential. A more recent work [9] proposed an automata-based algorithm for \mathcal{SIL} with an acyclic TBox. This algorithm tries to build a *tree automaton* to represent a model. In this construction, the acyclicity of a TBox prevents the algorithm from building a tree automaton with an exponential depth.

A common issue of these algorithms is that they need to store backtracking points in order to deal with nondeterminism. When the depth is exponential, they have to use an exponential memory to store backtracking points.

There have been very few works on connections between category theory and DLs. Spivak et al. [12] used category theory to define a high-level graphical language comparable with OWL (based on DLs) for knowledge representation rather than a foundational formalism for reasoning. Codescu *et al.* [13] introduced a categorical framework to formalize a network of aligned ontologies. The formalism on which the framework is based is independent from the logic used in ontologies. It is shown that all global reasoning over such a network can be reduced to local reasoning for a given DL used in the ontologies involved in the network. As a consequence, the semantics of DLs employed in the ontologies continue to rely on set theory.

3 Syntax and set-theoretical semantics of \mathcal{ALC}

We present syntax and semantics of the Description Logic \mathcal{ALC} [1] with TBoxes and some basic inference problems.

Definition 1 (Syntax and set-theoretical semantics). Let \mathbf{R} and \mathbf{C} be non-empty sets of role names and concept names respectively. The set of \mathcal{ALC} -concepts is defined as the smallest set containing all concept names in \mathbf{C} with \top , \perp and complex concepts that are inductively defined as follows: $C \sqcap D$, $C \sqcup D$, $\neg C$, $\exists R.C$, $\forall R.C$ where C and D are \mathcal{ALC} -concepts, and R is a role name in \mathbf{R} . An axiom $C \sqsubseteq D$ is called a general concept inclusion (GCI) where C, D are (possibly complex) \mathcal{ALC} -concepts. An \mathcal{ALC} ontology \mathcal{O} (or general TBox) is a finite set of GCIs.

An interpretation $\mathcal{I} = \langle \Delta^{\mathcal{I}}, \cdot^{\mathcal{I}} \rangle$ consists of a non-empty set $\Delta^{\mathcal{I}}$ (domain), and a function $\cdot^{\mathcal{I}}$ (interpretation function) which associates a subset of $\Delta^{\mathcal{I}}$ to each concept name, an element in $\Delta^{\mathcal{I}}$ to each individual, and a subset of $\Delta^{\mathcal{I}} \times \Delta^{\mathcal{I}}$ to each role name such that

$$\begin{aligned}
\top^{\mathcal{I}} &= \Delta^{\mathcal{I}} \\
\perp^{\mathcal{I}} &= \emptyset \\
(C \sqcap D)^{\mathcal{I}} &= C^{\mathcal{I}} \cap D^{\mathcal{I}} \\
(C \sqcup D)^{\mathcal{I}} &= C^{\mathcal{I}} \cup D^{\mathcal{I}} \\
(\neg C)^{\mathcal{I}} &= \Delta^{\mathcal{I}} \setminus C^{\mathcal{I}} \\
(\exists R.C)^{\mathcal{I}} &= \{x \in \Delta^{\mathcal{I}} \mid \exists y \in \Delta^{\mathcal{I}}, \langle x, y \rangle \in R^{\mathcal{I}} \wedge y \in C^{\mathcal{I}}\} \\
(\forall R.C)^{\mathcal{I}} &= \{x \in \Delta^{\mathcal{I}} \mid \forall y \in \Delta^{\mathcal{I}}, \langle x, y \rangle \in R^{\mathcal{I}} \implies y \in C^{\mathcal{I}}\}
\end{aligned}$$

An interpretation \mathcal{I} satisfies a GCI $C \sqsubseteq D$ if $C^{\mathcal{I}} \subseteq D^{\mathcal{I}}$. \mathcal{I} is a model of \mathcal{O} , written $\mathcal{I} \models \mathcal{O}$, if \mathcal{I} satisfies each GCI of \mathcal{O} . In this case, we say that \mathcal{O} is set-theoretically consistent, and set-theoretically inconsistent otherwise. A concept C is set-theoretically satisfiable with respect to \mathcal{O} if there is a model \mathcal{I} of \mathcal{O} such that $C^{\mathcal{I}} \neq \emptyset$, and set-theoretically unsatisfiable otherwise. We say that a GCI $C \sqsubseteq D$ is set-theoretically entailed by \mathcal{O} , written $\mathcal{O} \models C \sqsubseteq D$, if $C^{\mathcal{I}} \subseteq D^{\mathcal{I}}$ for all models \mathcal{I} of \mathcal{O} . The pair $\langle \mathbf{C}, \mathbf{R} \rangle$ is called the signature of \mathcal{O} .

We finish this section by introducing notations that will be used in the paper. We use $|S|$ to denote the cardinality of a set S . Given an \mathcal{ALC} ontology \mathcal{O} , we denote by $\text{sub}(\mathcal{O})$ the set of all sub-concepts occurring in \mathcal{O} . The size of an ontology \mathcal{O} , denoted by $\|\mathcal{O}\|$, is the size of all GCIs. Analogously, we use $\|C\|$ to denote the size of a concept C . It holds that $|\text{sub}(\mathcal{O})|$ is polynomially bounded by $\|\mathcal{O}\|$ since if a concept is represented as string then a sub-concept is a substring.

4 Category-theoretical semantics of \mathcal{ALC}

We can observe that the set-theoretical semantics of \mathcal{ALC} is based on set membership relationships, while ontology inferences, such as consistency or concept subsumption, involve set inclusions. This explains why inference algorithms developed in this setting often have to build sets of individuals connected in some way for representing a model.

In this section, we use some basic notions in category theory to characterize the semantics of \mathcal{ALC} . Instead of set membership, in this categorical language, we use “objects” and “arrows” to define semantics of a given object.

Although the present paper is self-contained, we refer the readers to textbooks [5, 14] on category theory for further information.

Definition 2 (Syntax categories). Let \mathbf{R} and \mathbf{C} be non-empty sets of role names and concept names respectively. We define a concept syntax category \mathcal{C}_c and a role syntax category \mathcal{C}_r from the signature $\langle \mathbf{C}, \mathbf{R} \rangle$ as follows:

1. Each role name R in \mathbf{R} is an object R of \mathcal{C}_r . In particular, there are initial and terminal objects R_{\perp} and R_{\top} in \mathcal{C}_r with arrows $R \longrightarrow R_{\top}$ and $R_{\perp} \longrightarrow R$ for all object R of \mathcal{C}_r . There is also an identity arrow $R \longrightarrow R$ for each object R of \mathcal{C}_r .
2. Each concept name in \mathbf{C} is an object of \mathcal{C}_c . In particular, \perp and \top are respectively initial and terminal objects, i.e. there are arrows $C \longrightarrow \top$ and $\perp \longrightarrow C$ for each object C of \mathcal{C}_c . Furthermore, for each object C of \mathcal{C}_c there is an identity arrow $C \longrightarrow C$, and for each object R of \mathcal{C}_r there are two objects of \mathcal{C}_c , namely $\text{dom}(R)$ and $\text{cod}(R)$.

3. If there are arrows $E \longrightarrow F$ and $F \longrightarrow G$ in \mathcal{C}_c (resp. \mathcal{C}_r), then there is an arrow $E \longrightarrow G$ in \mathcal{C}_c (resp. \mathcal{C}_r).
4. There are two functors dom and cod from \mathcal{C}_r to \mathcal{C}_c , i.e. they associate two objects $\text{dom}(R)$ and $\text{cod}(R)$ of \mathcal{C}_c to each object R of \mathcal{C}_r such that
 - (a) $\text{dom}(R_\top) = \top$, $\text{cod}(R_\top) = \top$, $\text{dom}(R_\perp) = \perp$ and $\text{cod}(R_\perp) = \perp$.
 - (b) if there is an arrow $R \longrightarrow R'$ in \mathcal{C}_r then there are arrows $\text{dom}(R) \longrightarrow \text{dom}(R')$ and $\text{cod}(R) \longrightarrow \text{cod}(R')$.
 - (c) if there are arrows $R \longrightarrow R' \longrightarrow R''$ in \mathcal{C}_r then there are arrows $\text{dom}(R) \longrightarrow \text{dom}(R'')$ and $\text{cod}(R) \longrightarrow \text{cod}(R'')$.
 - (d) if there is an arrow $\text{dom}(R) \longrightarrow \perp$ or $\text{cod}(R) \longrightarrow \perp$ in \mathcal{C}_c , then there is an arrow $R \longrightarrow R_\perp$ in \mathcal{C}_r .

For each arrow $E \longrightarrow F$ in \mathcal{C}_c or \mathcal{C}_r , E and F are respectively called domain and codomain of the arrow. We use also $\text{Ob}(\mathcal{C})$ and $\text{Hom}(\mathcal{C})$ to denote the collections of objects and arrows of a category \mathcal{C} .

Definition 3 provides a general framework with syntax elements and necessary properties from category theory. We need to “instantiate” it to obtain categories which capture semantic constraints coming from axioms. The following definition extends syntax categories in such a way that they admit the axioms of an \mathcal{ALC} ontology as arrows.

Definition 3 (Ontology categories). Let C be an \mathcal{ALC} concept and \mathcal{O} an \mathcal{ALC} ontology from a signature $\langle \mathbf{C}, \mathbf{R} \rangle$. We define a concept ontology category $\mathcal{C}_c\langle C, \mathcal{O} \rangle$ and a role ontology category $\mathcal{C}_r\langle C, \mathcal{O} \rangle$ as follows:

1. $\mathcal{C}_c\langle C, \mathcal{O} \rangle$ and $\mathcal{C}_r\langle C, \mathcal{O} \rangle$ are syntax categories from $\langle \mathbf{C}, \mathbf{R} \rangle$.
2. C is an object of $\mathcal{C}_c\langle C, \mathcal{O} \rangle$.
3. If $E \sqsubseteq F$ is an axiom of \mathcal{O} , then E, F are objects and $E \longrightarrow F$ is an arrow of $\mathcal{C}_c\langle C, \mathcal{O} \rangle$.

In this paper, an object of $\mathcal{C}_c\langle C, \mathcal{O} \rangle$ and $\mathcal{C}_r\langle C, \mathcal{O} \rangle$ is called concept and role object respectively. We transfer the vocabulary used in Description Logics to categories as follows. A concept object $C \sqcup D$, $C \sqcap D$ or $\neg C$ is respectively called disjunction, conjunction and negation object. For an existential restriction object $\exists R.C$ or universal restriction object $\forall R.C$, C is called the *filler* of $\exists R.C$ and $\forall R.C$.

In the sequel, we introduce category-theoretical semantics of disjunction, conjunction, negation, existential and universal restriction objects if they appear in $\mathcal{C}_c\langle C, \mathcal{O} \rangle$. Some of them require more *explicit* properties than those needed for the set-theoretical semantics. This is due to the fact that set membership is translated into arrows in a syntax category. Since semantics of an object in a category depends to relationships with another ones, the following definitions need to add to $\mathcal{C}_c\langle C, \mathcal{O} \rangle$ and $\mathcal{C}_r\langle C, \mathcal{O} \rangle$ new objects and arrows.

Definition 4 (Category-theoretical semantics of disjunction). Let $C, D, C \sqcup D$ be concept objects of $\mathcal{C}_c\langle C, \mathcal{O} \rangle$. Category-theoretical semantics of $C \sqcup D$ is defined by using arrows in $\mathcal{C}_c\langle C, \mathcal{O} \rangle$ as follows. There are arrows i, j from C and D to $C \sqcup D$,




Fig. 1: Commutative diagram for disjunction

and if there is an object X and arrows f, g from C, D to X , then there is an arrow k such that the following diagram commutes :

The diagram in Figure 1 can be rephrased as follows:

$$C \longrightarrow C \sqcup D \text{ and } D \longrightarrow C \sqcup D \quad (1)$$

$$\forall X, C \longrightarrow X \text{ and } D \longrightarrow X \implies C \sqcup D \longrightarrow X \quad (2)$$

Intuitively speaking, Properties (1) and (2) tell us that $C \sqcup D$ is the “smallest” object which is “greater” than C and D . The following lemma establishes the connection between the usual set semantics of disjunction and the category-theoretical one given in Definition 4. In this lemma, Properties (3) and (4) are rewritings of Properties (1) and (2) in set theory.

Lemma 1. *The category-theoretical semantics of $C \sqcup D$ characterized by Definition 4 is compatible with the set-theoretical semantics of $C \sqcup D$, that means if $\langle \Delta^{\mathcal{I}}, \cdot^{\mathcal{I}} \rangle$ is an interpretation under set-theoretical semantics, then the following holds:*

$$(C \sqcup D)^{\mathcal{I}} = C^{\mathcal{I}} \cup D^{\mathcal{I}} \text{ iff}$$

$$C^{\mathcal{I}} \subseteq (C \sqcup D)^{\mathcal{I}}, D^{\mathcal{I}} \subseteq (C \sqcup D)^{\mathcal{I}} \quad (3)$$

$$\forall X \subseteq \Delta^{\mathcal{I}}, C^{\mathcal{I}} \subseteq X, D^{\mathcal{I}} \subseteq X \implies (C \sqcup D)^{\mathcal{I}} \subseteq X \quad (4)$$

Proof. “ \Leftarrow ”. Due to (3) we have $C^{\mathcal{I}} \cup D^{\mathcal{I}} \subseteq (C \sqcup D)^{\mathcal{I}}$. Let $X = C^{\mathcal{I}} \cup D^{\mathcal{I}}$. Due to (4) we have $(C \sqcup D)^{\mathcal{I}} \subseteq X = C^{\mathcal{I}} \cup D^{\mathcal{I}}$.

“ \Rightarrow ”. From $(C \sqcup D)^{\mathcal{I}} = C^{\mathcal{I}} \cup D^{\mathcal{I}}$, we have (3). Let $x \in (C \sqcup D)^{\mathcal{I}}$. Due to $(C \sqcup D)^{\mathcal{I}} = C^{\mathcal{I}} \cup D^{\mathcal{I}}$, we have $x \in C^{\mathcal{I}}$ or $x \in D^{\mathcal{I}}$. Hence, $x \in X$ since $C^{\mathcal{I}} \subseteq X$ and $D^{\mathcal{I}} \subseteq X$.

At first glance, one can follow the same idea used in Definition 4 to define category-theoretical semantics of $C \sqcap D$ as described in Figure 2. They tell us that $C \sqcap D$ is the “greatest” object which is “smaller” than C and D .

However, this definition is not strong enough to entail the distributive property of conjunction over disjunction. Hence, we need a stronger definition for conjunction.

Definition 5 (Category-theoretical semantics of conjunction).

Let $C, D, E, C \sqcap D, C \sqcap E, D \sqcup E, C \sqcap (D \sqcup E)$ and $(C \sqcap D) \sqcup (C \sqcap E)$ be objects of $\mathcal{C}_c\langle C, \mathcal{O} \rangle$. Category-theoretical semantics of $C \sqcap D$ is defined by using the following properties in $\mathcal{C}_c\langle C, \mathcal{O} \rangle$.

$$C \sqcap D \longrightarrow C \text{ and } C \sqcap D \longrightarrow D \quad (5)$$

$$\forall X, X \longrightarrow C \text{ and } X \longrightarrow D \implies X \longrightarrow C \sqcap D \quad (6)$$

$$C \sqcap (D \sqcup E) \longrightarrow (C \sqcap D) \sqcup (C \sqcap E) \quad (7)$$




Fig. 2: Commutative diagram for a weak conjunction

Lemma 2. *The following properties hold:*

$$C \sqcup D \iff D \sqcup C \quad (8)$$

$$C \sqcap D \iff D \sqcap C \quad (9)$$

$$(C \sqcup D) \sqcup E \iff C \sqcup (D \sqcup E) \quad (10)$$

$$(C \sqcap D) \sqcap E \iff C \sqcap (D \sqcap E) \quad (11)$$

In other words, \sqcup and \sqcap are commutative and associative with relation to the objects.

Proof. These properties are direct consequences of the previous definitions.

1. We start by proving Property (8). Consider object $D \sqcup C$: from Property (1), we have $D \rightarrow D \sqcup C$ and $C \rightarrow D \sqcup C$. Then, recall Property (2) above, which states that for all object X such that $C \rightarrow X$ and $D \rightarrow X$ then $C \sqcup D \rightarrow X$. Replace X by $D \sqcup C$ to obtain $C \sqcup D \rightarrow D \sqcup C$. We obtain arrow $D \sqcup C \rightarrow C \sqcup D$ by switching the roles of $D \sqcup C$ and $C \sqcup D$ from the above reasoning.
2. Property (9): use the first part of the conjunction definition (5) on $D \sqcap C$ to obtain $D \sqcap C \rightarrow D$ and $D \sqcap C \rightarrow C$. From Property (6), we know that for all object X such that $X \rightarrow C$ and $X \rightarrow D$ then $X \rightarrow C \sqcap D$. Thus replace X by $D \sqcap C$ to get $D \sqcap C \rightarrow C \sqcap D$. As above, the inverse arrow is obtained by swapping the roles of $D \sqcap C$ and $C \sqcap D$.
3. Property (10): We start by proving that

$$(C \sqcup D) \sqcup E \rightarrow C \sqcup (D \sqcup E).$$

Let $X = C \sqcup (D \sqcup E)$, we have $C \rightarrow X$ by (1), as well as $D \rightarrow D \sqcup E \rightarrow X$, then by (2), we get $C \sqcup D \rightarrow X$. Noting we also have $E \rightarrow D \sqcup E \rightarrow X$ by definition, we can conclude that

$$(C \sqcup D) \sqcup E \rightarrow X.$$

The other direction can be proven with no loss of generality by changing the order by which we apply the arrows.

4. Property (11): As above, proving one direction is virtually the same as proving the other one by swapping the role of $C \sqcap D$ and $D \sqcap E$. Thus we just need to prove the following property:

$$C \sqcap (D \sqcap E) \rightarrow (C \sqcap D) \sqcap E$$

Let $X = C \sqcap (D \sqcap E)$. From (5), we get $X \longrightarrow C$ and $X \longrightarrow D \sqcap E \longrightarrow D$. Applying (6), we obtain $X \longrightarrow C \sqcap D$. Property (5) also gives us $X \longrightarrow D \sqcap E \longrightarrow E$; so, applying (6) once again, we end up with:

$$X \longrightarrow (C \sqcap D) \sqcap E$$

which concludes the proof.

Lemma 3. Assume that we have $D \longrightarrow E$, then the following properties hold:

$$C \sqcup D \longrightarrow C \sqcup E \quad (12)$$

$$C \sqcap D \longrightarrow C \sqcap E. \quad (13)$$

Proof. By hypothesis the arrow $D \longrightarrow E$ exists. If we let $X = C \sqcup E$, then by (1) we have $C \longrightarrow X$ and $E \longrightarrow X$, since $D \longrightarrow E$, by definition we have $D \longrightarrow X$ and then by (2), $C \sqcup D \longrightarrow X$.

Let $X = C \sqcap D$, then by hypothesis and (5), we have $X \longrightarrow C$ and $X \longrightarrow D \longrightarrow E$. Using (6), we get $X \longrightarrow C \sqcap E$.

Note that under the set-theoretical semantics the distributive property of disjunction over conjunction is not *independent*, i.e. it is a consequence of the definitions of disjunction and conjunction. However, this does not hold under the category-theoretical semantics. The following lemma provides the connection between the usual set semantics of conjunction and the category-theoretical one given in Definition 5. In this lemma, Properties (14-16) are rewritings of Properties (5-7) in set theory.

Lemma 4. The category-theoretical semantics of $C \sqcap D$ characterized by Definition 5 is compatible with the set-theoretical semantics of $C \sqcap D$, that means if $\langle \Delta^{\mathcal{I}}, \cdot^{\mathcal{I}} \rangle$ is an interpretation under set-theoretical semantics, then the following holds:

$$(U \sqcap V)^{\mathcal{I}} = U^{\mathcal{I}} \cap V^{\mathcal{I}} \text{ for all concepts } U, V \text{ iff}$$

$$(C \sqcap D)^{\mathcal{I}} \subseteq C^{\mathcal{I}}, (C \sqcap D)^{\mathcal{I}} \subseteq D^{\mathcal{I}} \quad (14)$$

$$\forall X \subseteq \Delta^{\mathcal{I}}, X \subseteq C^{\mathcal{I}}, X \subseteq D^{\mathcal{I}} \implies X \subseteq (C \sqcap D)^{\mathcal{I}} \quad (15)$$

$$(C \sqcap (D \sqcup E))^{\mathcal{I}} \subseteq ((C \sqcap D) \sqcup (C \sqcap E))^{\mathcal{I}} \quad (16)$$

for all concepts C, D and E .

Proof. “ \Leftarrow ”. Due to (14) we have $(U \sqcap V)^{\mathcal{I}} \subseteq U^{\mathcal{I}} \cap V^{\mathcal{I}}$. Let $X \subseteq \Delta^{\mathcal{I}}$ such that $X = U^{\mathcal{I}} \cap V^{\mathcal{I}}$. This implies that $X \subseteq U^{\mathcal{I}}$ and $X \subseteq V^{\mathcal{I}}$. From (15), we have $X \subseteq (U \sqcap V)^{\mathcal{I}}$. “ \Rightarrow ”. From $(C \sqcap D)^{\mathcal{I}} = C^{\mathcal{I}} \cap D^{\mathcal{I}}$ we obtain (14). Moreover, if $X \subseteq C^{\mathcal{I}}$ and $X \subseteq D^{\mathcal{I}}$ then $X \subseteq C^{\mathcal{I}} \cap D^{\mathcal{I}} = (C \sqcap D)^{\mathcal{I}}$ by the hypothesis. Thus, (15) is proved. To prove (16), we use the hypothesis and the usual set-theoretical semantics as follows: $(C \sqcap (D \sqcup E))^{\mathcal{I}} = C^{\mathcal{I}} \cap (D \sqcup E)^{\mathcal{I}} = C^{\mathcal{I}} \cap (D^{\mathcal{I}} \cup E^{\mathcal{I}}) = (C^{\mathcal{I}} \cap D^{\mathcal{I}}) \cup (C^{\mathcal{I}} \cap E^{\mathcal{I}}) = (C \sqcap D)^{\mathcal{I}} \cup (C \sqcap E)^{\mathcal{I}} = ((C \sqcap D) \sqcup (C \sqcap E))^{\mathcal{I}}$.

With disjunction and conjunction, one could use the arrows $C \sqcap \neg C \longrightarrow \perp$ and $\top \longrightarrow C \sqcup \neg C$ to define category-theoretical semantics of negation. However, such a definition does not allow to entail useful properties (cf. Lemma 6) which are available under set-theoretical semantics. Therefore, it is required to use more properties to characterize negation in category-theoretical semantics.

Definition 6 (Category-theoretical semantics of negation).

Let $C, \neg C, C \sqcap \neg C, C \sqcup \neg C$ be objects of $\mathcal{C}_c\langle C, \mathcal{O} \rangle$. Category-theoretical semantics of $\neg C$ is defined by using the following arrows in $\mathcal{C}_c\langle C, \mathcal{O} \rangle$.

$$C \sqcap \neg C \longrightarrow \perp \quad (17)$$

$$\top \longrightarrow C \sqcup \neg C \quad (18)$$

$$\forall X, C \sqcap X \longrightarrow \perp \implies X \longrightarrow \neg C \quad (19)$$

$$\forall X, \top \longrightarrow C \sqcup X \implies \neg C \longrightarrow X \quad (20)$$

Informally, Property (19) tells us that $\neg C$ is the “greatest” object satisfying (17) while Property (20) tells us that $\neg C$ is the “smallest” object satisfying (18). We now provide the connection between set-theoretical semantics of negation and the category-theoretical one given in Definition 6.

Lemma 5. *The category-theoretical semantics of $\neg C$ characterized by Definition 6 is compatible with the set-theoretical semantics of $\neg C$, that means if $\langle \Delta^{\mathcal{I}}, \cdot^{\mathcal{I}} \rangle$ is an interpretation under set-theoretical semantics, then the following holds:*

$C^{\mathcal{I}} \cap \neg C^{\mathcal{I}} \subseteq \perp^{\mathcal{I}}$ and $\top^{\mathcal{I}} \subseteq C^{\mathcal{I}} \cup \neg C^{\mathcal{I}}$ imply

$$\forall X, (C \sqcap X)^{\mathcal{I}} \subseteq \perp^{\mathcal{I}} \implies X^{\mathcal{I}} \subseteq (\neg C)^{\mathcal{I}} \quad (21)$$

$$\forall X, \top^{\mathcal{I}} \subseteq (C \sqcup X)^{\mathcal{I}} \implies (\neg C)^{\mathcal{I}} \subseteq X^{\mathcal{I}} \quad (22)$$

Proof. Let $x \in X^{\mathcal{I}}$ with $(C \sqcap X)^{\mathcal{I}} \subseteq \perp^{\mathcal{I}}$. Due to Lemma 4, we have $(C \sqcap X)^{\mathcal{I}} = C^{\mathcal{I}} \cap X^{\mathcal{I}}$. Therefore, $x \notin C^{\mathcal{I}}$, and thus $x \in (\neg C)^{\mathcal{I}}$. Let $x \in (\neg C)^{\mathcal{I}}$ with $\top^{\mathcal{I}} \subseteq (C \sqcup X)^{\mathcal{I}}$. It follows that $x \notin C^{\mathcal{I}}$. Due to Lemma 1, we have $(C \sqcup X)^{\mathcal{I}} = C^{\mathcal{I}} \cup X^{\mathcal{I}}$. Therefore, $x \in X^{\mathcal{I}}$.

From Properties (17-20), we obtain De Morgan’s laws and other properties for the category-theoretical semantics as follows.

Lemma 6. *The following properties hold.*

$$C \xleftrightarrow{\quad} \neg \neg C \quad (23)$$

$$C \longrightarrow \neg D \iff D \longrightarrow \neg C \quad (24)$$

$$C \sqcap D \longrightarrow \perp \iff C \longrightarrow \neg D \quad (25)$$

$$\top \longrightarrow C \sqcup D \iff \neg C \longrightarrow D \quad (26)$$

$$\neg(C \sqcap D) \xleftrightarrow{\quad} \neg C \sqcup \neg D \quad (27)$$

$$\neg(C \sqcup D) \xleftrightarrow{\quad} \neg C \sqcap \neg D \quad (28)$$

Proof. 1. By Properties (17) and (19) where C gets $\neg C$ and X gets C , we have $C \longrightarrow \neg \neg C$. Analogously, by Properties (18) and (20), we obtain $\neg \neg C \longrightarrow C$. Hence, (23) is proved.

2. To prove (24), we need $C \sqcap D \longrightarrow \perp$ which follows from $C \sqcap D \longrightarrow C \longrightarrow \neg D$ and $C \sqcap D \longrightarrow D$, and thus $C \sqcap D \longrightarrow D \sqcap \neg D \longrightarrow \perp$. Conversely, if $D \longrightarrow \neg C$, then we have $C \sqcap D \longrightarrow D \longrightarrow \neg C$ and $C \sqcap D \longrightarrow C$ thus $C \sqcap D \longrightarrow \perp$ and we have finished the proof.

3. To prove (25), we start by proving $C \rightarrow \neg D \Rightarrow C \sqcap D \rightarrow \perp$. We have $C \sqcap D \rightarrow D$ and $C \sqcap D \rightarrow C \rightarrow \neg D$. By definition of conjunction, we obtain $C \sqcap D \rightarrow D \sqcap \neg D \rightarrow \perp$. To prove the other direction, we use (19) with $X = D$ or $X = C$.
4. The first direction of (26) is a direct consequence of Definition 6, Property (20) with $X = D$. To prove the other direction, we start by using (18), which gives us $\top \rightarrow E \sqcup \neg E$. Since there is an arrow $E \rightarrow F$, according to Property (12) of Lemma 3 there is also an arrow $\top \rightarrow F \sqcup \neg E$ - Property (8) of Lemma 2 implies the existence of an arrow $\top \rightarrow \neg E \sqcup F$.
5. To prove (27), we need the definitions of conjunction, disjunction and negation. We have $C \sqcap D \rightarrow C$ and $C \sqcap D \rightarrow D$. Due to (24), we obtain $\neg C \rightarrow \neg(C \sqcap D)$ and $\neg D \rightarrow \neg(C \sqcap D)$. By the definition of disjunction, we obtain $\neg C \sqcup \neg D \rightarrow \neg(C \sqcap D)$. To prove the inverse, we take arrows $\neg C \rightarrow \neg C \sqcup \neg D$ and $\neg D \rightarrow \neg C \sqcup \neg D$ from the definition of disjunction. Due to (24), it follows that $\neg(\neg C \sqcup \neg D) \rightarrow C$ and $\neg(\neg C \sqcup \neg D) \rightarrow D$. By definition, we obtain $\neg(\neg C \sqcup \neg D) \rightarrow C \sqcap D$. Due to (24) and (23), it follows that $\neg(C \sqcap D) \rightarrow \neg C \sqcup \neg D$.
6. Analogously, we can prove (28) by starting with arrows $\neg C \sqcap \neg D \rightarrow \neg C$ and $\neg C \sqcap \neg D \rightarrow \neg D$ from the definition of conjunction. Due to (24), we have $C \rightarrow \neg(\neg C \sqcap \neg D)$ and $D \rightarrow \neg(\neg C \sqcap \neg D)$. By the definition of disjunction, we have $C \sqcup D \rightarrow \neg(\neg C \sqcap \neg D)$, and by (24) we obtain $(\neg C \sqcap \neg D) \rightarrow \neg(C \sqcup D)$. To prove the inverse, we take arrows $C \rightarrow C \sqcup D$ and $D \rightarrow C \sqcup D$ obtained from the definition of disjunction. Due to (24), we have $\neg(C \sqcup D) \rightarrow \neg C$ and $\neg(C \sqcup D) \rightarrow \neg D$. By definition, we have $\neg(C \sqcup D) \rightarrow \neg C \sqcap \neg D$.

In order to define category-theoretical semantics of existential restrictions, we need to introduce new objects and arrows to $\mathcal{C}_c\langle C, \mathcal{O} \rangle$ and $\mathcal{C}_r\langle C, \mathcal{O} \rangle$, and use the functors dom and cod as described in Figure 3.

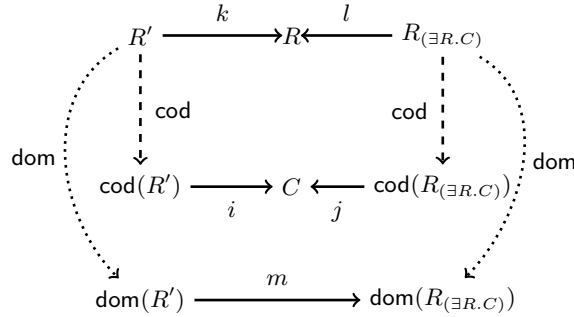


Fig. 3: Category-theoretical semantics for existential restriction

Definition 7 (Category-theoretical semantics of existential restriction). Let $\exists R.C, C$ be objects of $\mathcal{C}_c\langle C, \mathcal{O} \rangle$, and $R, R_{(\exists R.C)}$ be objects of $\mathcal{C}_r\langle C, \mathcal{O} \rangle$. Category-theoretical

semantics of $\exists R.C$ is defined by using arrows in $\mathcal{C}_c\langle C, \mathcal{O} \rangle$ and $\mathcal{C}_r\langle C, \mathcal{O} \rangle$ as follows.

$$R_{(\exists R.C)} \longrightarrow R, \text{cod}(R_{(\exists R.C)}) \longrightarrow C \quad (29)$$

$$\text{dom}(R_{(\exists R.C)}) \longleftarrow \exists R.C \quad (30)$$

$$\begin{aligned} \forall R', R' \longrightarrow R, \text{cod}(R') \longrightarrow C \implies \\ \text{dom}(R') \longrightarrow \text{dom}(R_{(\exists R.C)}) \end{aligned} \quad (31)$$

The following lemma establishes the connection between set-theoretical semantics of existential restriction and the category-theoretical one given in Definition 7.

Lemma 7. *The category-theoretical semantics of $\exists R.C$ characterized by Definition 7 is compatible with the set-theoretical semantics of $\exists R.C$, that means if $\langle \Delta^{\mathcal{I}}, \cdot^{\mathcal{I}} \rangle$ is an interpretation under set-theoretical semantics such that*

$$R_{(\exists R.C)}^{\mathcal{I}} \subseteq R^{\mathcal{I}} \quad (32)$$

$$\text{cod}(R_{(\exists R.C)})^{\mathcal{I}} \subseteq C^{\mathcal{I}} \quad (33)$$

then the following holds:

$$\text{dom}(R_{(\exists R.C)})^{\mathcal{I}} = \{x \in \Delta^{\mathcal{I}} \mid \exists y \in \Delta^{\mathcal{I}} : \langle x, y \rangle \in R^{\mathcal{I}} \wedge y \in C^{\mathcal{I}}\} \text{ iff}$$

$$\begin{aligned} \forall R' \subseteq \Delta^{\mathcal{I}} \times \Delta^{\mathcal{I}}, R' \subseteq R^{\mathcal{I}}, \text{cod}(R') \subseteq C^{\mathcal{I}} \implies \\ \text{dom}(R') \subseteq \text{dom}(R_{(\exists R.C)})^{\mathcal{I}} \end{aligned} \quad (34)$$

Proof. “ \Leftarrow ”. Let $x' \in \text{dom}(R_{(\exists R.C)})^{\mathcal{I}}$. There is an element $y \in \text{cod}(R_{(\exists R.C)})^{\mathcal{I}}$ such that $\langle x', y \rangle \in R_{(\exists R.C)}^{\mathcal{I}}$ by definition. Due to (33), we have $y \in C^{\mathcal{I}}$. Analogously, due to (32), we have $\langle x', y \rangle \in R^{\mathcal{I}}$. Thus, $x' \in \{x \in \Delta^{\mathcal{I}} \mid \exists y \in \Delta^{\mathcal{I}} : \langle x, y \rangle \in R^{\mathcal{I}} \wedge y \in C^{\mathcal{I}}\}$.

Let $x' \in \{x \in \Delta^{\mathcal{I}} \mid \exists y \in \Delta^{\mathcal{I}} : \langle x, y \rangle \in R^{\mathcal{I}} \wedge y \in C^{\mathcal{I}}\}$. Thus, there is an element $y \in C^{\mathcal{I}}$ such that $\langle x', y \rangle \in R^{\mathcal{I}}$. Take an $R' \subseteq \Delta^{\mathcal{I}} \times \Delta^{\mathcal{I}}$ such that $R' \subseteq R^{\mathcal{I}}, \text{cod}(R') \subseteq C^{\mathcal{I}}$ with $x' \in \text{dom}(R')$ and $y \in \text{cod}(R')$. Due to (34), we have $x' \in \text{dom}(R_{(\exists R.C)})^{\mathcal{I}}$. “ \Rightarrow ”. Let $R' \subseteq \Delta^{\mathcal{I}} \times \Delta^{\mathcal{I}}$ such that $R' \subseteq R^{\mathcal{I}}, \text{cod}(R') \subseteq C^{\mathcal{I}}$. Let $x' \in \text{dom}(R')$. This implies that there is some $y \in \text{cod}(R')$ such that $\langle x', y \rangle \in R'$. Hence, $y \in C^{\mathcal{I}}$ and $\langle x', y \rangle \in R^{\mathcal{I}}$. Therefore, $x' \in \{x \in \Delta^{\mathcal{I}} \mid \exists y \in \Delta^{\mathcal{I}} : \langle x, y \rangle \in R^{\mathcal{I}} \wedge y \in C^{\mathcal{I}}\} = \text{dom}(R_{(\exists R.C)})^{\mathcal{I}}$.

Lemma 8. *The following properties hold:*

$$C \longrightarrow \perp \implies \exists R.C \longrightarrow \perp \quad (35)$$

$$C \longrightarrow D \implies \exists R.C \longrightarrow \exists R.D \quad (36)$$

Proof. 1. We have $\text{cod}(R_{(\exists R.C)}) \longrightarrow C$ by definition. By hypothesis $C \longrightarrow \perp$, we have $\text{cod}(R_{(\exists R.C)}) \longrightarrow \perp$ due Definition 2 of cod . Again, due Definition 2 of cod , we have $R_{(\exists R.C)} \longrightarrow R_{\perp}$. Moreover, we have $\text{dom}(R_{(\exists R.C)}) \longrightarrow \perp$ due Definition 2 of dom . By Definition 7, we obtain $\exists R.C \longrightarrow \perp$.

2. To prove (36) we consider two objects $R_{(\exists R.C)}$ and $R_{(\exists R.D)}$ in \mathcal{C}_r . We have $R_{(\exists R.C)} \longrightarrow R$ and $\text{cod}(R_{(\exists R.C)}) \longrightarrow C \longrightarrow D$. By definition, we obtain $\text{dom}(R_{(\exists R.C)}) \longrightarrow \text{dom}(R_{(\exists R.D)})$.

The set-theoretical semantics of universal restriction can be defined as negation of existential restriction. However, $\forall R.C \iff \neg \exists R.\neg C$ does not allow to obtain usual connections between existential and universal restrictions such as $\exists R.D \sqcap \forall R.C \longrightarrow \exists R.(D \sqcap C)$ under the category-theoretical semantics (the “property (ii)” mentioned in our introduction). Therefore, we need more arrows to define category-theoretical semantics of universal restriction as follows.

Definition 8 (Category-theoretical semantics of universal restriction). *Let $\forall R.C$, C be objects of $\mathcal{C}_c\langle C, \mathcal{O} \rangle$, and R be an object of $\mathcal{C}_r\langle C, \mathcal{O} \rangle$. Category-theoretical semantics of $\forall R.C$ is defined by using arrows in $\mathcal{C}_c\langle C, \mathcal{O} \rangle$ and $\mathcal{C}_r\langle C, \mathcal{O} \rangle$ as follows.*

$$\forall R.C \iff \neg \exists R.\neg C \quad (37)$$

$$\forall R', R' \longrightarrow R, \text{dom}(R') \longrightarrow \forall R.C \implies \text{cod}(R') \longrightarrow C \quad (38)$$

We formulate and prove the connection between the usual set-theoretical semantics of universal restriction and the category-theoretical one given in Definition 8.

Lemma 9. *The category-theoretical semantics of $\forall R.C$ characterized by Definition 8 is compatible with the set-theoretical semantics of $\forall R.C$, that means if $\langle \Delta^{\mathcal{I}}, \cdot^{\mathcal{I}} \rangle$ is an interpretation under set-theoretical semantics, then the following holds:*

$$\forall R.C^{\mathcal{I}} = \{x \in \Delta^{\mathcal{I}} \mid \langle x, y \rangle \in R^{\mathcal{I}} \implies y \in C^{\mathcal{I}}\} \text{ iff}$$

$$\forall R.C^{\mathcal{I}} = (\neg \exists R.\neg C)^{\mathcal{I}} \quad (39)$$

$$\begin{aligned} \forall R' \subseteq \Delta^{\mathcal{I}} \times \Delta^{\mathcal{I}}, R' \subseteq R^{\mathcal{I}}, \text{dom}(R') \subseteq \forall R.C^{\mathcal{I}} \implies \\ \text{cod}(R')^{\mathcal{I}} \subseteq C^{\mathcal{I}} \end{aligned} \quad (40)$$

Proof. “ \Leftarrow ”. We have $\{x \in \Delta^{\mathcal{I}} \mid \langle x, y \rangle \in R^{\mathcal{I}} \implies y \in C^{\mathcal{I}}\}$ is the complement of $\{x \in \Delta^{\mathcal{I}} \mid \exists y \in \Delta^{\mathcal{I}} : \langle x, y \rangle \in R^{\mathcal{I}} \wedge y \in \neg C^{\mathcal{I}}\} = \exists R.\neg C^{\mathcal{I}}$. Hence, we have $\forall R.C^{\mathcal{I}} = \{x \in \Delta^{\mathcal{I}} \mid \langle x, y \rangle \in R^{\mathcal{I}} \implies y \in C^{\mathcal{I}}\}$ from (39).

“ \Rightarrow ”. Let $R' \subseteq R^{\mathcal{I}}$ with $\text{dom}(R') \subseteq \forall R.C^{\mathcal{I}}$. Let $y \in \text{cod}(R')$. There is some $x' \in \text{dom}(R')$ such that $\langle x', y \rangle \in R'^{\mathcal{I}}$. Since $R' \subseteq R^{\mathcal{I}}$ and $\text{dom}(R') \subseteq \forall R.C^{\mathcal{I}}$, we have $x \in \forall R.C^{\mathcal{I}}$ and $\langle x', y \rangle \in R^{\mathcal{I}}$. By hypothesis, $y \in C^{\mathcal{I}}$.

Lemma 10. *The following properties hold.*

$$\forall R.C \sqcap \exists R.\neg C \longrightarrow \perp \quad (41)$$

$$C \longrightarrow D \implies \forall R.C \longrightarrow \forall R.D \quad (42)$$

$$\exists R.D \sqcap \forall R.C \longrightarrow \exists R.(D \sqcap C) \quad (43)$$

$$\exists R.C \sqcup \exists R.D \iff \exists R.(C \sqcup D) \quad (44)$$

Proof. 1. (41) is a consequence of (37) and (17).

2. Due to (24), $C \longrightarrow D$ implies $\neg D \longrightarrow \neg C$. By (36), we obtain $\exists R.\neg D \longrightarrow \exists R.\neg C$. Again, due to (24), we have $\neg \exists R.\neg C \longrightarrow \neg \exists R.\neg D$. By definition with (37), it follows $\forall R.C \longrightarrow \forall R.D$.

3. To prove (43) we need category-theoretical semantics of existential and universal restrictions. We define an object R_X in \mathcal{C}_r such that $R_X \rightarrow R_{(\exists R.D)}$ and $\text{dom}(R_X) \xleftarrow{\quad} \exists R.D \sqcap \forall R.C$. This implies that $\text{cod}(R_X) \rightarrow \text{cod}(R_{(\exists R.D)})$ due to the functor cod from \mathcal{C}_r to \mathcal{C}_c , and $\text{dom}(R_X) \rightarrow \forall R.C$. By definition, we have $\text{cod}(R_{(\exists R.D)}) \rightarrow D$. Thus, $\text{cod}(R_X) \rightarrow D$. Due to Arrow (38) and $\text{dom}(R_X) \rightarrow \forall R.C$, we obtain $\text{cod}(R_X) \rightarrow C$. Hence, $\text{cod}(R_X) \rightarrow C \sqcap D$. By the definition of existential restrictions, we obtain $\text{dom}(R_X) \rightarrow \exists R.(D \sqcap C)$.

4. The arrow from left to right of (44) is a direct consequence of the the disjunction arrows (1), (2) and the existential property arrow (36). To prove the other direction, we make extensive use of the negation and its properties. Let us write U the right part of the arrow and V the left part, we need to prove that the arrow $U \sqcap \neg V \rightarrow \perp$ exists. Indeed, if $U \sqcap \neg V \rightarrow \perp$ holds, it follows that $U \rightarrow \neg \neg V$ by the implication (19) in Definition 6. Thus, we obtain $U \rightarrow V$ due to Property (23) in Lemma 6.

For that, we need to rewrite V . First, apply rule (23), then apply our version of De Morgan's rules (28). Apply (37) to each member of the conjunction, then (23) again:

$$\exists R.C \sqcup \exists R.D \xleftarrow{\quad} \neg(\forall R.\neg C \sqcap \forall R.\neg D)$$

From there, consider the concept object $U \sqcap \neg V$ defined by

$$\exists R.(C \sqcap D) \sqcap (\forall R.\neg C \sqcap \forall R.\neg D)$$

Using the implied associative nature of \sqcap , and Property (43) proved above, we can write

$$\begin{aligned} & \exists R.(C \sqcup D) \sqcap (\forall R.\neg C \sqcap \forall R.\neg D) \\ & \rightarrow \exists R. \left(((C \sqcup D) \sqcap \neg C) \sqcap \neg D \right) \end{aligned}$$

The distributive property (7) of \sqcap and \sqcup , the disjunction property (2), and Definition 2 of \perp , allow us to make the following reduction

$$\begin{aligned} (C \sqcup D) \sqcap \neg C & \rightarrow (C \sqcap \neg C) \sqcup (D \sqcap \neg C) \\ & \rightarrow \perp \sqcup (D \sqcap \neg C) \\ & \rightarrow D \sqcap \neg C \end{aligned}$$

Thus, thanks to the commutative nature of \sqcap and (5) again, we have $(D \sqcap \neg C \sqcap \neg D) \rightarrow (\perp \sqcap C) \rightarrow \perp$. Applying Properties (35) and (36) of Lemma 8 to the previous existential arrow, we obtain

$$\exists R.(C \sqcup D) \sqcap (\forall R.\neg C \sqcap \forall R.\neg D) \rightarrow \perp$$

which concludes the proof.

Note that both $\mathcal{C}_c\langle C, \mathcal{O} \rangle$ and $\mathcal{C}_r\langle C, \mathcal{O} \rangle$ may consist of more objects. However, new arrows should be derived from those existing or by using the properties given in Definitions (2-8). Adding to $\mathcal{C}_c\langle C, \mathcal{O} \rangle$ a new arrow that is *independent* from those existing leads to a semantic change of the ontology. Since all properties in Lemma 6, 8 and 10 are consequences of those given in these definitions, they can be used to obtain *derived* arrows (i.e. not independent ones).

Theorem 1 (Arrow and subsumption). *Let C_0 be an \mathcal{ALC} concept and \mathcal{O} an \mathcal{ALC} ontology. Let $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ be an ontology category. It holds that $\langle C_0, \mathcal{O} \rangle \models X \sqsubseteq Y$ (under set-theoretical semantics) if $X \longrightarrow Y$ is an arrow in $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$.*

Proof. For every axiom $E \sqsubseteq F$ in \mathcal{O} , we have $E \longrightarrow F$ in $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ according to Definition 3. Property (26) of Lemma 6 and Lemma 5, we can conclude that $\langle C_0, \mathcal{O} \rangle \models E \sqsubseteq F$. For every other arrows $X \longrightarrow Y$ introduced to $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ from Definitions 4, 5, 6, 7, 8.(37), we have Lemmas 1, 4, 5, 7 and 9.(39) which give us $\langle C_0, \mathcal{O} \rangle \models X \sqsubseteq Y$. \square

We now introduce category-theoretical satisfiability of an \mathcal{ALC} concept with respect to an \mathcal{ALC} ontology.

Definition 9. *Let C_0 be an \mathcal{ALC} concept, \mathcal{O} an \mathcal{ALC} ontology. C is category-theoretically unsatisfiable with respect to \mathcal{O} if there is an ontology category $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ which has an arrow $C_0 \longrightarrow \perp$.*

Since an ontology category $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ may consist of objects arbitrarily built from the signature, Definition 9 offers possibilities to build a larger ontology category from which new arrows can be discovered by applying arrows given in Definitions (4-8).

Theorem 2. *Let \mathcal{O} be an \mathcal{ALC} ontology and C_0 an \mathcal{ALC} concept. C_0 is category-theoretically unsatisfiable with respect to \mathcal{O} iff C_0 is set-theoretically unsatisfiable.*

To prove this theorem, we need the following preliminary result.

Lemma 11. *Let \mathcal{O} be an \mathcal{ALC} ontology and C_0 an \mathcal{ALC} concept. If C_0 is set-theoretically unsatisfiable with respect to \mathcal{O} then C_0 is category-theoretically unsatisfiable.*

In order to prove this lemma, we use a tableau algorithm to generate from an unsatisfiable \mathcal{ALC} concept with respect to an ontology a set of completion trees each of which contains a clash (\perp or a pair $\{A, \neg A\}$ where A is a concept name). To ensure self-containedness of the paper, we describe here necessary elements which allow to follow the proof of the lemma. We refer the readers to [15,16] for formal details.

We use $\text{sub}(C_0, \mathcal{O})$ to denote a set of subconcepts in NNF (i.e. negations appear only in front of concept name) from C_0 and \mathcal{O} . This set is defined as the smallest set such that the following conditions hold :

1. $C_0 \in \text{sub}(C_0, \mathcal{O})$ and $\neg E \sqcup F \in \text{sub}(C_0, \mathcal{O})$ for each axiom $E \sqsubseteq F$;
2. if $\neg C \in \text{sub}(C_0, \mathcal{O})$ then $C \in \text{sub}(C_0, \mathcal{O})$;
3. if $C \sqcap D$ or $C \sqcup D \in \text{sub}(C_0, \mathcal{O})$ then $C, D \in \text{sub}(C_0, \mathcal{O})$;
4. if $\exists R.C$ or $\forall R.C \in \text{sub}(C_0, \mathcal{O})$ then $C \in \text{sub}(C_0, \mathcal{O})$.

A *completion tree* $T = \langle v_0, V, E, L \rangle$ is a tree where V is a set of nodes, and each node $x \in V$ is labelled with $L(x) \subseteq \text{sub}(C_0, \mathcal{O})$, and a root $v_0 \in V$ with $C \in L(v_0)$; E is a set of edges, and each edge $\langle x, y \rangle \in E$ is labelled with a role $L\langle x, y \rangle = \{R\}$ and $R \in \mathbf{R}$. In a completion tree T , a node x is *blocked* by an ancestor y if $L(x) = L(y)$.

To build completion trees, a tableau algorithm starts by initializing a tree T_0 and applies the following *completion rules* to each *clash-free* tree T (i.e. no node contains a clash):

1. [\sqsubseteq -rule] for each axiom $E \sqsubseteq F$ of \mathcal{O} and each node x , if $\neg E \sqcup F \notin L(x)$ then $L(x) \leftarrow L(x) \cup \{\neg E \sqcup F\}$;
2. [\sqcap -rule] if $E \sqcap F \in L(x)$ and $\{E, F\} \not\subseteq L(x)$ then $L(x) \leftarrow L(x) \cup \{E, F\}$;
3. [\sqcup -rule] if $E \sqcup F \in L(x)$ and $\{E, F\} \cap L(x) = \emptyset$ then it creates two copies T_1 and T_2 of the current tree T , and set $L(x_1) \leftarrow L(x_1) \cup \{E\}$, $L(x_2) \leftarrow L(x_2) \cup \{F\}$ where x_i in T_i is a copy of x from T .
4. [\exists -rule] if $\exists R.C \in L(x)$, x is not blocked and x has no edge $\langle x, x' \rangle$ with $L(\langle x, x' \rangle) = \{R\}$ and $C \in L(x')$ then it creates a successor x' of x , and set $L(x') \leftarrow \{C\}$, $L(\langle x, x' \rangle) \leftarrow \{R\}$;
5. [\forall -rule] if $\forall R.C \in L(x)$ and x has a successor x' with $L(\langle x, x' \rangle) = \{R\}$ then $L(x') \leftarrow L(x') \cup \{C\}$.

When [\sqcup -rule] is applied to a node x of a completion tree T with $E \sqcup F \in L(x)$, it generates two children trees T_1 and T_2 with a node x_1 in T_1 such that $E \sqcup F, E \in L(x_1)$, and a node x_2 in T_2 such that $E \sqcup F, F \in L(x_2)$ as described above. In this case, we say that T is parent of T_1 and T_2 by x ; or T_1 and T_2 are children of T by x ; x is called a *disjunction node* by $E \sqcup F$; and x_1, x_2 are called *disjunct nodes* of x by $E \sqcup F$. We use \mathbb{T} to denote the tree whose nodes are completion trees generated by the tableau algorithm as described above. At any moment, a complete rule is applied only to leaf trees of \mathbb{T} .

A completion tree is *complete* if no completion rule is applicable. It was shown that if C is set-theoretically unsatisfiable with respect to \mathcal{O} then all *complete completion trees* contain a clash (an incomplete completion tree may contain a clash) [15,16]. Since this result does not depend on the order of applying completion rules to nodes, we can assume in this proof that the following order [\sqsubseteq -rule], [\sqcap -rule], [\sqcup -rule], [\exists -rule] and [\forall -rule] is used, and a completion rule should be applied to the most ancestor node if applicable. Some properties are drawn from this assumption.

- (P1) If a node x of a completion tree T contains a clash then x is a leaf node of T .
- (P2) For a completion tree T , if a node y is an ancestor of a node x in T such that x is a disjunction node and y is a disjunct node of y' , then the children trees by y' are ancestors of the children trees by x in \mathbb{T} .

(P1) tells us that when a clash is discovered in a completion tree T , no rule is applied to any node of T while (P2) is a consequence of the order of rule applications and the fact that each completion rule is applied to the most ancestor node in a completion tree if applicable.

Proof of Lemma 11. We define an ontology category $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ from \mathbb{T} by starting from leaf trees of \mathbb{T} . By (P1), each leaf tree T of \mathbb{T} contains a clash in a leaf node y . We add an object $\prod_{Y \in L(y)} Y$ and an arrow $\prod_{Y \in L(y)} Y \longrightarrow \perp$ to $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$. In the sequel, we try to define a sequence of arrows started with $\prod_{Y \in L(y)} Y \longrightarrow \perp$ which makes clashes propagate from the leaves into the root of \mathbb{T} . This propagation has to get through two crucial kinds of passing: from a node of a completion tree to an ancestor that is a disjunct node; and from such a disjunct node in a completion tree to its disjunction node in the parent completion tree in \mathbb{T} .

Let T_1 and T_2 be two leaf trees of \mathbb{T} whose parent is T , and y_1, y_2 two leaf nodes of T_1, T_2 containing a clash. By construction, T_i has a disjunct node x_i which is an ancestor of y_i with $x_i \neq y_i$, and there is no disjunct node between x_i and y_i (among

descendants of x_i). For each node z between y_i and x_i if it exists, we add objects $\prod_{Z \in L(z)} Z$ to $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$. Let z' be the parent node of y_i . By construction, there is a concept $\exists R.D \in L(z')$ and $D \in L(y_i)$. In addition, if $\forall R.D_1 \in L(z')$ and $[\forall\text{-rule}]$ is applied to z' then $D_1 \in L(y_i)$. We show that $D \rightarrow Z$ or $D_1 \rightarrow Z$ for each concept $Z \in L(y_i)$. By construction, $[\sqcup\text{-rule}]$ is not applied to y_i (and any node from x_i to y_i). If $Z = \neg E \sqcup F$ comes from an axiom $E \sqsubseteq F$, then $D \rightarrow \top \rightarrow Z$. If Z comes from some $Z \sqcap Z'$ then we have to have already $D \rightarrow Z \sqcap Z' \rightarrow Z$ or $D_1 \rightarrow Z \sqcap Z' \rightarrow Z$. Hence, $\prod_{Y \in L(y_i)} Y \rightarrow \perp$ implies $D \sqcap \prod_{\forall R.D_i \in L(z')} D_i \rightarrow \perp$. By (35) and (43), we obtain $\exists R.D \sqcap \prod_{\forall R.D_i \in L(z')} \forall R.D_i \rightarrow \perp$, and thus $\prod_{Z \in L(z')} Z \rightarrow \perp$. We add an object $\prod_{X \in L(z')} X$ and an arrow $\prod_{X \in L(z')} X \rightarrow \perp$ to $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$. By using the same argument from z' until x_i , we add an object $\prod_{X \in L(x_i)} X$ and an arrow $\prod_{X \in L(x_i)} X \rightarrow \perp$ to $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$.

We now show $\prod_{X \in L(x)} X \rightarrow \perp$ where x is the disjunction node of x_i , $L(x) = W \cup \{E \sqcup F\}$, $L(x_1) = W \cup \{E \sqcup F, E\}$, $L(x_2) = W \cup \{E \sqcup F, F\}$. Due to (7), we have $\prod_{V \in W} V \sqcap (E \sqcup F) \rightarrow (\prod_{V \in W} V \sqcap E) \sqcup (\prod_{V \in W} V \sqcap F)$. Moreover, since $\prod_{X \in L(x_i)} X \rightarrow \perp$, we have $\prod_{V \in W} V \sqcap E \rightarrow \prod_{V \in W} V \sqcap (E \sqcup F) \sqcap E \rightarrow \prod_{X \in L(x_1)} X \rightarrow \perp$ (we have $(E \sqcup F) \sqcap E \rightarrow E$ due to (1) and (6)), and $\prod_{V \in W} V \sqcap F \rightarrow \prod_{V \in W} V \sqcap (E \sqcup F) \sqcap F \rightarrow \prod_{X \in L(x_2)} X \rightarrow \perp$. Therefore, if we add an object $\prod_{V \in W} V \sqcap (E \sqcup F)$ to $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$, we obtain an arrow $\prod_{V \in W} V \sqcap (E \sqcup F) \rightarrow \perp$ due to (7).

We can apply the same argument from x to the next disjunct node in T which is an ancestor of x according to (P2), and go upwards in \mathbb{T} to find its parent and sibling. This process can continue and reach the root tree T_0 of \mathbb{T} . We get $\prod_{X \in L(x_0)} X \rightarrow \perp$ where x_0 is the root node of T_0 . By construction, we have $\{C\} \cup \{\neg E \sqcup F \mid E \sqsubseteq F \in \mathcal{O}\} \subseteq L(x_0)$. Let $X \in L(x_0)$. If $X = \neg E \sqcup F$ for some axiom $E \sqsubseteq F \in \mathcal{O}$ then $C \rightarrow \top \rightarrow \neg E \sqcup F$. Moreover, if $X = E'$ or $X = F'$ with $C = E' \sqcap F'$ then $C \rightarrow E'$ and $C \rightarrow F'$. This implies that $C \rightarrow \prod_{X \in L(x_0)} X \rightarrow \perp$. Hence, $C \rightarrow \perp$. Therefore, $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ is an ontology category consisting of $C \rightarrow \perp$. This completes the proof of the lemma.

Proof of Theorem 2. “ \Leftarrow ”. Let $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ be an ontology category. Assume that there is an arrow $C \rightarrow \perp$ in $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$. Every arrow $X \rightarrow Y$ added to $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ must be one of following cases: (i) $X \sqsubseteq Y$ is an axiom of \mathcal{O} . Thus, $\mathcal{O} \models X \sqsubseteq Y$. (ii) $X \rightarrow Y$ is added by Definitions 4, 5, 6, 7, 8. Due to Theorem 1, we have $\mathcal{O} \models X \sqsubseteq Y$. (iii) $X \rightarrow Y$ is obtained by transitivity from $X \rightarrow Z$ and $Z \rightarrow Y$. It holds that $\mathcal{O} \models X \sqsubseteq Z$ and $\mathcal{O} \models Z \sqsubseteq Y$ imply $\mathcal{O} \models X \sqsubseteq Y$. Hence, if $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ consists of an arrow $C \rightarrow \perp$, then $\mathcal{O} \models C \sqsubseteq \perp$.

“ \Rightarrow ”. A consequence of Lemma 11.

5 Reasoning in a sublogic of \mathcal{ALC}

In this section, we identify a new sublogic of \mathcal{ALC} , namely \mathcal{ALC}_{∇} , obtained from \mathcal{ALC} with all the properties introduced in Definitions (4-8), except for Property (38) in Definition 8. This sublogic cannot be defined under the usual set-theoretical semantics since

Property (38) is *not independent* from Definition 7 and Property (37) in this setting. Indeed, for every interpretation \mathcal{I} it holds that if $R'^{\mathcal{I}} \subseteq R^{\mathcal{I}}$, $\text{dom}(R')^{\mathcal{I}} \subseteq \forall R.C^{\mathcal{I}}$ and $x \in \text{cod}(R')^{\mathcal{I}}$, then $x \in C^{\mathcal{I}}$.

First, we need to show the independence of Property (38), i.e. that it is not derived from the other properties introduced in Definitions (4-7) and from Property (37) in Definition 8. For this purpose, we present in Example 2 a category which verifies all properties from Definition 7, and Property (37), but not Property (38).

Example 2. Every ontology category $\mathcal{C}_c \langle \forall R.D, \emptyset \rangle$ that has an object $\forall R.D$ has to consist at least of the following arrows : $\forall R.D \xrightarrow{\quad} \neg \exists R.\neg D$, $\exists R.\neg D \xrightarrow{\quad} \text{dom}(R_{(\exists R.\neg D)})$ where R and $R_{(\exists R.\neg D)}$ are objects of $\mathcal{C}_c \langle \forall R.D, \emptyset \rangle$. By applying Definitions 2-7, we can add to $\mathcal{C}_c \langle \forall R.D, \emptyset \rangle$ other arrows such as $\exists R.\neg D \sqcap \neg \exists R.\neg D \rightarrow \perp$, $\top \rightarrow \exists R.\neg D \sqcup \neg \exists R.\neg D$ and $\text{cod}(R_{(\exists R.\neg D)}) \rightarrow \neg D$.

Let R' be some object in $\mathcal{C}_c \langle \forall R.D, \emptyset \rangle$ such that $R' \rightarrow R$ and $\text{dom}(R') \rightarrow \forall R.D$. If we apply exhaustively Definitions 2-7 and Property (37) in Definition 8, they never add to $\mathcal{C}_c \langle \forall R.D, \emptyset \rangle$ an arrow $\text{cod}(R') \rightarrow D$, which should be derived by Property (38) in Definition 8.

We can follow the same idea used in Definition 9 to introduce concept unsatisfiability for \mathcal{ALC}_{\neg} without referring to set interpretation.

Definition 10 (Category-theoretical unsatisfiability in \mathcal{ALC}_{\neg}). Let C be an \mathcal{ALC}_{\neg} concept, \mathcal{O} an \mathcal{ALC}_{\neg} ontology. C is category-theoretically unsatisfiable with respect to \mathcal{O} if there is an ontology category $\mathcal{C}_c \langle C, \mathcal{O} \rangle$ which has an arrow $C \rightarrow \perp$.

In the sequel, we propose an algorithm for checking satisfiability of an \mathcal{ALC}_{\neg} concept C_0 with respect to an ontology \mathcal{O} . Similarly to the usual set theoretical-semantics, we can define Negation Normal Form (NNF) $\text{NNF}(C)$ of a concept object C , i.e. negations appear only in front of concept name object. It is possible to convert polynomially a concept object to its NNF by using the following properties resulting from Lemma 6 and Definition 8.

$$\begin{aligned} \neg(C \sqcup D) &\xrightarrow{\quad} \neg C \sqcap \neg D \\ \neg(C \sqcap D) &\xrightarrow{\quad} \neg C \sqcup \neg D \\ \neg \forall R.C &\xrightarrow{\quad} \exists R.\neg C \\ \neg \exists R.C &\xrightarrow{\quad} \forall R.\neg C \\ \neg \neg C &\xrightarrow{\quad} C \\ \neg \top &\xrightarrow{\quad} \perp \\ \neg \perp &\xrightarrow{\quad} \top \end{aligned}$$

Definition 11 (subconcepts). Let C_0 be an \mathcal{ALC} concept and \mathcal{O} an \mathcal{ALC}_{\neg} ontology. A smallest set $\text{sub}\langle C_0, \mathcal{O} \rangle$ of subconcepts occurring in C_0 and \mathcal{O} is defined as follows:

1. $C_0 \in \text{sub}\langle C_0, \mathcal{O} \rangle$, and $E, F \in \text{sub}\langle C_0, \mathcal{O} \rangle$ for each axiom $E \sqsubseteq F \in \mathcal{O}$;
2. If $E \sqcap F$ or $E \sqcup F \in \text{sub}\langle C_0, \mathcal{O} \rangle$ then $E, F \in \text{sub}\langle C_0, \mathcal{O} \rangle$;
3. If $\exists R.D$ or $\forall R.D \in \text{sub}\langle C_0, \mathcal{O} \rangle$ then $D \in \text{sub}\langle C_0, \mathcal{O} \rangle$;
4. If $C \in \text{sub}\langle C_0, \mathcal{O} \rangle$ then $\text{NNF}(\neg C) \in \text{sub}\langle C_0, \mathcal{O} \rangle$.

To check satisfiability of an \mathcal{ALC}_{∇} concept C_0 with respect to an ontology \mathcal{O} , we initialize an ontology category $\mathcal{C}\langle C_0, \mathcal{O} \rangle$ and saturate it by applying the saturation rules in Table 1 to $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ until no rule is applicable. Each saturation rule in Table 1 corresponds to a property given in the definitions of constructor semantics. Moreover, we adopt the following assumptions when designing the algorithm.

1. The collections $\text{Ob}(\mathcal{C})$ and $\text{Hom}(\mathcal{C})$ of a category \mathcal{C} built by the algorithm are considered as sets, i.e there are no duplicate in them.
2. When the algorithm adds an object X to a category \mathcal{C} , it adds also an identity arrow $X \longrightarrow X$, and $\perp \longrightarrow X$, $X \longrightarrow \top$ where \perp, \top are initial and terminal objects of \mathcal{C} . In particular, if an object X is added to a concept ontology category, it adds $\text{NNF}(X)$ as well. For the sake of simplicity, we will not mention explicitly these arrows in the rules described in Table 1.

Input : $\langle C_0, \mathcal{O} \rangle$ where C_0 is an \mathcal{ALC}_{∇} concept and \mathcal{O} an ontology

Output: true or false

```

1 Initialize two categories  $\mathcal{C}_c$  and  $\mathcal{C}_r$ ;
2 Add an object  $C_0$  to  $\mathcal{C}_c$ ;
3 foreach  $E \sqsubseteq F$  of  $\mathcal{O}$  do
4   | Add objects  $E, F$  and an arrow  $E \longrightarrow F$  to  $\mathcal{C}_c$ ;
5 end
6 while there is a saturation rule  $r$  that is applicable to  $\mathcal{C}_c$  and  $\mathcal{C}_r$  do
7   | Apply  $r$  to  $\mathcal{C}_c$  and  $\mathcal{C}_r$ ;
8 end
9 if there is an arrow  $C_0 \longrightarrow \perp$  in  $\mathcal{C}_c$  then
10  | return false;
11 end
12 else
13  | return true;
14 end

```

Algorithm 1: $\text{isSatisfiable}\langle C_0, \mathcal{O} \rangle$

Lemma 12 (Complexity). *Let C be an \mathcal{ALC}_{∇} concept and \mathcal{O} an ontology. Algorithm 1 runs in polynomial space for the input $\langle C, \mathcal{O} \rangle$.*

Proof. Since there are at most two arrows between two objects, it suffices to determine the number of different objects added to \mathcal{C}_c and \mathcal{C}_r . For this purpose, we analyse the behavior of each rule in Table 1 and determine the number of objects added by each such a rule.

Let $n = \|\langle C_0, \mathcal{O} \rangle\|$ be the size of input, i.e. the number of bytes. By Definition 11, we write $\text{sub}\langle C_0, \mathcal{O} \rangle$, the set of sub-concepts. For Definition 11.1, 3 and 4 they are sub-strings of $\langle C, \mathcal{O} \rangle$, not all of sub-strings belongs to it, so we have at most $\ell \leq n(n+1)/2$ objects created from those three properties. From Definition 11.2, we simply double the number of object obtained from the other three point - note that $\text{NNF}(\neg\neg C)$ is C - so

[\perp-rule] If $X \longrightarrow \text{NNF}(\neg C)$, $X \longrightarrow C$ are arrows of \mathcal{C}_c , and $X \longrightarrow \perp$ is not an arrow of \mathcal{C}_c , then we add an object $C \sqcap \text{NNF}(\neg C)$ and an arrow $X \longrightarrow \perp$ to \mathcal{C}_c .
[\perp_m-rule] If there is an arrow $E \sqcap F \longrightarrow \perp$ in \mathcal{C}_c , and there is no arrow $E \longrightarrow \text{NNF}(\neg F)$ or $F \longrightarrow \text{NNF}(\neg E)$ in \mathcal{C}_c , then we add arrows $E \longrightarrow \text{NNF}(\neg F)$ and $F \longrightarrow \text{NNF}(\neg E)$ to \mathcal{C}_c .
[\top-rule] If $\text{NNF}(\neg C) \longrightarrow X$, $C \longrightarrow X$ are arrows of \mathcal{C}_c , and $\top \longrightarrow X$ is not an arrow of \mathcal{C}_c , then we add an object $C \sqcup \text{NNF}(\neg C)$ and an arrow $\top \longrightarrow X$ to \mathcal{C}_c .
[\top_m-rule] If there is an arrow $\top \longrightarrow E \sqcup F$ in \mathcal{C}_c , and there is no arrow $\text{NNF}(\neg F) \longrightarrow E$ or $\text{NNF}(\neg E) \longrightarrow F$ in \mathcal{C}_c , then we add arrows $\text{NNF}(\neg F) \longrightarrow E$ and $\text{NNF}(\neg E) \longrightarrow F$ to \mathcal{C}_c .
[\neg-rule] If there is an arrow $C \longrightarrow D$ in \mathcal{C}_c and there is no arrow $\text{NNF}(\neg D) \longrightarrow \text{NNF}(\neg C)$ in \mathcal{C}_c , then we add objects $\text{NNF}(\neg C)$, $\text{NNF}(\neg D)$ and an arrow $\text{NNF}(\neg D) \longrightarrow \text{NNF}(\neg C)$ to \mathcal{C}_c .
[\sqcap-rule] If there is an object $E \sqcap F$ of \mathcal{C}_c and there are not arrows $E \sqcap F \longrightarrow E$ and $E \sqcap F \longrightarrow F$, then we add objects E, F and arrows $E \sqcap F \longrightarrow E$, $E \sqcap F \longrightarrow F$ to \mathcal{C}_c .
[\sqcap_m-rule] If there is an object $E \sqcap F$ and arrows $X \longrightarrow E$, $X \longrightarrow F$ in \mathcal{C}_c , and there is no arrow $X \longrightarrow E \sqcap F$ in \mathcal{C}_c , then we add an arrow $X \longrightarrow E \sqcap F$ to \mathcal{C}_c .
[\sqcup-rule] If there is an object $E \sqcup F$ in \mathcal{C}_c and there are not two arrows $E \longrightarrow E \sqcup F$ and $F \longrightarrow E \sqcup F$, then we add objects E, F and arrows $E \longrightarrow E \sqcup F$, $F \longrightarrow E \sqcup F$ to \mathcal{C}_c .
[\sqcup_m-rule] If there is an object $E \sqcup F$ and arrows $E \longrightarrow X$, $F \longrightarrow X$ in \mathcal{C}_c , and there is no arrow $E \sqcup F \longrightarrow X$ in \mathcal{C}_c , then we add an arrow $E \sqcup F \longrightarrow X$ to \mathcal{C}_c .
[\sqcup_{dis}-rule] If there are two objects $C \sqcap (D \sqcup E)$ and W in \mathcal{C}_c , and there is no arrow $C \sqcap (D \sqcup E) \longrightarrow W$ in \mathcal{C}_c , and $\text{check}(\mathcal{C}_c, C \sqcap (D \sqcup E), W)$ returns “true”, then we add an arrow $C \sqcap (D \sqcup E) \longrightarrow W$ to \mathcal{C}_c .
[\exists-rule] If there is an object $\exists R.D$ of \mathcal{C}_c , there is no object $R_{(\exists R.D)}$ of \mathcal{C}_r , then we add objects $R_{(\exists R.D)}$, R , an arrow $R_{(\exists R.D)} \longrightarrow R$ to \mathcal{C}_r , and add to \mathcal{C}_c objects D , $\text{cod}(R_{(\exists R.D)})$, $\text{dom}(R_{(\exists R.D)})$, arrows $\text{cod}(R_{(\exists R.D)}) \longrightarrow D$, $\text{dom}(R_{(\exists R.D)}) \longleftarrow \exists R.D$.
[\exists_m-rule] If there is an object $\exists R.D$ of \mathcal{C}_c and an object R' of \mathcal{C}_r such that $R' \longrightarrow R$ and $\text{cod}(R') \longrightarrow D$, and there is no arrow $\text{dom}(R') \longrightarrow \text{dom}(R_{(\exists R.D)})$, then we add to \mathcal{C}_c an arrow $\text{dom}(R') \longrightarrow \text{dom}(R_{(\exists R.D)})$.
[\forall-rule] If there is an object $\forall R.C$ in \mathcal{C}_c and there are no arrows $\forall R.C \longleftarrow \text{NNF}(\neg \exists R.\neg C)$ in \mathcal{C}_c , then we add objects $\exists R.\text{NNF}(\neg C)$, $\text{NNF}(\neg \exists R.\neg C)$ and arrows $\forall R.C \longleftarrow \text{NNF}(\neg \exists R.\neg C)$ to \mathcal{C}_c .
[trans-rule] If there are objects X, Y, Z and arrows $X \longrightarrow Y$, $Y \longrightarrow Z$ of \mathcal{C}_c , there is no arrow $X \longrightarrow Z$ of \mathcal{C}_c , then we add an arrow $X \longrightarrow Z$ to \mathcal{C}_c .
[dc-rule] (a) If R is an object of \mathcal{C}_r , and $X \longrightarrow \perp$ is an arrow of \mathcal{C}_c for some $X \in \{\text{dom}(R), \text{cod}(R)\}$, and $Y \longrightarrow \perp$ is not an arrow of \mathcal{C}_c for some $Y \in \{\text{dom}(R), \text{cod}(R)\}$, then we add $Y \longrightarrow \perp$ to \mathcal{C}_c . (b) If $R \longrightarrow R'$ is an arrow of \mathcal{C}_r and $X \longrightarrow Y$ is not an arrow of \mathcal{C}_c , for some $(X, Y) \in \left\{ (\text{dom}(R), \text{dom}(R')), (\text{cod}(R), \text{cod}(R')) \right\}$, then we add to \mathcal{C}_c an arrow $X \longrightarrow Y$ to \mathcal{C}_c .

Table 1: Saturation rules

Input : $\langle \mathcal{C}_c, (C_1 \sqcup D_1) \sqcap \dots \sqcap (C_n \sqcup D_n), W \rangle$ where \mathcal{C}_c is an category and $(C_1 \sqcup D_1) \sqcap \dots \sqcap (C_n \sqcup D_n)$ and W are objects of \mathcal{C}_c

Output: true or false

```

1 foreach  $(X_1, \dots, X_n)$  with  $X_i \in \{C_i, D_i\}$  do
2   if there is no object  $(X_{i_1} \sqcap \dots \sqcap X_{i_k})$  in  $\mathcal{C}_c$  with  $1 \leq i_j \leq n$  such that there is an
   arrow  $(X_{i_1} \sqcap \dots \sqcap X_{i_k}) \longrightarrow W$  in  $\mathcal{C}_c$  then
3     return false ;
4   end
5 end
6 return true ;

```

Algorithm 2: $\text{check}(\mathcal{C}_c, (C_1 \sqcup D_1) \sqcap \dots \sqcap (C_n \sqcup D_n), W)$

in total $\|\text{sub}\langle C_0, \mathcal{O} \rangle\| = 2\ell = k \leq O(n^2)$. It should be noted that every time we add a object to \mathcal{C}_c , we also add its negation, we won't mention it every time an object is added but it is done. Hence why we reason on k instead of ℓ even when we index added objects on a object C of $\text{sub}\langle C_0, \mathcal{O} \rangle$.

1. **[Initialisation]**(line 3-5). It is the first loop of the algorithm and corresponds to Definition 11.1, in the sense the only added objects by the algorithm at this stage are already part of $\text{sub}\langle C_0, \mathcal{O} \rangle$, *i.e.* it cannot add more object than $\|\text{sub}\langle C_0, \mathcal{O} \rangle\| = k \leq O(n^2)$ to \mathcal{C}_c .
2. **[\sqcap -rule], [\sqcup -rule]**. These two rules correspond to Definition 11.3, objects added to \mathcal{C}_c are already part of $\text{sub}\langle C_0, \mathcal{O} \rangle$, meaning there are $O(n^2)$ of them.
3. **[\exists -rule]**. Objects D added to \mathcal{C}_c by this rule are already part of $\text{sub}\langle C_0, \mathcal{O} \rangle$ according to Definition 11.4, following the same reasoning as for the previous rules, we have $O(n^2)$ of them. Remaining objects to be added to \mathcal{C}_c , namely $\text{cod}(R_{(\exists R.D)})$ and $\text{dom}(R_{(\exists R.D)})$, are *not* part of $\text{sub}\langle C_0, \mathcal{O} \rangle$. However, they are only added once per each occurrence of object of the form $\exists R.D$ in $\text{sub}\langle C_0, \mathcal{O} \rangle$, *i.e.* the number of object added is bounded by $2k$. In total, this rule add a number of to \mathcal{C}_c object smaller than $3k \leq O(n^2)$. We leave the number of objects added to \mathcal{C}_R for later.
4. **[\forall -rule]**. From Definition 11.4, $\text{NNF}(\neg \forall R.D) \iff \exists R.\text{NNF}(\neg D)$ is already part of $\text{sub}\langle C_0, \mathcal{O} \rangle$. Only $\exists R.\neg D$ isn't part of Definition 11, however, it is linearly bounded by the number of object of the form $\forall R.D$ which is smaller than k , hence this rule add at most $2k \leq O(n^2)$ objects to \mathcal{C}_c in total.
5. **[\perp -rule], [\top -rule]**. These rules only add one object of the type $C \sqcap \text{NNF}(\neg C)$ or $C \sqcup \text{NNF}(\neg C)$ to \mathcal{C}_c per object C , respectively. Assume that we have applied the rule once on a single X and added $C \sqcap \text{NNF}(\neg C)$ or $C \sqcup \text{NNF}(\neg C)$ to \mathcal{C}_c . If there is an other Y such that $Y \longrightarrow C$ and $Y \longrightarrow \text{NNF}(\neg C)$ or $C \longrightarrow Y$ and $\text{NNF}(\neg C) \longrightarrow Y$, we can apply the rules nonetheless, however, it won't add another occurrence of $C \sqcap \text{NNF}(\neg C)$ or $C \sqcup \text{NNF}(\neg C)$ since we are dealing with sets so an object can appear one and only one time - and there's already an occurrence of it since we have applied the rule before. So the number of object added by these rules is bounded by $k \leq O(n^2)$.
6. **[\neg -rule]**. If we have an arrow $C \longrightarrow D$ in \mathcal{C}_c , C and D are already in \mathcal{C}_c , consequently $\text{NNF}(\neg C)$ and $\text{NNF}(\neg D)$ as well. Since we are dealing with sets, we are not adding any new objects.

7. [trans-rule], [\sqcup_m -rule], [\sqcap_m -rule], [\sqcup_{dis} -rule], [\perp_m -rule], [\top_m -rule], [\exists_m -rule], [dc-rule]. These rules only deal with arrows and no objects are added - we can ignore them.
8. Algorithm 2 (check). This algorithm can be implemented such that it runs in polynomial space. For example, we can consider each vector (X_1, \dots, X_n) as a binary number $(b(X_1), \dots, b(X_n))$ where $b(X_i) = 1$ iff $X_i = C_i$ ($X_i \in \{C_i, D_i\}$). In this case, the loop from Line 1 can take binary numbers from 0 to $2^n - 1$, from which it can determine the vector (X_1, \dots, X_n) .

For [\exists -rule] the number of objects $R_{(\exists R.D)}$ added to \mathcal{C}_r is bounded by ℓ . Objects R are only added to \mathcal{C}_r once per role name appearing in \mathcal{T} , it is also bounded by ℓ . In summary, each rule adds to \mathcal{C}_c a number of objects bounded by $O(n^2)$, the number of objects of \mathcal{C}_r is also bounded by $O(n^2)$, thus Algorithm 1 runs in polynomial space. \square

Lemma 13 (soundness and completeness). *Let C_0 be an \mathcal{ALC}_{\neg} concept and \mathcal{O} an ontology. Algorithm 1 returns “false” with the input $\langle C_0, \mathcal{O} \rangle$ iff C_0 is unsatisfiable with respect to \mathcal{O} .*

Proof. “ \Leftarrow ”. Let \mathcal{C}_c be a category built by Algorithm 1 that returns “false”. This implies that \mathcal{C}_c has an arrow $C_0 \rightarrow \perp$. First, we show that \mathcal{C}_c satisfies all properties in Definitions 2-7 and Property (37) in Definition 8.

1. Definition 2. When a saturating rule in Table 1 adds a new concept (resp. role) object, it adds also an identity arrow and arrows between the object and \perp (resp. R_{\perp}) and \top (resp. R_{\top}). Thus, Properties 1 and 2 in Definition 2 hold in \mathcal{C}_c . Moreover, when Algorithm 1 returns “true”, the loop from Line 6 terminates, and thus no rule is applicable. That means [trans-rule] is not applicable. This implies that Property 3 in Definition 2 holds in \mathcal{C}_c . Analogously, [dc-rule] is not applicable when Algorithm 1 returns “true”. Hence, Property 4 in Definition 2 is ensured in \mathcal{C}_c , and thus in \mathcal{C}_c' .
2. Definition 3. By the assumption, for each object X added to \mathcal{C}_c , there is also $\text{NNF}(\neg X)$ in \mathcal{C}_c . In this case, non applicability of [\perp -rule] and [\top -rule] guarantees that there are arrows $\text{NNF}(\neg X) \sqcap X \rightarrow \perp$, $\top \rightarrow \text{NNF}(\neg X) \sqcup X$ in \mathcal{C}_c . Let $C \sqcap X \rightarrow \perp$ (resp. $\top \rightarrow C \sqcup X$) be an arrow in \mathcal{C}_c . Non applicability of [\perp_m -rule] and [\top_m -rule] implies that there are arrows $C \rightarrow \text{NNF}(\neg X)$, $X \rightarrow \text{NNF}(\neg C)$ (resp. $\text{NNF}(\neg X) \rightarrow C$, $\text{NNF}(\neg C) \rightarrow X$) in \mathcal{C}_c .
3. Definition 4. Let E, F and $E \sqcup F$ be objects of \mathcal{C}_c . Thanks to [\sqcup -rule], \mathcal{C}_c has arrows $E \rightarrow E \sqcup F$ and $F \rightarrow E \sqcup F$ which ensure Property (1) in Definition 4. Let $E \rightarrow X$ and $F \rightarrow X$ be arrows in \mathcal{C}_c , and $E \sqcup F$ be an object of \mathcal{C}_c . Non-applicability of [\sqcup_m -rule] ensures that there is an arrow $E \sqcup F \rightarrow X$ in \mathcal{C}_c . Hence, Property (2) in Definition 4 holds.
4. Definition 5. Let E, F and $E \sqcap F$ be objects of \mathcal{C}_c . Thanks to [\sqcap -rule], we have arrows $E \sqcap F \rightarrow E$ and $E \sqcap F \rightarrow F$ which ensures Property (5) in Definition 5. Assume that $X \rightarrow E$ and $X \rightarrow F$ be arrows in \mathcal{C}_c , and $E \sqcap F$ be an object of \mathcal{C}_c . Non-applicability of [\sqcap_m -rule] ensures that there is an arrow $X \rightarrow E \sqcap F$ in \mathcal{C}_c . Hence, Property (6) in Definition 5 holds. Assume that $C \sqcap (D \sqcup E)$, and $(C \sqcap D) \sqcup (C \sqcap E)$ be objects in \mathcal{C}_c . Due to non-applicability of [\sqcup -rule], \mathcal{C}_c

has objects $C \sqcap D$, $C \sqcap E$ and arrows $C \sqcap D \longrightarrow (C \sqcap D) \sqcup (C \sqcap E)$ and $C \sqcap E \longrightarrow (C \sqcap D) \sqcup (C \sqcap E)$, i.e. $\text{check}(\mathcal{C}_c, C \sqcap (D \sqcup E), (C \sqcap D) \sqcup (C \sqcap E))$ returns “true”. Due to non-applicability of $[\sqcup_{\text{dis}}\text{-rule}]$, \mathcal{C}_c has an arrow $C \sqcap (D \sqcup E) \longrightarrow (C \sqcap D) \sqcup (C \sqcap E)$. Hence, Property (7) in Definition 5 holds.

5. Definition 6. Let $C, \text{NNF}(\neg C), C \sqcap \text{NNF}(\neg C), C \sqcup \text{NNF}(\neg C), C \sqcap X, C \sqcup X$ be objects of \mathcal{C}_c . Due to non-applicability of $[\perp\text{-rule}]$ and $[\top\text{-rule}]$, \mathcal{C}_c has arrows $C \sqcap \text{NNF}(\neg C) \longrightarrow \perp$, $\top \longrightarrow C \sqcup \text{NNF}(\neg C)$. Assume that \mathcal{C}_c has an arrow $C \sqcap X \longrightarrow \perp$ (resp. $\top \longrightarrow C \sqcup X$). Due to non-applicability of $[\perp_m\text{-rule}]$ and $[\top_m\text{-rule}]$, \mathcal{C}_c has arrows $C \longrightarrow \text{NNF}(\neg X)$ (resp. $\text{NNF}(\neg X) \longrightarrow C$). Hence, Properties (17)-(20) in Definition 6 hold.
6. Definition 7. Let $\exists R.C$ be an object of \mathcal{C}_c . Due to non-applicability of $[\exists\text{-rule}]$, it follows that $R_{(\exists R.C)}, R$ are objects, and $R_{(\exists R.C)} \longrightarrow R$ is an arrow of \mathcal{C}_r ; and $\text{dom}(R_{(\exists R.C)}), \text{cod}(R_{(\exists R.C)}), C$ are objects, and $\text{dom}(R_{(\exists R.C)}) \longleftarrow \exists R.C$, $\text{cod}(R_{(\exists R.C)}) \longrightarrow C$ are arrows of \mathcal{C}_c . Let R' be an object of \mathcal{C}_r such that $R' \longrightarrow R$ is an arrow of \mathcal{C}_r , and $\text{cod}(R') \longrightarrow C$ is an arrow of \mathcal{C}_c . Due to non-applicability of $[\exists_m\text{-rule}]$, it follows that $\text{dom}(R') \longrightarrow \text{dom}(R_{(\exists R.C)})$ is an arrow of \mathcal{C}_c . Hence, all properties in Definition 7 hold.
7. Property (37) in Definition 8. If there is an object $\forall R.C$ occurring in \mathcal{C}_c , it is converted in $\neg \exists R.\neg C$ due to the assumption that all objects of \mathcal{C}_c are in NNF. Hence, Property (37) holds.

We have showed that \mathcal{C}_c satisfy all properties in Definitions 2-7 and Property (37) in Definition 8 except that Property 7 in Definition 5. Indeed, if \mathcal{C}_c has an object $C \sqcap (D \sqcup E)$, it may not have an arrow $C \sqcap (D \sqcup E) \longrightarrow (C \sqcap D) \sqcup (C \sqcap E)$ with object $(C \sqcap D) \sqcup (C \sqcap E)$.

To complete it, we define a category \mathcal{C}'_c that is an extension of \mathcal{C}_c by adding objects and arrows satisfying Property (7) in Definition 5, i.e. if \mathcal{C}'_c has an object $C \sqcap (D \sqcup E)$ then it has also an object $(C \sqcap D) \sqcup (C \sqcap E)$. Then we apply saturation rules in Table 1 to \mathcal{C}'_c until no rule is applicable. We can use the same argument above to show that \mathcal{C}'_c satisfy all properties in Definitions 2-7 and Property (37) in Definition 8. Since \mathcal{C}_c has an arrow $C_0 \longrightarrow \perp$, \mathcal{C}'_c does. According to Definition 10, C_0 is unsatisfiable in \mathcal{ALC}_{\forall} with respect to \mathcal{O} .

“ \implies ”. Assume that $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle, \mathcal{C}_r\langle C_0, \mathcal{O} \rangle$ are *smallest* concept and role ontology categories according to the definitions, i.e. they have only necessary objects and arrows which satisfy the definition. By hypothesis, $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ has an arrow $C_0 \longrightarrow \perp$. We use $\langle \mathcal{C}_c, \mathcal{C}_r \rangle$ to denote the concept and role ontology categories built by Algorithm 1. We define a function π from $\text{Ob}(\mathcal{C}_c) \cup \text{Ob}(\mathcal{C}_r)$ to $\text{Ob}(\mathcal{C}_c\langle C_0, \mathcal{O} \rangle) \cup \text{Ob}(\mathcal{C}_r\langle C_0, \mathcal{O} \rangle)$. Since $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ and each \mathcal{C}_c have objects C_0 , and E, F for all axiom $E \sqsubseteq F$ (Line 2 and the loop from Line 3), π can be initialized with $\pi(C_0) = C_0$ and $\pi(E) = E, \pi(F) = F$. Thus, the following properties hold for all current π .

$$\pi(X) = X \text{ for each object } X \in \text{Ob}(\mathcal{C}_c) \cup \text{Ob}(\mathcal{C}_r) \quad (45)$$

$$X \longrightarrow Y \iff \pi(X) \longrightarrow \pi(Y) \quad (46)$$

We will extend π such that Properties (45) and (46) are preserved for each application of rules. Assume that these properties hold for the current π .

1. [**\perp -rule**]. Assume that \mathcal{C}_c has arrows $X \rightarrow \text{NNF}(\neg C)$, $X \rightarrow C$, but it does not have an arrow $X \rightarrow \perp$. By the hypothesis on Properties (45) and (46), we have $\pi(X) = X$, $\pi(C) = C$, $\pi(\text{NNF}(\neg C)) = \text{NNF}(\neg C)$, $\pi(X) \rightarrow \pi(\text{NNF}(\neg C))$, $\pi(X) \rightarrow \pi(C)$. In this case, [**\perp -rule**] adds to \mathcal{C}_c objects $C \sqcap \text{NNF}(\neg C)$, and arrows $X \rightarrow \perp$ and \cdot . Since $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ is an ontology category, it has $\pi(C \sqcap \text{NNF}(\neg C))$ and $\pi(X) \rightarrow \pi(\perp)$. This implies that Property (45) and the direction “ \Rightarrow ” of Property (46) are preserved.
2. [**\sqcap -rule**] and [**\sqcup -rule**]. These rules are applied to objects $C \sqcap D$ and $C \sqcup D$ for adding to \mathcal{C}_c the following arrows $C \sqcap D \rightarrow C$, $C \sqcap D \rightarrow D$, $C \rightarrow C \sqcup D$, $D \rightarrow C \sqcup D$. Since $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ is an ontology category, it has $\pi(C \sqcap D) \rightarrow \pi(C)$, $\pi(C \sqcap D) \rightarrow \pi(D)$, $\pi(C) \rightarrow \pi(C \sqcup D)$, $\pi(D) \rightarrow \pi(C \sqcup D)$. Thus, Properties (45)-(46) are preserved.
3. [**\perp_m -rule**]. Assume that \mathcal{C}_c has an arrow $E \sqcap F \rightarrow \perp$ and it does not have an arrow $E \rightarrow \text{NNF}(\neg F)$ (or $F \rightarrow \text{NNF}(\neg E)$). By the hypothesis on Property (45) and (46), $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ has an arrow $\pi(E \sqcap F) \rightarrow \pi(\perp)$. In this case, [**\perp_m -rule**] adds to \mathcal{C}_c an arrow $E \rightarrow \text{NNF}(\neg F)$ (or $F \rightarrow \text{NNF}(\neg E)$). Since $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ is an ontology category, it has an arrow $\pi(E) \rightarrow \pi(\text{NNF}(\neg F))$ (or $\pi(F) \rightarrow \pi(\text{NNF}(\neg E))$). This implies that Properties (45)-(46) are preserved.
4. [**\top -rule**] and [**\top_m -rule**] Analogously.
5. [**\neg -rule**]. Assume \mathcal{C}_c has an arrow $C \rightarrow D$ and it has no arrow $\text{NNF}(\neg D) \rightarrow \text{NNF}(\neg C)$. By the hypothesis on Properties (45) and (46), there is an arrow $\pi(C) \rightarrow \pi(D)$. In this case, [**\neg -rule**] adds to \mathcal{C}_c an arrow $\text{NNF}(\neg D) \rightarrow \text{NNF}(\neg C)$. Since $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ is an ontology category, it has an arrow $\pi(\text{NNF}(\neg D)) \rightarrow \pi(\text{NNF}(\neg C))$. Thus, Properties (45)-(46) are preserved.
6. [**\sqcup_m -rule**]. Assume \mathcal{C}_c has an object $E \sqcup F$ and two arrows $E \rightarrow X$ and $F \rightarrow X$ and it has no arrow $E \sqcup F \rightarrow X$. By the hypothesis on Properties (45) and (46), there is an object $\pi(E \sqcup F)$ and arrows $\pi(E) \rightarrow \pi(X)$ and $\pi(F) \rightarrow \pi(X)$. In this case, [**\sqcup_m -rule**] adds to \mathcal{C}_c . Since $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ is an ontology category, it has an arrow $\pi(E \sqcup F) \rightarrow \pi(X)$. Thus, Properties (45)-(46) are preserved.
7. [**\sqcap_m -rule**]. Analogously.
8. [**\sqcup_{dis} -rule**]. Assume that \mathcal{C}_c has objects $C \sqcap (D \sqcup E)$, W . It holds that $C \sqcap (D \sqcup E)$ can be rewritten as $C \sqcap (D \sqcup E) = (C_1 \sqcup D_1) \sqcap \dots \sqcap (C_n \sqcup D_n)$. For instance, if C is not a conjunction, then D , E and C take respectively C_1 , D_1 , and $(C_2 \sqcup D_2) \sqcap \dots \sqcap (C_n \sqcup D_n)$. Assume that $\text{check}(\mathcal{C}_c, C \sqcap (D \sqcup E), W)$ returns “true” (otherwise the rule is not applicable and nothing is changed). This implies that for each vector (X_1, \dots, X_n) with $X_i \in \{C_i, D_i\}$, \mathcal{C}_c has an arrow $X_{i_1} \sqcap \dots \sqcap X_{i_j} \rightarrow W$. By the hypothesis on Properties (45), $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ has arrows $\pi(X_{i_1} \sqcap \dots \sqcap X_{i_j}) \rightarrow \pi(W)$, and thus $X_1 \sqcap \dots \sqcap X_n \rightarrow \pi(W)$. It follows that $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ has an arrow $\bigsqcup_{X_i \in \{C_i, D_i\}} (X_1 \sqcap \dots \sqcap X_n) \rightarrow \pi(W)$ due to Definition 4, and an arrow $\pi(C \sqcap (D \sqcup E)) \rightarrow \pi(W)$ due to Property (7) in Definition 5. In this case, [**\sqcup_{dis} -rule**] adds to \mathcal{C}_c an arrows $C \sqcap (D \sqcup E) \rightarrow W$. Thus, Properties (45) and (46) are preserved.
9. [**\exists -rule**]. Assume that \mathcal{C}_c has an object $\exists R.D$. By the hypothesis on Properties (45) we have $\pi(\exists R.D) = \exists R.D$. In this case, [**\exists -rule**] adds to \mathcal{C}_c a role object $R_{(\exists R.D)}$, concept objects $\text{dom}(R_{(\exists R.D)})$, $\text{cod}(R_{(\exists R.D)})$ with arrows $\text{dom}(R_{(\exists R.D)}) \xleftarrow{\quad} \exists R.D$. Since $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ is an ontology category, it has also $R_{(\exists R.D)}$, concept ob-

jects $\text{dom}(R_{(\exists R.D)})$, $\text{cod}(R_{(\exists R.D)})$ with arrows $\text{dom}(R_{(\exists R.D)}) \xleftarrow{\quad} \exists R.D$. We can extend π with $\pi(\text{dom}(R_{(\exists R.D)})) = \text{dom}(R_{(\exists R.D)})$, $\pi(\text{cod}(R_{(\exists R.D)})) = \text{cod}(R_{(\exists R.D)})$, and $\pi(R_{(\exists R.D)}) = R_{(\exists R.D)}$. Thus, Properties (45) and (46) are preserved.

10. **[\exists_m -rule]**. Assume that \mathcal{C}_c has an object $\exists R.D$ and a role object R' such that $R' \rightarrow R$ and $\text{cod}(R') \rightarrow D$. By the hypothesis on Properties (45) and (46) we have $\pi(\exists R.D) = \exists R.D$, $\pi(\text{cod}(R')) = \text{cod}(R')$, $\pi(D) = D$ with $\pi(\text{cod}(R')) \rightarrow \pi(D)$ and $\pi(R') \rightarrow \pi(R)$. In this case, **[\exists_m -rule]** adds to \mathcal{C}_c an arrow $\text{dom}(R') \rightarrow \text{dom}(R_{(\exists R.D)})$. Since $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ is an ontology category, it has $\pi(\text{dom}(R')) \rightarrow \pi(\text{dom}(R_{(\exists R.D)}))$. Hence, Properties (45) and (46) are preserved.
11. **[\forall -rule]**. Assume that \mathcal{C}_c has an object $\forall R.C$, and it has no arrows $\forall R.C \xleftarrow{\quad} \neg \exists R.\neg C$. By the hypothesis on Properties (45) and (46) we have $\pi(\exists R.D) = \exists R.D$. In this case, **[\exists_m -rule]** adds to \mathcal{C}_c arrows $\forall R.C \xleftarrow{\quad} \neg \exists R.\neg C$. Since $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ is an ontology category, it has $\pi(\forall R.C) \xleftarrow{\quad} \pi(\neg \exists R.\neg C)$. Hence, Properties (45) and (46) are preserved.
12. **[dc-rule]**. Analogously.
13. **[trans-rule]**. Assume \mathcal{C}_c has arrows $C \rightarrow D$ and $D \rightarrow E$, and it has no arrow $C \rightarrow E$. By the hypothesis on Properties (45) and (46), there is an arrow $\pi(C) \rightarrow \pi(D)$. In this case,

To prove the direction “ \Leftarrow ” of Property (46) for **[\perp -rule]** and **[trans-rule]**, we need an intermediate result. Assume that there is an object of the form $C = (C_1 \sqcup D_1) \sqcap \dots \sqcap (C_n \sqcup D_n)$. If we apply Property (7) in Definition 5 to C and new objects of the same form resulting from these applications, then we can obtain a tree of objects denoted T_C whose root is C , and if a node C' of T_C is of the form $C' = W \sqcap (U \sqcup V)$, then C' has three successors $C'_0 = (W \sqcap U) \sqcup (W \sqcap V)$, $C'_1 = W \sqcap U$ and $C'_2 = W \sqcap V$. In this case, each object of the form $X_1 \sqcap \dots \sqcap X_n$ is a leaf of T_C with $X_i \in \{C_i, D_i\}$. Note that if \mathcal{C}_c has an object of the form $W \sqcap (U \sqcup V)$ and there is no object $(W \sqcap U) \sqcup (W \sqcap V)$, then no saturation rule adds $(W \sqcap U) \sqcup (W \sqcap V)$ to \mathcal{C}_c . Moreover, we have $W \sqcap (U \sqcup V) \xleftarrow{\quad} (W \sqcap U) \sqcup (W \sqcap V)$. This implies that if there is some $Z \notin \text{Ob}(\mathcal{C}_c)$ and $Z \in \text{Ob}(\mathcal{C}_c\langle C_0, \mathcal{O} \rangle)$ and Z is not of the form $(W \sqcap U) \sqcup (W \sqcap V)$, then Z must be a conjunction which is a node of a tree $T_{W \sqcap (U \sqcup V)}$. With such an object Z , we show the following property.

$$\pi(X) \rightarrow Z, Z \rightarrow \pi(Y) \text{ in } \mathcal{C}_c\langle C_0, \mathcal{O} \rangle \implies X \rightarrow Y \text{ in } \mathcal{C}_c(\dagger)$$

First, it is straightforward to show that (\dagger) implies the direction “ \Leftarrow ” of Property (46) for **[trans-rule]**. We can apply (\dagger) to $\pi(X) \rightarrow Z \sqcap \text{NNF}(\neg Z)$ to show the direction “ \Leftarrow ” of Property (46) for **[\perp -rule]**. We now show (\dagger) .

Indeed, since Z is a conjunction of the form $C \sqcap D$, we have $\pi(X) \rightarrow Z$ is added to $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ by Definition 5 if $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ has arrows $\pi(X) \rightarrow \pi(C)$ and $\pi(X) \rightarrow \pi(D)$. By the hypothesis on Properties (45) and (46), \mathcal{C}_c has arrows $X \rightarrow C$ and $X \rightarrow D$. Since $Z \in \text{Ob}(\mathcal{C}_c\langle C_0, \mathcal{O} \rangle) \setminus \text{Ob}(\mathcal{C}_c)$, it is not possible that $Z \sqsubseteq \pi(Y)$ is an axiom. Moreover, since Z is a conjunction of the form $C \sqcap D$, and $Z \rightarrow \pi(Y)$ is an arrow of $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$, it follows that either $C = \text{NNF}(\neg D)$, $\pi(Y) = \perp$, or $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ has an arrow $C \rightarrow \pi(Y)$ or $D \rightarrow \pi(Y)$. By the hypothesis on Properties (45) and (46), \mathcal{C}_c has an arrow $X \rightarrow Y$. Hence, (\dagger) is proved.

According to Lemma 12, Algorithm 1 terminates. Due to Properties (45) and (46), π is an injection. By hypothesis, $\text{Hom}(\mathcal{C}_c\langle C_0, \mathcal{O} \rangle)$ contains an arrow $\pi(C_0) \longrightarrow \pi(\perp)$. By definition, the presence of $\pi(C_0) \longrightarrow \pi(\perp)$ must be due to the properties in Definitions 2-7 and Property (37) in Definition 8. By Properties (45) and (46) on the function π , $\text{Hom}(\mathcal{C}_c)$ contains an arrow $C_0 \longrightarrow \perp$, and thus Algorithm 1 return “false”. This completes the proof. \square

The following theorem is a consequence of Lemmas 12 and 13.

Theorem 3. *Satisfiability of an \mathcal{ALC}_{∇} concept with respect to an ontology can be decided in polynomial space.*

Example 3. Consider the following \mathcal{ALC}_{∇} ontology :

$$\mathcal{O} = \{A \sqsubseteq \exists R.C, A \sqsubseteq \forall R.D, D \sqsubseteq \neg C\}.$$

Let us check whether A is satisfiable with respect to \mathcal{O} . According to Definition 10, A is not satisfiable with respect to \mathcal{O} if there exists $\mathcal{C}_c\langle A, \mathcal{O} \rangle$ that has an arrow $A \longrightarrow \perp$. For this, we derive from the definitions the arrows in the following blocks (I)-(V), and add them to $\mathcal{C}_c\langle A, \mathcal{O} \rangle$:

(I)	$A \longrightarrow \exists R.C$ $D \longrightarrow \neg C$	$A \longrightarrow \forall R.D$
(II)	$C \sqcap \neg C \longrightarrow \perp$ $C \longrightarrow \neg D$	$D \sqcap C \longrightarrow \perp$
(III)	$\exists R.C \xleftrightarrow{\quad} \text{dom}(R_{(\exists R.C)})$	$\text{cod}(R_{(\exists R.C)}) \longrightarrow C$
(IV)	$\forall R.D \xleftrightarrow{\quad} \neg \text{dom}(R_{(\exists R.\neg D)})$ $\text{cod}(R_{(\exists R.\neg D)}) \longrightarrow \neg D$	$\exists R.\neg D \xleftrightarrow{\quad} \text{dom}(R_{(\exists R.\neg D)})$
(V)	$\text{dom}(R_{(\exists R.C)}) \longrightarrow \text{dom}(R_{(\exists R.\neg D)})$ $A \longrightarrow \neg \text{dom}(R_{(\exists R.\neg D)})$	$A \longrightarrow \text{dom}(R_{(\exists R.\neg D)})$ $A \longrightarrow \perp$

Let's check that $\mathcal{C}_c\langle A, \mathcal{O} \rangle$ satisfies Definitions 2-7 and Property (37) in Definition 8 and it has an arrow $A \longrightarrow \perp$. Indeed, the arrows in Block (I) are added to $\mathcal{C}_c\langle A, \mathcal{O} \rangle$ by Definition 3; those in Block (II) added by Definition 6; those in Block (III) added by Definition 7; those in Block (IV) added by Definitions 8 and 7; and those in Block (V) added by Definitions 7 and 6. The other arrows that do not directly contribute to adding $A \longrightarrow \perp$ are omitted.

Now, we apply Algorithm 1 to $(\mathcal{A}, \mathcal{O})$ in order to find an arrow $A \longrightarrow \perp$. We omit most of objects and arrows that can be added by Algorithm 1, and we focus on those which lead to adding $A \longrightarrow \perp$.

Applied rule	Pre-requisite	Arrows (and objects) added to \mathcal{C}_c
[Initialisation] (Line 3 to 5)	None.	$A \longrightarrow \exists R.C$ (1) $A \longrightarrow \forall R.D$ (2) $D \longrightarrow \neg C$ (3)
[\neg-rule]	Arrow (3) is in \mathcal{C}_c , but no arrow $C \longrightarrow \neg D$.	$C \longrightarrow \neg D$ (4)
[\exists-rule]	$\exists R.C$ in \mathcal{C}_c , but no object $R_{(\exists R.C)}$ in \mathcal{C}_r .	$\text{dom}(R_{(\exists R.C)}) \xleftarrow{\quad} \exists R.C$ (5) $\text{cod}(R_{(\exists R.C)}) \longrightarrow C$ (6)
[\forall-rule]	$\forall R.D$ in \mathcal{C}_c , but no arrow $\forall R.D \xleftarrow{\quad} \neg \exists R.\neg D$.	$\forall R.D \xleftarrow{\quad} \neg \exists R.\neg D$ (7) $\exists R.\neg D$ (8)
[\exists-rule]	$\exists R.\neg D$ in \mathcal{C}_c , but no object $R_{(\exists R.\neg D)}$ in \mathcal{C}_r .	$\text{dom}(R_{(\exists R.\neg D)}) \xleftarrow{\quad} \exists R.\neg D$ (9) $\text{cod}(R_{(\exists R.\neg D)}) \longrightarrow \neg D$ (10)
[trans-rule]	We have arrows (4) and (6).	$\text{cod}(R_{(\exists R.C)}) \longrightarrow \neg D$ (11)
[\exists_m-rule]	We have arrow (11) and arrow $R_{(\exists R.C)} \longrightarrow R$, but no arrow $\text{dom}(R_{(\exists R.C)}) \longrightarrow \text{dom}(R_{(\exists R.\neg D)})$.	$\text{dom}(R_{(\exists R.C)}) \longrightarrow$ $\text{dom}(R_{(\exists R.\neg D)})$ (12)
[trans-rule]	From arrow (1) to (5) and (1) to (12) successively.	$A \longrightarrow \text{dom}(R_{(\exists R.\neg D)})$ (13)
[trans-rule] + [\neg-rule] + [trans-rule]	From arrow (2) to (7). On arrow (9). From arrow (2) to last arrow.	$A \longrightarrow \neg \exists R.\neg D$ $\neg \exists R.\neg D \longrightarrow \neg \text{dom}(R_{(\exists R.\neg D)})$ $A \longrightarrow \neg \text{dom}(R_{(\exists R.\neg D)})$ (14)
[\perp-rule]	We have arrow (13) and (14), but no arrow $A \longrightarrow \perp$.	$A \longrightarrow \perp$ (15)

The rules never remove any arrow, thus the algorithm will always be able to find (line 9) the arrow $A \longrightarrow \perp$ if it is added, hence the algorithm return false. Since all rules are deterministic, there is no category without $A \longrightarrow \perp$ that can be constructed.

Example 4. Consider the following \mathcal{ALC}_{\neg} concept $C_0 = (A \sqcup B) \sqcap (C \sqcup D) \sqcap (E \sqcup F)$ and ontology :

$$\mathcal{O} = \{A \sqcap C \sqsubseteq \perp, A \sqcap D \sqsubseteq \perp, B \sqcap C \sqsubseteq \perp, B \sqcap D \sqsubseteq \perp\}$$

Let us check whether C_0 is satisfiable with respect to \mathcal{O} . As for the previous example, we have from Definition 10 that C_0 is not satisfiable with respect to \mathcal{O} if there exists $\mathcal{C}_c \langle C_0, \mathcal{O} \rangle$ that has an arrow $C_0 \longrightarrow \perp$. We derive from the definitions the arrows in the following blocks (I)-(V), and add them to $\mathcal{C}_c \langle C_0, \mathcal{O} \rangle$. We rename a particular object for the sake of clarity, it comes from Property (7) of Definition 5 and is a notation :

$$\begin{aligned} C_1 = & (A \sqcap C \sqcap E) \sqcup (B \sqcap C \sqcap E) \sqcup (A \sqcap D \sqcap E) \\ & \sqcup (B \sqcap D \sqcap E) \sqcup (A \sqcap C \sqcap F) \sqcup (B \sqcap C \sqcap F) \\ & \sqcup (A \sqcap D \sqcap F) \sqcup (B \sqcap D \sqcap F) \end{aligned}$$

we omit the intermediate arrows for the sake of clarity.

(I)	$A \sqcap C \longrightarrow \perp$ $B \sqcap D \longrightarrow \perp$	$A \sqcap D \longrightarrow \perp$	$B \sqcap C \longrightarrow \perp$
(II)	$C \longrightarrow \neg A$ $D \longrightarrow \neg B$	$D \longrightarrow \neg A$	$C \longrightarrow \neg B$
(III)	$A \longrightarrow A \sqcup B$ $C \longrightarrow C \sqcup D$ $A \sqcap C \sqcap E \longrightarrow C_1$ $A \sqcap C \sqcap F \longrightarrow C_1$ $A \sqcap D \sqcap F \longrightarrow C_1$	$B \longrightarrow A \sqcup B$ $F \longrightarrow E \sqcup F$ $B \sqcap C \sqcap E \longrightarrow C_1$ $B \sqcap D \sqcap E \longrightarrow C_1$ $B \sqcap D \sqcap F \longrightarrow C_1$	$D \longrightarrow C \sqcup D$ $E \longrightarrow E \sqcup F$ $A \sqcap D \sqcap E \longrightarrow C_1$ $B \sqcap C \sqcap F \longrightarrow C_1$ $C_1 \longrightarrow \perp$
(IV)	$C_0 \longrightarrow A \sqcup B$ $C_0 \longrightarrow C_1$ $A \sqcap D \sqcap E \longrightarrow A \sqcap D$ $B \sqcap C \sqcap F \longrightarrow B \sqcap C$	$C_0 \longrightarrow C \sqcup D$ $A \sqcap C \sqcap E \longrightarrow A \sqcap C$ $B \sqcap D \sqcap E \longrightarrow B \sqcap D$ $A \sqcap D \sqcap F \longrightarrow A \sqcap D$	$C_0 \longrightarrow E \sqcup F$ $B \sqcap C \sqcap E \longrightarrow B \sqcap C$ $A \sqcap C \sqcap F \longrightarrow A \sqcap C$ $B \sqcap D \sqcap F \longrightarrow B \sqcap D$
(V)	$A \sqcap C \sqcap E \longrightarrow \perp$ $B \sqcap D \sqcap E \longrightarrow \perp$ $A \sqcap D \sqcap F \longrightarrow \perp$	$B \sqcap C \sqcap E \longrightarrow \perp$ $A \sqcap C \sqcap F \longrightarrow \perp$ $B \sqcap D \sqcap F \longrightarrow \perp$	$A \sqcap D \sqcap E \longrightarrow \perp$ $B \sqcap C \sqcap F \longrightarrow \perp$ $C_0 \longrightarrow \perp$

Let's check that $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ satisfies Definitions 2-7 and Property (37) in Definition 8 and it has an arrow $C_0 \longrightarrow \perp$. Indeed, the arrows in Block (I) are added to $\mathcal{C}_c\langle C_0, \mathcal{O} \rangle$ by Definition 3; those in Block (II) added by Definition 6; those in Block (III) added by Definition 4; those in Block (IV) added by Definitions 5; and those in Block (V) added by Definitions 2.

As before, we apply Algorithm 1 to (C_0, \mathcal{O}) in order to find an arrow $C_0 \longrightarrow \perp$.

Applied rule	Pre-requisite	Arrows added to \mathcal{C}_c
[Initialisation] (Line 3 to 5)	None.	$A \sqcap C \longrightarrow \perp$ (1) $B \sqcap C \longrightarrow \perp$ (2) $A \sqcap D \longrightarrow \perp$ (3) $B \sqcap D \longrightarrow \perp$ (4)
Algorithm 2	$\text{check}(\mathcal{C}_c, C_0, \perp)$	$C_0 = (A \sqcup B) \sqcap (C \sqcup D) \sqcap (E \sqcup F)$
1st loop	$A \sqcap C \sqcap E$	(1), [\sqcap-rule] and [trans-rule] $\text{imply } A \sqcap C \sqcap E \longrightarrow \perp$
2nd loop	$B \sqcap C \sqcap E$	(2), [\sqcap-rule] and [trans-rule] $\text{imply } B \sqcap C \sqcap E \longrightarrow \perp$
3rd loop	$A \sqcap D \sqcap E$	(3), [\sqcap-rule] and [trans-rule] $\text{imply } A \sqcap D \sqcap E \longrightarrow \perp$
4th loop	$B \sqcap D \sqcap E$	(4), [\sqcap-rule] and [trans-rule] $\text{imply } B \sqcap D \sqcap E \longrightarrow \perp$
5th loop	$A \sqcap C \sqcap F$	(1), [\sqcap-rule] and [trans-rule] $\text{imply } A \sqcap C \sqcap F \longrightarrow \perp$
6th loop	$B \sqcap C \sqcap F$	(2), [\sqcap-rule] and [trans-rule] $\text{imply } B \sqcap C \sqcap F \longrightarrow \perp$
7th loop	$A \sqcap D \sqcap F$	(3), [\sqcap-rule] and [trans-rule] $\text{imply } A \sqcap D \sqcap F \longrightarrow \perp$
8th loop	$B \sqcap D \sqcap F$	(4), [\sqcap-rule] and [trans-rule] $\text{imply } B \sqcap D \sqcap F \longrightarrow \perp$
End loop	For each $1 \leq i \leq 3$ with and $X_i \in \{A, B\}, Y_i \in \{C, D\},$ $Z_i \in \{E, D\}$, we have an arrow $X_i \sqcap Y_i \sqcap Z_i \longrightarrow \perp$.	check returns true
[\sqcup_{dis}-rule]	There is no arrow $C_0 \longrightarrow \perp$ and $\text{check}(\mathcal{C}_c, C_0, \perp)$ returns true .	$C_0 \longrightarrow \perp$

By the same arguments as the previous example, there is no category without $C_0 \iff \perp$ that can be constructed, hence C_0 is unsatisfiable.

6 Conclusion

We have presented a rewriting of the usual set-theoretical semantics of \mathcal{ALC} by using categorical language. Thanks to the modular representation of category-theoretical semantics composed of separate constraints, we identify a sublogic of \mathcal{ALC} , namely $\mathcal{ALC}_{\overline{\vee}}$, and show that it is strictly from \mathcal{ALC} . We also proposed a PSPACE non-deterministic algorithm for checking concept unsatisfiability in $\mathcal{ALC}_{\overline{\vee}}$, which implies that $\mathcal{ALC}_{\overline{\vee}}$ is PSPACE. For future work, we will investigate the question whether $\mathcal{ALC}_{\overline{\vee}}$ is PSPACE-complete. This question is open because $\mathcal{ALC}_{\overline{\vee}}$ (with general TBoxes) may not be included in \mathcal{ALC} without TBox. Moreover, we believe that category-theoretical semantics can be extended to more expressive DLs with role constructors. For instance, role functionality can be expressed as *monic and epic arrows* [5].

References

1. F. Baader, D. Calvanese, D. L. McGuinness, D. Nardi, P. F. Patel-Schneider (Eds.), The Description Logic Handbook: Theory, Implementation and Applications, Second Edition, Cambridge University Press, 2010.
2. P. Patel-Schneider, P. Hayes, I. Horrocks, Owl web ontology language semantics and abstract syntax, in: W3C Recommendation, 2004.
3. B. Cuenca Grau, I. Horrocks, B. Motik, B. Parsia, P. Patel-Schneider, U. Sattler, Owl 2: The next step for owl, journal of web semantics: Science, services and agents, World Wide Web 6 (2008) 309–322.
4. W. Lawvere, An elementary theory of the category of sets, in: Proc. Nat. Acad. Sci. (USA), 1964, p. 1506–1511.
5. R. Goldblatt, Topoi - The categorical analysis of logic, Mathematics, Dover publications, 2006.
6. K. Schild, A correspondence theory for terminological logics: preliminary report, in: Proceedings of the 12th international joint conference on Artificial intelligence, 1991, p. 466–471.
7. F. Baader, I. Horrocks, C. Lutz, U. Sattler, An Introduction to Description Logic, Cambridge University Press, 2017.
8. M. Schmidt-Schauß, G. Smolka, Attributive concept descriptions with complements, Artificial Intelligence 48 (1) (1991) 1–26.
9. F. Baader, J. Hladik, R. Peñaloza, Automata can show PSpace results for description logics, Information and Computation 206 (9) (2008) 1045–1056, special Issue: 1st International Conference on Language and Automata Theory and Applications (LATA 2007).
10. C. Le Duc, Category-theoretical semantics of the description logic alc , in: M. Homola, V. Ryzhikov, R. A. Schmidt (Eds.), Proceedings of the 34th International Workshop on Description Logics (DL 2021), Vol. 2954 of CEUR Workshop Proceedings, CEUR-WS.org, 2021.
11. I. Horrocks, U. Sattler, S. Tobies, Practical reasoning for expressive description logics, in: Proceedings of the International Conference on Logic for Programming, Artificial Intelligence and Reasoning (LPAR 1999), Springer, 1999.
12. D. I. Spivak, R. E. Kent, Ologs: a categorical framework for knowledge representation, PLoS one 7 (1) (2012) e24274.
13. M. Codescu, T. Mossakowski, O. Kutz, A categorical approach to networks of aligned ontologies, J. Data Semant. 6 (4) (2017) 155–197.
14. S. Mac Lane, I. Moerdijk, Sheaves in Geometry and Logic, Springer, 1992.
15. F. Baader, U. Sattler, Tableau algorithms for description logics, in: Proceedings of the International Conference on Automated Reasoning with Tableaux and Related Methods, Vol. 1847, Springer-Verlag, St Andrews, Scotland, UK, 2000, p. 118.
16. I. Horrocks, U. Sattler, A tableau decision procedure for \mathcal{SHOIQ} , Journal Of Automated Reasoning 39 (3) (2007) 249–276.