

Addressing Census data problems in race imputation via fully Bayesian Improved Surname Geocoding and name supplements*

Kosuke Imai[†]Santiago Olivella[‡]Evan Rosenman[§]

September 2, 2022

Abstract

Prediction of individual’s race and ethnicity plays an important role in social science and public health research. Examples include studies of racial disparity in health and voting. Recently, Bayesian Improved Surname Geocoding (BISG), which uses Bayes’ rule to combine information from Census surname files with the geocoding of an individual’s residence, has emerged as a leading methodology for this prediction task. Unfortunately, BISG suffers from two Census data problems that contribute to unsatisfactory predictive performance for minorities. First, the decennial Census often contains zero counts for minority racial groups in the Census blocks where some members of those groups reside. Second, because the Census surname files only include frequent names, many surnames – especially those of minorities – are missing from the list. To address the zero counts problem, we introduce a fully Bayesian Improved Surname Geocoding (fBISG) methodology that accounts for potential measurement error in Census counts by extending the naïve Bayesian inference of the BISG methodology to full posterior inference. To address the missing surname problem, we supplement the Census surname data with additional data on last, first, and middle names taken from the voter files of six Southern states where self-reported race is available. Our empirical validation shows that the fBISG methodology and name supplements significantly improve the accuracy of race imputation across all racial groups, and especially for Asians. The proposed methodology, together with additional name data, is available via the open-source software package WRU.

Keywords: BISG, ecological inference, measurement error, racial disparity, voter files

*We thank Bruce Willsie of L2, Inc. for his generosity in letting us make publicly available additional data on names and race.

[†]Professor, Department of Government and Department of Statistics, Harvard University. 1737 Cambridge Street, Institute for Quantitative Social Science, Cambridge MA 02138. Email: imai@harvard.edu URL: <https://imai.fas.harvard.edu>

[‡]Associate Professor, Department of Political Science, University of North Carolina at Chapel Hill.

[§]Postdoc, Harvard Data Science Initiative, Harvard University.

1 Introduction

Social scientists and public health researchers often must predict individual race and ethnicity when assessing disparities in policy and health outcomes. The Bayesian Improved Surname Geocoding (BISG), which uses Bayes’ rule to combine information from the Census surname list with the geocoding of individual residence, has emerged as a leading methodology for this prediction task (Elliott et al., 2008, 2009; Fiscella and Fremont, 2006; Imai and Khanna, 2016). Recent applications of the BISG methodology include studies on racial disparity in police violence (Edwards, Lee and Esposito, 2019), eviction (Hepburn, Louis and Desmond, 2020), suicide (Studdert et al., 2020), and turnout (Fraga, 2018).

In this paper, we address two Census data problems that hinder accurate prediction of individual race and ethnicity when using the BISG. First, the decennial Census often contains zero counts for minority groups in the Census blocks where some members of those groups reside. This may happen for several reasons. Some individuals may have moved after the decennial Census. There may also be under-counts. Another possibility is that the Census may inject measurement error for privacy protection (see Kenny et al., 2021, and references therein).

Second, the decennial Census surname files only include the racial composition of surnames that occur 100 or more times in the population. According to the Census Bureau, these names account for about 90 percent of people with surnames recorded in the 2010 Census (Comenetz, 2016). This means that no racial breakdown statistic is available for the remaining 10 percent. This lack of information may disproportionately affect minority groups if their surnames are less frequently occurring than those of the majority group.

Using data from six Southern states in which individual race of voters is available for validation, we show how these problems can result in a deterioration of predictive quality for the standard BISG approach (Section 2). To address these problems, we introduce a fully Bayesian generalization of the BISG approach and extend the coverage of available name-race tables (Section 3).

Our empirical validation study demonstrates that these proposed solutions yield substantial improvements in predictive accuracy — particularly among racial minorities (Section 4). Specifically, a model that incorporates all our proposed improvements increases classification accuracy by an average of about 14% among all five major racial groups (*vis-à-vis* the standard BISG), with improvements as high as 26% among Asian voters. Moreover, these gains in predictive accuracy do not come at the expense of the calibration of predicted probabilities across racial groups, which is particularly high for predictions made by the standard BISG methodology for White and Black voters. Finally, we conclude with a brief discussion about the applicability of our proposed modeling approach to various domains.

2 The Census Data Problems in Race Imputation

In this section, we first briefly review the standard BISG methodology. We then describe the census data problems and quantify the degree to which they negatively affect the predictive performance of

BISG.

2.1 Bayesian Improved Surname Geocoding (BISG): A Review

The goal of BISG is to predict the race of individual i , defined as $R_i \in \mathcal{R}$ where $|\mathcal{R}| = J$ is the total number of (mutually exclusive) racial categories. In this manuscript, we will have $J = 5$, with the categories $\mathcal{R} = \{\text{“White,” “Black,” “Hispanic,” “Asian,” “Other”}\}$.

Suppose we observe the individual’s surname $S_i \in \mathcal{S} = \{1, 2, \dots, K\}$ and geolocation $G_i \in \mathcal{G} = \{1, 2, \dots, L\}$ where the latter is typically recorded as a Census geographical unit (e.g., Census block), in which his or her residence is located. The BISG methodology is an application of naïve Bayes prediction, where the key assumption is given by the following conditional independence relation between geolocation and surname, given race.

ASSUMPTION 1 (INDEPENDENCE BETWEEN SURNAME AND GEOLOCATION WITHIN RACIAL GROUP)

$$G_i \perp\!\!\!\perp S_i \mid R_i$$

Under Assumption 1, the BISG prediction of an individual’s race is given by,

$$P(R_i \mid S_i, G_i) \propto P(S_i \mid R_i, G_i)P(R_i \mid G_i) = P(S_i \mid R_i)P(R_i \mid G_i). \quad (1)$$

One may also use the following equivalent formula obtained via another application of Bayes’ rule:

$$P(R_i \mid S_i, G_i) \propto P(R_i \mid S_i)P(G_i \mid R_i)$$

In practice, the decennial Census surname files are used to compute $P(S_i \mid R_i)$, whereas for $P(R_i \mid G_i)$ it is common to use the Census Bureau’s cross-tabulations of racial category by geographic location (e.g. Census blocks).

Although we do not address the appropriateness of Assumption 1 in this paper, it is important to acknowledge its limitation. The assumption is violated if, for example, among Asian Americans, various ethnic groups (Chinese, Indians, Japanese, Korean, Vietnamese, etc.) have distinct surnames and tend to live in different areas. A similar problem might also arise among Hispanic Americans. The surname “Santos,” for instance, may be common among Hispanics in some areas, but it may also be a common last name among Brazilian Americans (who are classified as non-Hispanic whites according to the Census) in other areas.

We now turn to two Census data problems that negatively affect the predictive performance of BISG.

2.2 Consequences of Zero Census Counts

The decennial census is intended to provide a full accounting of where each resident of the United States lives as of April 1 on the census year. Reported census distributions are considered reasonably reliable as of this date, though still imperfect (see e.g. Kenny et al., 2021). Over time, however, this accuracy degrades even further, as individuals move within the nation’s borders at significant rates (Basso and Peri, 2020). At fine levels of resolution, such as Census blocks, this means that the racial

Census Tally	White	Black	Hispanic	Asian	Other
Zero counts	0.12 (1%)	0.32 (4%)	0.16 (5%)	0.13 (20%)	0.22 (30%)
Non-zero counts	22.13 (99%)	7.55 (96%)	2.84 (95%)	0.51 (80%)	0.51 (70%)

Table 1: Count of individuals of each race in millions, for whom the 2010 Census states that there are zero (top row) or more than zero (bottom row) members of that racial group living within the individual’s home census block. Data is sourced from voter files from AL, FL, GA, LA, NC, and SC and racial data is self-reported on the file.

distributions may not fully capture the diversity of residents within a short time after the census is conducted. Among rapidly growing minority groups, such as Asian Americans and Hispanic Americans, errors may be particularly large.

Prior studies have shown that the use of the Census block level data, rather than the data at a higher level of geographical aggregation, tend to yield more accurate BISG prediction of individual race and ethnicity (e.g., Imai and Khanna, 2016). This, however, can result in a greater chance of measurement error. In particular, when Census counts are used to obtain the prior distribution $P(R_i | G_i)$ at the Census block level, some blocks may record zero individuals of certain ethnic and racial categories. In such cases, $P(R_i | G_i)$ would be set to zero, making the posterior probability of belonging to these groups automatically zero for all individuals who reside in these blocks. For example, someone with the last name “Gutiérrez” — a distinctively Hispanic last name — living in a neighborhood where the Census failed to count anyone of Hispanic descent would have a zero posterior probability of being classified as such according to the standard BISG methodology.

Thus, the predictive accuracy of the BISG methodology can suffer dramatically when probabilities are zeroed-out *a priori*. To quantify this error, we consider the voter files of six Southern states — Alabama, Florida, Georgia, Louisiana, North Carolina, and South Carolina — sourced between October 2020 and February 2021 (prior to the release of 2020 census data). The voter files were provided by L2, Inc., a leading national non-partisan firm and the oldest organization in the United States that supplies voter data and related technology to candidates, political parties, pollsters, and consultants for use in campaigns. These files tally all registered voters (approximately 37.8 million voters) in the state as of the production date, geocoding the Census blocks of their home addresses. About 91% of these voters provided self-reported race data.

Table 1 shows the counts of voters (in millions) by self-reported race, further divided by whether the 2010 Census indicates that exactly zero members of the individual’s racial group live within their home block. Due to internal mobility and other forms of measurement error, just shy of one million voters (2.8%) live in a Census block where the 2010 Census tallies indicate that no members of the individual’s racial group reside. Notably, these errors are not shared evenly across races. While fewer than 1% of White voters live in a Census block in which the Census data says no White individuals reside, a full fifth of Asian voters live in Census blocks in which the 2010 Census says there are no Asian residents. Even these aggregates mask substantial heterogeneity by state. In South Carolina, for example, 19% of Hispanic voters and 31% of Asian voters reside in zero-Hispanic and zero-Asian

Census Tally	White	Black	Hispanic	Asian	Other
Zero counts	50.0%	50.0%	50.0%	50.0%	50.0%
Non-zero counts	89.2%	92.4%	94.9%	91.4%	58.9%
Overall	89.8%	91.7%	91.9%	82.2%	59.0%

Table 2: Area under the receiver operating characteristic curve (AUROC) for BISG predictions of individual race, using Census blocks to set racial prior distributions. Overall AUROC values (third row) are lower for all non-white racial groups than are AUROC values for individuals living in blocks for which the racial prior for those groups is nonzero.

blocks, according to the 2010 Census.

This mismatch presents a significant challenge for the BISG methodology. A naïve application of BISG would yield a prediction of 0% for the true racial group of all individuals in the first row of Table 1 — comprising a relatively large proportion of all minority voters in the South — simply as a mechanical result the Census reporting no members of these racial groups living in the corresponding geographies.

The impact on BISG prediction is summarized in Table 2, where we split out the data as in Table 1 and compute the area under the receiver operating characteristic (AUROC) curve for the BISG predictions on each subgroup. The AUROC measures the probability that a randomly chosen member of each racial group will have a higher predicted probability of belonging to that racial group than a randomly chosen non-member. Accordingly, higher values of the AUROC indicate better classification accuracy. The first row of entries are all equal to 50.0% — a direct consequence of the fact that the true positive rates must be zero for each racial group in any block for which the Census prior is zero. In Census blocks for which the prior on the racial group is nonzero, the AUROC is above 90% for Black, Hispanic, and Asian voters, indicating good predictive accuracy. As a result, aggregate performance across *all* Census blocks (the third row) tends to be poorer for most racial groups (with the exception of White and Other voters), owing to the poor prediction on Census blocks for which the prior is erroneously set to zero.

We can also compute misclassification rates for each racial group, by assigning each individual to the the maximum a posteriori class and comparing against their true, self-reported race. These results can be found in Table A1 in the Appendix, where we report both overall error and false positive and false negative rates by racial group. All individuals living in Census blocks for whom the prior equals zero for their true race are misclassified, driving the overall error rate up from 14.5% to 16.9%.

These results suggest that individual race prediction can be improved by addressing the possibility that block-level racial priors may be inaccurate or out of date, especially if they are equal to zero.

2.3 Consequences of Missing Race-Name Data

A second plausible source of error arises from the use of surname data. In most applications of the BISG methodology, surname racial distributions are drawn from the Census Bureau’s surname list.

Name Match?	White	Black	Hispanic	Asian	Other
No	1.47 (7%)	0.27 (3%)	0.13 (4%)	0.09 (14%)	0.08 (10%)
Yes	20.79 (93%)	7.61 (97%)	2.88 (96%)	0.55 (86%)	0.66 (90%)

Table 3: Count of individuals (in millions) of each race for whom the individual’s surname cannot be matched to a name in the Census surname dictionary or Hispanic surname file. Data is sourced from voter files from AL, FL, GA, LA, NC, and SC and racial data is self-reported on the file.

Name Match?	White	Black	Hispanic	Asian	Other
No	79.4%	85.5%	78.1%	71.3%	55.9%
Yes	90.3%	91.8%	92.2%	82.3%	59.1%
Overall	89.8%	91.7%	91.9%	82.2%	59.0%

Table 4: Area under the receiver operating characteristic curve (AUROC) for BISC predictions of individual race, using Census blocks to set racial prior distributions. Predictive performance among individuals whose last names cannot be matched to the WRU name dictionary (first row) is significantly worse than among individuals for whom a match is found (second row).

The 2010 Census surname list, for example, provides the racial distribution of surnames appearing at least 100 times, which amounts to a total of about 160,000 names. These data are supplemented with the Census’s Spanish surname list, a list of about 12,000 common Hispanic surnames, approximately half of which are not in the Census surname list.

While these data are quite broad, they do not account for the possibility of rare surnames. In our sample of Southern states as of late 2020 and early 2021, we find that about 2 million voters (5.9%) have surnames that cannot be matched to the census name dictionary, even after the data are cleaned and stripped of punctuation to improve the chance of a match. The distribution of this mismatch across racial groups is given in Table 3. Although Asian voters are particularly unlikely to have their surnames matched (14%), the same is true for a significant portion of White voters (7%).

In the absence of a surname match, the default behavior of a common implementation of BISC (viz. the software package WRU (Khanna et al., 2021)) is to use the approximate 2010 national race proportions as an estimate for $P(R_i | S_i)$. This approximation yields a degradation in predictive performance among these records, as seen in Table 4. The AUROC is significantly lower among individuals without a name match than among those whose surnames are found in the dictionary, and the discrepancy is more than ten percentage points for White, Hispanic, and Asian voters.

As in the prior section, we compute misclassification rates for each racial group. These results can be found in Table A2 in the Appendix. The results are somewhat less dramatic in this case, because the default behavior in the absence of a name match does not automatically yield a misclassification. Nonetheless, we can see that misclassifications occur for less than one sixth of individuals whose names are matched, but nearly a quarter of individuals whose names are unmatched, increasing the overall error rate.

Once again, a data limitation yields a reduction in the predictive performance of the BISC

methodology. Accordingly, better name coverage would improve the quality of our predictions. In what follows, we lay out our proposed solutions to these common data quality issues, and show how correcting for them can substantially improve the prediction accuracy of BISG. In addition, we further extend the common BISG approach to incorporate first and middle names — information that is typically readily available from voter files, and which can further improve BISG’s accuracy.

3 The Proposed Solutions

In this section, we propose solutions to the measurement error problems described above. We begin by introducing a measurement error model designed to address potential for error in census tallies. Our model generalizes the naïve Bayes BISG methodology to a fully Bayesian model. We complete our approach by discussing our name augmentation strategy, designed to correct for lack of coverage in commonly used name-by-race dictionaries.

3.1 Accounting for the Measurement Error in Census Counts

We use a fully Bayesian modeling strategy to account for potential measurement error that arises when quantifying the racial distribution within each geography. We begin by modeling the observed Census counts as a draw from a Multinomial distribution with the true, but unknown, race proportions in geolocation g , denoted by $\zeta_g = (\zeta_{1g}, \zeta_{2g}, \dots, \zeta_{Jg})$,

$$\mathbf{N}_g \stackrel{\text{indep.}}{\sim} \text{Multinom}(\mathbf{N}_g, \zeta_g) \quad (2)$$

where $\mathbf{N}_g = (N_{1g}, N_{2g}, \dots, N_{Jg})$ is the J -dimensional vector of Census counts for individuals who belong to different racial groups and live in geolocation g , and $N_g = \sum_{r \in \mathcal{R}} N_{rg}$ is the observed total Census population count in geolocation g .

Next, we place the following conjugate prior distribution over the unknown race distribution for the geolocation g ,

$$\zeta_g \stackrel{\text{indep.}}{\sim} \text{Dirichlet}(\boldsymbol{\alpha}) \quad (3)$$

where $\boldsymbol{\alpha} = (\alpha_1, \alpha_2, \dots, \alpha_J)$ is the J -dimensional vector of prior hyperparameters. In our implementation, we define a uniform prior distribution with $\boldsymbol{\alpha} = \mathbf{1}$. This provides enough smoothing over observed zero counts, without preferring a particular ethnic and racial group over another.

We call this measurement error model the fully-Bayesian BISG (fBISG). Letting $P(S_i \mid R_i = r) = \boldsymbol{\pi}_r$, the full posterior distribution of the fBISG is given by,

$$\begin{aligned} & P(\{R_i\}_{i=1}^n, \{\zeta_g\}_{g \in \mathcal{G}} \mid \mathbf{S}, \mathbf{G}, \{\boldsymbol{\pi}_r\}_{r \in \mathcal{R}}, \boldsymbol{\alpha}) \\ & \propto \prod_{i=1}^n \prod_{r \in \mathcal{R}} \prod_{g \in \mathcal{G}} \left\{ \left(\prod_{s \in \mathcal{S}} \pi_{sr}^{\mathbf{1}\{S_i=s\}} \right) \zeta_{rg}^{\mathbf{1}\{G_i=g\}} \right\}^{\mathbf{1}\{R_i=r\}} \times \prod_{r \in \mathcal{R}} \prod_{g \in \mathcal{G}} \zeta_{rg}^{N_{rg} + \alpha_r - 1} \\ & = \prod_{s \in \mathcal{S}} \prod_{r \in \mathcal{R}} \pi_{sr}^{m_{sr}} \times \prod_{r \in \mathcal{R}} \prod_{g \in \mathcal{G}} \zeta_{rg}^{n_{rg} + N_{rg} + \alpha_r - 1} \end{aligned} \quad (4)$$

where $n_{rg} = \sum_{i=1}^n \mathbf{1}\{R_i = r, G_i = g\}$ is the number of individuals on the voter file who belong to race r and live in geographical unit g , and $m_{sr} = \sum_{i=1}^n \mathbf{1}\{S_i = s, R_i = r\}$ is the number of individuals in the voter file who belong to race r and have surname s .

To simplify computation, we integrate out ζ_g , obtaining the following marginalized posterior distribution,

$$P(\{R_i\}_{i=1}^n \mid \{\pi_r\}_{r \in \mathcal{R}}, \mathbf{S}, \mathbf{G}, \boldsymbol{\alpha}) \propto \prod_{r \in \mathcal{R}} \left\{ \prod_{s \in \mathcal{S}} \pi_{sr}^{n_{sr}} \prod_{g \in \mathcal{G}} \Gamma(n_{rg} + N_{rg} + \alpha_r) \right\}. \quad (5)$$

To sample from this joint posterior, we construct a Gibbs sampler. Using the fact that $\Gamma(x+y) = x^y \Gamma(x)$ for $y \in \{0, 1\}$, we can derive the following conditional posterior distribution for R_i given the race of the other individuals,

$$\Pr(R_i = r \mid \mathbf{R}_{-i}, S_i = s, G_i = g, \mathbf{G}_{-i}, \boldsymbol{\alpha}) \propto \pi_{sr}(n_{rg}^{-i} + N_{rg} + \alpha_r) \quad (6)$$

where $n_{rg}^{-i} = \sum_{i' \neq i} \mathbf{1}\{R_{i'} = r, G_{i'} = g\}$ is the only parameter that needs to be updated throughout the sampling process. After the corresponding Markov chain has converged to its stationary distribution, the posterior prediction for R_i can now be based on the posterior approximated by iteratively sampling from the full set of conditional distributions in Equation (6).

The comparison of Equation (6) with Equation (1) shows how the fBISG addresses the problems caused by zero census counts. Notice that the race-geolocation probability $\Pr(R_i \mid G_i)$ in the BISG prediction formula, which is given by $N_{rg}/\sum_{r'} N_{r'g}$, is replaced with the ratio $(n_{rg}^{-i} + N_{rg} + \alpha_r)/\sum_{r'} (n_{r'g}^{-i} + N_{r'g} + \alpha_{r'})$ in the fBISG formula. Thus, in the BISG methodology, if $N_{rg} = 0$, the posterior prediction for this racial group r in the geolocation g is zero. In contrast, the fBISG methodology gives non-zero probability of belonging to the racial group with zero Census counts by adding a prior and partially pooling other individuals who live in the same geolocation.

3.2 Increasing Surname Coverage, and Incorporating First and Middle Names

In addition to the surname, we may also have first and middle names of each individual whose racial group we wish to predict. Let $F_i \in \mathcal{F} = \{1, 2, \dots, K_F\}$ and $M_i \in \mathcal{M} = \{1, 2, \dots, K_M\}$ denote the first and middle names of individual i , respectively. Using the same voter file data from L2, Inc., we construct the racial composition of each first name and that of each middle name. This allows us to further approximate the joint distributions $P(R_i, F_i)$ and $P(R_i, M_i)$.

Voicu (2018) shows that incorporating the first name can improve the performance of the BISG. The author makes the assumption, similar to Assumption 1, that the first name is independent of geolocation conditional on race. In addition, it is assumed that the first name is independent of the surname given race. If we make the same assumption about middle names, the prediction formula becomes,

$$P(R_i \mid F_i, M_i, S_i, G_i) \propto P(F_i \mid R_i)P(M_i \mid R_i)P(S_i \mid R_i)P(R_i \mid G_i).$$

Combining this information with our fully-Bayesian model for smoothing over zero census counts results in the following updated full conditional distribution over individual i 's race:

$$\Pr(R_i = r \mid \mathbf{R}_{-i}, F_i = f, M_i = m, S_i = s, G_i = g, \mathbf{G}_{-i}, \boldsymbol{\alpha}) \propto \pi_{fr}^{\mathcal{F}} \pi_{mr}^{\mathcal{M}} \pi_{sr}^{\mathcal{S}} (n_{rg}^{-i} + N_{rg} + \alpha_r) \quad (7)$$

where $\pi_{fr}^{\mathcal{F}} = P(F_i = f \mid R_i = r)$, and similarly with $\pi_{mr}^{\mathcal{M}}$ and $\pi_{sr}^{\mathcal{S}}$.

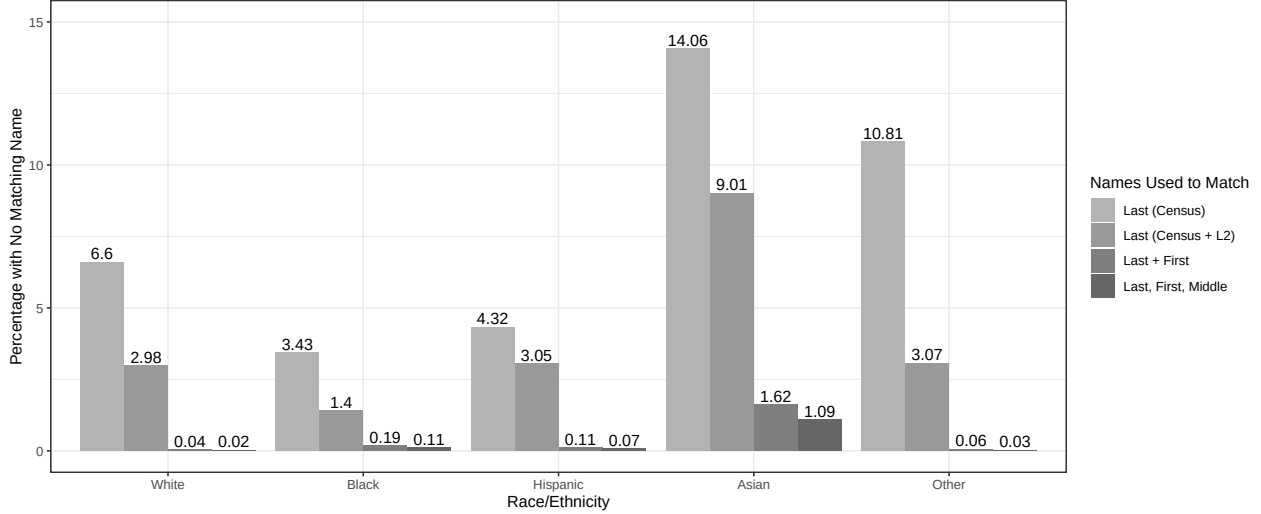


Figure 1: Percentage of individuals in each racial group who cannot be matched to *any* name dictionary, under four different matching schemes: matching to census last names only; matching to census and L2 last names; matching last names and first names; and matching last, first, and middle names. Data is drawn from the voter files of Alabama, Florida, Georgia, Louisiana, North Carolina, and South Carolina.

We next demonstrate the empirical benefit of incorporating voter file data surname racial distributions, as well as those of first and middle names. Using the same set of voter files from L2, Inc., we consider matching individuals to name dictionaries under several schemes. First, we consider surnames exclusively, and compute the proportion of individuals from each racial group who do not have a surname matched to the Census dictionaries (as in Table 3). Next, we compute the proportion of individuals of each race who do not have a surname matched to the Census dictionaries, augmented with data from the L2 voter files themselves. Third, we compute the proportion of individuals of each race who do not have a surname matched to the augmented surname dictionary *or* a first name matched to the separate first name dictionary compiled from the L2 data. Lastly, we compute the proportion of individuals of each race who do not have a name matched to any of the augmented surname dictionary or to first and middle name dictionaries compiled from the L2 data.

Because the voter file data is used both to compile the dictionaries and to assess coverage, we iteratively hold out each of the six states (Alabama, Florida, Georgia, Louisiana, North Carolina, and South Carolina), and consider coverage using a dictionary compiled from the other five states. The results in Figure 1 show that dictionary augmentation — and inclusion of additional names — substantially decreases the proportion of individuals who cannot be matched to any dictionary. For non-Asian voters, all but a negligible fraction of voters can be matched to at least one dictionary once all their names are included. Among Asians, approximately one percent of voters still cannot be matched when using first, middle, and last names. This, however, represents a dramatic improvement relative to the case of exclusively using surnames, and sourcing data only from the Census.

4 Empirical Validation

To empirically validate our proposed improvements, we fit both the standard BISG and our fBISG to the combined voter files from AL, FL, GA, LA, NC, and SC, from L2, Inc. As discussed in Section 2, this combined data set contains information for roughly 38 million voters.

4.1 The Setup

In our validation, we treat the self-reported race of each record as unobserved, and use the remaining available information for that record to obtain posterior probability distributions over their race. Specifically, we use the last, first, and middle names of each voter, as well as the Census block in which their reported home address is located. We then compare predictions based on these posterior distributions to the known racial categories of each record in order to evaluate the overall quality of our fBISG predictions *vis-à-vis* those of the standard BISG methodology.

To obtain samples from the fBISG posterior distribution over races for each voter in our combined voter file, we rely on the latest version of the `wru` package in R (Khanna et al., 2021). We initialize the global counts in the Gibbs updates of Equation (6) using the predictions based on the standard BISG methodology, and run a single Markov chain for 1,500 iterations, discarding the first 500 samples as burn-in. Note that the conditional posterior in Equation (6) factorizes over locations g , which allows us to fit the model separately across any level of geographic aggregation defined on $\mathcal{G}$.

In our application, we fit models separately by state through the same leave-one-out approach we used when assessing the impact of dictionary coverage (see Section 3.2). For instance, in sampling the race probabilities of voters in North Carolina, we only use the name-given-race distributions derived from augmenting the original Census dictionary with records from all *other* states. This ensures that the name-given-race distributions are not obtained from the validation voter file. While the size of each voter file in our sample did not require parallelization to make computation feasible, factorization over g allows researchers to parallelize their analyses in order to fit our model efficiently on much larger data files. We completed all analyses on a laptop computer with an M1 Max CPU and 64Gb of RAM in under 3 hours of wall time.

4.2 Correcting the Zero Census Counts Problem

Figure 2 shows, for each racial category, the area under the receiver operating characteristic curve (AUROC) based on posterior predictions generated by the standard BISG (light grey) and fBISG (dark grey) methods. For all but the “Other” racial category, the predictive performance of the fBISG methodology represents a substantial improvement over that of the standard BISG. These performance gains are most dramatic for Hispanic and Asian racial groups — with the latter yielding an 11% increase (from 0.82 using the BISG to 0.91 using the fBISG). In general, the use of fBISG effectively eliminates the performance gap observed between major racial categories when using BISG, which disproportionately affected members of the Asian category.

The source of these improvements in classification accuracy varies by racial category, as indicated by changes in False Positive and False Negative error rates (see column “Last name (census)” of

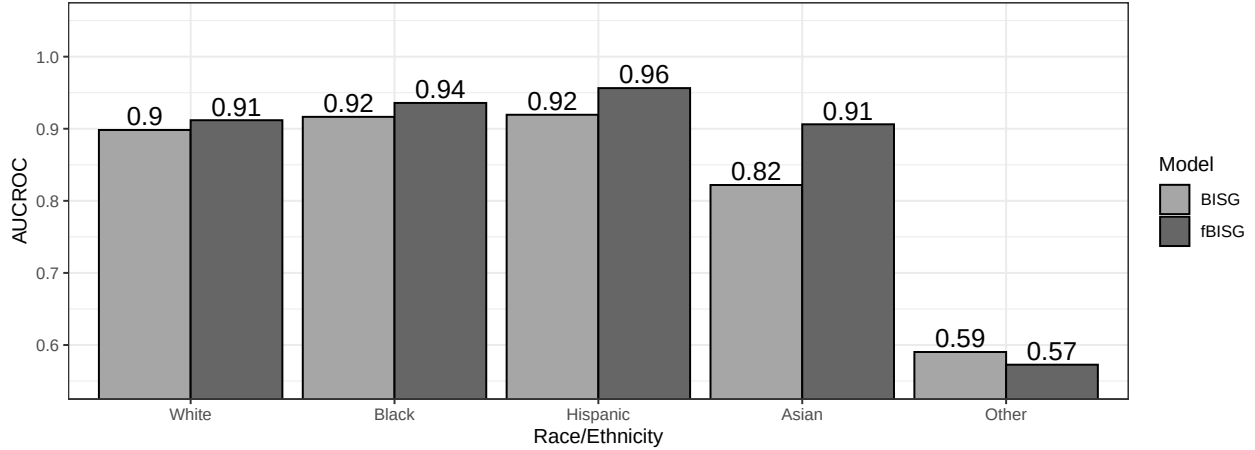


Figure 2: Area under the receiver operating characteristic curve for race predictions obtained using the standard BISG methodology (dotted) and our fully Bayesian BISG methodology (fBISG; stripped). All results are based on the 2010 Census surname dictionary. A greater value of AUROC indicates more accurate race classification. For all but the “Other” category, the fBISG methodology has better classification performance than the standard BISG methodology, generating the most dramatic improvements among Asian minorities.

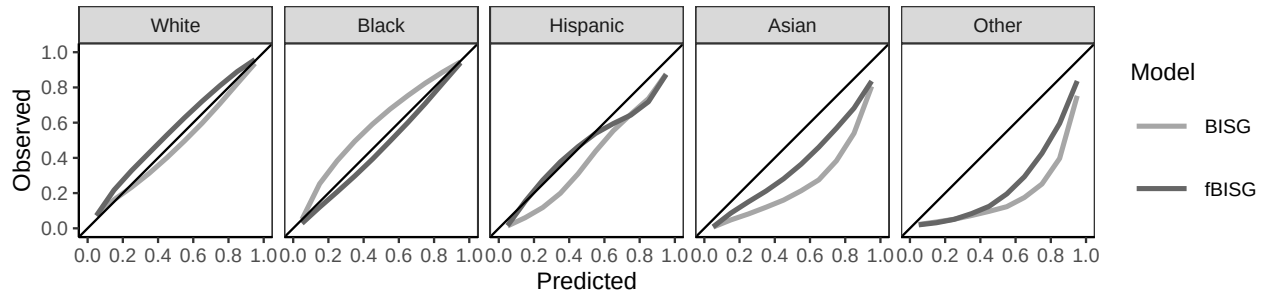


Figure 3: Calibration curves for race predictions obtained using the standard BISG (dotted) and fBISG (dashed) methods. The results are based on the 2010 Census surname dictionary. Curves closer to the 45° line indicate better calibrated predictions.

Table A3 in the Appendix). Among White voters, fBISG substantially reduces the false positive rate from 31% to 24%, while keeping the false negative rate below 10%. Among Black voters, the improvement comes primarily from reducing false negatives, bringing type II error down to about 24% from the 36% achieved by BISG.

In turn, while error reduction among Hispanics is small, accounting for the zeroes in the Census counts substantially affects the accuracy of classification among Asian voters. For the latter, fBISG reduces both the false negative rate (from 47% to 41%) and the false positive rate (from 0.78% to 0.48%) relative to the standard BISG model. Given the large percentage (20%) of Asian voters living in a block for which the 2010 Census tallies register zero Asians, the improvement induced by fBISG is unsurprising.

In addition to improving prediction accuracy, fBISG generally improves the calibration of pre-

dicted probabilities, as shown in Figure 3. The figure shows predicted probabilities vs. observed sample proportions of voters in each racial category, for both BISG (light gray) and fBISG (dark gray) methods. The closer the curves lie to the 45°line, the better calibrated the corresponding method’s predictions. This is because well-calibrated methods generate predicted probabilities that match observed sample proportions of positive cases. The figure shows that fBISG can produce better calibrated predictions than the standard BISG methodology for voters in most racial categories, producing well calibrated predictions even among “White” voters — the only category in which calibration becomes slightly worse when making predictions based on fBISG rather than on BISG. In sum, correcting the zero-count measurement error issues can yield substantial improvements in race predictive accuracy across all major racial categories.

4.3 Correcting the Missing Race-Name Data Problem

Correcting for name under-coverage, and adding additional name information, also result in substantial improvements in predictive accuracy. Figure 4 shows the overall improvement in predictive accuracy that results from using additional name-race data from the L2 voter files, for both BISG (light bars) and fBISG (dark bars). While these results aggregate across voter files, recall that we mitigate over-fitting by sampling each state separately, leaving names from that state out of the augmented dictionaries. Figure A1 in the Appendix presents the results separately for each state.

Consistent with prior findings (e.g. Voicu, 2018), we find that using first and middle name information typically improves the predictive performance of models. Moving from top to bottom, panels in Figure 4 show the steady improvement in model performance as the predictions rely on an increasing amount of name information (i.e., surnames only, surnames and first names, and surnames, first names, and middle names together). While both BISG and fBISG benefit from the progressively larger name-sets being used in the prediction, fBISG is able to make the most of the additional information. This is especially true among White voters, for whom accuracy can be improved by as much as 4.4% (from and AUROC of 0.91 to 0.95 using fBISG for generating predictions).

Once all our proposed solutions are implemented, improvements in predictive accuracy over the standard BISG methodology are substantial. Across major racial categories, the average increase in AUROC is about 7%, with improvements among Asian voters being as large as 15% (from 0.82 using the standard, surname-only BISG to 0.94 using all our proposed solutions). Using our fully specified model renders predictive quality across major racial categories effectively uniform, bringing probabilities of a correct classification over 0.95 for all major racial groups.

These gains in accuracy come primarily from substantial reductions in the number of false negatives among all but White voters, as can be seen by comparing the gray boxes within each error block across columns 4 and 7 of Table A3 in the Appendix. For non-White voters, type II error is reduced, on average, by 18 percentage points once all our solutions are implemented. These improvements come primarily from correcting false positives attributed to the White category, where we see a corresponding type I error rate reduction of almost 16 percentage points.

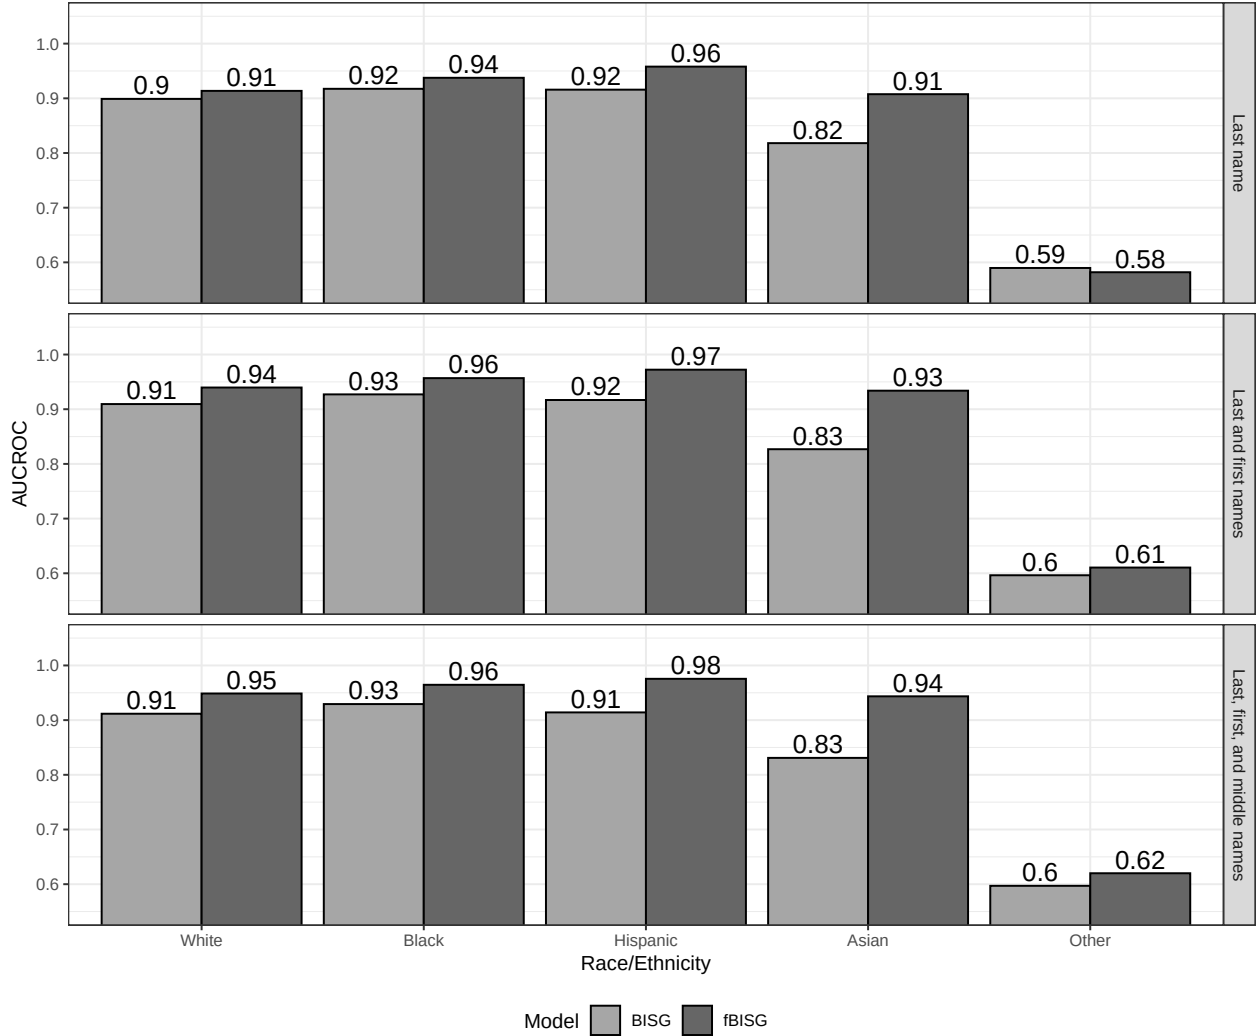


Figure 4: Area under the receiver operating characteristic curve (AUROC) for race predictions obtained using the standard BISG (light grey) and fBISG (dark grey) methods. The results are based on progressively more name information, starting with the L2-augmented surname dictionary (top panel). As before, higher values indicate better predictive accuracy. Overall, using more name information uniformly improves the accuracy of models, and using fBISG combined with more name information produces the most accurate models.

Augmenting name dictionaries can also improve calibration, although gains are more modest on this front. Figure 5 presents the calibration curves for the BISG (light gray) and fBISG (dark gray) models, now estimated using augmented name dictionaries. Comparing the first row of this figure to the panels in Figure 3, we find that using the expanded surname set can improve name calibration — particularly among White and Black voters, for whom calibration is exceptionally high — and reduce the observed differences between BISG and fBISG approaches.

Moreover, gains in accuracy from adding information on first and middle names are not made at the expense of calibration, with calibration curves that are effectively the same across most rows of

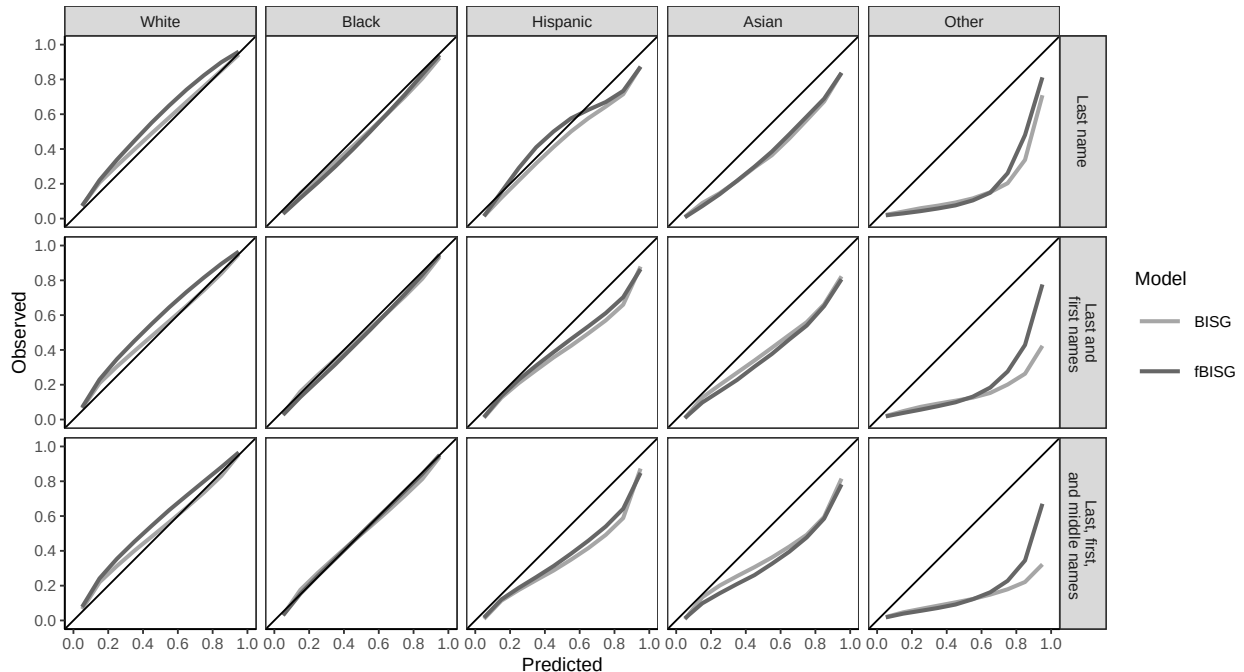


Figure 5: Calibration curves for race predictions obtained using BISG (light grey) and fBISG (dark grey), using progressively more name information from dictionaries augmented with L2 data (from top to bottom rows). As before, curves closer to the 45° line indicate better calibrated predictions.

Figure 5. The exceptions to this pattern come from the inclusion of middle names among Hispanic and Asian voters, which slightly worsens calibration for predictions based on both BISG and fBISG. This is likely the result of different norms around middle name usage among members of these racial groups. Of all four major racial categories, calibration remains worst among Asian voters.

5 Conclusion

In this paper, we consider the problem of predicting an individual’s race. This task is especially relevant to modern research on racial equity in areas such as public health and political science. The current state-of-the-art approach is Bayesian Improved Surname Geocoding (BISG), which uses surname and geolocation data to generate a probabilistic prediction for each individual over racial classes. Yet, as we have shown, BISG predictions can underperform for minority groups due to two consistent challenges: inaccurate Census counts, and name under-coverage.

To address these challenges, we have introduced a fully Bayesian analogue known as fully-Bayesian Improved Surname Geocoding (fBISG) that addresses the problem of Census zero counts. Moreover, we have augmented our name dictionaries, including additional surnames, as well as first and middle names, sourced from voter files in six southern states provided by L2, Inc. Taken together, these methodological improvements yield substantial performance gains in predictive accuracy — as measured by AUROC, as well as false positive and false negative error rates under maximum a posteriori predictions – while simultaneously improving the calibration of predictions. Moreover, the

gains are most pronounced among Hispanics and Asian Americans, drawing their predictions almost to parity with those for White and Black voters in terms of accuracy. We believe these improvements will be useful for practitioners, allowing them to obtain improved individual-level racial predictions and better characterize disparate racial impacts.

References

- Basso, Gaetano and Giovanni Peri. 2020. “Internal mobility: The greater responsiveness of foreign-born to economic conditions.” *Journal of Economic Perspectives* 34:77–98.
- Comenetz, Joshua. 2016. Frequently Occuring Surnames in the 2010 Census. Technical Report. United States Census Bureau <https://www2.census.gov/topics/genealogy/2010surnames/surnames.pdf>: .
- Edwards, Frank, Hedwig Lee and Michael Esposito. 2019. “Risk of being killed by police use of force in the United States by age, race-ethnicity, and sex.” *Proceedings of the National Academy of Science* 116:16793–16798.
- Elliott, Marc N., Allen Fremont, Peter A. Morrison, Philip Pantoja and Nicole Lurie. 2008. “A New Method for Estimating Race/Ethnicity and Associated Disparities Where Administrative Records Lack Self-Reported Race/Ethnicity.” *Health Services Research* 43:1772–1736.
- Elliott, Marc N., Peter A. Morrison, Allen Fremont, Daniel F. McCaffrey, Philip Pantoja and Nicole Lurie. 2009. “Using the Census Bureau’s surname list to improve estimates of race/ethnicity and associated disparities.” *Health Services and Outcomes Research Methodology* 9:69–83.
- Fiscella, Kevin and Allen M. Fremont. 2006. “Use of Geocoding and Surname Analysis to Estimate Race and Ethnicity.” *Health Services Research* 41:1482–1500.
- Fraga, Bernard L. 2018. *The Turnout Gap: Race, Ethnicity, and Political Inequality in a Diversifying America*. New York: Cambridge University Press.
- Hepburn, Peter, Renee Louis and Matthew Desmond. 2020. “Racial and Gender Disparities among Evicted Americans.” *Sociological Science* 7:649–662.
- Imai, Kosuke and Kabir Khanna. 2016. “Improving ecological inference by predicting individual ethnicity from voter registration records.” *Political Analysis* 24:263–272.

- Kenny, Christopher T, Shiro Kuriwaki, Cory McCartan, Evan TR Rosenman, Tyler Simko and Kosuke Imai. 2021. “The use of differential privacy for census data and its impact on redistricting: The case of the 2020 US Census.” *Science advances* 7:eabk3283.
- Khanna, Kabir, Kosuke Imai, Evan Rosenman and Santiago Olivella. 2021. *wru: Who are You? Bayesian Prediction of Racial Category Using Surname and Geolocation*. R package version 0.1-12.
URL: <https://github.com/kosukeimai/wru>
- Studdert, David M., Yifan Zhang, Sonja A. Swanson, Lea Prince, Jonathan A. Rodden, Erin E. Holsinger, Matthew J. Spittal, Garen J. Wintemute and Matthew Miller. 2020. “Handgun Ownership and Suicide in California.” *New England Journal of Medicine* 382:2220–2229. PMID: 32492303.
- Voicu, Ioan. 2018. “Using First Name Information to Improve Race and Ethnicity Classification.” *Statistics and Public Policy* 5:1–13.

Appendix: Additional Results

Ethnicity	Data	Nonzero Census Blocks	Zero Census Blocks	Total
Overall Error Rate		14.5%	100%	16.9%
White	False negative	5.6%	100%	6.1%
	False positive	31.4%	NA	31.4%
Black	False negative	33.7%	100%	36.4%
	False positive	3.5%	NA	3.5%
Hispanic	False negative	15.7%	100%	20.3%
	False positive	2.2%	NA	2.2%
Asian	False negative	33.2%	100%	46.6%
	False positive	0.7%	NA	0.7%
Other	False negative	92.7%	100%	94.9%
	False positive	0.3%	NA	0.3%

Table A1: Overall classification error rate as well as false positive (Type I error) and false negative (Type II error) rates for White, Black, Latino, Asian, and Other voters using the standard BISG prediction as implemented in the `WRU` package. Each voter is classified to the racial category with the highest predicted probability. We compare rates for individuals in blocks for whom the Census sets a nonzero prior for their true racial group (“Nonzero Census Blocks”) against individuals in blocks from who the census sets a zero prior (“Zero Census Blocks”). All individuals are classified to the wrong racial group in zero Census blocks, so false negative rates are 100% while false positive rates are undefined.

Ethnicity	Error	Name Matched to Dictionary	Name Unmatched to Dictionary	Total
Overall Error Rate		16.4%	24.7%	16.9%
White	False negative	6.1%	6.5%	6.1%
	False positive	30.1%	58.8%	31.4%
Black	False negative	35.5%	63.7%	36.4%
	False positive	3.6%	2.1%	3.5%
Hispanic	False negative	18.4%	65.4%	20.3%
	False positive	2.1%	4.1%	2.2%
Asian	False negative	40.3%	84.6%	46.6%
	False positive	0.6%	2.7%	0.7%
Other	False negative	94.4%	99.3%	94.9%
	False positive	0.3%	0.2%	0.3%

Table A2: Overall classification error rate as well as false positive (Type I error) and false negative (Type II error) rates for White, Black, Latino, Asian, and Other voters using prediction using standard BISG as implemented in the `WRU` package. Each voter is classified to the racial category with the highest predicted probability. We compare rates for individuals whose names are matched to our name dictionary against those whose names are not matched (in which case a national racial prior is used). Error rates are significantly higher among those whose names are unmatched.

Ethnicity	Error	Model	Last name (Census)	Last name (augmented)	Last & first names	Last, first, & middle names
White	False negative	BISG	6.11	8.60	6.87	6.29
		fBISG	9.37	9.67	7.79	6.93
	False positive	BISG	31.40	25.36	21.90	19.73
		fBISG	24.25	23.00	17.69	15.59
Black	False negative	BISG	36.44	26.22	22.98	21.24
		fBISG	24.39	23.81	19.21	17.93
	False positive	BISG	3.54	6.29	4.81	4.19
		fBISG	6.91	6.89	5.25	4.23
Hispanic	False negative	BISG	20.35	24.58	20.21	18.38
		fBISG	24.16	22.81	14.99	12.05
	False positive	BISG	2.22	2.05	1.92	1.99
		fBISG	2.11	2.08	2.06	2.19
Asian	False negative	BISG	46.59	48.36	45.27	43.68
		fBISG	41.10	39.35	32.58	29.40
	False positive	BISG	0.74	0.41	0.39	0.40
		fBISG	0.48	0.52	0.54	0.60
Other	False negative	BISG	94.90	94.30	92.98	91.96
		fBISG	95.21	94.10	92.91	91.85
	False positive	BISG	0.28	0.43	0.63	0.83
		fBISG	0.16	0.50	0.55	0.73

Table A3: False positive (Type I error) and false negative (Type II error) error rates for White, Black, Latino, Asian, and Other voters using predictions from standard BISG and from our proposed fBISG model. Each voter is classified to the racial category with the highest posterior probability. For all but the ‘Other’ category, both types of errors are reduced as you move from standard, Census-dictionary BISG, to fBISG using the augmented dictionary (gray cells within each block of rows).

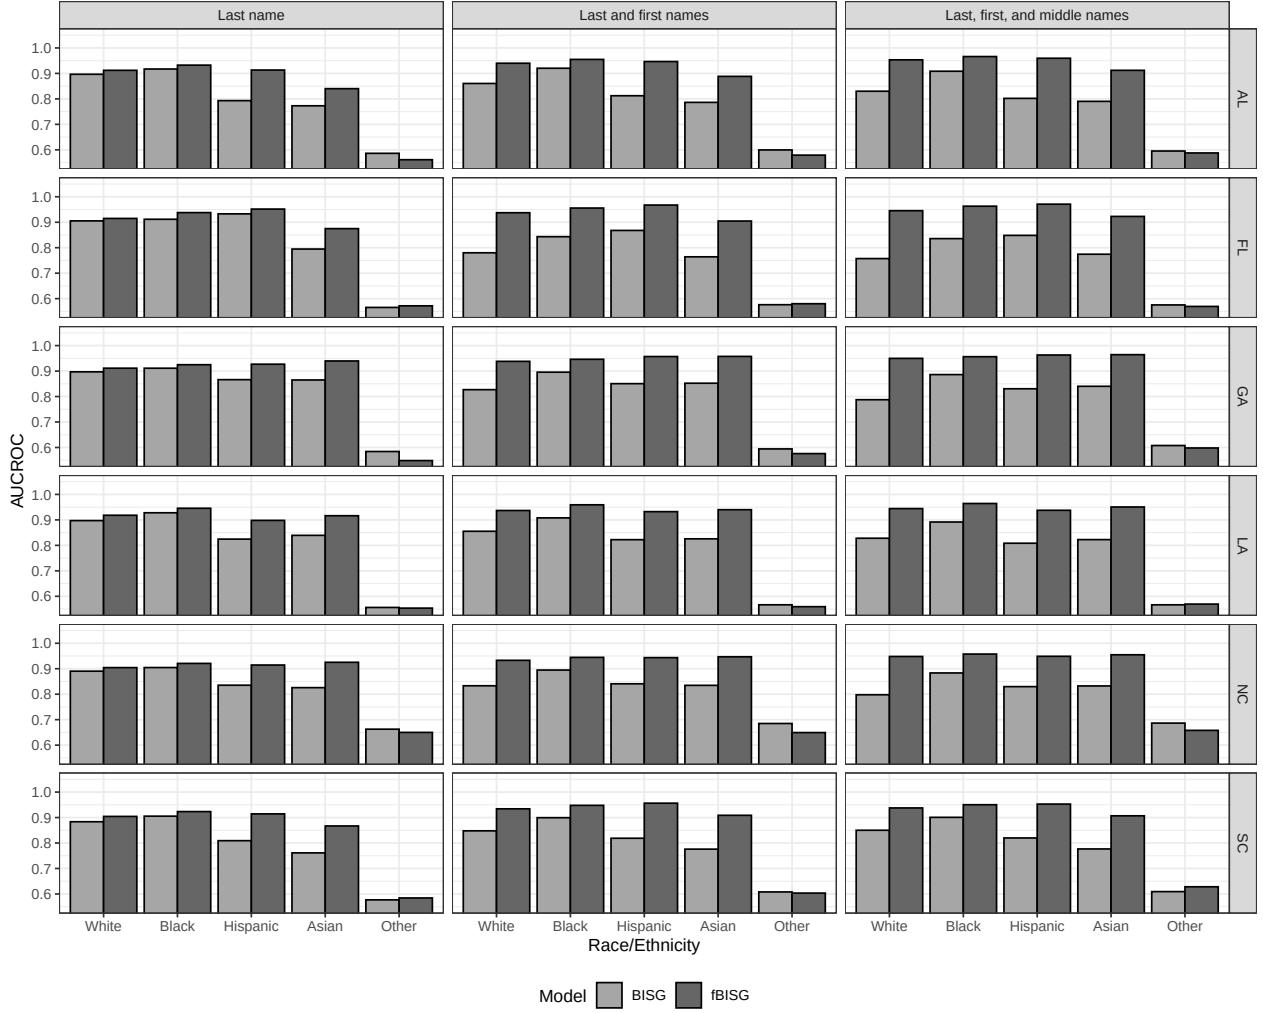


Figure A1: Area under the receiver operating characteristic curve (AUROC) for race predictions obtained using the standard BISG (light grey) and fBISG (dark grey) methods, by state. The results are based on progressively more name information, starting with the L2-augmented surname dictionary (left-most panel). Higher values indicate better predictive accuracy. Overall, the same patterns we observed when considering all states combined are evident when we disaggregate accuracy by state: additional name information improves accuracy, especially when using fBISG.