

The Smallest Hard Trees

Manuel Bodirsky*, Jakub Bulín†, Florian Starke‡, Michael Wernthaler§

May 2022

Abstract

We find an orientation of a tree with 20 vertices such that the corresponding fixed-template constraint satisfaction problem (CSP) is NP-complete, and prove that for every orientation of a tree with fewer vertices the corresponding CSP can be solved in polynomial time. We also compute the smallest tree that is NL-hard (assuming $L \neq NL$), the smallest tree that cannot be solved by arc consistency, and the smallest tree that cannot be solved by Datalog. Our experimental results also support a conjecture of Bulín concerning a question of Hell, Nešetřil and Zhu, namely that ‘easy trees lack the ability to count’. Most proofs are computer-based and make use of the most recent universal-algebraic theory about the complexity of finite-domain CSPs. However, further ideas are required because of the huge number of orientations of trees. In particular, we use the well-known fact that it suffices to study orientations of trees that are cores and show how to efficiently decide whether a given orientation of a tree is a core using the arc-consistency procedure. Moreover, we present a method to generate orientations of trees that are cores that works well in practice. In this way we found interesting examples for the open research problem to classify finite-domain CSPs in NL.

Keywords: Graph Homomorphism, Constraint Satisfaction Problem, Polymorphism, Tree, Computational Complexity, Arc Consistency, Bounded pathwidth duality, Datalog, linear Datalog, symmetric linear Datalog

1 Introduction

For a fixed directed graph (short: *digraph*) \mathbb{H} , the *constraint satisfaction problem for \mathbb{H}* , denoted by $\text{CSP}(\mathbb{H})$, is the computational problem of deciding whether a given finite digraph \mathbb{G} admits a homomorphism to \mathbb{H} . This problem is also known as the *\mathbb{H} -coloring problem*. If \mathbb{H} is finite and symmetric, then $\text{CSP}(\mathbb{H})$ can be solved in polynomial time if \mathbb{H} is bipartite or contains a loop, and is NP-complete otherwise [37]. The situation if \mathbb{H} is a finite but not necessarily symmetric digraph is much more complicated. The Feder-Vardi dichotomy conjecture states that $\text{CSP}(\mathbb{H})$ is in P or NP-complete [32]. In fact, the conjecture was phrased not only for digraphs but for the corresponding computational problem for general finite relational structures. However, it is known that every CSP for a finite relational structure is polynomial-time (and even logspace) equivalent to the CSP for a finite digraph [32, 22]. The Feder-Vardi conjecture was proved in 2017 independently by Bulatov [19] and by Zhuk [64, 63]. Prior to their break-through result, the conjecture was open even if \mathbb{H} is an orientation of a finite tree.

The description of the polynomially solvable cases in the proofs of Bulatov and of Zhuk is based on the so-called algebraic approach and phrased using *polymorphisms* of \mathbb{H} , i.e., edge-preserving multivariate operations on the vertex set (‘higher-dimensional symmetries’) [12]. The algebraic

*Institut für Algebra, TU Dresden. <https://orcid.org/0000-0001-8228-3611>.

†Department of Theoretical Computer Science and Mathematical Logic, Faculty of Mathematics and Physics, Charles University, Prague. <https://orcid.org/0000-0001-5235-8715>.

‡Institut für Algebra, TU Dresden. <https://orcid.org/0000-0003-2360-9364>.

§Institut für Algebra, TU Dresden. <https://orcid.org/0000-0003-4978-0928>.

condition for polynomial-time tractability in the proofs of Bulatov and of Zhuk has numerous equivalent characterizations, e.g. [60, 56, 6]. Siggers was the first to show the (at the time somewhat surprising) fact that the condition can be characterized by the existence of a single, 6-ary polymorphism satisfying certain identities [60] — which can readily be tested at least for very small digraphs. This was later improved by Kearnes, Marković, and McKenzie [49] to the existence of a single 4-ary operation, commonly referred to as a *Siggers polymorphism*, or a pair of 3-ary operations which we will call *Kearnes-Marković-McKenzie polymorphisms* (for the definition, see Section 6.1). The latter is computationally the most feasible (the search space is the smallest) and thus the most suitable for our purposes. The question whether a given finite digraph \mathbb{H} satisfies any of the equivalent characterizations of the algebraic tractability condition is decidable, but NP-hard [24].

1.1 Computational Complexity

Several other important conjectures about the computational complexity of the constraint satisfaction problem for a fixed finite structure \mathbb{H} with finite relational signature remain open: most notably the question for which finite structures \mathbb{H} the problem $\text{CSP}(\mathbb{H})$ is in the complexity class NL (non-deterministic logspace), and for which finite structures \mathbb{H} it is in the complexity class L (deterministic logspace). As in the case of P versus NP-hard, it appears that these questions are closely linked to central dividing lines in universal algebra, as illustrated by the following conjectures.

Conjecture 1 (Larose and Tesson [52]). *If the polymorphisms of a finite structure \mathbb{H} with finite relational signature contain a Kearnes-Kiss chain (defined in Section 6.7), then $\text{CSP}(\mathbb{H})$ is in NL.*

It is known that if \mathbb{H} does not satisfy the condition from Conjecture 1, then \mathbb{H} is hard for complexity classes that are not believed to be in NL (more details can be found in Section 6.7). Conjecture 1 is wide open and we believe it to be one of the most difficult research problems in the theory of finite-domain constraint satisfaction that remains open.

Conjecture 2 (Egri, Larose, and Tesson [29]). *If the polymorphisms of a finite structure \mathbb{H} with finite relational signature contain a Noname chain (defined in Section 6.9) then $\text{CSP}(\mathbb{H})$ is in L.*

Also here it is known that if \mathbb{H} does not satisfy the condition from Conjecture 2, then \mathbb{H} is hard for complexity classes that are not believed to be in L (more details can be found in Section 6.9).

We mention that both conjectures can equivalently be phrased by the inability to *primitively positively construct in \mathbb{H}* certain finite structures that are known to be L-hard, Mod_pL -hard, or NL-hard (see Section 6). Kazda proved a conditional result that states that resolving the first conjecture would also provide a solution to the second [46].

Again, these conjectures are already open if \mathbb{H} is a finite digraph, or even if \mathbb{H} is an orientation of a finite tree. It is also known that answering the question of containment in NL for finite digraphs would also answer the question for general finite structures [22]. For orientations of finite trees, however, the question might be easier to resolve. For brevity, an orientation of a finite tree is simply called a *tree* in this paper and we adopt the following terminology: a digraph \mathbb{H} is *NP-hard* if $\text{CSP}(\mathbb{H})$ is NP-hard, and *tractable* if $\text{CSP}(\mathbb{H})$ is in P. Similarly, we say that \mathbb{H} is *P-hard*, *NL-hard*, *in NL*, *in L*, *NP-complete*, *NL-complete*, etc. if $\text{CSP}(\mathbb{H})$ has that property.

Unfortunately, there is no graph theoretic characterization of which trees are NP-hard. The first NP-hard tree \mathbb{T} was found by Gutjahr, Welzl, and Woeginger and had 287 vertices [35]. This was later improved by Gutjahr to a smaller NP-hard tree with 81 vertices [34], and then to an NP-hard tree with just 45 vertices by Hell, Nešetřil, and Zhu [36]. The tree \mathbb{T} constructed there is even a *triad*, i.e., a tree with exactly one vertex of degree three and all other vertices of degree one or two. An NP-hard triad with 39 vertices was found by Barto, Kozik, Maróti, and Niven [8, 9] using an in-depth analysis of the polymorphisms of triads; they conjectured that their triad is the smallest NP-hard tree (assuming $\text{P} \neq \text{NP}$). This approach led to a study of certain classes of trees [4, 21]. Fischer [33] used a computer search and found an NP-hard tree with just 30

author	year	size	comment
Gutjahr, Welzl, and Woeginger [35]	1992	287	First published
Gutjahr [34]	1991	81	PhD thesis
Hell, Nešetřil, and Zhu [36]	1996	45	Triad
Barto, Kozik, Maróti, and Niven [8]	2009	39	Triad
Fischer [33]	2015	30	Master thesis
Tatarko [61]	2019	26	Triad, Bachelor thesis
Present article	2022	22	Smallest triad
Present article	2022	20	Smallest tree

Table 1: A time-line of the history of the smallest known NP-hard orientation of a tree.

vertices (refuting the conjecture of Barto et al. mentioned above). Later, independently, Tatarko constructed a 26-vertex NP-hard triad, by manual analysis of polymorphisms. See Table 1.

1.2 Descriptive Complexity

Besides the computational complexity of CSPs, the *descriptive complexity* of CSPs has been studied intensively, and leads to a fruitful interplay of finite model theory, graph theory, and universal algebra. Since the results obtained in this context are highly relevant for the open conjectures mentioned above, we provide a brief introduction to the most prominent concepts. A digraph \mathbb{H} has *tree duality* if for all finite digraphs \mathbb{G} , if whenever all trees that map homomorphically to \mathbb{G} also map to \mathbb{H} , then \mathbb{G} maps to \mathbb{H} . It is well-known that a finite digraph \mathbb{H} has tree duality if and only if the so-called *arc-consistency procedure* solves $\text{CSP}(\mathbb{H})$ [32]. This procedure is of central importance to our work, for many independent reasons that we mention later, and will be introduced in detail in Section 2.1.

For every finite digraph \mathbb{H} , the arc-consistency procedure for $\text{CSP}(\mathbb{H})$ can be formulated as a *Datalog program* [32]; Datalog is the fragment of Prolog where function symbols are forbidden. Every Datalog program can be evaluated in polynomial time. Feder and Vardi proved that $\text{CSP}(\mathbb{H})$ can be solved by Datalog if and only if \mathbb{H} has so-called *bounded treewidth duality*; the definition of this concept is similar to the concept of tree duality but we omit it since it is not needed in this article. Bounded treewidth duality can be strengthened to *bounded pathwidth duality*, which corresponds precisely to solvability by a natural fragment of Datalog, namely *linear Datalog* [25]. Linear Datalog programs can be evaluated in NL. An even more restricted fragment of Datalog is *linear symmetric Datalog*; such programs can be evaluated in L [29].

A structure \mathbb{H} has the *ability to count* [53] if $\text{CSP}(\mathbb{H})$ can encode, in some natural sense (namely *pp-constructibility* [13, 12]), solving systems of linear equations over \mathbb{Z}_p (for some prime p); thus making $\text{CSP}(\mathbb{H}) \text{ Mod}_p\text{-hard}$. The ability to count adds substantial complexity to the CSP. Structures that *cannot count* are all tractable and even in Datalog [17, 5] and this result, known as the *bounded width theorem*, was an important intermediate step towards the resolution of the Feder-Vardi CSP dichotomy conjecture. Based on this theorem, the lack of the ability to count has a number of equivalent characterizations: *bounded width*, bounded treewidth duality, definability in Datalog, solvability by *Singleton Arc Consistency* [50].

Several important classes of structures exhibit a dichotomy between NP-hardness and the lack of the ability to count (assuming $P \neq NP$), which we will refer to as “easy structures cannot count”. Examples include undirected graphs [37], *smooth digraphs* (digraphs without sources and sinks) [10], *conservative digraphs* (digraphs expanded with all subsets of vertices as unary relations) [41], *binary conservative structures* (even 3-conservative) [47]. We note that this phenomenon also occurs for many large classes of infinite structures \mathbb{H} : for example for all first-order expansions of the basic relations of RCC5 [14]; see [15] for a survey on the question of which infinite-domain CSPs can be solved in Datalog. In this paper, however, we only consider finite structures. Additionally, for classes of finite structures, if the easy structures in the class cannot count, then the algebraic

tractability condition for that class can be tested in polynomial time [24].

In [21] Bulín conjectured that easy trees cannot count, establishing this fact for a large yet structurally limited subclass of trees.

Conjecture 3. *Let \mathbb{T} be a tree. If \mathbb{T} has the ability to count, then \mathbb{T} is NP-hard.*

This conjecture (which is rephrasing Conjecture 2 in [21]) would answer an open question posed by Hell, Nešetřil, and Zhu [40] (Open Problem 1 at the end of the article): they asked whether there exists a tractable tree which does not have bounded treewidth duality.

1.3 Contributions

In this article, we obtain the following results.

1. We find 36 NP-hard trees with 20 vertices; moreover, we prove that all smaller trees and all other trees with 20 vertices are tractable.
2. We find four NP-hard triads with 22 vertices, and prove that all smaller triads and all other triads with 22 vertices are tractable.
3. We show that all the trees with at most 20 vertices that are not NP-hard can be solved by Datalog, confirming Conjecture 3 for trees with at most 20 vertices.
4. We find a tree with 19 vertices that can not be solved by arc consistency, and prove that all smaller trees and all other trees with 19 vertices can be solved by arc consistency.
5. We find 8 NL-hard trees with 12 vertices; moreover, we prove that all smaller trees and all other trees with 12 vertices are in L.

Even though we draw from the results of the universal-algebraic approach to the CSP which led to the theorems of Bulatov and of Zhuk, and use state-of-the-art computers for our computations, these tasks remain challenging due to the huge number of trees: for example, even considered up to isomorphism, there are 139,354,922,608 trees with 20 vertices (see Table 2), which is prohibitive even if we could test the algebraic tractability condition within milliseconds. Several further contributions of this article are related to the way we managed to overcome these difficulties.

A well-known key simplification is to only consider trees that are *cores*; a digraph \mathbb{H} is a core if every homomorphism from \mathbb{H} to \mathbb{H} is injective. Two graphs \mathbb{H}_1 and \mathbb{H}_2 are called *homomorphically equivalent* if there is a homomorphism from \mathbb{H}_1 to \mathbb{H}_2 and vice versa. Clearly, in that case $\text{CSP}(\mathbb{H}_1) = \text{CSP}(\mathbb{H}_2)$ and so $\mathbb{H}_1, \mathbb{H}_2$ are either both tractable or both NP-hard. It is easy to see that every finite digraph \mathbb{H} is homomorphically equivalent to a core digraph \mathbb{H}' , which is unique up to isomorphism. Moreover, if \mathbb{H} is a tree, then \mathbb{H}' is a tree as well (and its size is smaller or equal to the size of \mathbb{H}). Hence, it suffices to work with trees that are cores. However, Hell and Nešetřil proved that deciding whether a given digraph is a core is coNP-complete [38]. Remarkably, the following fact seems to be unnoticed in the literature.

6. There is a polynomial-time algorithm for deciding whether a tree is a core.

There are far too many trees with at most 20 vertices to run the core test on each of them. Our next contribution is a method to generate the core trees more directly, rather than generating all trees and then discarding the non-cores (the details can be found in Section 4). Applying our method we were able to construct all trees that are cores up to size 20, and all triads that are cores up to size 22, which was essential to achieve the results 1.-5. above.

7. We computed the number of trees that are cores for sizes up to 20 (see Table 2). In particular, there are 779268 core trees of size 20.

These are still too many to be tested for the algebraic tractability condition if this is implemented naively. We therefore use results from the universal algebraic approach to first run more efficient tests for certain sufficient conditions, such as the existence of a binary symmetric polymorphism, and only run the full test for Kearnes-Marković-McKenzie polymorphisms if the simpler conditions all fail; this will be explained in Section 6.

Finally, we identify trees that are important ‘test-cases’ for the open problems that have been mentioned earlier.

8. We computed the two smallest trees that are not known to be in NL; they have 16 vertices, and they are the smallest trees that do not have a majority polymorphism.
9. We computed 28 smallest trees that are candidates for failing the condition in Conjecture 1 and hence might be P-hard (and that are thus candidates for not being in NL, unless NL = P); they have 18 vertices.

1.4 Outline of the Article

Basic notation and terminology about directed and undirected graphs and homomorphisms is introduced in Section 2. This section also presents a brief description of the arc-consistency procedure which plays an important role in several of our results. In Section 3 we explain how to use the arc-consistency procedure to efficiently test whether a given tree is a core. In Section 4 we present our method to generate all trees that are cores (directly, without having to discard too many non-cores in the process). We then use these trees to make extensive experiments about their computational and descriptive complexity. For this, we need to introduce important polymorphism conditions and related facts from universal algebra (Sections 5 and 6). Finally, the results of our experiments as announced in Section 1.3 can be found in Section 7.

2 Graphs, Digraphs, Homomorphisms

For the definition of *relational structure* we refer to any text-book in mathematical logic; note that we allow the signature of structures to be infinite (but the constraint satisfaction problem is only defined for relational structures with finite relational signature). Since we work most of the time with digraphs, we present the basic definitions only for digraphs; most of them generalize to relational structures in a straightforward way. We use standard terminology for graphs and undirected graphs as introduced e.g. in [28]. All graphs we consider are finite. A digraph is a pair $\mathbb{H} = (H; E)$ where H is a nonempty set and $E = E(\mathbb{H}) \subseteq H^2$ is a set of (directed) edges. A (*simple, undirected*) graph is a pair $\mathbb{H} = (H; E)$ where H is a nonempty set and $E = E(\mathbb{H}) \subseteq \binom{H}{2}$ is a set of two-element subsets of H . An *orientation* of a graph \mathbb{G} is a digraph \mathbb{O} such that $O = G$, $(x, y) \in E(\mathbb{O})$ implies $\{x, y\} \in E(\mathbb{G})$, and for every $\{x, y\} \in E(\mathbb{G})$ either $(x, y) \in E(\mathbb{O})$ or $(y, x) \in E(\mathbb{O})$, but not both. If \mathbb{H} is a digraph, then the *reverse* of \mathbb{H} is the digraph $\mathbb{H}^R = (H; E^R)$ where $E^R = \{(y, x) \mid (x, y) \in E\}$. The operation that obtains \mathbb{H}^R from \mathbb{H} is called *edge reversal*.

If \mathbb{G} and \mathbb{H} are digraphs, then a *homomorphism* from \mathbb{G} to \mathbb{H} is a map $h: G \rightarrow H$ such that for all $(x, y) \in E(\mathbb{G})$ we have $(h(x), h(y)) \in E(\mathbb{H})$. We write CSP(\mathbb{H}) (for *constraint satisfaction problem*) for the class of all finite digraphs \mathbb{G} which admit a homomorphism to \mathbb{H} . A homomorphism from \mathbb{H} to \mathbb{H} is called an *endomorphism* of \mathbb{H} . A finite digraph \mathbb{H} is called a *core* if all endomorphisms of \mathbb{H} are injective. It is easy to see that an injective endomorphism of \mathbb{H} must in fact be bijective and an *automorphism*, i.e., an isomorphism between \mathbb{H} and \mathbb{H} . It is easy to see that every finite digraph \mathbb{G} is homomorphically equivalent to a finite core digraph \mathbb{H} , and that this core digraph is unique up to isomorphism [39], hence \mathbb{H} will be called *the core* of \mathbb{G} .

An *undirected tree* is a connected undirected graph without cycles. If $u, v \in T$ and \mathbb{T} is an undirected tree, then there exists a unique path \mathbb{P} from u to v in \mathbb{T} ; the number of edges of \mathbb{P} is denoted by $\text{dist}(u, v)$. A vertex $v \in T$ is called a *center* of \mathbb{T} if v lies in the middle of a longest path in \mathbb{T} . An edge $e \in E(\mathbb{T})$ is called a *bicenter* of \mathbb{T} if e is the middle edge of a longest path in \mathbb{T} . We will use the following classical result.

Theorem 1 (Jordan (1869)). *An undirected tree \mathbb{T} has exactly one center or one bicenter.*

If \mathbb{O} is an orientation of a tree and $u, v \in \mathbb{O}$, then $\text{dist}(u, v)$ (center of \mathbb{O} , bicenter \mathbb{O}) is meant with respect to the underlying undirected tree. As mentioned in the introduction in this article an orientation of a finite tree will simply be called a *tree*. A digraph \mathbb{H} is *balanced* if its vertices can be organized into *levels*, that is, there exists a function $\text{lvl}: H \rightarrow \mathbb{N}$ such that $\text{lvl}(v) = \text{lvl}(u) + 1$ for all $(u, v) \in E(\mathbb{H})$ and the smallest level is 0. The *height* of \mathbb{H} is the maximum level. Note that trees are balanced and observe that if \mathbb{G} and \mathbb{H} are balanced of the same height, and \mathbb{G} is connected, then any homomorphism from \mathbb{G} to \mathbb{H} must preserve levels, that is, $\text{lvl}(v) = \text{lvl}(h(v))$ for all $v \in G$. A *rooted tree* is a tuple (\mathbb{T}, r) , where \mathbb{T} is a tree and $r \in T$; r is then called the *root* of \mathbb{T} . A rooted tree (\mathbb{T}, r) is called a *rooted core* if every endomorphism of \mathbb{T} that fixes r is injective. The *depth* of a rooted tree (\mathbb{T}, r) is $\max\{\text{dist}(r, v) \mid v \in T\}$.

2.1 The Arc-consistency Procedure

One of the most efficient algorithms employed by constraint solvers to reduce the search space is the *arc-consistency* procedure. In the graph homomorphism literature, the algorithm is sometimes called the *consistency check algorithm*. The arc-consistency procedure is important for us for several reasons:

- It plays a crucial role for efficiently deciding whether a given tree is a core (Section 3).
- It is well suited for combination with exhaustive search to prune the search space, and this will be relevant in Section 5.
- It is an important fragment of Datalog of independent interest from the point of view of the CSP theory (see Section 6.5), and we will later perform experiments to compute the smallest tree that cannot be solved by arc consistency (Section 7.1.4).

We need to give a short description of the procedure.

Let \mathbb{G} and \mathbb{H} be finite digraphs. We would like to determine whether there exists a homomorphism from \mathbb{G} to \mathbb{H} . The idea of the arc-consistency procedure is to maintain for each $x \in G$ a set $L(x) \subseteq H$. Informally, each element of $L(x)$ represents a candidate for an image of x under a homomorphism from \mathbb{G} to \mathbb{H} . The algorithm initializes each list $L(x)$ with H and successively removes vertices from these lists; it only removes a vertex $u \in H$ from $L(x)$ if there is no homomorphism from \mathbb{G} to \mathbb{H} that maps x to u . To detect vertices x, u such that u can be removed from $L(x)$, the algorithm uses two rules (in fact, one rule and a symmetric version of the same rule): if $(x, y) \in E(\mathbb{G})$, then

remove u from $L(x)$ if there is no $v \in L(y)$ with $(u, v) \in E(\mathbb{H})$;
remove v from $L(y)$ if there is no $u \in L(x)$ with $(u, v) \in E(\mathbb{H})$.

If eventually we cannot remove any vertex from any list with these rules any more, the digraph \mathbb{G} together with the lists for each vertex is called *arc-consistent*. Note that formally we may view L as a function $L: G \rightarrow 2^H$ from the vertices of \mathbb{G} to sets of vertices of \mathbb{H} .

Note that we may run the algorithm also on digraphs \mathbb{G} where for some $x \in G$ the list $L(x)$ is already set to some subset of H . In this setting, the input consists of \mathbb{G} and the given lists, and we are looking for a homomorphism h from \mathbb{G} to \mathbb{H} such that for every $x \in G$ we have $h(x) \in L(x)$. The pseudocode of the entire arc-consistency procedure is displayed in Algorithm 1. The standard arc-consistency procedure $\text{AC}_{\mathbb{H}}(\mathbb{G})$ is then obtained by calling $\text{AC}_{\mathbb{H}}(\mathbb{G}, L)$ with $L(x) := H$ for all $x \in G$.

Clearly, if the algorithm removes all vertices from one of the lists, then there is no homomorphism from \mathbb{G} to \mathbb{H} . It follows that if $\text{AC}_{\mathbb{H}}$ rejects \mathbb{G} , then there is no homomorphism from \mathbb{G} to \mathbb{H} . The converse implication does not hold in general. For instance, let \mathbb{H} be the loopless digraph with two vertices and two edges, denoted \mathbb{K}_2 , and let \mathbb{G} be $\mathbb{K}_3 = (\{0, 1, 2\}; \neq)$. In this case, $\text{AC}_{\mathbb{H}}$

Algorithm 1: $\text{AC}_{\mathbb{H}}(\mathbb{G}, L)$

input: a finite digraph \mathbb{G}
data : a list $L(x) \subseteq H$ for each vertex $x \in G$
repeat
 foreach $(x, y) \in E(\mathbb{G})$ **do**
 if *there is no* $v \in L(y)$ *with* $(u, v) \in E(\mathbb{H})$ **then**
 remove u *from* $L(x)$
 if *there is no* $u \in L(x)$ *with* $(u, v) \in E(\mathbb{H})$ **then**
 remove v *from* $L(y)$
 if $L(x)$ *is empty for some vertex* $x \in G$ **then**
 reject
until *no list changes*

does not remove any vertex from any list, but obviously there is no homomorphism from \mathbb{K}_3 to \mathbb{K}_2 .

The arc-consistency procedure can be implemented so that it runs in $O(|E(\mathbb{G})| \cdot |H|^3)$, e.g. by Mackworth's AC-3 algorithm [55].

3 Cores of Trees

Recall that the problem of deciding whether a given digraph is a core is coNP-complete [38]. The following theorem implies that whether a given finite tree is a core can be tested in polynomial time.

Theorem 2. *Let \mathbb{T} be a finite tree. Then the following are equivalent.*

1. \mathbb{T} is a core;
2. $\text{End}(\mathbb{T}) = \{\text{id}_{\mathbb{T}}\}$;
3. $\text{AC}_{\mathbb{T}}(\mathbb{T})$ terminates such that the list for each vertex contains a single element.

Corollary 3. *There is a polynomial-time algorithm to decide whether a given finite tree is a core.*

We first prove the following two useful lemmata.

Lemma 4. *Let \mathbb{T} be a finite tree and let \mathbb{H} be a finite digraph such that $\text{AC}_{\mathbb{H}}(\mathbb{T})$ does not reject. Let $t \in T$, and let $a \in H$ be such that $a \in L(t)$ after running $\text{AC}_{\mathbb{H}}(\mathbb{T})$. Then there is a homomorphism $h: \mathbb{T} \rightarrow \mathbb{H}$ such that $h(t) = a$.*

Proof. Let S be a maximal subtree of \mathbb{T} such that $t \in S$ and there exists a partial homomorphism $h: S \rightarrow \mathbb{H}$ with $h(t) = a$. If $S \neq T$, then there exists $x \in S$ and $y \in T \setminus S$ such that either (x, y) or (y, x) is an edge in \mathbb{T} ; without loss of generality assume that $(x, y) \in E(\mathbb{T})$. Because the value $u = h(x)$ was not removed from $L(x)$ when running $\text{AC}_{\mathbb{H}}(\mathbb{T})$, it follows that there exists $v \in L(y)$ such that $(u, v) \in E(\mathbb{H})$. But then setting $h(y) = v$ extends h to a partial homomorphism from $S \cup \{y\}$ to \mathbb{H} contradicting maximality of the subtree S . \square

Lemma 5. *Let (\mathbb{T}, r) be a rooted tree with an automorphism that is not the identity. Then (\mathbb{T}, r) has a non-injective endomorphism.*

Proof. We prove the statement by induction on the number of vertices of \mathbb{T} . Consider the components of the graph obtained from \mathbb{T} by deleting r . If there is a component C such that h does not map C into itself, then the mapping which agrees with h on C and which fixes all other vertices of \mathbb{T} is a non-injective endomorphism of (\mathbb{T}, r) .

If each component C is mapped by h into itself, then each $h|_C$ is an automorphism of (C, r_C) , where r_C is the unique neighbor of r that lies in C . Since h is not id_T there must be some C such that $h|_C$ is not id_C and by induction hypothesis there exists a non-injective endomorphism h' of (C, r_C) . Since $h'(r_C) = r_C$ the mapping which extends h' to T by fixing all other vertices of \mathbb{T} is a non-injective endomorphism of (\mathbb{T}, r) . \square

Proof of Theorem 2. We prove the equivalence of 1. and 2., and then the equivalence of 2. and 3.

Clearly, 2. implies 1. Conversely, suppose that \mathbb{T} has an endomorphism h which is not the identity map. If h is not injective, then \mathbb{T} is not a core and we are done. Hence, suppose that h is an automorphism. Note that by Theorem 1, if \mathbb{T} has a center, then $h(c) = c$ and if \mathbb{T} has a bicenter $(x, y) \in E(\mathbb{T})$, then $h(\{x, y\}) = \{x, y\}$. In the latter case, since $(y, x) \notin E(\mathbb{T})$, we must have $h(x) = x$ and $h(y) = y$. In both cases h has a fixed point r and h is an automorphism of (\mathbb{T}, r) . By Lemma 5, \mathbb{T} has a non-injective endomorphism and is therefore not a core.

To prove that 2. implies 3., we prove the contrapositive. Suppose that $\text{AC}_{\mathbb{T}}(\mathbb{T})$ terminates with $|L(x)| > 1$ for some $x \in T$. Then there exists $y \in L(x), y \neq x$. Lemma 4 implies that there is an endomorphism h of \mathbb{T} such that $h(x) = y$ and thus $h \neq \text{id}_T$.

To see that 3. implies 2., note that $L(x) = \{x\}$ since because of the identity endomorphism id_T , x cannot be removed from $L(x)$. Therefore, for any endomorphism $h: \mathbb{T} \rightarrow \mathbb{T}$ and any $x \in T$ we must have $h(x) \in L(x)$, and so $h(x) = x$ and $h = \text{id}_T$. \square

4 Generating all Core Trees

In this section we present an algorithm to generate all core trees with n vertices up to isomorphism. To this end, we first present a known algorithm that generates all trees with n vertices up to isomorphism [62]. Later we explain how to modify this algorithm to directly generate core trees.

We also refer to the isomorphism classes of trees as *unlabeled trees*, as opposed to *labeled trees*, which are trees with vertex set $\{1, \dots, n\}$ for some $n \in \mathbb{N}$. The difference between the enumeration of labelled and unlabeled trees is significant: while the number of labelled trees is Sloane's integer sequence A097629, given by $2(2n)^{n-2}$, the number of unlabeled trees is Sloane's integer sequence A000238, which grows asymptotically as $cd^n/n^{5/2}$ where $d \approx 5.6465$ and $c \approx 0.2257$ are constants; the initial terms are shown in Table 2. However, these numbers are still too large to apply the core test to all the unlabeled trees separately. The number of unlabeled trees that are cores is again much smaller. We therefore present a modification of the generation algorithms that allows us to generate unlabeled trees that are cores directly without enumerating all unlabeled trees.

Let \geq be some total order on all rooted trees that linearly extends the order by depth. The idea of the algorithm is to generate all unlabeled rooted trees with at most $n - 1$ vertices and then use Theorem 1.

It is easy to verify that Algorithm 3 produces all unlabeled rooted trees with n vertices and depth d . Analogously, Algorithm 2 generates all unlabeled trees with n vertices. Remarkably, there are no isomorphism checks necessary and Algorithm 2 runs in linear time in the number of unlabeled trees with n vertices plus the number of unlabeled rooted trees with at most $n - 1$ vertices.

Let us make some observations. Let $(\mathbb{T}_1, r_1) \geq \dots \geq (\mathbb{T}_m, r_m)$ be rooted trees, $s \in \{0, 1\}^m$, $T := \{r\} \uplus T_1 \uplus \dots \uplus T_m$, and $E := \{(r_i, r) \mid s_i = 1\} \uplus \{(r, r_i) \mid s_i = 0\} \uplus E(\mathbb{T}_1) \uplus \dots \uplus E(\mathbb{T}_m)$.

- A rooted tree (\mathbb{T}, r) is a rooted core if and only if $\text{AC}_{\mathbb{T}}(\mathbb{T}, L)$, where $L(r) = \{r\}$ and $L(x) = T$ for $x \in T \setminus \{r\}$, terminates such that the list for each vertex contains a single element.
- By Corollary 3, testing whether a (rooted) tree is a (rooted) core can be checked in polynomial time using the arc-consistency procedure.
- If (\mathbb{T}, r) is a rooted core, then (\mathbb{T}_i, r_i) is a rooted core for every i .
- If \mathbb{T} is a core and r is its center, then (\mathbb{T}_i, r_i) is a rooted core for every i .

Algorithm 2: GenerateTrees

```
input : a positive integer  $n$ 
output: a list of trees with  $n$  vertices
begin
  Trees  $\leftarrow \emptyset$ 
  // bicenter
  foreach  $(\mathbb{T}_1, r_1), (\mathbb{T}_2, r_2)$  rooted trees where  $|T_1| + |T_2| = n$  and
  depth $(\mathbb{T}_1, r_1) = \text{depth}(\mathbb{T}_2, r_2)$  do
     $T := T_1 \uplus T_2$ 
     $E := \{(r_1, r_2)\} \uplus E(\mathbb{T}_1) \uplus E(\mathbb{T}_2)$ 
     $\mathbb{T} := (T; E)$ 
    Trees  $\leftarrow \text{Trees} \cup \{\mathbb{T}\}$ 

  // center
  foreach  $(\mathbb{T}_1, r_1) \geq (\mathbb{T}_2, r_2) \geq \dots \geq (\mathbb{T}_m, r_m)$  rooted trees where
   $|T_1| + \dots + |T_m| = n - 1$  and depth $(\mathbb{T}_1, r_1) = \text{depth}(\mathbb{T}_2, r_2)$  do
    foreach  $s \in \{0, 1\}^m$  where  $i < j$  and  $(\mathbb{T}_i, r_i) = (\mathbb{T}_j, r_j)$  imply  $s_i \leq s_j$  do
       $T := \{r\} \uplus T_1 \uplus \dots \uplus T_m$ 
       $E := \{(r_i, r) \mid r_i = 1\} \uplus \{(r, r_i) \mid r_i = 0\} \uplus E(\mathbb{T}_1) \uplus \dots \uplus E(\mathbb{T}_m)$ 
       $\mathbb{T} := (T; E)$ 
      Trees  $\leftarrow \text{Trees} \cup \{\mathbb{T}\}$ 

return Trees
```

- If $(T_1 \uplus T_2; \{(r_1, r_2)\} \uplus E(\mathbb{T}_1) \uplus E(\mathbb{T}_2))$ is a core and (r_1, r_2) is its bicenter, then (\mathbb{T}_1, r_1) and (\mathbb{T}_2, r_2) are rooted cores.
- If two trees that are cores are homomorphically equivalent, then they are isomorphic.

To generate all oriented trees that are cores we slightly modify both algorithms. In both functions we only add trees to the output if they are cores or rooted cores, respectively. By the above observations, these modified algorithms generate each tree with n vertices that is a core exactly once. We do not know whether our algorithm is a polynomial-delay generation procedure for unlabeled core trees. In practice, it is fast enough to generate all core trees with at most 20 vertices within reasonable time (see Section 7).

5 Polymorphism Conditions

In this section we introduce basic facts from the universal-algebraic approach that are essential for obtaining our results. If \mathbb{H} is a digraph and $k \geq 1$ is an integer, then \mathbb{H}^k denotes the k -th categorical power of \mathbb{H} , i.e., the digraph with vertex set H^k and edge set

$$\{((u_1, \dots, u_k), (v_1, \dots, v_k)) \mid (u_1, v_1), \dots, (u_k, v_k) \in E(\mathbb{H})\}.$$

A *polymorphism* of \mathbb{H} is a homomorphism from \mathbb{H}^k to \mathbb{H} , for some $k \geq 1$. Clearly, every projection, i.e., every operation of the form $(x_1, \dots, x_k) \mapsto x_i$, for some fixed $i \leq k$, is a polymorphism for every digraph \mathbb{H} . Of particular interest to us will be polymorphisms that satisfy certain sets of identities, introduced in Section 5.2. The connection between such identities and computational complexity is described in Section 5.1.

5.1 Primitive Positive Constructions

Primitive positive definitions are a natural type of gadget construction which can be used to obtain logspace reductions between CSPs. Central to the algebraic theory of the CSP is the

Algorithm 3: GenerateRootedTrees

```
input : two positive integers  $n, d$ 
output: a list of rooted trees with  $n$  vertices and depth  $d$ 
begin
  if  $n = 0$  then
    return  $\emptyset$ 
  if  $n = 1$  then
    return  $\{(\{r\}; \emptyset), r\}$ 
  RootedTrees  $\leftarrow \emptyset$ 
  foreach  $(\mathbb{T}_1, r_1) \geq \dots \geq (\mathbb{T}_m, r_m)$  rooted trees where  $|T_1| + \dots + |T_m| = n - 1$  and
     $\text{depth}(\mathbb{T}_1, r_1) = d - 1$  do
    foreach  $s \in \{0, 1\}^m$  where  $i < j$  and  $(\mathbb{T}_i, r_i) = (\mathbb{T}_j, r_j)$  imply  $s_i \leq s_j$  do
       $T := \{r\} \uplus T_1 \uplus \dots \uplus T_m$ 
       $E := \{(r_i, r) \mid r_i = 1\} \uplus \{(r, r_i) \mid r_i = 0\} \uplus E(\mathbb{T}_1) \uplus \dots \uplus E(\mathbb{T}_m)$ 
       $\mathbb{T} := (T; E)$ 
      RootedTrees  $\leftarrow$  RootedTrees  $\cup \{(\mathbb{T}, r)\}$ 
return RootedTrees
```

fact that the possibility of such an encoding can be determined from the polymorphisms of the respective templates. Let $\mathbb{A} = (A; R_1, \dots, R_n)$ be a relational structure. A relation $S \subseteq A^n$ is *primitive positive (pp-) definable* from \mathbb{A} if it can be defined (without parameters) by a first order formula which only uses the predicate symbols R_1, \dots, R_n , the equality predicate, conjunction, and existential quantification.

Primitive positive constructions are a more powerful generalization of primitive positive definitions. A relational structure $\mathbb{B} = (B; S_1, \dots, S_m)$ is *pp-constructible* from \mathbb{A} if there exists $k > 0$ and a structure $\mathbb{B}' = (B'; S'_1, \dots, S'_m)$ which is homomorphically equivalent to \mathbb{B} such that $B' = A^k$ and for every $i \in \{1, \dots, m\}$ the relation $S_i \subseteq B'^{r_i}$, when considered as a kr_i -ary relation on A , is pp-definable from \mathbb{A} . In this case there is a logspace reduction from $\text{CSP}(\mathbb{B})$ to $\text{CSP}(\mathbb{A})$.

If \mathbb{A} and \mathbb{B} are finite structures, then \mathbb{B} is pp-constructible from \mathbb{A} if and only if \mathbb{B} satisfies every *height-one condition satisfied by* \mathbb{A} ; these concepts will be introduced in the next section. This algebraic characterization of pp-constructibility was shown in [13, Theorem 1.3, Corollary 4.7] (see also [12, Theorem 38, Corollary 20]).

5.2 Linear Conditions and Height-one Conditions

Height-one conditions and linear conditions are particular types of *strong Maltsev condition* [48] that are essential for the algebraic approach to CSPs. If f is a function symbol of arity k and h is a function symbol of arity ℓ , and $\sigma: \{1, \dots, k\} \rightarrow \{1, \dots, n\}$ and $\rho: \{1, \dots, \ell\} \rightarrow \{1, \dots, n\}$ are functions, then an expression of the form

$$f(x_{\sigma(1)}, \dots, x_{\sigma(k)}) \approx g(x_{\rho(1)}, \dots, x_{\rho(\ell)})$$

is called a *height-one identity*. For the purposes of this paper, a finite set of height-one identities will be called a *height-one condition*. Height-one conditions are important because of the mentioned tight link with pp-constructibility (Section 5.1). More generally, an identity is *linear* if each side has one or zero occurrences of function symbols, i.e., it is either height-one, or of the form $f(x_{\sigma(1)}, \dots, x_{\sigma(k)}) \approx x_j$, $x_i \approx g(x_{\rho(1)}, \dots, x_{\rho(\ell)})$, or $x_i \approx x_j$. Then a *linear condition* is a finite set of linear identities.

A set of operations \mathcal{F} on some domain D *satisfies* a linear condition Σ if we can interpret every function symbol appearing in Σ as an operation from \mathcal{F} so that for every identity in Σ , the left-hand side of the identity and the right-hand side of the identity evaluate to the same element under all possible substitutions of variables by elements of D . We say that a structure \mathbb{A} *satisfies* a linear condition if the set of all polymorphisms of \mathbb{A} satisfies it.

An example of a height-one condition consisting of a single height-one identity involving a single binary function symbol f is

$$\{f(x_1, x_2) \approx f(x_2, x_1)\}$$

which is satisfied by \mathbb{A} if and only if \mathbb{A} has a binary symmetric polymorphism. Since x_1, x_2, x_3, \dots are just variable names we sometimes use x, y, z , etc. instead.

An operation $f: D^k \rightarrow D$ is called *idempotent* if it satisfies the identity $f(x, \dots, x) \approx x$. Note that this identity is linear but not height-one.

Remark 6. *It is well-known and easy to see that the polymorphisms of a finite core digraph satisfy a height-one condition if and only if its idempotent polymorphisms satisfy the condition.*

Linear conditions have been introduced and studied first, in particular motivated by the fact that idempotence of operations can only be expressed in linear conditions, but not in height one conditions, and that idempotence plays a central role in many classical areas of universal algebra. Also note that in the setting of finite-domain CSPs we may use the idempotence assumption for free because of Remark 6 and the fact that the core of a structure has the same CSP and satisfies the same height-one identities (which is not true for linear conditions in general).

5.3 The Indicator Construction

The question whether a given digraph \mathbb{H} has polymorphisms that satisfy a given height-one or even linear condition can be tested algorithmically as follows. To illustrate the well-known idea, suppose that the given set consists of a single identity, namely $f(x, y) \approx f(y, x)$. We then compute \mathbb{H}^2 and contract every vertex of \mathbb{H}^2 of the form (x, y) with the vertex (y, x) . The resulting digraph \mathbb{H}^{Ind} will be called the *indicator digraph* for the height-one condition. We finally search for a homomorphism from \mathbb{H}^{Ind} to \mathbb{H} . Note that \mathbb{H}^{Ind} may be viewed as an instance of $\text{CSP}(\mathbb{H})$, and that the homomorphisms from \mathbb{H}^{Ind} to \mathbb{H} are in 1-1 correspondence with the binary symmetric polymorphisms of \mathbb{H} (see Definition 9).

Analogously we may proceed for any other height-one condition: to compute \mathbb{H}^{Ind} , we construct for each function symbol the categorical power of \mathbb{H} of the corresponding arity, take their disjoint union, and then identify vertices as dictated by the identities. Clearly, the size of the indicator digraph grows exponentially with the arity of the function symbols in the condition and linearly with number of function symbols in the condition so we generally prefer conditions where the function symbols are of low arity even if the number of function symbols is large.

Linear conditions can be tested in the following way. Note that the left- and right-hand sides of identities can be switched, and that identities of the form $x_i \approx x_j$ are only satisfied in one-element structures. Therefore, we may assume that every identity is either height-one or of the form $f(x_{\sigma(1)}, \dots, x_{\sigma(k)}) \approx x_j$. First, construct the indicator digraph \mathbb{H}^{Ind} using only the height-one identities when identifying vertices. Then, for every identity that is not height-one, find every vertex of \mathbb{H}^{Ind} that comes from a tuple of vertices of \mathbb{H} matching the left-hand side and set its value to the vertex of \mathbb{H} given by the right-hand side. For example, if the identity is $f(x, y, x) \approx x$, we require that $(a, b, a) \in H^{\text{Ind}}$ must be mapped to a , for every $a, b \in H$. In this way, we obtain an instance of the *\mathbb{H} -precoloring extension problem* (see also the discussion in Section 8). It is well known that for cores, this problem is logspace-equivalent to $\text{CSP}(\mathbb{H})$ [20, 13]. Moreover, it is particularly easy to implement within the arc-consistency procedure, see the next section. For balanced digraphs, another important improvement—based on the decomposition into levels—that can be applied for many height-one conditions is described in Section 5.5 below.

5.4 Arc Consistency with Exhaustive Search

Chen and Larose [24] give a polynomial-time procedure to test for the existence of polymorphisms satisfying a given linear condition, providing that the linear condition implies the algebraic tractability condition. Their procedure uses the algorithm of Zhuk which is known to be *uniform*

in the sense that it runs in polynomial time even if we assume that also the template \mathbb{H} is part of the input to the algorithm for $\text{CSP}(\mathbb{H})$ [64].

However, in our approach we avoid implementing and running the algorithm of Zhuk (which is complex and whose running time is a polynomial of a yet unknown degree). Instead, we run the arc-consistency procedure for \mathbb{H} on the indicator digraph \mathbb{H}^{Ind} and then perform an exhaustive search. While this procedure is not (provably) in P, it is very efficient in practice.

We initialize the lists for vertices of \mathbb{H}^{Ind} with preset values dictated by non-height-one identities, as explained above. Additionally, for every $u \in H$, we initialize the list for every vertex of \mathbb{H}^{Ind} of the form (u, \dots, u) with $\{u\}$ (since it suffices to look for idempotent polymorphisms as we have explained in Remark 6 and this reduces the search space). For the remaining vertices of \mathbb{H}^{Ind} , the lists are initialized to H .

If $\text{AC}_{\mathbb{H}}$ detects an inconsistency, we can be sure that no polymorphisms satisfying the linear condition exist. Otherwise, we select some vertex $x \in H^{\text{Ind}}$, and set $L(x)$ to u for some $u \in L(x)$. Then we proceed recursively with the resulting lists. If $\text{AC}_{\mathbb{H}}$ now detects an empty list, we backtrack, but remove u from $L(x)$. Finally, if the algorithm does not detect an empty list at the first level of the recursion, we end up with singleton lists for each vertex $x \in H^{\text{Ind}}$, which defines a homomorphism from \mathbb{H}^{Ind} to \mathbb{H} . This homomorphism can then be interpreted as polymorphisms satisfying the linear condition.

There are numerous methods to speed up this backtracking procedure. One of the best known is called Maintaining Arc Consistency (MAC) [58]. This family of algorithms has the arc-consistency procedure at its core and takes advantage of the incremental design of the backtracking procedure by maintaining data structures which help to reduce the number of consistency checks. Another common way to speed up the search procedure is to choose the vertex $x \in \mathbb{H}^{\text{Ind}}$ that has a list of smallest size.

5.5 Level-wise satisfiability

If \mathbb{H} is a balanced digraph (in particular, a tree), the test from the previous section can sometimes be significantly simplified. We say that a linear condition is *level-wise satisfied* if we can interpret the function symbols as polymorphisms of \mathbb{H} in such a way that for every level in \mathbb{H} , the identities are satisfied under all evaluations of variables by vertices from that level.

When testing whether a linear condition is level-wise satisfied, we do not need to construct the full indicator digraph. Instead, for every function symbol (say of arity k) we construct only the subgraph of \mathbb{H}^k consisting of k -tuples of same-level vertices. Note that this is a union of connected components of \mathbb{H}^k and that polymorphisms can be defined the first projection on the remaining connected components of \mathbb{H}^k .

While we do not have a general construction, for many linear conditions relevant to the complexity of the CSP we can show that if a linear condition is level-wise satisfied in \mathbb{H} , then it is satisfied in \mathbb{H} . The idea is to start with polymorphisms satisfying the identities level-wise, and then redefine those polymorphisms for tuples of vertices that are not all on the same level, in such a way as to satisfy the identities. We will introduce several such concrete constructions in the next section. Similar constructions have appeared in [8, 4, 21, 22]. This optimization is particularly useful when testing the condition $\text{TS}(n)$ for all n ; see Section 7.1.4.

6 Specific Polymorphism Conditions

In this section we focus on certain concrete linear conditions that are relevant for studying the membership of CSPs in the most prominent complexity classes in the subsequent sections. An overview of the classes and the respective linear conditions is given in Figure 1. Solid arrows indicate implications, dotted arrows indicate conjectures. Figure 2 shows the relationships between relevant linear polymorphism conditions that are defined throughout the section. The left side shows the general case and the right side shows the case for trees assuming Conjecture 3 (and $\text{P} \neq \text{NP}$). The implications are either immediate or from the literature [42] (Chapter 9), [11, 49, 3].

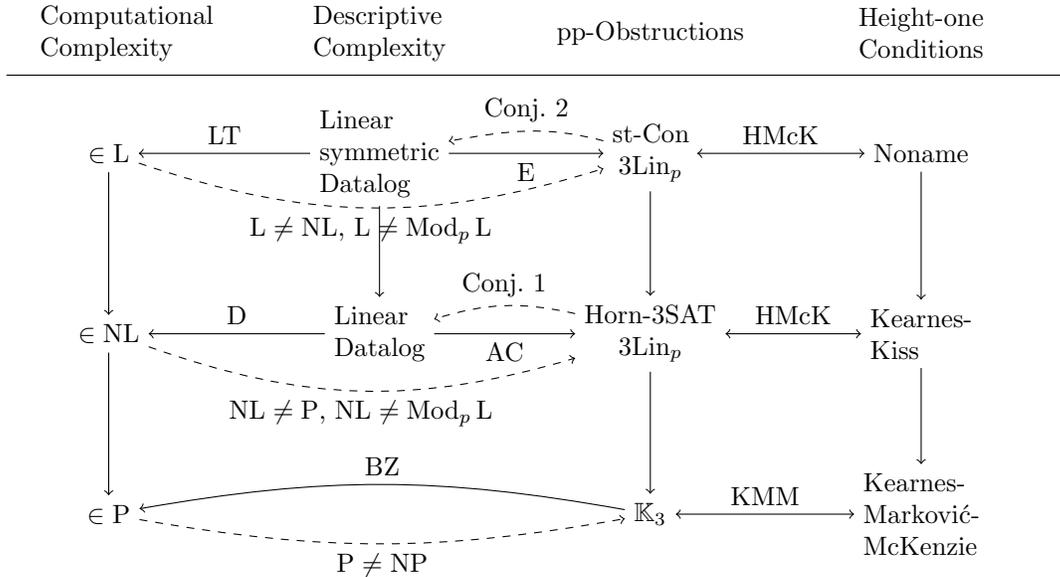


Figure 1: An overview of (computational and descriptive) complexity classes that are relevant for finite-domain CSPs, of important pp-constructions, and of the respective polymorphism conditions. LT stands for Larose and Tesson [52], E stands for Egri [30], HMcK stands for Hobby-McKenzie [42] (Chapter 9), D stands for Dalmau [26], AC stands for Afrati and Cosmadakis [1], BZ stands for Bulatov [19] and Zhuk [64], and KMM stands for Kearnes, Marković, and McKenzie [49].

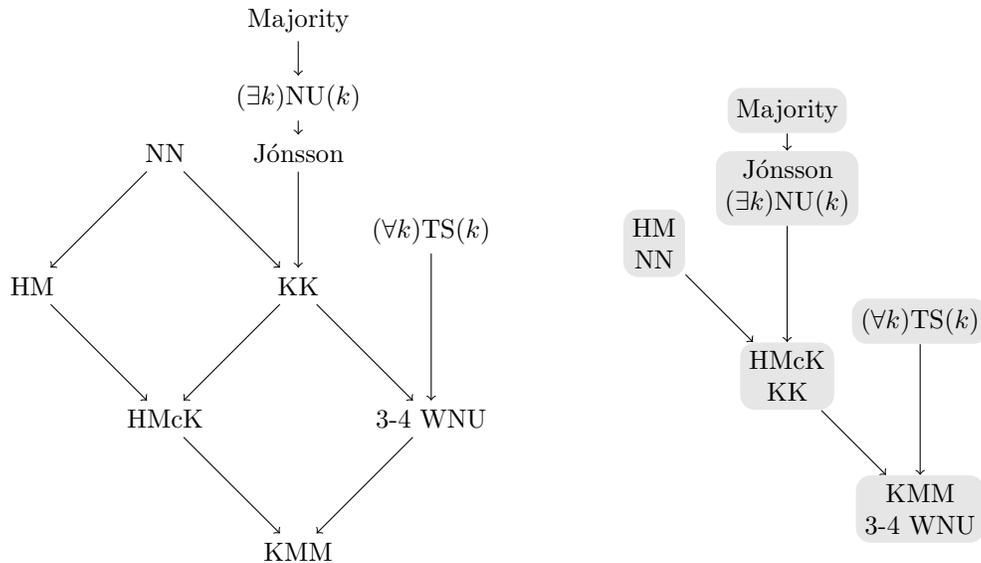


Figure 2: Taxonomy of polymorphism conditions of structures with a finite domain that are relevant for the computational complexity of CSPs, ordered by strength; the arrows point from stronger conditions to weaker ones. The right picture shows the situation for trees assuming Conjecture 3 (and $P \neq NP$).

6.1 Containment in P

As discussed above, the characterization of the algebraic condition for tractability which is the most suitable for testing with a computer consists of a pair of ternary operations [49].

Definition 7. *A pair of ternary operations $p, q: D^3 \rightarrow D$ is called Kearnes-Marković-McKenzie if it satisfies the height-one condition*

$$\begin{aligned} p(x, y, y) &\approx q(y, x, x) \approx q(x, x, y) \\ p(x, y, x) &\approx q(x, y, x). \end{aligned}$$

Using this characterization, the CSP dichotomy can be stated as follows.

Theorem 8 ([64, 19, 49]). *A finite digraph \mathbb{H} has Kearnes-Marković-McKenzie polymorphisms if and only if there is no pp-construction of \mathbb{K}_3 from \mathbb{H} . In this case, $\text{CSP}(\mathbb{H})$ is in P.*

This characterization is optimal in the following sense: every height-one condition equivalent to Kearnes-Marković-McKenzie polymorphisms involves either an operation of arity at least 4 or at least two operations of arity 3 [49]. However, there are several height-one conditions that imply the existence of Kearnes-Marković-McKenzie polymorphisms and that are easier to test. In particular, we use the following.

Definition 9. *An operation f of arity k , for $k \geq 2$, is called a k -ary weak near-unanimity operation (short, k -wnu) if it satisfies the following height-one condition*

$$f(y, x, \dots, x) \approx f(x, y, x, \dots, x) \approx \dots \approx f(x, \dots, x, y).$$

A binary operation f is called symmetric if it is a 2-wnu, i.e., if it satisfies $f(x, y) \approx f(y, x)$.

It is known that the existence of a k -wnu implies the existence of Kearnes-Marković-McKenzie polymorphisms [60, 49], and that the existence of Kearnes-Marković-McKenzie polymorphisms implies the existence of a k -wnu for some $k \geq 2$ [56]. Hence, in particular, if a finite digraph \mathbb{H} has a binary symmetric polymorphism then $\text{CSP}(\mathbb{H})$ can be solved in polynomial time. Our results will show that the converse is false even if \mathbb{H} is a tree, see Section 7.1.4.

For both Kearnes-Marković-McKenzie and k -wnu, it is enough to test for level-wise satisfiability as discussed in Section 5.5. We prove the following more general claim.

Lemma 10. *Let Σ be a height-one condition in two variables such that both the variables appear on each side in every identity from Σ . Then a balanced digraph level-wise satisfies Σ if and only if it satisfies Σ .*

Proof. Fix some polymorphisms f, \dots that level-wise satisfy Σ , and define polymorphisms f', \dots in the following way (say f is k -ary): If $\text{lvl}(x_1) = \text{lvl}(x_2) = \dots = \text{lvl}(x_k)$, define $f'(x_1, x_2, \dots, x_k) = f(x_1, x_2, \dots, x_k)$. Else, let $\ell = \min\{\text{lvl}(x_i) \mid 1 \leq i \leq k\}$ and define $f'(x_1, x_2, \dots, x_k) = x_j$ where $j \in \{1, 2, \dots, k\}$ is the smallest index such that $\text{lvl}(x_j) = \ell$. To verify that the f' 's are polymorphisms, note that if (x_i, y_i) is an edge for $i \in \{1, 2, \dots, k\}$, then $f'(x_1, x_2, \dots, x_k)$ and $f'(y_1, y_2, \dots, y_k)$ fall under the same case of the definition. If it is the second case, x_j lies on the smallest level out of $\{\text{lvl}(x_i) \mid 1 \leq i \leq k\}$ if and only if y_j lies on the smallest level out of $\{\text{lvl}(y_i) \mid 1 \leq i \leq k\}$. Hence, the selected coordinate j is the same. To see that every identity is satisfied, note that the only interesting case is when $\text{lvl}(x) \neq \text{lvl}(y)$, and f' then chooses the variable on the lower level. The other implication is trivial. \square

6.2 Containment in Datalog

We have already mentioned in the introduction that containment in Datalog has numerous equivalent characterizations. In this section, we formally state one of these characterizations in terms of pp-constructibility and one in terms of height-one conditions. The structure 3Lin_p has the domain $D = \{0, \dots, p-1\}$ where p is some prime, the relation $\{(x, y, z) \mid x + y + z \equiv 0 \pmod{p}\}$, and the relation $\{x\}$ for every $x \in D$. It is well-known that $\text{CSP}(3\text{Lin}_p)$ is not in Datalog [32].

Definition 11. A 3-4 weak near-unanimity pair (short, 3-4 WNU) is a pair of operations f, g such that f is a 3-wnu, g is a 4-wnu, and they additionally satisfy the identity

$$f(x, x, y) \approx g(x, x, x, y).$$

Theorem 12 ([7, 51]). Let \mathbb{H} be a finite digraph. Then the following are equivalent.

- \mathbb{H} can be solved by Datalog.
- there is no pp-construction of 3Lin_p in \mathbb{H} , for any prime p .
- \mathbb{H} has a 3-4 weak near-unanimity pair of polymorphisms.

Note that this shows that Conjecture 3 implies (assuming $P \neq NP$) that every tree with Kearnes-Marković-McKenzie polymorphisms has a 3-4WNU pair of polymorphisms and in particular, that it has a 3-wnu polymorphism, which is open as well. Also note that by Lemma 10, it is enough to test for level-wise 3-4 WNU.

6.3 Containment in NL

In this section we present a strong sufficient condition for the containment of \mathbb{H} in NL.

Definition 13. For $n \geq 0$, a Jónsson chain of length n over D is a sequence of ternary operations $j_1, j_2, \dots, j_{2n+1}$ on D that satisfy

$$\begin{aligned} x &\approx j_1(x, x, y) \\ j_{2i-1}(x, y, y) &\approx j_{2i}(x, y, y) && \text{for all } i \in \{1, \dots, n\} \\ j_i(x, y, x) &\approx x && \text{for all } i \in \{1, \dots, 2n+1\} \\ j_{2i}(x, x, y) &\approx j_{2i+1}(x, x, y) && \text{for all } i \in \{1, \dots, n\} \\ j_{2n+1}(x, y, y) &\approx y. \end{aligned}$$

The respective height one condition is abbreviated by $J(n)$.

Note that $J(n)$ implies $J(n+1)$ for every $n \geq 0$. Also note that for $n = 0$ the operation j_1 must be a so-called *majority* operation, which is the ternary case of a *near-unanimity* (NU) operation, that is, an operation satisfying the identities

$$x \approx f(y, x, \dots, x) \approx f(x, y, x, \dots, x) \approx \dots \approx f(x, \dots, x, y).$$

The existence of a near-unanimity polymorphism characterizes *bounded strict width* [32]. More importantly for us, a near-unanimity polymorphism is sufficient to put \mathbb{H} in NL, using the following two results. Barto, Kozik, and Willard proved that finite structures with finite relational signature and a near-unanimity polymorphism have bounded pathwidth duality [11]. Dalmau proved that bounded pathwidth duality implies containment in NL [26].

Barto [3] moreover proved that if a finite structure with a finite relational signature has polymorphisms that form a Jónsson chain, then it also has a near-unanimity polymorphism (albeit its arity in the proof is doubly exponential in the size of the domain). In the other direction, it is well known that $\text{NU}(n)$ implies $J(n-2)$, syntactically. Therefore, we do not test for near-unanimities of arities higher than 3; it is more efficient to test for a Jónsson chain.

Theorem 14 ([3, 11, 26]). If a finite digraph \mathbb{H} satisfies $J(n)$ for some $n \geq 1$, then $\text{CSP}(\mathbb{H})$ is in linear Datalog, and hence in NL.

Note that the existence of polymorphisms of \mathbb{H} that form a Jónsson chain is only a sufficient condition for the containment of $\text{CSP}(\mathbb{H})$ in NL. An incomparable sufficient condition for the containment of $\text{CSP}(\mathbb{H})$ in NL was identified in [23]. The condition presented there also has a characterization via height-one identities, but the arities of the operations are prohibitively large so that we did not implement this test for trees.

The conjectured characterization of containment in NL, the Kearnes-Kiss chain from Conjecture 1, is defined in Section 6.7 (Definition 21).

6.4 Containment in L

One of the strongest known sufficient conditions for containment in L is a conditional result of Kazda, which involves the following linear condition.

Definition 15. For $n \geq 1$, a Hagemann-Mitschke chain of length n over D is a sequence of ternary operations p_1, \dots, p_n on D that satisfy

$$\begin{aligned} x &\approx p_1(x, y, y) \\ p_i(x, x, y) &\approx p_{i+1}(x, y, y) && \text{for all } i \in \{1, \dots, n-1\} \\ p_n(x, x, y) &\approx y. \end{aligned}$$

The respective height one condition is abbreviated by $\text{HM}(n)$.

Note that $\text{HM}(n)$ implies $\text{HM}(n+1)$ for every $n \geq 1$. For $n = 1$ the operation p_1 is known as a Maltsev operation. Kazda [46] proved the following conditional result.

Theorem 16 ([46]). *If a finite digraph \mathbb{H} can be solved by linear Datalog, and \mathbb{H} satisfies $\text{HM}(n)$ for some $n \geq 1$, then \mathbb{H} can also be solved by linear symmetric Datalog (and hence is in L).*

The conjectured characterization of containment in L, the Noname chain from Conjecture 2, is defined in Section 6.9 (Definition 24).

6.5 Solvability by Arc Consistency

Solvability by Arc-Consistency (and tree duality) can be characterized in terms of height one conditions as well.

Definition 17. An operation $s_n: D^n \rightarrow D$ is called totally symmetric if for all variables x_1, \dots, x_n and y_1, \dots, y_n such that $\{x_1, \dots, x_n\} = \{y_1, \dots, y_n\}$ the operation s_n satisfies

$$s_n(x_1, \dots, x_n) \approx s_n(y_1, \dots, y_n).$$

The respective height one condition is abbreviated by $\text{TS}(n)$.

The digraph \mathbb{H} can be solved by arc consistency if and only if \mathbb{H} has totally symmetric polymorphisms of all arities [32, 27]. Note that $\text{TS}(4)$ implies 3-4 WNU. Also note that a finite digraph \mathbb{H} satisfies $\text{TS}(n)$ for all $n > 0$ if and only if it satisfies $\text{TS}(2|E(\mathbb{H})|)$ (see the proof given in [27]). The arity $2|E(\mathbb{H})|$ is still fairly large; therefore it is particularly useful that the level-wise test is sufficient.

Lemma 18 (see [8, proof of Lemma 4.1]). *For any balanced digraph \mathbb{H} and $n > 0$, \mathbb{H} level-wise satisfies $\text{TS}(n)$ if and only if \mathbb{H} satisfies $\text{TS}(n)$.*

Proof. Let s_n be an n -ary polymorphism of \mathbb{H} that level-wise satisfies the condition $\text{TS}(n)$. We can construct an n -ary totally symmetric polymorphism s'_n of \mathbb{H} by applying s_n to the set of vertices on the smallest level. That is, for an input tuple (x_1, \dots, x_n) let $\ell = \min\{\text{lvl}(x_i) \mid 1 \leq i \leq n\}$, $\{x_i \mid \text{lvl}(x_i) = \ell\} = \{x_{i_1}, \dots, x_{i_k}\}$, and set

$$s'_n(x_1, \dots, x_n) = s_n(x_{i_1}, \dots, x_{i_k}, \underbrace{x_{i_k}, \dots, x_{i_k}}_{(n-k) \text{ times}}).$$

Clearly, the definition of $s'_n(x_1, \dots, x_n)$ depends only on the set $\{x_1, \dots, x_n\}$. To see that s'_n is a polymorphism, note that similarly as in Lemma 10 if (x_i, y_i) is an edge for $i \in \{1, 2, \dots, n\}$, then x_{i_j} lies on the smallest level if and only if y_{i_j} does. The rest follows from the fact that s_n is totally symmetric on each level. The other implication is again trivial. \square

6.6 P-hardness

The structure Horn-3SAT has the domain $\{0, 1\}$ and a ternary relation $\{0, 1\}^3 \setminus \{(1, 1, 0)\}$, and the two unary relations $\{0\}$ and $\{1\}$. It is well-known that $\text{CSP}(\text{Horn-3SAT})$ is P-complete, i.e., complete for the complexity class P under deterministic logspace reductions.

Definition 19. A Hobby-McKenzie chain consists of ternary operations $d_0, \dots, d_n, p, e_0, \dots, e_n$ such that

$$\begin{aligned}
d_0(x, y, z) &\approx x \\
d_i(x, y, y) &\approx d_{i+1}(x, y, y) && \text{for even } i < n \\
d_i(x, x, y) &\approx d_{i+1}(x, x, y) && \text{for odd } i < n \\
d_i(x, y, x) &\approx d_{i+1}(x, y, x) && \text{for odd } i < n \\
d_n(x, y, y) &\approx p(x, y, y) \\
p(x, x, y) &\approx e_0(x, x, y) \\
e_i(x, y, y) &\approx e_{i+1}(x, y, y) && \text{for even } i < n \\
e_i(x, x, y) &\approx e_{i+1}(x, x, y) && \text{for odd } i < n \\
e_i(x, y, x) &\approx e_{i+1}(x, y, x) && \text{for even } i < n \\
e_n(x, y, z) &\approx z.
\end{aligned}$$

The respective height one condition is abbreviated by $\text{HMCK}(n)$.

Theorem 20 (consequence of Theorem 9.8 in [42]). *A finite structure does not satisfy $\text{HMCK}(n)$ for some $n \geq 1$ if and only if it can pp-construct Horn-3SAT.*

The theorem implies that if a finite digraph \mathbb{H} does not satisfy $\text{HMCK}(n)$ for some $n \geq 1$, then \mathbb{H} is P-hard (see Section 5.1).

6.7 P-hardness or Mod_pL -hardness

It is widely believed that NL is a proper subclass of P. Another complexity class which is believed to be a proper subclass of P is the class Mod_pL , for some prime p : this is defined to be the class of problems such that there exists a non-deterministic logspace machine M such that an instance is in the class if and only if the number of accepting paths of M on the instance is divisible by p ; see [52]. It is well known that $\text{CSP}(3\text{Lin}_p)$ is Mod_pL -complete. If NL would contain Mod_pL then this would be a considerable breakthrough in complexity theory.

Definition 21 (from Theorem 9.11 in [42]). *Let D be a set. A Kearnes-Kiss chain of length $n \geq 2$ over D is a sequence of ternary operations d_0, d_1, \dots, d_n on D such that*

$$\begin{aligned}
d_0(x, y, z) &\approx x \\
d_i(x, y, y) &\approx d_{i+1}(x, y, y) && \text{for even } i \in \{0, 1, \dots, n-1\} \\
d_i(x, y, x) &\approx d_{i+1}(x, y, x) && \text{for even } i \in \{0, 1, \dots, n-1\} \\
d_i(x, x, y) &\approx d_{i+1}(x, x, y) && \text{for odd } i \in \{1, \dots, n-1\} \\
d_n(x, y, z) &\approx z.
\end{aligned}$$

The respective height one condition is abbreviated by $\text{KK}(n)$.

Note that $\text{KK}(n)$ implies $\text{KK}(n+1)$ for every $n \geq 0$. Also note that the existence of a Jónsson chain implies the existence of a Kearnes-Kiss chain [42]; namely $\text{J}(n)$ trivially implies $\text{KK}(2n+4)$.

Theorem 22 (see [12] and [42]). *A finite structure does not satisfy $\text{KK}(n)$ for some $n \geq 2$ if and only if it can pp-construct Horn-3SAT or 3Lin_p for some prime p .*

We have already mentioned that if a finite digraph \mathbb{H} pp-constructs Horn-3SAT then it is P-hard, and hence $\text{CSP}(\mathbb{H})$ is not in NL unless $\text{NL} = \text{P}$. Similarly, if \mathbb{H} pp-constructs 3Lin_p then it is Mod_pL -hard, and in this case it is not in NL unless NL contains Mod_pL . If the conjecture that ‘easy trees cannot count’ (Conjecture 3) is true, then the existence a Kearnes-Kiss chain is equivalent to the existence of a Hobby-McKenzie chain for trees (assuming $\text{P} \neq \text{NP}$).

6.8 NL-hardness

The structure st-Con has the domain $\{0, 1\}$, the binary relation $\{(0, 0), (0, 1), (1, 1)\}$ and the unary relations $t = \{0\}$ and $s = \{1\}$. Note that an instance of the CSP of st-Con is unsatisfiable if and only if there exists a directed path from s to t in the digraph defined by the binary relation. It is well-known that $\text{CSP}(\text{st-Con})$ is complete for the complexity class NL.

Theorem 23 ([52, 42]). *If a finite digraph \mathbb{H} does not satisfy $\text{HM}(n)$ for some $n \geq 1$, then it can pp-construct the structure st-Con , and \mathbb{H} is NL-hard.*

6.9 NL-hardness or Mod_pL -hardness

We now present a polymorphism condition that characterizes the finite structures that can pp-construct st-Con or 3Lin_p for some prime p .

Definition 24 ([42], Theorem 9.15). *For $n \geq 0$, a Noname chain of length n over D is a sequence of operations f_0, f_1, \dots, f_n of arity four on D such that*

$$\begin{aligned} f_0(x, y, y, z) &\approx x \\ f_i(x, x, y, x) &\approx f_{i+1}(x, y, y, x) && \text{for all } i \in \{0, \dots, n-1\} \\ f_i(x, x, y, y) &\approx f_{i+1}(x, y, y, y) && \text{for all } i \in \{0, \dots, n-1\} \\ f_n(x, x, y, z) &\approx z. \end{aligned}$$

The respective height one condition is abbreviated by $\text{NN}(n)$.

Note that $\text{NN}(n)$ implies $\text{NN}(n+1)$ for every $n \geq 0$.

Theorem 25 ([42, 12]). *A finite structure does not satisfy $\text{NN}(n)$ for some $n \geq 1$ if and only if it can pp-construct the structure st-Con or the structure 3Lin_p for some prime p .*

It follows that if a finite digraph \mathbb{H} does not satisfy $\text{NN}(n)$ for any $n \geq 1$, then $\text{CSP}(\mathbb{H})$ is NL-hard or Mod_pL -hard. Hence, \mathbb{H} is in this case not in L, unless $\text{L} = \text{NL}$ or $\text{L} = \text{Mod}_p\text{L}$. Note that Conjecture 3 together with Conjecture 2 implies that $\text{NN}(n)$ for some n and $\text{HM}(n)$ for some n are equivalent for trees (assuming $\text{L} \neq \text{NL}$).

7 Experimental Results

We implemented the AC-3 algorithm for establishing arc-consistency and used its adaptation, known as the MAC-3 algorithm, for maintaining arc-consistency during the backtracking procedure described in Section 5.3. The lists and related operations were implemented by doubly-linked lists. The code is written in Rust¹ and the experiments were run on a Intel(R) Xeon(R) CPU E5-2680 v3 (12 cores) @ 2.50GHz with Linux. We also used another implementation written in Python. All tests for chains of polymorphisms and for totally symmetric polymorphisms were done using this implementation on a AMD Ryzen 5 4500U (with 8 cores) @ 2.38 GHz with Windows. An efficient implementation was essential to obtain our results.²

¹<https://gitlab.com/WhatDothLife/tripolys>

²For comparison, we modeled some polymorphism tests in the constraint modeling language MiniZinc [57] and used the CP solver Gecode [59]. However, this turned out to not be competitive.

n	trees	cores	rooted cores	core checks	time per core check (μs)	total time
1	1	1	1	1	10	0.7 ms
2	1	1	2	1	10	0.8 ms
3	3	1	3	3	11	1.0 ms
4	8	1	6	8	12	1.1 ms
5	27	1	11	19	13	1.3 ms
6	91	2	28	39	15	2.0 ms
7	350	3	63	94	24	2.3 ms
8	1376	7	170	198	25	5.6 ms
9	5743	15	439	439	30	12.0 ms
10	24635	36	1200	953	36	30.9 ms
11	108968	85	3307	2180	40	69.1 ms
12	492180	226	9380	5050	48	187.9 ms
13	2266502	578	26731	12218	55	547.2 ms
14	10598452	1569	77508	29785	66	1.6 s
15	50235931	4243	226399	74902	71	5.0 s
16	240872654	11848	668228	190632	84	15.9 s
17	1166732814	33104	1984592	496373	98	52.5 s
18	5702001435	94221	5937276	1308847	121	3.0 min
19	28088787314	269455	17856807	3512229	129	9.8 min
20	139354922608	779268	53996424	9538804	142	31.7 min

Table 2: The number of unlabeled trees with n vertices together with results of Algorithm 2.

Table 2 shows the number of unlabeled trees with n vertices and the number of those that are cores. The table suggests that the fraction of trees that are cores quickly goes to 0. The next columns contain the number of unlabeled rooted cores with n vertices, the number of core checks, and the mean cpu time per core check on a tree with n vertices. The final column in the table shows the computation time needed to generate all the unlabeled core trees with n vertices with Algorithm 2.

In this section we present the results of testing the discussed linear conditions on these trees to classify them with respect to their computational complexity. In some cases we manage to compute all the minimal trees in the respective complexity class; the corresponding results are presented in Section 7.1. In Section 7.2 we present trees whose precise complexity status is open. While the numbers of trees given in the text are up to isomorphism, the corresponding figures make a further restriction based on the following fact.

Remark 26. *An operation is a polymorphism of \mathbb{H} if and only if it is a polymorphism of \mathbb{H}^R .*

The remark justifies that our figures contain exactly one of the trees \mathbb{T} , \mathbb{T}^R . It turns out that the trees in our figures that do not satisfy a certain height-one condition have a unique minimal subtree which has no *idempotent* polymorphisms satisfying the respective condition (see Remark 6). The vertices and edges drawn in gray do not belong to this minimal subgraph of \mathbb{T} .

7.1 The Smallest Hard Trees

In this section we present the smallest trees that are NP-hard and that are NL-hard, under standard assumptions from complexity theory. We also compute the smallest tree that cannot be solved by arc consistency, the smallest trees that cannot be solved by Datalog, and the smallest trees that

cannot be solved by linear symmetric Datalog; these results hold without any assumptions from complexity theory.

7.1.1 The Smallest NP-Hard Trees

Our algorithm found that all trees with at most 19 vertices have Kearnes-Marković-McKenzie polymorphisms and hence are tractable. It also found that there exist exactly 36 trees with 20 vertices that have no Kearnes-Marković-McKenzie polymorphisms and hence are NP-hard. For such an NP-hard tree \mathbb{T} with 20 vertices it takes our algorithm about 0.07 seconds to construct the indicator digraph \mathbb{T}^{Ind} for the Kearnes-Marković-McKenzie polymorphisms and about 0.03 seconds to verify that \mathbb{T}^{Ind} does not have a homomorphism to \mathbb{T} . When applying the level trick, it takes about 0.01 seconds to construct the indicator digraph and 0.03 seconds to verify that \mathbb{T}^{Ind} does not have a homomorphism to \mathbb{T} .

The trees with 20 vertices that have no Kearnes-Marković-McKenzie polymorphisms are displayed in Figure 3. Note that the smallest subtree without idempotent Kearnes-Marković-McKenzie polymorphism is the same for the trees A2–A4, A5–A12, and A13–A18.

Moreover, there are 4 smallest triads with 22 vertices that have no Kearnes-Marković-McKenzie polymorphisms; these are shown in Figure 4. All smaller triads have a binary symmetric polymorphism.

7.1.2 The Smallest NL-hard Trees

There are 8 trees with 12 vertices that are NL-hard. Two of them are isomorphic to their reverse, so we only display 5 trees in Figure 5, called B1, B2, B3, B4, and B5. The proof that they are NL-hard can be found below. All other trees with at most 12 vertices satisfy HM(8).

Since the trees B1–B5 have a majority they are in NL. To prove that B1–B5 are NL-hard, we show that they can pp-construct st-Con. Hence we need to construct the three relations $\{0\}$, $\{1\}$, and $\{(0, 0), (0, 1), (1, 1)\}$. First note that in a core tree \mathbb{T} any singleton set is pp-definable from \mathbb{T} , since $\text{End}(\mathbb{T}) = \{\text{id}_{\mathbb{T}}\}$ by Theorem 2. The following two graphs represent two pp-formulas $\phi_1(x, y)$ and $\phi_2(x, y)$. The filled vertices stand for existentially quantified variables.



The trees B1, B2, B3 can pp-define a structure that is homomorphically equivalent to st-Con using $\phi_1(x, y)$ for $E(\text{st-Con})$. The trees B4 and B5 can do the same using $\phi_2(x, y)$ for $E(\text{st-Con})$. Since st-Con is NL-hard, B1–B5 are NL-hard as well.

So for 12 vertices, 8 out of 226 trees are NL-hard (assuming $L \neq \text{NL}$). In Table 6 we present how this distribution in core trees changes with increasing number of vertices. Every tree with at most 20 vertices falls into one of two cases:

- it satisfies HM(16) and has a majority polymorphism, hence it is in L, or
- it has no HM(30).

We strongly suspect that in the latter case the trees have no HM(n) for any n , can pp-construct st-Con, and are NL-hard.

7.1.3 The Smallest Tree not Solved by Datalog

It turns out that every tree with at most 20 vertices which is not NP-hard can be solved by Datalog, thus confirming Conjecture 3. In fact, up to 20 vertices all trees that have Kearnes-Marković-McKenzie polymorphisms either have a majority polymorphism or totally symmetric

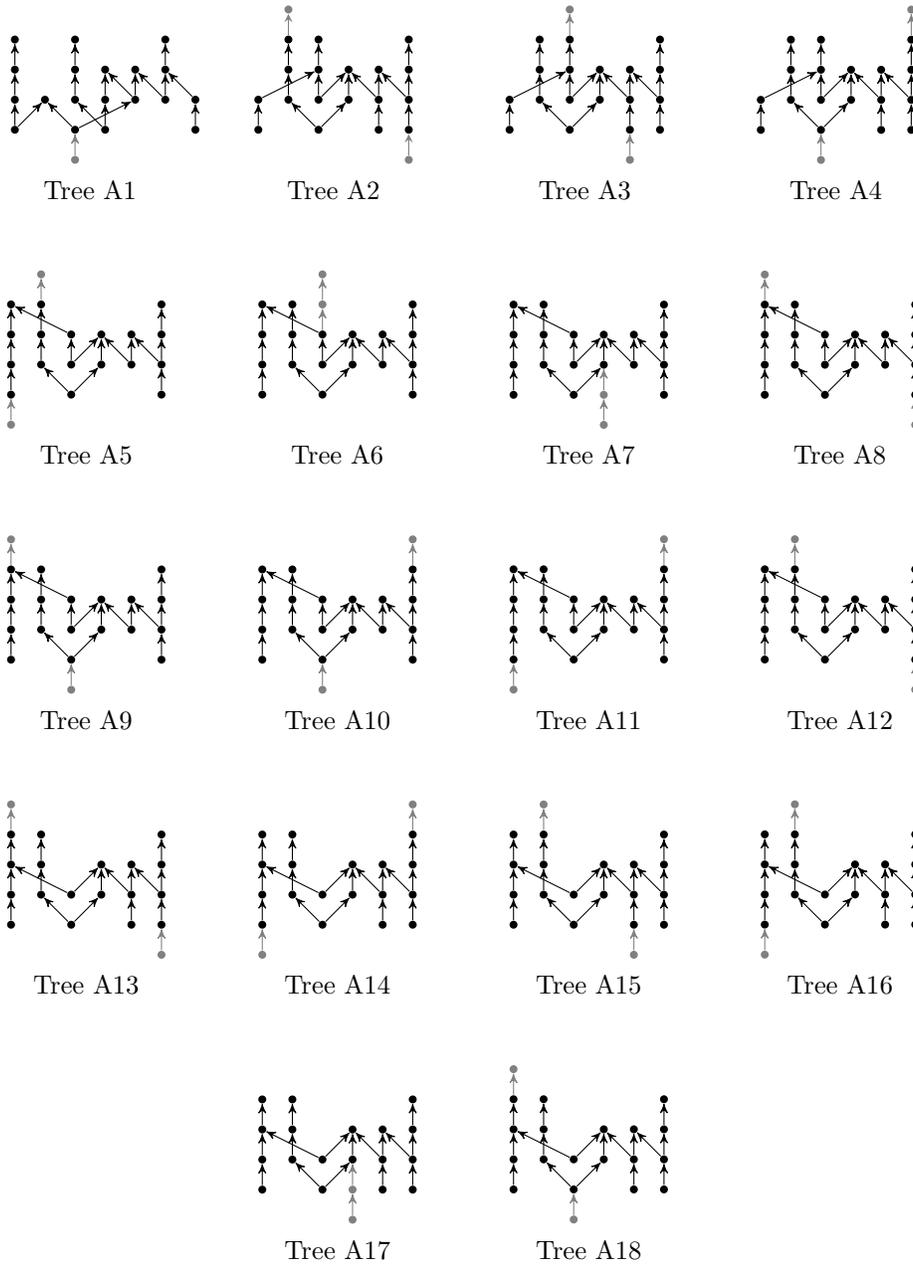


Figure 3: The smallest NP-hard trees (up to edge reversal and assuming $P \neq NP$).

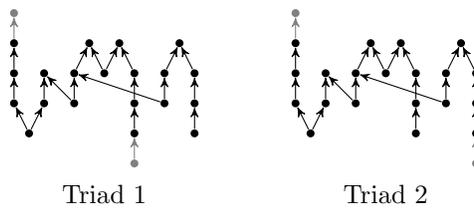


Figure 4: The smallest NP-hard triads (up to edge reversal and assuming $P \neq NP$).

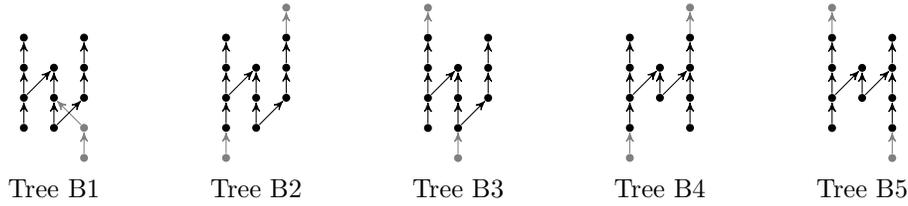


Figure 5: The smallest NL-hard trees (up to edge reversal and assuming $L \neq NL$).

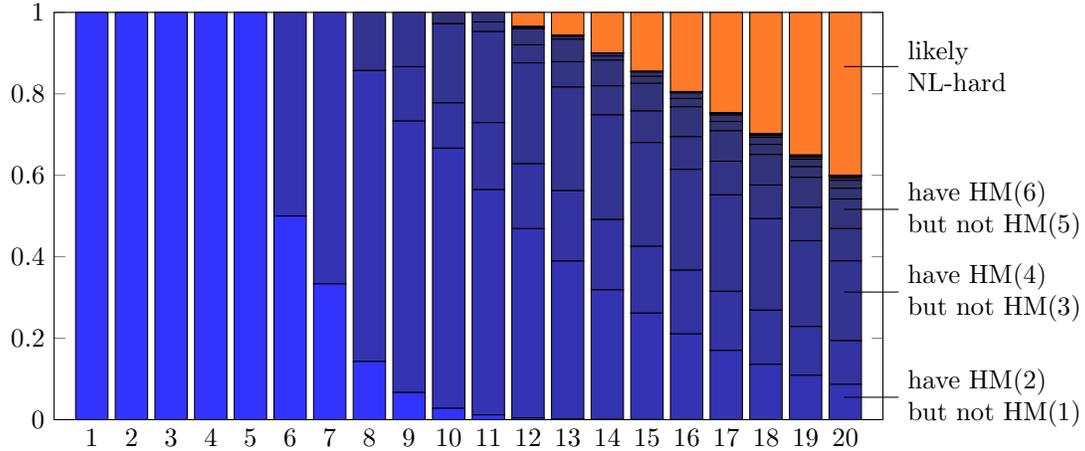


Figure 6: Distribution of core trees in L.

polymorphisms of all arities. The picture is however more complex for larger trees: there exists a tree which can be solved by Datalog but does not have a near-unanimity polymorphism (of any arity) and does not have totally symmetric polymorphisms of all arities, see [4, Proposition 5.5] for an example and [21] for its solvability in Datalog.

7.1.4 The Smallest Tree not Solved by Arc Consistency

The smallest tree \mathbb{T} that has no binary symmetric polymorphism has 19 vertices and is displayed in Figure 7. It has a 3-wnu polymorphism, and even a majority polymorphism which satisfies $f(x, x, y) = f(x, y, x) = f(y, x, x) = x$ for all $x, y \in T$. Note that $\text{CSP}(\mathbb{T})$ cannot be solved by the arc-consistency procedure since in this case \mathbb{T} must have a binary symmetric polymorphism [32, 27]. All other trees with at most 19 vertices satisfy $\text{TS}(n)$ for all n . For a tree \mathbb{T} the vertices of the indicator digraph for $\text{TS}(2|E(\mathbb{T})|)$ correspond to the nonempty subsets of T . Hence the indicator structure of a tree \mathbb{T} with 19 vertices has $2^{19} - 1 = 524287$ vertices. Using level-wise satisfiability (see Section 6.5) the number of vertices of the indicator structure is reduced to something between 19 and 513, depending on the number of vertices on each level.





Figure 7: The smallest tree that cannot be solved by Arc Consistency (it has 19 vertices and a majority, but no binary symmetric polymorphism).



Tree D

Figure 8: The smallest tree without a majority polymorphism (unique up to edge reversal; it has 16 vertices). It satisfies $\text{KK}(5)$ but does not satisfy $\text{Jónsson}(1000)$. Therefore, Conjecture 1 puts it in NL but we cannot prove this fact; it is an interesting open case.

7.2 Open Trees

In this section we present trees that are interesting test cases, in particular regarding the conjectured classification of digraphs in NL (Conjecture 1).

7.2.1 A Tree not Known to be in NL

We found a tree with polymorphisms that form a Kearnes-Kiss chain of length five and a Hobby-McKenzie chain of length 2, but has no Majority, and no (level-wise) Jónsson chain of length 1000 (see Figure 8). This tree is neither known to be P-hard or Mod_pL -hard, nor is it known to be in NL. It is the smallest tree without a majority polymorphism. Note that the existence of a Jónsson chain of *some* length is decidable because for a given digraph there are only finitely many operations of arity three. Moreover, by the discussion from Section 5.5 we know that we may narrow down the set of operations that have to be considered; the resulting number of operations is 12^{36} . Even if we could show that the tree has no Jónsson chain we would not know that the tree is not in NL. We believe that the tree is in NL, but new ideas are needed to prove that (e.g., ideas to prove Conjecture 1). We mention that it can pp-construct st-Con, so it is NL-hard.

7.2.2 Trees that might be P-hard

There are 28 trees with 18 vertices that satisfy neither $\text{HMCK}(1000)$ nor $\text{KK}(1000)$, not even level-wise (see Figure 9). They satisfy $\text{TS}(n)$ for all n , so they are in P and cannot pp-construct 3Lin_p for every p . Hence, this is in accordance with Conjecture 3. All other trees with up to 18 vertices satisfy $\text{KK}(5)$ and are in NL assuming Conjecture 1. Hence, if this conjecture is true, and if $\text{NL} \neq \text{P}$, and if indeed these 28 trees do not have $\text{HMCK}(n)$ for any n , then they are the smallest trees that are P-hard.

7.3 Majority Polymorphisms

Majority polymorphisms play a central role in the early theory of the constraint satisfaction problem [32, 31, 43], in graph theory [45, 41], and in the algebraic theory of CSPs [18, 19]. We have therefore also computed a smallest tree without a majority polymorphism (see Figure 8). Interestingly, when solving the indicator problem for the existence of a majority polymorphism of \mathbb{H} for graphs with at most 15 vertices (which all have a majority polymorphism), no backtracking was needed: pruning with the arc-consistency procedure did suffice to avoid all dead-ends in the search. Theoretical results only guarantee this behavior for establishing $(2, 3)$ -consistency (since \mathbb{H} has a majority polymorphism). So one might ask: can every tree with a majority polymorphism be solved by arc consistency? This is not the case; see Lemmata 4.1 and 4.2 in [8]. In our experiments we found the smallest such tree: Figure 7 shows a tree with a majority polymorphism which does not even have a binary symmetric polymorphism, and hence in particular cannot be solved by arc consistency.

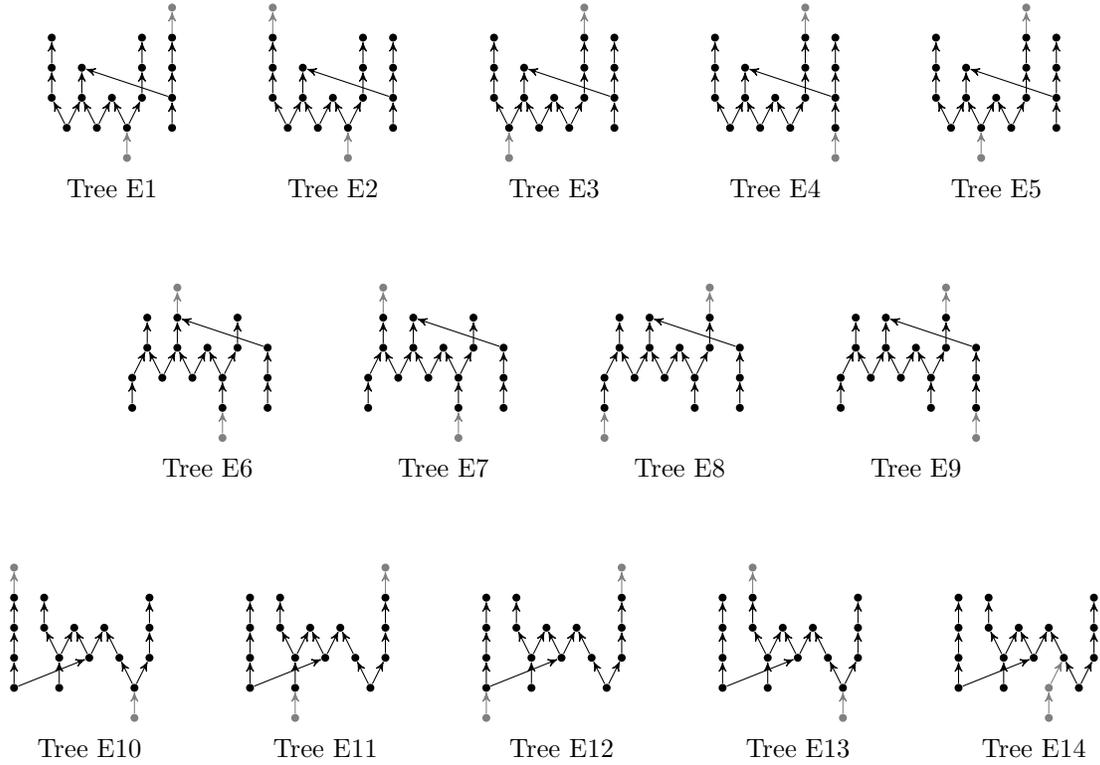


Figure 9: Smallest trees without HMCK(1000) (they have 18 vertices). These trees are tractable and candidates for being P-complete.

8 Open Problems and Future Work

The following conjecture is implied by Conjecture 3, but might be easier to answer.

Conjecture 4. *A tree has Kearnes-Marković-McKenzie polymorphisms if and only if it has a 3-wnu polymorphism.*

Question 1. *Is it true that the probability that a tree drawn uniformly at random from the set of all trees with vertex set $\{1, \dots, n\}$ is NP-hard tends to 1 as n tends to infinity? The answer is yes if we ask the question for random labelled digraphs instead of random labelled trees [54].*

The table in Figure 6 suggests that the following conjecture is true.

Conjecture 5. *The fraction of core trees with n vertices that are NL-hard goes to 1 as n goes to infinity.*

Question 2. *Determine the smallest trees that are P-hard (assuming that $NL \neq P$). We know from Section 7.3 that they must have at least 16 vertices, since all smaller trees have a majority and thus are in NL.*

Question 3. *Is our algorithm from Section 4 to generate unlabeled core trees a polynomial-delay enumeration algorithm (in the sense of [44])?*

Question 4. *Characterize linear conditions that can be tested level-wise (in the sense of Section 5.5) for balanced digraphs, and more specifically, for trees.*

It would be interesting to perform experiments similar to the experiments presented here for trees that are equipped with a singleton unary relation $\{a\}$ for each vertex a of the tree; in this

case, if \mathbb{T}_c is the resulting expanded tree structure, $\text{CSP}(\mathbb{T}_c)$ models the so-called \mathbb{T} -precoloring extension problem. This setting is particularly nice from the algebraic perspective because then all the polymorphisms of \mathbb{T}_c are idempotent. Note, however, that all these structure \mathbb{T}_c are cores, so there are far more structures to consider, and hardness will dominate more rapidly.

Taking this one step further, it would also be interesting to study the so-called *list homomorphism problem* for trees \mathbb{T} from an experimental perspective. Here, the input contains besides the graph \mathbb{G} a list of vertices from \mathbb{H} and we are looking for a homomorphism from \mathbb{G} to \mathbb{H} that maps each vertex to an element from its list. This can be seen as a special case of a CSP for a relational structure, which contains besides the edge relation also a unary relation for each subset of the vertices of \mathbb{H} . On the algebraic side, we are therefore interested in polymorphisms that preserve all subsets of \mathbb{H} ; such polymorphisms (and consequently the respective CSPs) are also called *conservative*. The algorithms and complexities for conservative CSPs are better understood than the general case [16, 2, 18, 47], which will help to determine the complexity of the list homomorphism for trees. On the other hand, as in the case of the precoloring extension problem we have much larger numbers of trees to consider since all the structures that we study are already cores.

9 Declarations

The authors are grateful to the Center for Information Services and High Performance Computing [Zentrum für Informationsdienste und Hochleistungsrechnen (ZIH)] at TU Dresden for providing its facilities for high throughput calculations. Manuel Bodirsky has received funding from the European Research Council (Grant Agreement no. 681988, CSP-Infinity). Jakub Bulín was supported by the MŠMT ČR INTER-EXCELLENCE project LTAUSA19070 and the Charles University project UNCE/SCI/004. Florian Starke is supported by DFG Graduiertenkolleg 1763 (QuantLA). The authors have no competing interests to declare that are relevant to the content of this article.

References

- [1] F. N. Afrati and S. S. Cosmadakis. Expressiveness of restricted recursive queries (extended abstract). In D. S. Johnson, editor, *Proceedings of the 21st Annual ACM Symposium on Theory of Computing, May 14-17, 1989, Seattle, Washington, USA*, pages 113–126. ACM, 1989.
- [2] L. Barto. The dichotomy for conservative constraint satisfaction problems revisited. In *Proceedings of the Symposium on Logic in Computer Science (LICS)*, Toronto, Canada, 2011.
- [3] L. Barto. Finitely related algebras in congruence distributive varieties have near unanimity terms. *Canadian Journal of Mathematics*, 65(1):3–21, 2013.
- [4] L. Barto and J. Bulín. CSP dichotomy for special polyads. *Int. J. Algebra Comput.*, 23(5):1151–1174, 2013.
- [5] L. Barto and M. Kozik. Constraint satisfaction problems of bounded width. In *Proceedings of Symposium on Foundations of Computer Science (FOCS)*, pages 595–603, 2009.
- [6] L. Barto and M. Kozik. Absorbing subalgebras, cyclic terms and the constraint satisfaction problem. *Logical Methods in Computer Science*, 8/1(07):1–26, 2012.
- [7] L. Barto and M. Kozik. Constraint satisfaction problems solvable by local consistency methods. *Journal of the ACM*, 61(1):3:1–3:19, 2014.
- [8] L. Barto, M. Kozik, M. Maróti, and T. Niven. CSP dichotomy for special triads. *Proceedings of the American Mathematical Society*, 137(9):2921–2934, 2009.

- [9] L. Barto, M. Kozik, M. Maróti, and T. Niven. Erratum to: CSP dichotomy for special triads. Available from the website of the first author, 2009.
- [10] L. Barto, M. Kozik, and T. Niven. The CSP dichotomy holds for digraphs with no sources and no sinks (a positive answer to a conjecture of Bang-Jensen and Hell). *SIAM Journal on Computing*, 38(5), 2009.
- [11] L. Barto, M. Kozik, and R. Willard. Near unanimity constraints have bounded pathwidth duality. In *Proceedings of the 27th ACM/IEEE Symposium on Logic in Computer Science (LICS)*, pages 125–134, 2012.
- [12] L. Barto, A. Krokhin, and R. Willard. Polymorphisms, and how to use them. In A. Krokhin and S. Živný, editors, *The Constraint Satisfaction Problem: Complexity and Approximability*, volume 7 of *Dagstuhl Follow-Ups*, pages 1–44. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, Dagstuhl, Germany, 2017.
- [13] L. Barto, J. Opršal, and M. Pinsker. The wonderland of reflections. *Israel Journal of Mathematics*, 223(1):363–398, 2018.
- [14] M. Bodirsky and B. Bodor. Canonical polymorphisms of Ramsey structures and the unique interpolation property. In *Proceedings of the Symposium on Logic in Computer Science (LICS)*, 2021.
- [15] M. Bodirsky and P. Jonsson. A model-theoretic view on qualitative constraint reasoning. *Journal of Artificial Intelligence Research*, 58:339–385, 2017.
- [16] A. A. Bulatov. Tractable conservative constraint satisfaction problems. In *Proceedings of the Symposium on Logic in Computer Science (LICS)*, pages 321–330, Ottawa, Canada, 2003.
- [17] A. A. Bulatov. Bounded relational width. Manuscript, 2009.
- [18] A. A. Bulatov. Conservative constraint satisfaction re-revisited. *Journal Computer and System Sciences*, 82(2):347–356, 2016. ArXiv:1408.3690.
- [19] A. A. Bulatov. A dichotomy theorem for nonuniform CSPs. In *58th IEEE Annual Symposium on Foundations of Computer Science, FOCS 2017, Berkeley, CA, USA, October 15-17*, pages 319–330, 2017.
- [20] A. A. Bulatov, A. A. Krokhin, and P. G. Jeavons. Classifying the complexity of constraints using finite algebras. *SIAM Journal on Computing*, 34:720–742, 2005.
- [21] J. Bulín. On the complexity of H -coloring for special oriented trees. *Eur. J. Comb.*, 69:54–75, 2018.
- [22] J. Bulín, D. Delic, M. Jackson, and T. Niven. A finer reduction of constraint problems to digraphs. *Log. Methods Comput. Sci.*, 11(4), 2015.
- [23] C. Carvalho, V. Dalmau, and A. Krokhin. CSP duality and trees of bounded pathwidth. *Theoretical Computer Science*, 411:3188–3208, 2010.
- [24] H. Chen and B. Larose. Asking the metaquestions in constraint tractability. *TOCT*, 9(3):11:1–11:27, 2017.
- [25] V. Dalmau. Computational complexity of problems over generalized formulas. PhD-thesis at the Departament de Llenguatges i Sistemes Informàtics at the Universitat Politècnica de Catalunya, 2000.
- [26] V. Dalmau. Linear Datalog and bounded path duality of relational structures. *Logical Methods in Computer Science*, 1(1), 2005.

- [27] V. Dalmau and J. Pearson. Closure functions and width 1 problems. In *Proceedings of the International Conference on Principles and Practice of Constraint Programming (CP)*, pages 159–173, 1999.
- [28] R. Diestel. *Graph Theory*. Springer–Verlag, New York, 2005. Third edition.
- [29] L. Egri, B. Larose, and P. Tesson. Symmetric datalog and constraint satisfaction problems in logspace. In *Proceedings of the Symposium on Logic in Computer Science (LICS)*, pages 193–202, 2007.
- [30] L. Egri, B. Larose, and P. Tesson. Directed st-connectivity is not expressible in symmetric datalog. In *Proceedings of the 35th International Colloquium on Automata, Languages and Programming, Part II, ICALP '08*, pages 172–183, Berlin, Heidelberg, 2008. Springer-Verlag.
- [31] T. Feder. Classification of homomorphisms to oriented cycles and of k -partite satisfiability. *SIAM Journal on Discrete Mathematics*, 14(4):471–480, 2001.
- [32] T. Feder and M. Y. Vardi. The computational structure of monotone monadic SNP and constraint satisfaction: a study through Datalog and group theory. *SIAM Journal on Computing*, 28:57–104, 1999.
- [33] J. Fischer. CSPs of orientations of trees. Master thesis, TU Dresden, 2015.
- [34] W. Gutjahr. Graph colourings. PhD Thesis, Free University Berlin, 1991.
- [35] W. Gutjahr, E. Welzl, and G. J. Woeginger. Polynomial graph-colorings. *Discret. Appl. Math.*, 35(1):29–45, 1992.
- [36] P. Hell, J. Nešetřil, and X. Zhu. Complexity of tree homomorphisms. *Discret. Appl. Math.*, 70(1):23–36, 1996.
- [37] P. Hell and J. Nešetřil. On the complexity of H-coloring. *Journal of Combinatorial Theory, Series B*, 48:92–110, 1990.
- [38] P. Hell and J. Nešetřil. The core of a graph. *Discrete Mathematics*, 109:117–126, 1992.
- [39] P. Hell and J. Nešetřil. *Graphs and Homomorphisms*. Oxford University Press, Oxford, 2004.
- [40] P. Hell, J. Nešetřil, and X. Zhu. Duality and polynomial testing of tree homomorphisms. *TAMS*, 348(4):1281–1297, 1996.
- [41] P. Hell and A. Rafiey. The dichotomy of list homomorphisms for digraphs. In *Proceedings of the Twenty-Second Annual ACM-SIAM Symposium on Discrete Algorithms, SODA '11*, page 1703–1713, USA, 2011. Society for Industrial and Applied Mathematics.
- [42] D. Hobby and R. McKenzie. *The structure of finite algebras*, volume 76 of *Contemporary Mathematics*. American Mathematical Society, 1988.
- [43] P. Jeavons, D. Cohen, and M. Gyssens. Closure properties of constraints. *Journal of the ACM*, 44(4):527–548, 1997.
- [44] D. S. Johnson, M. Yannakakis, and C. H. Papadimitriou. On generating all maximal independent sets. *Information Processing Letters*, 27(3):119–123, 1988.
- [45] A. Kazda. Maltsev digraphs have a majority polymorphism. *European Journal of Combinatorics*, 32:390–397, 2011.
- [46] A. Kazda. n -permutability and linear Datalog implies symmetric Datalog. *Logical Methods in Computer Science*, Volume 14, Issue 2, Apr. 2018.

- [47] A. Kazda. CSP for binary conservative relational structures. *Algebra universalis*, Volume 75, Issue 1:75–84, Feb. 2019.
- [48] K. A. Kearnes and E. W. Kiss. *The Shape of Congruence Lattices*, volume 222 (1046) of *Memoirs of the American Mathematical Society*. American Mathematical Society, 2013.
- [49] K. A. Kearnes, P. Marković, and R. McKenzie. Optimal strong Mal’cev conditions for omitting type 1 in locally finite varieties. *Algebra Universalis*, 72(1):91–100, 2015.
- [50] M. Kozik. Weak consistency notions for all the CSPs of bounded width. In *Proceedings of the 31st Annual ACM/IEEE Symposium on Logic in Computer Science, LICS ’16*, page 633–641, New York, NY, USA, 2016. Association for Computing Machinery.
- [51] M. Kozik, A. Krokhin, M. Valeriote, and R. Willard. Characterizations of several Maltsev conditions. *Algebra universalis*, 73(3):205–224, 2015.
- [52] B. Larose and P. Tesson. Universal algebra and hardness results for constraint satisfaction problems. *Theoretical Computer Science*, 410(18):1629–1647, 2009.
- [53] B. Larose, M. Valeriote, and L. Zádori. Omitting types, bounded width and the ability to count. *International Journal of Algebra and Computation*, 19(5), 2009.
- [54] T. Luczak and J. Nešetřil. When is a random graph projective? *Eur. Journal Comb.*, 27(7), 2006.
- [55] A. K. Mackworth. Consistency in networks of relations. *Artificial Intelligence*, 8:99–118, 1977.
- [56] M. Maróti and R. McKenzie. Existence theorems for weakly symmetric operations. *Algebra Universalis*, 59(3-4):463–489, 2008.
- [57] N. Nethercote, P. J. Stuckey, R. Becket, S. Brand, G. J. Duck, and G. Tack. Minizinc: Towards a standard CP modelling language. In C. Bessière, editor, *Principles and Practice of Constraint Programming – CP 2007*, pages 529–543, Berlin, Heidelberg, 2007. Springer Berlin Heidelberg.
- [58] D. Sabin and E. C. Freuder. Contradicting conventional wisdom in constraint satisfaction. In *ECAI*, 1994.
- [59] C. Schulte, M. Z. Lagerkvist, and G. Tack. Gecode, generic constraint development environment, 2010. <http://www.gecode.org/>.
- [60] M. H. Siggers. A strong Mal’cev condition for varieties omitting the unary type. *Algebra Universalis*, 64(1):15–20, 2010.
- [61] W. Tatarko. CSP over oriented trees. Bachelor thesis, Charles University Prague, 2019.
- [62] P. Taylor. Algorithm for generating all unlabeled trees with n nodes? Computer Science Stack Exchange. URL:<https://cs.stackexchange.com/q/103287> (version: 2019-01-23).
- [63] D. Zhuk. A proof of the CSP dichotomy conjecture. *J. ACM*, 67(5):30:1–30:78, 2020.
- [64] D. N. Zhuk. A proof of CSP dichotomy conjecture. In *58th IEEE Annual Symposium on Foundations of Computer Science, FOCS 2017, Berkeley, CA, USA, October 15-17*, pages 331–342, 2017.