
LogiGAN: Learning Logical Reasoning via Adversarial Pre-training

Xinyu Pi^{1*}, Wanjun Zhong^{2*}, Yan Gao³, Nan Duan³, Jian-Guang Lou³

¹University of Illinois Urbana-Champaign, Urbana, USA

²Sun Yat-Sen University ³Microsoft Research Asia

xinyupi2@illinois.edu, zhongwj25@mail2.sysu.edu.cn

{yan.gao, jlou, nanduan}@microsoft.com

Abstract

We present LogiGAN, an unsupervised adversarial pre-training framework for improving logical reasoning abilities of language models. Upon automatic identifying logical reasoning phenomena in massive text corpus via detection heuristics, we train language models to predict the masked-out logical statements. Inspired by the facilitation effect of reflective thinking in human learning, we analogically simulate the learning-thinking process with an adversarial Generator-Verifier architecture to assist logic learning. LogiGAN implements a novel sequential GAN approach that (a) circumvents the non-differentiable challenge of the sequential GAN by leveraging the Generator as a sentence-level generative likelihood scorer with a learning objective of reaching scoring consensus with the Verifier; (b) is computationally feasible for large-scale pre-training with arbitrary target length. Both base and large size language models pre-trained with LogiGAN demonstrate obvious performance improvement on 12 datasets requiring general reasoning abilities, revealing the fundamental role of logic in broad reasoning, as well as the effectiveness of LogiGAN. Ablation studies on LogiGAN components reveal the relative orthogonality between linguistic and logic abilities and suggest that reflective thinking’s facilitation effect might also generalize to machine learning.

1 Introduction

“Learning without thought is labor lost; thought without learning is perilous.” – Confucius

Pre-trained Language Models (PLMs) (Devlin et al., 2018; Brown et al., 2020; Raffel et al., 2020) are approaching human-level performance in numerous tasks requiring basic linguistic abilities (Wang et al., 2018; Rajpurkar et al., 2016), setting off a huge wave of interest in Natural Language Processing (NLP). Despite the emerging fervor, researchers soon realized that PLMs are relatively incompetent in their **reasoning** abilities, which seems to be an insurmountable bottleneck for PLMs with even better linguistic abilities (Helwe et al., 2021; Kassner & Schütze, 2019). Following this, researchers delve into reasoning from multitudinous aspects, striving to improve PLMs’ reasoning abilities.

From our perspective, reasoning (in natural language) is essentially an inferential process where an unstated statement is drawn based on several presented statements, and **Logic** is the systemic set of principles that provides reasoning with correctness and consistency assurance (Hurley, 1982). Regardless of the variability of contents, logical reasoning generally incorporates two invariant forms: drawing conclusions based on some premises (aka. deduction & induction, (Reichert, 2013)), or hypothesizing premises to explain some conclusions (aka. abduction (Douven, 2021)). Most existing tasks requiring general reasoning ability, such as natural language inference (Nie et al., 2019) and

*indicates equal contribution. Work done during internship at Microsoft Research Asia.

complex machine reading comprehension (Lai et al., 2017), can be readily interpreted by this criterion. Other tasks requiring specialized reasoning skills can be considered either as (i) providing sufficient premises but requiring specific ways of premise extraction to draw conclusions, such as multi-hop (Yang et al., 2018b) or hybrid (Chen et al., 2020) reasoning; or (ii) requires external knowledge, such as commonsense (Sap et al., 2020) or numerical (Dua et al., 2019) knowledge, as premises to draw conclusions, hence could also be interpreted by the two forms of logical reasoning. Following this analysis on the relation between logic and reasoning, *Logic ability* will be an essential foundation for a broad scope of reasoning, and should be prioritized in improving PLMs’ reasoning abilities ².

Conventional pre-training via randomized **Masked Language Modeling (MLM)** and auxiliary tasks are generally developed upon Firth (1957)’s distributional hypothesis of semantics – “a word is characterized by the company it keeps.” Under this paradigm, models efficiently learn to capture grammatical structures (Sun et al., 2022) and contextualized semantics (Li et al., 2022). However, since logical consistency is beyond correctness on a linguistic level, it is less obvious how MLM could help with logical reasoning abilities. Do models harvest logic ability for free from MLM? Or is that something that needs further learning beyond language acquisition? Motivated by these questions, we propose an **unsupervised pre-training method aiming at enhancing the logical reasoning ability of PLMs**: we automatically identify occurrences of logical reasoning phenomena in large corpus via detection heuristics and then require PLMs to predict the masked logical statements in the original context (Sec. 3). For example, in the case “Bob made up his mind to lose weight. *Therefore*, [MASK]”, the prediction goal is the masked original statement “he decides to go on a diet”.

However, statements different from the original one could also be logically consistent w.r.t a given context. For example, “he decides to exercise from today on” is also a reasonable inference in the case above. Since Generators trained merely from recovering original statements are not encouraged to explore the possibilities of other reasonable statements, their overall learning effectiveness of logic could potentially be degraded. Therefore, it makes sense to provide additional feedback based on the degree of logical consistency between statements predicted beforehand and the original context – we realize this much resembles humans’ reflective thinking process. Inspired by research from cognitive psychology (Di Stefano et al., 2016; Moon, 2013; Boud et al., 2013) advocating for the vital role of reflective thinking in improving the experiential efficiency of human learning, we hypothesize that machines might also benefit from reflective thinking in their learning processes. Following this hypothesis, we analogically simulate humans’ learning-thinking process with a Generator-Verifier architecture, and propose **LogiGAN**, a novel adversarial training approach tailored for sequential GAN training to further facilitate the learning of logical reasoning.

In LogiGAN’s design, the Generator learns not only to recover the original masked statements, but also to score candidate statements (based on their generative likelihood) in a manner that could reach scoring consensus with the Verifier, who learns to make a judgment on the logical consistency between premises and conclusions. The more logically consistent the Verifier thinks of a statement w.r.t. the input context, the higher generative likelihood score is expected to be assigned by the Generator. To encourage the exploration of broader possibilities of reasonable statements other than the original one, we also apply a diversified sampling strategy for candidate statement generation. Both Generator and Verifier scoring processes are continuous throughout the adversarial training, thereby circumventing the non-differentiable barrier in sequential GAN put by the discrete beam-search. Moreover, LogiGAN does not involve token-wise Monte Carlo Search for policy gradient estimation, and the scoring process of Generator and Verifier are decoupled, so that parallel score computation is possible. This makes large-scale pre-training with arbitrary target length computationally feasible.

To test the effectiveness of LogiGAN, we extensively experiment on **12** datasets requiring general reasoning ability. The apparent performance improvements of *both base and large size PLMs* across all tasks reveal models’ harvest of logic ability, shoring up the fundamental role of logic in general reasoning. We also carry out ablation studies to understand the functionality of LogiGAN components, the results of which sheds light on the relative orthogonality between linguistic and logic ability and suggest that the facilitation effect of reflective thinking is also generalizable to machine learning.

²We expand this analysis in-depth in App. A, and refer intrigued readers there.

2 Logic Pre-training

In this work, we primarily focus on improving PLMs’ ability of *informal logic* (Groarke, 2021). We include the three most classical types of logical reasoning: **deductive, inductive, and abductive reasoning** conducted in the form of natural language (Reichertz, 2004; Kennedy & Thornberg, 2018; Reichertz, 2007; Douven, 2021) in our consideration. Note that our coverage is broader than the informal logic strictly defined in the philosophy community (Munson, 1976) that primarily focuses on analyzing the soundness and cogency of the application of the aforementioned reasoning in real-life arguments. The other half of logic investigation – the theoretical study of formal or mathematical logic (typically conducted in a symbolic form), which usually deal with propositional logic (Buvac & Mason, 1993) (Smullyan, 1968), and fuzzy logic (Dote, 1995), is beyond the scope of this paper.

Logic Indicators as Detection Heuristics To set up an unsupervised pre-training aiming at improving models’ logic ability, our first step will be to identify logical reasoning phenomena from a vast-scale unstructured text corpus. While invocations of logic are not explicitly stated in most cases, writers’ usage of *logic indicators* usually marks their logical reasoning process with high precision (Hurley, 1982), thereby serving as an ideal heuristic device for our detection purpose. We consider two standard types of logic indicators: (i) **conclusion indicator** such as “Therefore”, “We may infer that”, which denotes drawing conclusion deductively or inductively from given premises; And (ii) **premise indicator** such as “Due to”, “The reason that”, which denotes abductively hypothesizing premises that explain or provide evidence to some stated conclusions.

Corpus Construction For a selected text corpus, we detect every occurrence of pre-defined logic indicators (listed in App. C), and mask out (i.e., replace with [MASK]) the entire **statement** subsequent to the indicator (each training example will have exactly one masked-out statement). Then models’ task will be to perform language modeling and predict the masked statement. Here we emphasize that **statements** are declarative sentences or declarative clauses, owning complete subject and predicate structures, and are capable of being factually true or false. To supply sufficient context information for these predictions, we keep x complete sentences previous to the [MASK], as well as y sentences after the [MASK], where x and y can be sampled from a geometric distribution with pre-defined hyper-parameters. Fig. 1 illustrates the input and output format, and we discuss details in Sec. 4.

Masked Logical Statement Prediction The Generator learns to infill the masked statement via a single-task pre-training, which fulfills the training process of a typical masked language modeling task. The only difference is that models no longer predict *randomly masked tokens or spans* but instead *logic-targeted masked complete statements*. Models are trained to perform Max Likelihood Estimation (MLE) for masked statements under a typical teacher forcing loss. Practically, generative pre-trained language models such as T5 (Raffel et al., 2020) could take up the position of Generator \mathcal{G} . Given a single input context / output statement pair (c, s) , the teacher forcing loss can be mathematically expressed as³:

$$\mathcal{L}_{tf}(c, s) = -\frac{1}{T} \sum_{t=1}^T \log p_{\mathcal{G}_\theta}(w_t(s) | w_{1:t-1}(s); x) \quad (1)$$

3 The Adversarial Training Framework

Since Generators trained merely from recovering masked statements miss out opportunities of exploring other reasonable statements, LogiGAN implements a adversarial mechanism for providing the Generator with extra signals based on logical consistency between pseudo-statements (sampled from Eq. 3) and context. The framework has two major components: (i) a *Verifier* \mathcal{V} that learns to judge the logical consistency between statements and context; (ii) a *Generator* \mathcal{G} that learns both to recover the original masked statements, and scores pseudo-statements (based on their generative likelihood) in a manner that could reach consensus with the Verifier. The more logically consistent the Verifier thinks of a statement w.r.t. the input context, the more likely the Generator is expected to generate the statement. The overall objective of LogiGAN can be expressed as the minimax objective:

$$J^{\mathcal{G}^*, \mathcal{V}^*} = \min_{\theta} \max_{\phi} \mathbb{E}_{\mathbf{s}^+ \sim p_{\text{true}}(\cdot|c)} [\log \mathcal{V}_\phi(c, \mathbf{s}^+)] + \mathbb{E}_{\mathbf{s}^- \sim p_{\text{neg}}(\cdot|\mathcal{G}_\theta, c, \mathbf{s}^+)} [\log(1 - \mathcal{V}_\phi(c, \mathbf{s}^-))]. \quad (2)$$

³ $w_t(\cdot)$ denotes the t^{th} token of a input string.

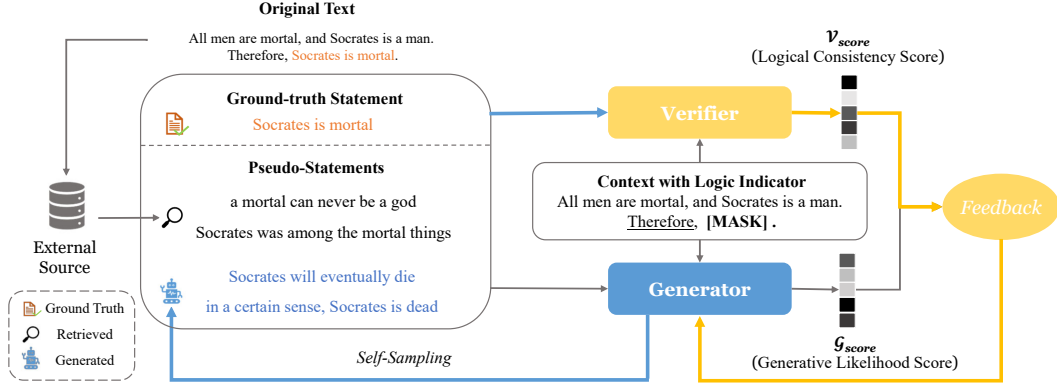


Figure 1: LogiGAN Overview. Generator targets to predict the masked-out logical statement and scores candidate statements, while Verifier justifies the logical correctness of statements. The blue path indicates the process where the Generator helps Verifier learning, while the yellow path denotes the process of giving Verifier feedback for Generator training.

where \mathcal{G}_θ and \mathcal{V}_ϕ denote the Generator and the Verifier with model parameters θ and ϕ , respectively. s^+/s^- represents ground-truth statements from original text / sampled pseudo-statement⁴. We discuss sampling details of pseudo-statements later in this section.

Classical GAN settings (Goodfellow et al., 2014; Zhu et al., 2017) fall short in sequential generation because the gradient propagation from the Verifier to the Generator is blocked by a non-differentiable beam-search for text generation. Previous approaches (Yu et al., 2017; Lin et al., 2017) address this challenge by token-wise policy gradient estimation via Monte Carlo search. However, since the sampling run-time grows exponentially with the length of the target sequence, their original implementations are not directly applicable to million-scale pre-training with arbitrary target length.

Different from them, LogiGAN omits the sequential token-wise Monte Carlo Search for policy gradient estimation to train Generator, and computes a sentence-level generative likelihood score instead. Its main procedures can be summarized in four steps: (a) several candidate pseudo-statements are sampled on a sentence-level; (b) the Verifier assigns the **logical consistency scores** \mathcal{V}_{score} based on how logical consistent these candidates are w.r.t the original context; (c) the Generator assigns the sentence-level **generative likelihood score** \mathcal{G}_{score} to each candidate to reflect how likely it will produce the pseudo-statement under the original context. (d) The similarity between Generator and Verifier score distributions is computed as a new signal to encourage the Generator to reach scoring consensus with the Verifier – i.e., the more logically consistent the Verifier thinks of the statement, the higher likelihood score the Generator is expected to assign. Since both scoring processes are continuous, the non-differentiable barrier is successfully bypassed. Meanwhile, this design does not involve token-level Monte Carlo sampling and decouples the Generator and Verifier score computation process, thereby enabling parallel computing. This makes large-scale pre-training with arbitrary target sequence length computationally feasible.

The overall framework overview is illustrated in Fig. 1, and the detailed training procedure is summarized in Algorithm 1. To diversify the candidate pseudo-statements, we sample pseudo-statements from two sources: (i) self-sampling via diversified beam-search from the Generator; or (ii) retrieving similar statements from the corpus, and the sampling process can be summarized as:

$$p_{\text{neg}}(\cdot | \mathcal{G}_\theta, c, s^+) = \{s_\alpha \sim \mathcal{G}_\theta(\cdot | c) \cup s_\beta \sim R(s^+)\}, \quad (3)$$

where $\mathcal{G}_\theta(\cdot | c)$ denotes self-sampled statement s_α given context c from Generator \mathcal{G}_θ , and $R(s^+)$ denotes a retriever⁵ that retrieves textually similar statements s_β with ground-truth statement s^+ from the corpus. Note that this process is conducted separately for the corpus of Verifier and Generator.

⁴Note: in real practice, there is a **gap** between sampled *pseudo-statements* s^- and *logically inconsistent* statements. We keep current symbolic denotations for simplicity only and discuss this issue in App. B.

⁵Any retriever is feasible and we adopt BM25 as the retrieving method here.

Algorithm 1: Adversarial Training Process

Dependencies : (1) A Pre-trained Generative Language Model as Generator \mathcal{G}_0
(2) A Pre-trained Discriminative Language Model as Verifier \mathcal{V}_0
(3) Generator Source Training Corpus C_G with size M
(4) Verifier Source Training Corpus C_V with size N
(5) Pre-defined Warmup epochs E , max iterations of GAN training Q
(6) Pre-defined training sample size m, n for \mathcal{V}, \mathcal{G} per iteration

- 1 Random partition C_G into $C_{\mathcal{G}_\alpha}, C_{\mathcal{G}_\beta}$ with size M_α, M_β ;
- 2 $\mathcal{G}_0 \leftarrow$ Warmup \mathcal{G}_α on $C_{\mathcal{G}_0}$ for E epochs with \mathcal{L}_{tf} ;
- 3 **for** i **in** $1:Q$ **do**
- 4 $\mathcal{G}_i \leftarrow \mathcal{G}_{i-1}$;
- 5 $C_{\mathcal{V}_i}, \widetilde{C}_{\mathcal{G}_i} \leftarrow$ Sample m examples from C_V , and n examples from $C_{\mathcal{G}_\beta}$, w/o replacement;
- 6 $\widetilde{C}_{\mathcal{V}_i}, \widetilde{C}_{\mathcal{G}_i} \leftarrow$ Sample pseudo-statements for $C_{\mathcal{V}_i}, C_{\mathcal{G}_i}$ with \mathcal{G}_i and BM25, as in Eq. 3;
- 7 $\mathcal{V}_i \leftarrow$ Train \mathcal{V}_{i-1} on $\widetilde{C}_{\mathcal{V}_i}$ for 1 epoch with \mathcal{L}_{ver} , as in Eq. 4; (Verifier Training)
- 8 **for** \tilde{c} **in** batch($\widetilde{C}_{\mathcal{G}_i}$) **do**
- 9 $\mathcal{V}_{score}, \mathcal{G}_{score} \leftarrow \mathcal{V}_i, \mathcal{G}_i$ do scoring on \tilde{c} , as in Eq. 5 and 6;
- 10 $\mathcal{L}_{gen} \leftarrow \lambda_1 \mathcal{L}_{tf}(s^+ \text{ from } \tilde{c}) + \lambda_2 D_{KL}(\mathcal{V}_{score} \parallel \mathcal{G}_{score})$, as in Eq. 7;
- 11 $\mathcal{G}_i \leftarrow$ Update \mathcal{G}_i for 1 step with \mathcal{L}_{gen} ; (Generator Training)
- 12 **end**
- 13 **end**

3.1 Training of Verifier

The Verifier serves as a critic to judge whether a statement is logically consistent w.r.t. the context. Therefore, the training task of Verifier can be viewed as a binary classification problem. Any pre-trained language models that can perform classification task as BERT (Devlin et al., 2018), ALBERT (Lan et al., 2019), and RoBERTa (Liu et al., 2019), will be suitable for the role of Verifier. With $y = 1$ for both ground-truth and logically consistent pseudo-statements, and $y = 0$ for other pseudo-statements, the binary classification loss for a single pair of context/statement/label (c, s, y) of Verifier can be mathematically expressed as (omitting average):

$$\mathcal{L}_{ver}(c, s, y) = -y \log \mathcal{V}_\phi(y \mid [c; s]) - (1 - y) \log(1 - \mathcal{V}_\phi(y \mid [c; s])), \quad (4)$$

3.2 Training of Generator

The Generator targets both to recover the original masked statements, and to score pseudo-statements based on their generative likelihood in a manner that could reach sentence-level scoring consensus with the Verifier. This corresponds to the two sources of learning signals received by the Generator: (i) the original generative objective with teacher forcing loss defined in Eq.1 as a signal; and (ii) the distribution similarity between sentence-level generative likelihood score assigned by Generator and logic consistency score assigned by Verifier. To achieve the goal of (ii), we first sample pseudo-statements $\{s_1^-, \dots, s_n^-\}$ from $p_{\text{neg}}(\cdot \mid \mathcal{G}_\theta, c, s^+)$ and the Verifier assigns **logical consistency score** $\mathcal{V}_{\text{score}}$ based on how logically consistent the pseudo-statements are w.r.t. the context, expressed as:

$$\mathcal{V}_{\text{score}}(c; s_1^-, \dots, s_n^-) = [\mathcal{V}_\phi(s_1^-, c); \mathcal{V}_\phi(s_2^-, c); \dots; \mathcal{V}_\phi(s_n^-, c)], \quad (5)$$

and then computes the sentence-level **generative likelihood score** $\mathcal{G}_{\text{score}}$ for each pseudo-statement reflecting the Generator’s likelihood of producing them under the given context as:

$$\mathcal{G}_{\text{score}}(c; s_1^-, \dots, s_n^-) = [\ell_\theta(s_1^- \mid c); \ell_\theta(s_2^- \mid c); \dots; \ell_\theta(s_n^- \mid c)], \quad (6)$$

where $\ell_\theta(s \mid c)$ is the accumulated log-likelihood of the statement s conditioned on the context c .

Afterward, each statement with a high Verifier score $\mathcal{V}_\phi(s, c)$ is also expected to receive a high generative score $\ell_\theta(s \mid c)$ to facilitate the Generator’s capturing of the Verifier’s judgment criterion based on logic consistency. KL-divergence (Kullback & Leibler, 1951) D_{KL} is therefore a appropriate measure for the similarity between the score distribution of $\mathcal{V}_{\text{score}}$ and $\mathcal{G}_{\text{score}}$. For the purpose of smoothing the gradient to stabilize the GAN training process, we gather both the ground-truth (learned with teacher-forcing loss) and pseudo statements (learned with KL loss) inside the same

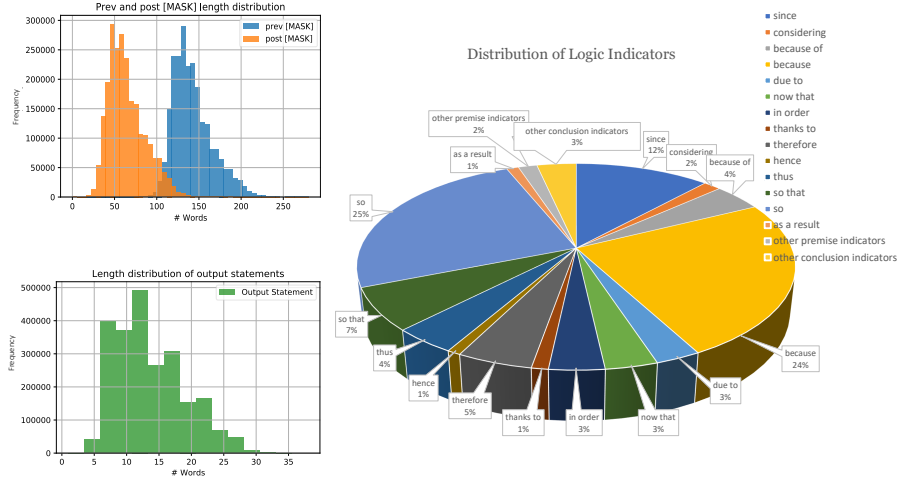


Figure 2: Corpus statistics. Histograms on the left side display length of masked statements (bottom) and prev-and-post statement context (top). The right-side pie chart displays indicators’ distribution.

batch w.r.t. a single input context c . In our case, there is exactly one ground-truth statement and n pseudo-statements for each input context c . For a batch of $(c; s_1^+, s_1^-, \dots, s_n^-)$, the overall objective of the Generator is defined as (in App. F we show how Eq. 7 commits to the optimization of Eq. 2):

$$\mathcal{L}_{gen}(c; s_1^+, s_1^-, \dots, s_n^-) = \lambda_1 \mathcal{L}_{tf}(c, s_1^+) + \lambda_2 D_{KL}(\mathcal{V}_{score}(s_1^-, \dots, s_n^-) || \mathcal{G}_{score}(s_1^-, \dots, s_n^-)). \quad (7)$$

4 Experiment Setup

4.1 Datasets

To test the effectiveness of LogiGAN, we extensively experiment on **12** datasets requiring reasoning via natural language. Specifically, ReClor (Yu et al., 2020), LogiQA (Liu et al., 2021a), Adversarial NLI - ANLI (Nie et al., 2019), focuses especially on logical reasoning, TellMeWhy (Lal et al., 2021) on abductive reasoning, HotpotQA (Yang et al., 2018a) on multi-hop reasoning, QuoRef (Dasigi et al., 2019) on reasoning with co-reference resolution, MuTual (Cui et al., 2020), DREAM (Sun et al., 2019)), SAMSum (Gliwa et al., 2019) on reasoning in conversational scenarios, and NarrativeQA (s Koř ciský et al., 2018), RACE (Lai et al., 2017), XSum (Narayan et al., 2018) on general verbal reasoning. These datasets make most, if not all, necessary premises for drawing logically consistent conclusions available in their provided context, and require few external premises like commonsense or numerical knowledge. Hence, they fit nicely for testing our hypothesis that LogiGAN brings PLMs logic ability beyond their intrinsic linguistic ability, which could benefit general reasoning processes.

4.2 Pre-training Corpus

We apply the corpus construction methodology (§ 2) on *BookCorpus* (Kobayashi, 2018), which consists of e-books and movies with topics from general domains. Although some corpus featuring debates and arguments (Walker et al., 2012; Abbott et al., 2016; Swanson et al., 2015) appears to be more suitable for our emphasis on logic, we do not elect them due to their high domain specificity in fields such as politics, law, and economics. We discard overly short statements and instances where indicators do not indicate logical reasoning (e.g., “since” indicating time rather than premises, “so” indicating degree rather than conclusions). This results in 3.14 million (1.43 and 1.71 million from conclusion and premise indicators, respectively) instances. Corpus statistics are visualized in Fig. 2.

4.3 Models

Baseline Choice. Since our primary goal of the experiment is to test the effectiveness of LogiGAN and test our hypothesis that logic ability can be further enhanced beyond PLMs’ intrinsic linguistic ability, we only compare models pre-trained with LogiGAN against their vanilla versions. After Logi-

GAN pre-training, we discard the auxiliary Verifier (discussed in Sec. 6) and employ the Generator only to solve all downstream tasks in a purely end-to-end manner. We discuss implementation details and hyper-parameter settings of pre-training and downstream fine-tuning in Appendix D.

Elastic Search vs. Self Sampling. As stated earlier in section 3.2, candidate pseudo-statements have two possible sources – they could either be sampled via beam search from the Generator’s self-distribution, or could be retrieved from some external resources. We carry out two variant versions of LogiGAN whose Generator is trained purely from self-sampled sentences as pseudo-statements (**LogiGAN** *base*(ss)), and from extra pseudo-statements retrieved from corpus by Elastic Search Gormley & Tong (2015) (**LogiGAN** *base*(ss+es)). For the large model, we use LogiGAN *large*(es+ss) as default. Practically, our database consists of 3.14 million sentences discovered by the corpus construction process, and we keep the top five similar retrieved sentences as training examples.

5 Experiments

5.1 Experiment Results

Table 1: Main results of LogiGAN on 12 downstream tasks (*development sets* judgement).

Multiple Choice & Classification Datasets						
Models / Dataset Metrics	ReClor <i>Acc</i>	LogiQA <i>Acc</i>	RACE <i>Acc</i>	DREAM <i>Acc</i>	ANLI <i>Acc</i>	MuTual <i>Acc</i>
Vanilla T5 <i>base</i>	35.20	27.19	63.89	59.36	44.10	67.38
LogiGAN <i>base</i> (ss)	40.20	34.72	67.13	63.38	49.50	69.41
LogiGAN <i>base</i> (ss+es)	40.00	37.02	67.27	63.73	49.70	69.98
Vanilla T5 <i>large</i>	50.40	38.56	78.99	78.98	58.00	76.41
LogiGAN <i>large</i>	54.80	40.55	80.67	81.42	63.50	77.88
Generation Datasets						
Models / Dataset Metrics	QuoRef EM/F ₁	HotpotQA EM/F ₁	NarrativeQA Rouge _L	TellMeWhy Rouge _L	SAMSum Rouge _L	XSum Rouge _L
Vanilla T5 <i>base</i>	70.76 / 74.58	61.11 / 74.86	48.11	30.03	39.32	29.14
LogiGAN <i>base</i> (ss)	75.02 / 78.68	62.68 / 76.14	49.44	31.18	39.92	30.26
LogiGAN <i>base</i> (ss+es)	74.94 / 78.40	62.80 / 76.18	49.46	31.15	40.21	30.27
Vanilla T5 <i>large</i>	80.06 / 83.25	66.11 / 79.80	51.09	31.42	41.40	31.58
LogiGAN <i>large</i>	81.92 / 85.25	67.04 / 80.36	51.79	32.72	43.13	33.49

As presented in Table 1, both base and large-sized PLMs further pre-trained with LogiGAN surpass their vanilla baselines across both discriminative and generative task formats, throughout the wide scope of reasoning tasks and scenarios of all datasets. We can make the following observations: Among all observed improvements, those on tasks with particular emphasis on logic (ReClor, LogiQA, and ANLI) are most noticeable. These positive results manifest the effectiveness of LogiGAN in injecting logic ability into PLMs, while testifying to our primary hypothesis that logic ability is fundamental to general reasoning as well. This conclusion answers the two questions in the intro section ⁶, suggesting that randomized MLM pre-training might fall short in endowing language models with logic ability, and a logic-targeted pre-training approach like LogiGAN may further assist logic learning beyond language acquisition. Furthermore, extra retrieved pseudo-statements (ss+es) bring some additional performance improvement compared with the pure self-sampling (ss) LogiGAN variant, revealing the important role of pseudo-statements’ *diversity* in adversarial training.

5.2 Ablation Study and Analysis

Observing the apparent performance enhancement, we now aim at pinpointing the truly functional components of LogiGAN through ablation studies and deriving the origins of observed improvements. For fair comparison purposes, we hold all pre-training and downstream settings (including hyper-parameters, implementation designs, and evaluations) unchanged from full LogiGAN. All variations are initialized from T5_{base}, and we report performance variance on 7 datasets.

I. Random Masked Sentence Prediction Pre-training To explain the observed improvements, our first hypothesis is: Models harvest *extra linguistic ability* from masked *statement* prediction compared

⁶Is logic ability obtained for free from MLM? Could it be further learned beyond language acquisition?

Table 2: Ablation Results on 7 datasets. The last column shows average performance variance, along with relative percentage improvement against vanilla T5_{base} as the baseline.

Models / Dataset Metrics	ReClor Acc	LogiQA Acc	RACE Acc	DREAM Acc	ANLI Acc	QuoRef EM/F ₁	NarrativeQA Rouge _L	— Average
Vanilla T5 _{base}	35.20	27.19	63.89	59.36	44.10	70.76 / 74.58	48.11	49.80 _(+0.0%)
LogiGAN _{base} (ss+es)	40.00	37.02	67.27	63.73	49.70	74.94 / 78.40	49.46	54.59 _(+9.6%)
I. Random Sentence	36.00	30.56	61.26	58.15	45.40	70.96 / 74.50	48.38	50.10 _(+0.6%)
II. MLE Logic Pre-train	38.80	35.02	64.55	61.71	46.00	73.61 / 76.96	49.30	52.71 _(+5.9%)
III. Iterative Multi-task	37.20	34.25	64.01	62.06	46.20	71.67 / 75.14	49.15	52.08 _(+4.6%)

with masked *token* (or *span*) prediction. Quite intuitively, filling entire sentences with complete subject-predicate structures might put additional demands on models to capture more abundant syntactic information beyond the coverage of masked token (or span) prediction. Since LogiGAN involves predicting corrupted sentences, it is then necessary to determine to what degree, if any, that the observed performance gain is attributable to models’ plausible linguistic ability improvement. We therefore carry out a variant pre-training where the prediction objects are *randomly masked sentence*.

Results (shown in Table 2) suggests masked sentence prediction training barely brings performance improvement against the vanilla baseline in most scenarios. This suggests that it is unlikely that masked sentence prediction empowers PLM trained from masked token prediction significantly better linguistic ability. The performance improvement should therefore derive from somewhere else.

II. MLE-only Logic Pre-training Our second hypothesis is that logic-guided masked statement prediction enhances models’ intrinsic ability of logical reasoning, thereby lifting the downstream performance. Having addressed the potential impact of learning randomized complete sentence generation, we next aim to check how learning logic-targeted statement generation affects models’ behavior. We ablate the entire adversarial training process, and train models to perform maximum likelihood estimation (MLE) with teacher-forcing loss only on masked-out logical statements.

Results 2 of MLE-only logic pre-training reveals quite a notable improvement across almost all datasets against both vanilla baseline and I., suggesting that learning to generate logical statements indeed injects extra abilities into the model. Since results of I. eliminate the possibility that models harvest stronger linguistic abilities from complete sentence prediction, it is safe to partially ascribe the better downstream performance to models’ enhanced ability in modeling logical reasoning. This reveals the relative orthogonality between logic ability and models’ inherent linguistic ability, suggesting that logic ability could be enhanced through further logic-targeted pre-training.

III. Iterative Multi-task Pre-training Since II. only partially accounts for the observed improvement, here is our last hypothesis: the adversarial training procedure of LogiGAN explains the unexplained rest part beyond the coverage of II. A multi-task pre-training with both generation and verification tasks will be the most natural intermediate setting between the single-model generation-only setting of II. and LogiGAN’s dual-model adversarial setting. However, since the verification task relies on Generator’s self-sampled statements, we adopt an iterative self-critic pre-training manner following Nijkamp et al. (2021). Unlike typical multi-tasking training that simultaneously carries different tasks and then sums the losses, our generation and verification tasks happen alternately⁷.

Surprisingly, the iterative multi-task pre-training barely brings any positive effects to models’ downstream performance compared with II. One possible explanation for this might be that the drastically different mechanisms between the verification and generations task intervene with each other, making the single-model & multi-task setting non-beneficial. Now that we have confirmed that an extra verification task fails to explain the rest improvement, we can accept our final hypothesis and conclude that it is indeed the adversarial mechanism between the Generator and Verifier that truly facilitate learning of logical reasoning, thereby further improving the downstream performance beyond II.

6 Discussion

Adversarial Training Might Assist Generative Downstream Tasks In our main experiments, we discard the Verifier and solve downstream tasks with the Generator only. According to our other empirical results, directly applying Verifier in downstream tasks leads to performance drop, which might be attributable to the strong inductive bias from the binary-classification pre-training task.

⁷Verification is formulated as a generation task – model outputs natural language token “good” and “bad”.

However, the pre-trained Verifier could still be useful: some previous works (Shen et al., 2021; Cobbe et al., 2021) reveal that the Verifier can be used for ranking multiple generation results, thereby effectively enhancing overall downstream accuracy. However, in their paradigm, the information propagates unidirectionally from the Generator to the Verifier, and the Generator cannot directly benefit from the Verifier’s discriminative feedback. In contrast, our LogiGAN adversarial training paradigm surmounts the non-differentiable obstacle and could potentially enlighten a new paradigm of both pre-training and downstream fine-tuning.

Improving Logical Pre-training Our paper demonstrates that PLMs’ logic ability can be further enhanced beyond their inherent linguistic ability, and adversarial training facilitates the learning of logic-targeted masked statement prediction. However, our heuristic-based approach to identifying logical phenomena in a text corpus and the single mask prediction setting can be further improved. Logic recognition methods with higher recall and better unsupervised task designs (e.g., *logical indicator prediction*, or *logic-guided sentence shuffling*) are worthwhile to explore in the further work. Besides, since we are adopting a general domain pre-training corpus (i.e., *BookCorpus*) with bare emphasis on logic, understanding the impacts of extending pre-training to the domain-specific corpus (e.g., law corpus) or others emphasizing logical reasoning is also substantial.

7 Related Works

Generative Adversarial Training in NLP. Unlike conventional GAN (Goodfellow et al., 2014; Mirza & Osindero, 2014; Zhu et al., 2017) that generates continuous output such as images, sequential GAN generates discrete sequences via non-differential searches. This makes feedback from the discriminator not propagatable to the generator. To tackle this challenge, **SeqGAN** (Yu et al., 2017) borrows an idea from reinforcement learning, treating each output token as a single action, and estimates token-wise policy gradient via Monte Carlo search. **RankGAN** (Lin et al., 2017) adopts a similar approach but breaks the binary-classification assumption of discriminator task design, and a ranker provides feedback to the generator. Their generator attempts to generate verisimilar sentences to deceive the ranker into ranking synthetic sentences higher over multiple human-written ones. In our scenario, however, the gold ranking is hard to determine because measuring which statements are more logically consistent w.r.t. context than others is non-trivial, and multi-gold cases are possible. While successfully enabling communication between generator and discriminator, the original designs of SeqGAN, RankGAN, as well as other works such as (Rekabdar et al., 2019; Fedus et al., 2018; Caccia et al., 2018; Guo et al., 2017), generally formulate text generation as a sequential action decision problem, thereby involving heavy sampling for policy gradient estimation, and are sensitive to the length of the target sequence. Since large-scale pre-training (with arbitrary target length) puts a high demand on scalability and computational efficiency, the above approaches are not readily applicable in our scenario. Furthermore, previous work leverages adversarial training to *improve qualities of generated examples*, whereas our focus is on *enhancing models’ intrinsic logic ability*.

A recent work, **AR2** (Zhang et al., 2021), leverages adversarial training to improve dense document retrieval. With a retriever-ranker architecture, the learning objective of retriever is to maximize the agreeableness between its own score assignment and that of the ranker for input documents. This is conceptually similar to LogiGAN, as our Generator also aims at reaching consensus with Verifier. However, AR2 does not fall into the sequential GAN paradigm, since it does not involve any sequential text generation, and there is no non-differentiable barrier between the retriever and ranker.

Pre-training for Reasoning Ability Improvement. Previous works have extensively investigated the possibility of injecting specific type of reasoning via pre-training, such as numerical (Pi et al., 2022; Geva et al., 2020; Yoran et al., 2021), commonsense (Tamborrino et al., 2020; Staliunaite et al., 2021; Zhong et al., 2019), formal logic (Wang et al., 2021; Pi et al., 2022), multi-hop (Deng et al., 2021; Zhong et al., 2022), and tabular (Liu et al., 2021b) reasoning. Different from them, LogiGAN focuses on logic reasoning, which plays a fundamental role in general reasoning via natural language.

8 Conclusion

In this work, we hypothesize that (i) logic ability plays a key role in a wide scope of tasks requiring general reasoning; and (ii) PLMs’ logic ability can be further improved beyond their original linguistic

ability. We correspondingly propose LogiGAN, an unsupervised adversarial pre-training framework for logical reasoning enhancement. LogiGAN circumvents the non-differentiable challenge of sequential GAN via a novel Generator-Verifier scoring consensus mechanism, and enables large-scale pre-training with arbitrary target length. Extensive experiments and ablation studies reveal the effectiveness and functional components of LogiGAN, providing evidence to our major hypothesis.

References

- Rob Abbott, Brian Ecker, Pranav Anand, and Marilyn A. Walker. Internet argument corpus 2.0: An sql schema for dialogic social media and the corpora to go with it. In *LREC*, 2016.
- David Boud, Rosemary Keogh, and David Walker. *Reflection: Turning experience into learning*. Routledge, 2013.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. *CoRR*, abs/2005.14165, 2020. URL <https://arxiv.org/abs/2005.14165>.
- Sasa Buvac and Ian A Mason. Propositional logic of context. In *AAAI*, pp. 412–419, 1993.
- Massimo Caccia, Lucas Caccia, William Fedus, Hugo Larochelle, Joelle Pineau, and Laurent Charlin. Language gans falling short. *CoRR*, abs/1811.02549, 2018. URL <http://arxiv.org/abs/1811.02549>.
- Wenhu Chen, Hanwen Zha, Zhiyu Chen, Wenhan Xiong, Hong Wang, and William Yang Wang. HybridQA: A dataset of multi-hop question answering over tabular and textual data. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pp. 1026–1036, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.findings-emnlp.91. URL <https://aclanthology.org/2020.findings-emnlp.91>.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- Leyang Cui, Yu Wu, Shujie Liu, Yue Zhang, and Ming Zhou. Mutual: A dataset for multi-turn dialogue reasoning. *CoRR*, abs/2004.04494, 2020. URL <https://arxiv.org/abs/2004.04494>.
- Pradeep Dasigi, Nelson F. Liu, Ana Marasović, Noah A. Smith, and Matt Gardner. Quoref: A reading comprehension dataset with questions requiring coreferential reasoning. In *EMNLP*, 2019.
- Xiang Deng, Yu Su, Alyssa Lees, You Wu, Cong Yu, and Huan Sun. ReasonBERT: Pre-trained to reason with distant supervision. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 6112–6127, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. URL <https://aclanthology.org/2021.emnlp-main.494>.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: pre-training of deep bidirectional transformers for language understanding. *CoRR*, abs/1810.04805, 2018. URL <http://arxiv.org/abs/1810.04805>.
- Giada Di Stefano, Francesca Gino, Gary P Pisano, and Bradley R Staats. Making experience count: The role of reflection in individual learning. *Harvard Business School NOM Unit Working Paper*, (14-093):14–093, 2016.
- Y. Dote. Introduction to fuzzy logic. In *Proceedings of IECON '95 - 21st Annual Conference on IEEE Industrial Electronics*, volume 1, pp. 50–56 vol.1, 1995. doi: 10.1109/IECON.1995.483332.

- Igor Douven. Abduction. In Edward N. Zalta (ed.), *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, Summer 2021 edition, 2021.
- Dheeru Dua, Yizhong Wang, Pradeep Dasigi, Gabriel Stanovsky, Sameer Singh, and Matt Gardner. Drop: A reading comprehension benchmark requiring discrete reasoning over paragraphs. In *NAACL*, 2019.
- William Fedus, Ian Goodfellow, and Andrew M. Dai. Maskgan: Better text generation via filling in the, 2018. URL <https://arxiv.org/abs/1801.07736>.
- J. Firth. A synopsis of linguistic theory 1930-1955. In *Studies in Linguistic Analysis*. Philological Society, Oxford, 1957. reprinted in Palmer, F. (ed. 1968) *Selected Papers of J. R. Firth*, Longman, Harlow.
- Yifan Gao, Chien-Sheng Wu, Jingjing Li, Shafiq Joty, Steven CH Hoi, Caiming Xiong, Irwin King, and Michael R Lyu. Discern: Discourse-aware entailment reasoning network for conversational machine reading. *arXiv preprint arXiv:2010.01838*, 2020.
- Yifan Gao, Jingjing Li, Michael R Lyu, and Irwin King. Open-retrieval conversational machine reading. *arXiv preprint arXiv:2102.08633*, 2021.
- Mor Geva, Ankit Gupta, and Jonathan Berant. Injecting numerical reasoning skills into language models. *CoRR*, abs/2004.04487, 2020. URL <https://arxiv.org/abs/2004.04487>.
- Bogdan Gliwa, Iwona Mochol, Maciej Biesek, and Aleksander Wawer. SAMSum corpus: A human-annotated dialogue dataset for abstractive summarization. In *Proceedings of the 2nd Workshop on New Frontiers in Summarization*, pp. 70–79, Hong Kong, China, November 2019. Association for Computational Linguistics. doi: 10.18653/v1/D19-5409. URL <https://aclanthology.org/D19-5409>.
- Ian J. Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial networks, 2014. URL <https://arxiv.org/abs/1406.2661>.
- Clinton Gormley and Zachary J. Tong. *Elasticsearch: The definitive guide*. 2015.
- Leo Groarke. Informal Logic. In Edward N. Zalta (ed.), *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, Fall 2021 edition, 2021.
- Jiaxian Guo, Sidi Lu, Han Cai, Weinan Zhang, Yong Yu, and Jun Wang. Long text generation via adversarial training with leaked information. *CoRR*, abs/1709.08624, 2017. URL <http://arxiv.org/abs/1709.08624>.
- Chadi Helwe, Chloé Clavel, and Fabian M Suchanek. Reasoning with transformer-based models: Deep learning, but shallow reasoning. In *3rd Conference on Automated Knowledge Base Construction*, 2021.
- Patrick Hurley. *A Concise Introduction to Logic*. Belmont, CA, USA: Wadsworth, 1982.
- Nora Kassner and Hinrich Schütze. Negated LAMA: birds cannot fly. *CoRR*, abs/1911.03343, 2019. URL <http://arxiv.org/abs/1911.03343>.
- Brianna L Kennedy and Robert Thornberg. Deduction, induction, and abduction. *The SAGE handbook of qualitative data collection*, pp. 49–64, 2018.
- Sosuke Kobayashi. Homemade bookcorpus. <https://github.com/BIGBALLON/cifar-10-cnn>, 2018.
- Solomon Kullback and Richard A Leibler. On information and sufficiency. *The annals of mathematical statistics*, 22(1):79–86, 1951.
- Guokun Lai, Qizhe Xie, Hanxiao Liu, Yiming Yang, and Eduard Hovy. Race: Large-scale reading comprehension dataset from examinations. *arXiv preprint arXiv:1704.04683*, 2017.

- Yash Kumar Lal, Nathanael Chambers, Raymond Mooney, and Niranjan Balasubramanian. Tellme-why: A dataset for answering why-questions in narratives. *CoRR*, abs/2106.06132, 2021. URL <https://arxiv.org/abs/2106.06132>.
- Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. ALBERT: A lite BERT for self-supervised learning of language representations. *CoRR*, abs/1909.11942, 2019. URL <http://arxiv.org/abs/1909.11942>.
- Jingjing Li, Zichao Li, Tao Ge, Irwin King, and Michael R Lyu. Text revision by on-the-fly representation optimization. *arXiv preprint arXiv:2204.07359*, 2022.
- Kevin Lin, Dianqi Li, Xiaodong He, Ming-Ting Sun, and Zhengyou Zhang. Adversarial ranking for language generation. In *NIPS*, 2017.
- Jian Liu, Leyang Cui, Hanmeng Liu, Dandan Huang, Yile Wang, and Yue Zhang. Logiqa: A challenge dataset for machine reading comprehension with logical reasoning. In *Proceedings of the Twenty-Ninth International Joint Conference on Artificial Intelligence, IJCAI'20*, 2021a. ISBN 9780999241165.
- Qian Liu, Bei Chen, Jiaqi Guo, Zeqi Lin, and Jian-Guang Lou. TAPEX: table pre-training via learning a neural SQL executor. *CoRR*, abs/2107.07653, 2021b. URL <https://arxiv.org/abs/2107.07653>.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized BERT pretraining approach. *CoRR*, abs/1907.11692, 2019. URL <http://arxiv.org/abs/1907.11692>.
- Mehdi Mirza and Simon Osindero. Conditional generative adversarial nets. *CoRR*, abs/1411.1784, 2014. URL <http://arxiv.org/abs/1411.1784>.
- Jennifer A Moon. *Reflection in learning and professional development: Theory and practice*. Routledge, 2013.
- Ronald Munson. *The Way of Words an Informal Logic*. Boston, MA, USA: Houghton Mifflin School, 1976.
- Shashi Narayan, Shay B. Cohen, and Mirella Lapata. Don't give me the details, just the summary! Topic-aware convolutional neural networks for extreme summarization. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, Brussels, Belgium, 2018.
- Yixin Nie, Adina Williams, Emily Dinan, Mohit Bansal, Jason Weston, and Douwe Kiela. Adversarial NLI: A new benchmark for natural language understanding. *CoRR*, abs/1910.14599, 2019. URL <http://arxiv.org/abs/1910.14599>.
- Erik Nijkamp, Bo Pang, Ying Nian Wu, and Caiming Xiong. SCRIPT: Self-critic PreTraining of transformers. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 5196–5202, Online, June 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.naacl-main.409. URL <https://aclanthology.org/2021.naacl-main.409>.
- Xinyu Pi, Qian Liu, Bei Chen, Morteza Ziyadi, Zeqi Lin, Yan Gao, Qiang Fu, Jian-Guang Lou, and Weizhu Chen. Reasoning like program executors. *CoRR*, abs/2201.11473, 2022. URL <https://arxiv.org/abs/2201.11473>.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67, 2020. URL <http://jmlr.org/papers/v21/20-074.html>.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. Squad: 100, 000+ questions for machine comprehension of text. *CoRR*, abs/1606.05250, 2016. URL <http://arxiv.org/abs/1606.05250>.

- Jo Reichertz. 4.3 abduction, deduction and induction in qualitative research. *A Companion to*, pp. 159, 2004.
- Jo Reichertz. *Abduction: The logic of discovery of grounded theory*. Sage London, 2007.
- Jo Reichertz. Induction, deduction. *The SAGE handbook of qualitative data analysis*, pp. 123–135, 2013.
- Banafsheh Rekabdar, Christos Mousas, and Bidyut Gupta. Generative adversarial network with policy gradient for text summarization. *2019 IEEE 13th International Conference on Semantic Computing (ICSC)*, pp. 204–207, 2019.
- Tomáš Kořický, Jonathan Schwarz, Phil Blunsom, Chris Dyer, Karl Moritz Hermann, Gábor Melis, and Edward Grefenstette. The NarrativeQA reading comprehension challenge. *Transactions of the Association for Computational Linguistics*, TBD:TBD, 2018. URL <https://TBD>.
- Maarten Sap, Vered Shwartz, Antoine Bosselut, Yejin Choi, and Dan Roth. Commonsense reasoning for natural language processing. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: Tutorial Abstracts*, pp. 27–33, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-tutorials.7. URL <https://aclanthology.org/2020.acl-tutorials.7>.
- Jianhao Shen, Yichun Yin, Lin Li, Lifeng Shang, Xin Jiang, Ming Zhang, and Qun Liu. Generate & rank: A multi-task framework for math word problems. *CoRR*, abs/2109.03034, 2021. URL <https://arxiv.org/abs/2109.03034>.
- Raymond Merrill Smullyan. *First-Order Logic*. Berlin, Germany: New York [Etc.]Springer-Verlag, 1968.
- Ieva Staliunaite, Philip John Gorinski, and Ignacio Iacobacci. Improving commonsense causal reasoning by adversarial training and data augmentation. *CoRR*, abs/2101.04966, 2021. URL <https://arxiv.org/abs/2101.04966>.
- Kai Sun, Dian Yu, Jianshu Chen, Dong Yu, Yejin Choi, and Claire Cardie. DREAM: A challenge dataset and models for dialogue-based reading comprehension. *Transactions of the Association for Computational Linguistics*, 2019. URL <https://arxiv.org/abs/1902.00164v1>.
- Xin Sun, Tao Ge, Shuming Ma, Jingjing Li, Furu Wei, and Houfeng Wang. A unified strategy for multilingual grammatical error correction with pre-trained cross-lingual language model. *arXiv preprint arXiv:2201.10707*, 2022.
- Reid Swanson, Brian Ecker, and Marilyn Walker. Argument mining: Extracting arguments from online dialogue. In *Proceedings of the 16th Annual Meeting of the Special Interest Group on Discourse and Dialogue*, pp. 217–226, Prague, Czech Republic, September 2015. Association for Computational Linguistics. doi: 10.18653/v1/W15-4631. URL <https://aclanthology.org/W15-4631>.
- Alexandre Tamborrino, Nicola Pellicano, Baptiste Pannier, Pascal Voitot, and Louise Naudin. Pre-training is (almost) all you need: An application to commonsense reasoning. *CoRR*, abs/2004.14074, 2020. URL <https://arxiv.org/abs/2004.14074>.
- Timon Ten Berge and René Van Hezewijk. Procedural and declarative knowledge: An evolutionary perspective. *Theory & Psychology*, 9(5):605–624, 1999.
- Michael T Ullman. A neurocognitive perspective on language: The declarative/procedural model. *Nature reviews neuroscience*, 2(10):717–726, 2001.
- Marilyn Walker, Jean Fox Tree, Pranav Anand, Rob Abbott, and Joseph King. A corpus for research on deliberation and debate. In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC’12)*, pp. 812–817, Istanbul, Turkey, May 2012. European Language Resources Association (ELRA). URL http://www.lrec-conf.org/proceedings/lrec2012/pdf/1078_Paper.pdf.

- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. GLUE: A multi-task benchmark and analysis platform for natural language understanding. *CoRR*, abs/1804.07461, 2018. URL <http://arxiv.org/abs/1804.07461>.
- Siyuan Wang, Wanjun Zhong, Duyu Tang, Zhongyu Wei, Zhihao Fan, Daxin Jiang, Ming Zhou, and Nan Duan. Logic-driven context extension and data augmentation for logical reasoning of text. *arXiv preprint arXiv:2105.03659*, 2021.
- Siyuan Wang, Zhongkun Liu, Wanjun Zhong, Ming Zhou, Zhongyu Wei, Zhumin Chen, and Nan Duan. From lsat: The progress and challenges of complex reasoning. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 2022.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. Transformers: State-of-the-art natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pp. 38–45, Online, October 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-demos.6. URL <https://aclanthology.org/2020.emnlp-demos.6>.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William W. Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. Hotpotqa: A dataset for diverse, explainable multi-hop question answering. *CoRR*, abs/1809.09600, 2018a. URL <http://arxiv.org/abs/1809.09600>.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William W. Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. HotpotQA: A dataset for diverse, explainable multi-hop question answering. In *Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2018b.
- Ori Yoran, Alon Talmor, and Jonathan Berant. Turning tables: Generating examples from semi-structured tables for endowing language models with reasoning skills. *CoRR*, abs/2107.07261, 2021. URL <https://arxiv.org/abs/2107.07261>.
- Lantao Yu, Weinan Zhang, Jun Wang, and Yong Yu. Seqgan: Sequence generative adversarial nets with policy gradient. In *Proceedings of the Thirty-First AAAI Conference on Artificial Intelligence, AAAI’17*, pp. 2852–2858. AAAI Press, 2017.
- Weihao Yu, Zihang Jiang, Yanfei Dong, and Jiashi Feng. Reclor: A reading comprehension dataset requiring logical reasoning. In *International Conference on Learning Representations (ICLR)*, April 2020.
- Hang Zhang, Yeyun Gong, Yelong Shen, Jiancheng Lv, Nan Duan, and Weizhu Chen. Adversarial retriever-ranker for dense text retrieval. *CoRR*, abs/2110.03611, 2021. URL <https://arxiv.org/abs/2110.03611>.
- Wanjun Zhong, Duyu Tang, Nan Duan, Ming Zhou, Jiahai Wang, and Jian Yin. Improving question answering by commonsense-based pre-training. In *CCF International Conference on Natural Language Processing and Chinese Computing*, pp. 16–28. Springer, 2019.
- Wanjun Zhong, Duyu Tang, Zhangyin Feng, Nan Duan, Ming Zhou, Ming Gong, Linjun Shou, Daxin Jiang, Jiahai Wang, and Jian Yin. Logicalfactchecker: Leveraging logical operations for fact checking with graph module network. *arXiv preprint arXiv:2004.13659*, 2020.
- Wanjun Zhong, Siyuan Wang, Duyu Tang, Zenan Xu, Daya Guo, Jiahai Wang, Jian Yin, Ming Zhou, and Nan Duan. Ar-lsat: Investigating analytical reasoning of text. *arXiv preprint arXiv:2104.06598*, 2021.
- Wanjun Zhong, Junjie Huang, Qian Liu, Ming Zhou, Jiahai Wang, Jian Yin, and Nan Duan. Reasoning over hybrid chain for table-and-text open domain qa. *arXiv preprint arXiv:2201.05880*, 2022.
- Jun-Yan Zhu, Taesung Park, Phillip Isola, and Alexei A. Efros. Unpaired image-to-image translation using cycle-consistent adversarial networks. *CoRR*, abs/1703.10593, 2017. URL <http://arxiv.org/abs/1703.10593>.

A Thinking Straight about Reasoning in NLP

The following argument is tentative and is deduced with bounded rationality, and is **for communication purposes only**. We realize and well acknowledge that researchers observing different sets of evidence could hold fundamentally different but reasonable views from ours.

A.1 Conundrums of Reasoning

Along with the increasing interest in reasoning, multiple reasoning terms are proposed – hybrid reasoning, commonsense reasoning, numerical reasoning, multi-hop reasoning, and unspecified general reasoning, to name a few. However, among all these scattered and distinctive types of reasoning, what is varying? What essence remains constant regardless of the variety of forms? If we were to arrange these reasoning into a hierarchical structure much like a biological taxonomy or to group them into categories, what standard should we follow? How should we put boundaries between each type of reasoning? To the best of our knowledge, few works from the NLP community articulated these queries well. There seems to be a **conceptual conundrum** of reasoning.

Moreover, the ethereal and shapeless nature of reasoning makes it not as visible or concrete as tokens or spans that are readily accessible to the masked language modeling pre-training paradigm. How could we then systematically inject reasoning ability into models via pre-training? What is the nature of this ethereal ability are we truly pursuing? More fundamentally, is pre-training the correct way to add reasoning abilities into language models? Should reasoning abilities be acquired during the pre-training stage, or should it be subsequently tackled by outsourcing symbolic modules (i.e., with neural-symbolic models)? There seems to be a **methodological conundrum** of reasoning.

These questions are non-trivial to answer, and these morals are hard to tell. However, it is quite unlikely that we can solve the reasoning challenge before articulating what the challenge truly is.

A.2 Reasoning in our Sense

As defined in the introduction section, reasoning (via natural language) is an *inferential process where an unstated statement is drawn based on several presented statements*. Specifically for deductive and inductive reasoning, a conclusion is drawn from provided premises under the guidance of logic. Here is an example of the most trivial cases of such reasoning: given premises “Bob’s daughter is called Lily. Lily is now 3 years old.”, concluding “Thus, Bob’s daughter is 3 years old.” requires shallow synthesis between exactly-matched subject and predicate terms.

However, in complex machine reading comprehension tasks, such single-step synthesis can be arbitrarily long-chained (e.g., requires 5 syntheses, and combined with semantic-invariant linguistic transformations such as synonym replacements and syntactic transformations). As a result, reasoning over long and rhetorically sophisticated articles becomes non-trivial, demanding highly on both linguistic and logic abilities.

Apart from linguistic transformations, synthesizing among statements usually requires specific synthesis rules of statements. For example, the synthesis rule of degree comparison “Elephants are larger than dogs. Tigers are larger than dogs.” → “Elephants are larger than dogs.” does not apply to the case “In Pokemon, the water type is strong against the fire type, and the fire type is strong against the grass type.” since the conclusion is guided by the same rule “Therefore, the water type is strong against the grass type.” fallaciously contradicts reality. Putting into broader domains, mathematics (e.g., arithmetic operators, set operators), formal logic (e.g., quantifiers, logic operators), and most artificial symbolic systems implement their own synthesis rules as standards of correctness. Therefore, while the forms of reasoning remain relatively invariant, the underlying synthesis mechanism could be drastically different from system to system. Among all these symbolic reasoning, the reasoning in NLP focuses primarily on reasoning via natural language – i.e., linguistics as synthesis rules.

A.3 General Reasoning and Specialized Reasoning

Following the definition of reasoning we make in the previous subsection, we are now able to tentatively categorize all investigations of reasoning in NLP into two families: **Specialized Reasoning and General Reasoning**. We discuss them separately below:

I. Specialized Reasoning can be further divided into sub-categories:

(a) *Reasoning requiring special way of premise extraction*, such as multi-hop reasoning (Yang et al., 2018b), tabular reasoning (Zhong et al., 2020), and hybrid reasoning (Chen et al., 2020). The foremost assumption in this scenario is that the input context has already provided all premises necessary to draw targeted conclusions. If we humans are trying to answer a question correctly (i.e., with both correct answers and reasons), we will have to first seek back-and-forth across multiple documents or paragraphs (multi-hop) or rows and columns (tabular) to extract premises for answering this question. Based on these extracted premises, we then follow the logic rules and synthesize a conclusion from these premises to answer the question. Not drastically different from humans, in such complex reasoning scenarios where spurious patterns are mostly unreliable, machines will also have to identify the necessary premises correctly to reach correct conclusions. With all relevant and necessary premises extracted, the rest of the reasoning are reducible to general reasoning described below in II.

(b) *Reasoning requiring external premises*, such as numerical reasoning (Dua et al., 2019), symbolic reasoning (Zhong et al., 2021), domain-specific reasoning (Wang et al., 2022; Gao et al., 2021), and commonsense reasoning (Sap et al., 2020; Zhong et al., 2019). This family of reasoning requires external knowledge that is harder to be acquired via typical language modeling pre-training. Here we emphasize that knowledge can either be *declarative* or *procedural*, following the theory from psychology (Ten Berge & Van Hezewijk, 1999; Ullman, 2001). For example, the commonsense knowledge “There are 365 days in a year on earth.”, or knowledge of historical events can be primarily declarative (i.e., can be articulated with language). Other not readily articulable knowledge, such as swimming, and performing complex arithmetics by hand (e.g. $1969 * 331$) are primarily procedural.

In fact, humans need extra learning to acquire specialized knowledge. For example, we do not acquire knowledge of mathematics or domain expertise for free from language learning. Just as “import PyTorch” is a necessary dependency to implement our neural models in Python, we have to implicitly invoke established mathematics rules to perform calculations, and invoke domain-specific knowledge or laws as premises to make scientific arguments. Machines are generally no different. One special type of premise is commonsense, a large set of knowledge that human effortlessly obtains from multi-modal life experiences. Suppose all necessary premises are readily invoked and stated in natural language, the rest of the reasoning proceeds just as general reasoning, which is discussed below in II.

II. General Reasoning General reasoning covers a broad unspecified form of reasoning that involves recognizing and understanding relevant concepts framed in plain text as premises and then synthesizing them into conclusions. Typically, it assumes stated premises are mostly self-contained (i.e., sufficient for drawing certain conclusions), and require little or no external knowledge to be additionally invoked beyond the given context. Moreover, since premises are presented in a plain text format, general reasoning does not require special ways of extracting premises from context (e.g., structured data such as tables). The general reasoning is pervasive in tasks emphasizing natural language understanding (NLU), such as machine reading comprehension (Gao et al., 2020) and natural language inference (Nie et al., 2019). General reasoning also serves as an underlying foundation of other specialized reasoning tasks, since most of them can be conditionally reducible to general reasoning, as discussed earlier.

During general reasoning processes, premises can be organized into a logic chain via procedures such as alignment of semantically similar concepts, understanding relations among sentences, and synthesizing sub-conclusions from specific subsets of premises. **Logic** is the systemic set of principles created for providing correctness assurance to conclusions inferred following such logic chains, upon examination of coherency and consistency of chains⁸. Invocation of logic is therefore necessary for reasoning to be correct (i.e., obtaining correct conclusions from correct reasons) – although humans and machines usually carry this out implicitly. Conclusively, logic is the core engine for general reasoning. *This completes our analysis on logic and reasoning from the introduction section.*

Some Comments on our Categorization Regarding I-(b), we realize it might be less intuitive or even controversial to consider procedural knowledge as “premises”. In contrast with crystallized declarative knowledge that resembles more of *String type variables* in computer programs, fluid procedural knowledge resembles more of *functions* – although functions have well-defined function

⁸Notice that premises from given context are assumed to be true when solving NLP downstream tasks.

bodies while procedural knowledge is usually beyond words. Therefore, tasks requiring external declarative knowledge (e.g., commonsense, domain-specific expertise) and procedural knowledge (e.g. symbolic calculations formal logic, arithmetics) might be further divided into two sub-categories.

Apart from the above, our coverage bounds to deductive and inductive reasoning via natural language. Abductive reasoning is the reverse reasoning process where premises are hypothesized to explain or support some stated conclusion, and symbolic reasoning is beyond the coverage of linguistics.

B Bridging the Gap between Pseudo and Logical Inconsistency

As mentioned in the footnote of Sec. 3 (The Adversarial Training Framework) from the main text, there is a gap between pseudo-statements that are either self-sampled from the Generator or retrieved and logically inconsistent statements. i.e., there might be logically consistent statements that should have received a positive label when training the Verifier assigned with a negative label since they are pseudo. This could potentially introduce noise signals in the training of the Verifier.

To bridge this gap, we propose a trick that leverages off-the-shelf Natural Language Inference (NLI) models to make judgment on the textual entailment between the pseudo-statement and the ground-truth statement. Our basic intuition here is that: suppose a pseudo-statement implies or is implied by the ground-truth statement, then this pseudo-statement is also expected to be logically consistent w.r.t. the original context, just as the ground-truth one.

For example, in the example of Fig. 1 (LogiGAN Overview), with context, “*All men are mortal, and Socrates is a man. Therefore, [MASK].*”, the ground-truth statement “*Socrates is mortal.*” implies the self-sampled pseudo-statement “*Socrates will eventually die.*” from Generator, vice versa. Hence this pseudo-statement should receive a positive label (i.e., $y = 1$) for training Verifier, who learns to discriminate logical consistency of statements w.r.t. input context, instead of merely capturing fake examples. In contrast, the first retrieved pseudo-statement “*a mortal can never be a god.*” does not entail, nor is entailed by, the ground-truth statement. Therefore this pseudo-statement will have a negative label for training Verifier.

Technically, we employ “`ynie/albert-xxlarge-v2-snli_mnli_fever_anli_R1_R2_R3-nli`” from Huggingface, a well-trained NLI model (denoted as \mathcal{F}), to determine the textual entailment relationship between ground-truth and pseudo-statements. The process can be formally expressed as:

$$e(s^+, s^-) = \max(\mathcal{F}(s^+, s^-), \mathcal{F}(s^-, s^+)),$$

where $e(s^+, s^-)$ represents the entailment score between the ground-truth statement s^+ and a pseudo-statement s^- . To determine the final label for training Verifier, we set a hard threshold of 0.50 – above results in $y = 1$ below turns to $y = 0$. According to our statistical study, this extra NLI mechanism flips around 12% of the pseudo-statements (whose default labels are negative) to $y = 1$. With our human evaluation, the flipped pseudo-statements are indeed logically consistent w.r.t. the original context in most cases.

As an emphasis, the NLI model and the Verifier are making judgment on different things. The NLI does not consider the original context and merely judges the entailment of a statement pair, whereas the Verifier judges one statement’s logical consistency w.r.t. the context at a time. The signal from the NLI serves noisy and indirect supervision in Verifier’s learning process, and we are leveraging the intrinsic denoising ability of large pre-trained language models. Ablation of this mechanism results in a minor performance drop, but not significant enough to include in our main ablation study, so we are omitting this in the main text.

C List of Logic Indicators

Conclusion Indicators (41 in total): therefore, thereby, wherefore, accordingly, we may conclude, entails that, hence, thus, consequently, we may infer, it must be that, whence, so that, so, it follows that, implies that, as a result, it can be inferred that, suggests that, can conclude, proves that, it can be shown, as a conclusion, conclusively, which implies that, for that reason, as a consequence, on that account, that being said, in conclusion, to that end, for this reason, on account of, because of this, that being so, because of that, ergo, in this way, in this manner, in such a manner, by such means.

Premise Indicators (20 in total): since, on account of, considering, because of, because, due to, now that, in order, as indicated by, because, may be inferred from, given that, owing to, by virtue of, owing to, on account of, in view of, for the sake of, thanks to, reason that.

D Implementation Details

LogiGAN Details. We randomly sample 2 million and 0.5 million for source training examples of Generator and Verifier, respectively (i.e., $M = 2$ million, $N = 0.5$ million in Algorithm 1 in the main text). We partition the source Generator training corpus into two 1 million subsets for warmup and GAN training (i.e., $M_\alpha = M_\beta = 1$ million). In each iteration of GAN training, 10% or 0.05 million and 0.1 million examples are sampled for Verifier and Generator training (i.e., $m = 0.05$ million, $n = 0.1$ million). The warm-up epoch E is set to 5, whereas the max number of GAN iteration is set to 10. For our main experiments, we initialize the Generator from pre-trained “google/t5-v1_1-base” or “google/t5-v1_1-large”, and the Verifier as “albert-large-v2” from HuggingFace (Wolf et al., 2020).

We use 8 V100 GPUs for model training, and set the maximum iterations of adversarial training as 15, and set batch size as 8 and 64 for Generator and Verifier training. During Generator training, we put both the only one ground-truth statement, and 5 candidate statements for each instance within the same batch. By default, we adopt learning rate as $5e-5$, $1e-5$ for the training of Generator and Verifier during adversarial process, respectively.

Downstream Details. Our tested downstream datasets mainly belong to two types: generation-based datasets (like extractive QA, abstractive QA, summarization, etc.), and classification datasets (like natural language inference, and multiple-choice QA). We introduce how we process the inputs and outputs for each downstream tasks and the hyper-parameters for fine-tuning.

For the generation-based datasets, we adopt simple hard prompts to write the task input. For example, for the generative QA task, we formulate the input with “*The question is: {question}. The context is: {context}, please give the answer*”. For the classification datasets, with the context (optionally question and options) given as the inputs, the target sequence is one of the options, like “entailment” for NLI datasets or one candidate answer for MRC datasets. For example, for the multiple-choice QA task, we prompt the input as “*The question is: {question}. The options are: {options}. The context is: {context}, please select the best option.*”, where the output is the specific content of the option. We make the final choice of option by selecting the option with the highest text similarity score calculated by the model output and the context of each option.

During fine-tuning, we don’t perform exhaustive parameter searches for each task. We adopt the learning rate as either $1e-4$ or $5e-5$ for each task, depending on which one will lead to stable performance. We adopt 8 V100 GPUs for fine-tuning and set batch size as 32 for the base model, and 8 for the large model.

E Few-shot Experiments

Table 3: LogiGAN Few-shot Setting Performance.

Models/Datasets metrics	RACE <i>Acc</i>	DREAM <i>Acc</i>	ReCLor <i>Acc</i>	LogiQA <i>Acc</i>	ANLI <i>Acc</i>	NarrativeQA <i>Rouge_L</i>	α NLG <i>Rouge_L</i>	xsum <i>Rouge_L</i>	samsum <i>Rouge_L</i>
Vanilla T5 <i>base</i>	25.27	34.09	26.20	23.34	33.50	5.86	10.90	13.67	13.52
Random Sentence	25.26	32.50	26.80	25.03	33.70	16.79	18.28	15.39	26.52
LogiGAN-es <i>base</i>	26.28	35.05	28.40	26.57	35.60	18.83	20.80	17.34	27.93

As a supplementary experiment, we also explore LogiGAN’s impact under a data-scarce setting. For each dataset, we randomly select 32 samples and fine-tune models until convergence. To decouple the complete sentence generation and logic learning in the logic-targeted masked statement prediction process, we also add the random sentence pre-training setting into the comparison. This could reveal to what extent the performance variance is explained by the linguistic logic ability improvement separately. Results of provide more evidence for our hypothesis that logic ability and linguistic ability have non-overlapping components.

F LogiGAN Training with Policy Gradient

This is to show the overall optimization goal of the adversarial training (Eq. 2 in the main):

$$J^{\mathcal{G}^* \cdot \mathcal{V}^*} = \min_{\theta} \max_{\phi} \mathbb{E}_{s^+ \sim p_{\text{true}}(\cdot | c)} [\log \mathcal{V}_{\phi}(c, s^+)] + \mathbb{E}_{s^- \sim p_{\text{neg}}(\cdot | \mathcal{G}_{\theta}, c, s^+)} [\log (1 - \mathcal{V}_{\phi}(c, s^-))].$$

is reducible to the optimization problem of KL-divergence in Generator training in (Eq. 7). First of all, we can discard the irrelevant terms of Eq. 2:

$$\begin{aligned} J^{\mathcal{G}^*} &= \min_{\theta} \mathbb{E}_{s^- \sim p(\cdot | \mathcal{G}_{\theta}, c, s^+)} \log (1 - \mathcal{V}_{\phi}(c, s^-)) \\ &= \max_{\theta} \mathbb{E}_{s^- \sim p(\cdot | \mathcal{G}_{\theta}, c, s^+)} \log (\mathcal{V}_{\phi}(c, s^-)) \\ &\approx \max_{\theta} \mathbb{E}_{s^- \sim p(\cdot | \mathcal{G}_{\theta}, c, s^+)} \mathcal{V}_{\phi}(c, s^-). \end{aligned} \tag{8}$$

Since the sampling process of s^- is discrete, we cannot directly optimize the \mathcal{G}^* with gradient descent. Following previous works in Sequential GAN, we apply the policy gradient approach.

$$\begin{aligned} \nabla_{\theta} \hat{J}^{\mathcal{G}^*} &= \nabla_{\theta} \mathbb{E}_{s^- \sim p_{\theta}(\cdot | c)} \mathcal{V}_{\phi}(c, s^-) \\ &= \sum_i \nabla_{\theta} p_{\theta}(s_i^- | c) \mathcal{V}_{\phi}(c, s_i^-) \\ &= \sum_i p_{\theta}(s_i^- | c) \nabla_{\theta} \log p_{\theta}(s_i^- | c) \mathcal{V}_{\phi}(c, s_i^-) \\ &= \mathbb{E}_{s^-} [\nabla_{\theta} \log p_{\theta}(s_i^- | c) \mathcal{V}_{\phi}(c, s_i^-)] \\ &\approx \frac{1}{K} \sum_{k=1}^K \nabla_{\theta} \log p_{\theta}(s_i^- | c) \mathcal{V}_{\phi}(c, s_k^-) \\ &= \nabla_{\theta} \frac{1}{K} \sum_{k=1}^K [-\mathcal{V}_{\phi}(c, s_i^-) \log \mathcal{V}_{\phi}(c, s_i^-) + \log p_{\theta}(s_i^- | c) \mathcal{V}_{\phi}(c, s_i^-)] \\ &= \nabla_{\theta} -D_{\text{KL}}(\mathcal{V}_{\phi}(c, s_k^-), p_{\theta}(\cdot | c)) \end{aligned} \tag{9}$$

which is equivalent to minimizing \mathcal{L}_{gen} as described in Eq. 7 from the main text.