
Integral Migrating Pre-trained Transformer Encoder-decoders for Visual Object Detection

Xiaosong Zhang^{1*} Feng Liu^{1*} Zhiliang Peng¹ Zonghao Guo¹ Fang Wan¹

Xiangyang Ji^{2†}

Qixiang Ye^{1†}

University of Chinese Academy of Sciences, 100049, Beijing, China¹
Department of Automation, Tsinghua University, 100084, Beijing, China²

Abstract

Modern object detectors have taken the advantages of pre-trained vision transformers by using them as backbone networks. However, except for the backbone networks, other detector components, such as the detector head and the feature pyramid network, remain randomly initialized, which hinders the consistency between detectors and pre-trained models. In this study, we propose to integrally migrate the pre-trained transformer encoder-decoders (imTED) for object detection, constructing a feature extraction-operation path that is not only “fully pre-trained” but also consistent with pre-trained models. The essential improvements of imTED over existing transformer-based detectors are twofold: (1) it embeds the pre-trained transformer decoder to the detector head; and (2) it removes the feature pyramid network from the feature extraction path. Such improvements significantly reduce the proportion of randomly initialized parameters and enhance the generation capability of detectors. Experiments on MS COCO dataset demonstrate that imTED consistently outperforms its counterparts by $\sim 2.8\%$ AP. Without bells and whistles, imTED improves the state-of-the-art of few-shot object detection by up to 7.6% AP, demonstrating significantly higher generalization capability. Code will be made publicly available.

1 Introduction

Unprecedented progress for object detection has been made over the past few years. This largely attributed to the usage of powerful representation models as backbone networks for feature extraction. By transferring the representation models, such as convolutional neural networks (CNNs) [2] and vision transformers (ViTs) [3] pre-trained using large-scale datasets, object detectors demonstrated desirable performance and generalization capability.

Modern object detectors, such as Faster R-CNN and Mask R-CNN [1, 4], typically consist of a backbone network, a neck component and a detector head. Except for the backbone networks, other components remain randomly initialized (not pre-trained). Such components include the region proposal network (RPN) [1], the feature pyramid network (FPN) [5] and the detector head [6]. These randomly initialized components fails to take advantage of the representation models pre-trained on large-scale datasets.

Recently, ViTs [3] have been promising representation models. In terms of representation generalization, vanilla ViTs pre-trained with the masked auto-encoder (MAE) [7] demonstrates superiority

*Equal Contribution.

†Corresponding Authors.

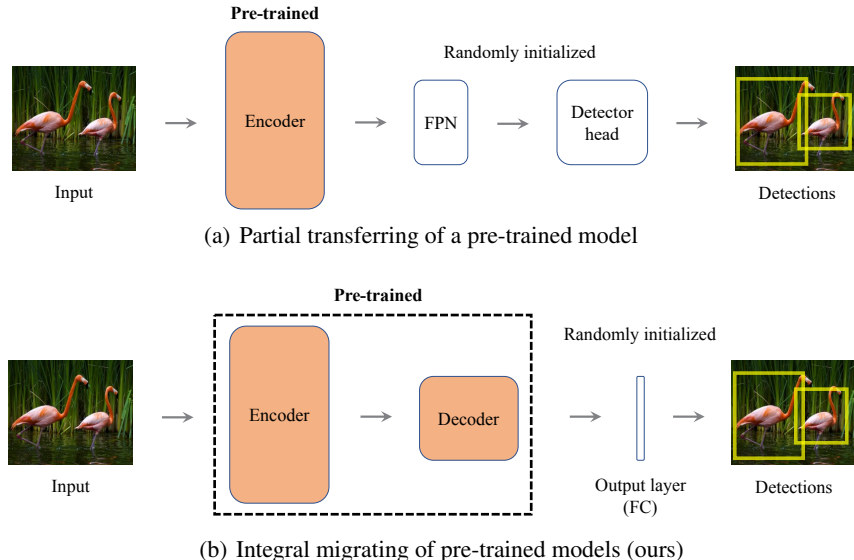


Figure 1: Comparison of imTED with the baseline detector (*e.g.*, Faster R-CNN [1] with a ViT encoder). The baseline detector solely transfers a pre-trained backbone network. By contrast, the imTED integrally migrates the pre-trained transformer encoder-detectors for object detection.

when compared to its supervised counterparts. Since the introduction of vanilla transformer [8] to computer vision, the effort of taming pre-trained ViTs for object detection has never stopped [9, 10]. ViTs pre-trained with MAE have been demonstrating great potential to be powerful detector backbones [10, 11].

In this study, we do not design any new components for object detectors; instead, we make minimal adaptations to improve their generalization capability. Specifically, we propose to integrally migrate pre-trained transformer encoder-decoders (imTED) to object detectors, constructing a feature extraction-operation path which is not only “fully pre-trained” but also consistent with pre-trained models. To fulfill this purpose, our imTED detector makes use of the transformer encoder pre-trained with MAE as the backbone and the MAE decoder as the detector head. imTED breaks the routine to remove the FPN (which is not pre-trained) from the feature extraction path while leveraging adaptive receptive fields provide by the attention mechanism in vision transformers [3] to handle objects at multiple scales. These designs guarantee integral migrating pre-trained transformer encoder-detector for object detection.

By adding linear output layers, *i.e.*, the light-weight classification layer and regression layer, atop the migrated transformer encoder-decoder, imTED classifies and localizes objects based on powerful features extracted by the pre-trained models. The plausibility of integrally migrating pre-trained encoder-decoders and introducing randomly initialized linear layers is analyzed from the perspective of model optimization. We also justify that migrating the pre-trained decoder to the detector head and removing the FPN facilitate stronger minima for the non-convex loss function when training detectors.

The competitiveness of imTED is validated using popular object detectors including Faster R-CNN and Mask R-CNN [1, 4]. Experiments on the MS COCO dataset demonstrate that imTED with the ViT-base model outperforms its counterpart by $\sim 2.8\%$ AP at moderate computational cost.

Benefiting from the integral migration of pre-trained models, imTED demonstrates strong generalization capability, which is validated by low-shot and few-shot detection tasks. When reducing the proportion of the training data, the performance gain of imTED monotonously improves. When training a few-shot object detector, by freezing the backbone network while fine-tuning the rest detector components, imTED improves the performance by up to 7.6% AP. imTED opens up a promising direction for few-shot object detection using vision transformers.

The contributions of this study are concluded as follows:

- We propose to integrally migrate pre-trained transformer encoder-decoders (imTED) to object detectors, constructing a “fully pre-trained” feature extraction-operation path to improve their generalization capability.
- We analyze the plausibility of integral migration of pre-trained encoder-decoders and using randomly initialized linear layers in terms of model optimization.
- imTED not only achieves significant performance gains in object detection, but establishes a solid baseline for few-shot detection using vision transformers.

2 Related Work

Representation Models. Object detection has widely explored the representation models trained using large-scale datasets as feature extractors. Over the past decade, CNNs [12–16] have dominated the area of representation models. More recently, vision transformers [17–20] became promising representation models. Vision transformers including ViT [17], Swin [18], MViT [19], and PvT [20] demonstrated great potential in object detection. The vision transformers [21–23] trained with self-supervised paradigms were validated to have higher generalization capability. Such generalization capability was pushed to new heights by MAE [23], which constructs not only representation models for feature extraction but also decoders for feature operation.

The representation model, FPN [24] and detector head occupy most of the learnable parameters of an object detector. Model object detectors, either CNN-based [25–29] or transformer-based [30, 31], utilized pre-trained representation models as encoders to extract features, while leaving FPN and detector heads with randomly initialized parameters. These randomly initialized parameters, when finetuned using fewer samples, could get stuck to local minimums. The problem of making a “fully pre-trained” detector remains.

Feature Pyramid Network. FPN [24] leverages a top-down structure with lateral connections to construct high-level semantic feature maps at multiple scales, enhancing the flexibility for multi-scale representation. It is designed to adapt hierarchical CNN features but not compatible with plain representation models, *e.g.*, ViT [17] and MAE [23]. To solve this problem, a small network was designed to obtain multi-scale features [32], but this unfortunately caused more parameters being randomly initialized. VitDet [33] proposed to remove the top-down feature fusion to simplify FPN. The main differences between VitDet [33], [32] and our imTED are twofold. For the ROI head, imTED simply feeds the last feature map of the MAE encoder to the RoI-Align component, without using FPN. The aligned features are fed to the pre-trained transformer decoder for further processing. Such designs guarantee that the feature extraction-operation path be consistent with that of MAE.

Detector Head. DETRs [30, 31] are representative detectors, which leverage the long-range feature dependency of vision transformers to predict object locations. Vision transformers in DETRs are randomly initialized and only used to process features extracted by CNN. By contrast, the transformer in our imTED is pre-trained and utilized to process both images and features. ViDT [34] replaces the CNN backbone used by DETR [30] with a pre-trained transformer but still leaving the following transformer neck randomly initialized.

Both VitDet [33, 32] and MIMDet [35] leverage the self-supervised MAEs to extract features. However, VitDet solely leverages the pre-trained MAE encoder but deprecates the pre-trained decoder. Whereas, the proposed imTED utilizes both the pre-trained encoder and the pre-trained decoder. MIMDet [35] utilizes both the encoder and decoder for feature extraction. However, the detector head in MIMDet remains randomly initialized. By contrast, the imTED approach in this study utilizes the pre-trained encoder to extract features and the pre-trained decoder as the detector head, constructing a “fully pre-trained” feature selection-operation path.

3 Methodology

The goal of this study is to integrally migrate the pre-trained transformer encoder-decoder as the main detector components. To this end, we choose encoder-decoders pre-trained by MAE [7] and transfer them to conventional two-stage detectors, *e.g.*, Faster R-CNN and Mask R-CNN [1, 4]. In this section, we first address how to migrate the pre-trained encoder-decoders. We then describe the

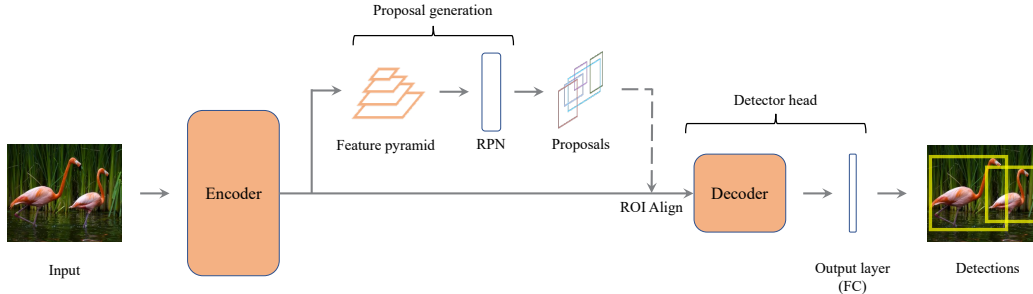


Figure 2: Detection architecture. While the baseline detector [1, 4] uses several randomly initialized component for feature extraction, our imTED detector integrally migrates the transformer encoder-decoder, constructing a “fully pre-trained” path for feature extraction and operation.

detailed implementation of the detector components. Finally, we analyze light-weight output layers and why they are randomly initialized.

3.1 Integral Migration of Pre-trained Models

A Faster R-CNN detector consists of the following components: a backbone network, a feature pyramid network (FPN), a region proposal network (RPN) and a detector head. The conventional detectors partially transfers pre-trained models. Typically, they use a pre-trained representation model, either supervised or unsupervised, as the backbone network for feature extraction. However, the FPN, RPN and detector head, which occupy a large proportion ($\sim 40\%$) of learnable parameters, remained trained from scratch. One important reason is that the backbone networks specified for image classification [36] can not be directly used for multi-scale feature extraction and instance localization.

Recently, MAE [7] defines a self-supervised pre-trained encoder-decoder based on the pretext task of masked pixel reconstruction. By randomly masking image patches and reconstructing the masked image patches, MAE trains an encoder for feature extraction and a decoder for image context modeling. The conventional way of using the pre-trained MAE model is to employ the encoder as the backbone for object feature extraction [10, 11]. Whereas, we think that the pre-trained encoder-decoder can be integrally migrated for object detection, so that detectors not only leverage the encoder for feature extraction but also the a decoder for context information modeling. By integral migrating the encoder-decoder, we aim to fulfill the purpose that as many as detector parameters being pre-trained.

The architecture of the proposed imTED detector is provided in Fig. 2. The detector takes the pre-trained encoder-decoder as main components, using output fully connected layers for object classification and localization, while keeping the proposal generation component unchanged. When using the ViT-S [3] model, the Faster R-CNN detector has $\sim 17.7\text{M}$ parameters trained from scratch, while imTED changes this figure to $\sim 3.3\text{M}$, which infers an 81.3% reduction of randomly initialized parameters. Larger proportions of pre-trained parameters imply higher detector generalization capability, which is confirmed through experiments.

3.2 Implementation Details

In the Faster R-CNN detector, the backbone, the FPN and the detector head construct a path for proposal feature extraction and operation. If we use the encoder as the backbone, set the decoder as a detector head, and removing the FPN from the feature extraction path, we can integrally migrate the encoder-decoder as the main component of the Faster R-CNN detector. The architecture of RPN is not updated as it plays the role of generating region proposals but dose not disturb the feature stream for final classification and localization. In other words, imTED is implemented by simply adding a few linear layers and a proposal generation module to the fully pre-trained encoder-decoder, Fig. 2. With these implementation details, imTED’s architecture is greatly simplified while the detection

performance is improved. In what follows, we describe the implementations of the backbone, the proposal generation module and the detector head.

Backbone network. The pre-trained transformer encoder is set as the backbone network. There is no modification to the transformer encoder except for resizing the encoder’s positional embedding so that they are consistent with input image sizes. The transformer encoder outputs single-scale feature maps which are down-sampled by a factor of 16 relative to the input image. Meanwhile, to produce multi-scale feature maps, we up-sample or down-sample intermediate ViT feature maps by placing four resolution-modifying modules at equally spaced intervals of $d/4$ transformer blocks following [10], where d denotes the total number of blocks.

Region proposal generation. In the two-stage detection architecture [1], dense region proposals are required to be generated for final object detection. This is done by RPN, which uses pre-defined five-scale anchors to predict proposal boxes. As shown in Fig. 2, the RPN uses the feature pyramid obtained by the encoder as input. By passing the features of the five-scale anchors through the RPN, it predicts dense region proposals. The training of the RPN parameters, *i.e.*, the weights of the fully connected output layer, is consistent with that of Faster RCNN [1].

Detector head. A pre-trained MAE decoder is employed to replace the randomly initialized network layers and to construct the detector head, which consists of a decoder and two linear layers. For each region proposal box, an ROI-Align operation is used to extract the features for each region proposal from the feature maps extracted by the backbone (encoder). Proposal features are then embedded with location information by summarizing with position embedding [7]. Such proposal features are then fed to the decoder and operated with alternative attention and MLP layers. The operated features are finally fed to the linear classification and regression layers to predict object categories and location offsets.

3.3 Output Layers

Atop the integrally migrated encoder-decoder, Fig. 2, imTED adds a few linear layers, referred to as output layers, for classification and regression. These output layers use randomly initialized weights because the pre-trained model does not involve a bounding box regression component, which is indispensable for a detector. Meanwhile, the classification output layer needs to be re-initialized according to different object categories.

From the perspective of model optimization, using randomly initialized weights for the output layers is plausible. Let’s consider a simple network, a multi-layer neural network with nonlinear hidden layers f parameterized with θ_f and a linear output layer parameterized by θ_o . When feeding a sample x to the network, the hidden layer features, output \hat{y} , and loss are sequentially calculated as $x \xrightarrow{f_{\theta_f}} z \xrightarrow{f_{\theta_o}} \hat{y} \xrightarrow{\mathcal{L}} \text{loss}$. The loss is computed by $\mathcal{L}(\hat{y}, y)$ where \mathcal{L} is a pre-defined loss function and y denotes the label of the input x . Due to the large number of non-linear operations contained in the hidden layers f , training of deep neural networks is a non-convex optimization problem. In downstream tasks, the large number of hidden parameters θ_f require to be initialized by the pre-trained models so that they converge to stronger local minima, Fig. 3. Unlike the hidden layer, the output layer itself is a simple linear function with a single global minima. Even if the output layers use randomly initialized weights, the loss function can be optimized to a global minimum.

4 Experiment

4.1 Experimental Setting

The ViT models are categorized to ViT-S and ViT-B [3] according to the parameter scales. These models are pre-trained on ImageNet-1K using the self-supervised MAE method [7] for 1600 epochs.

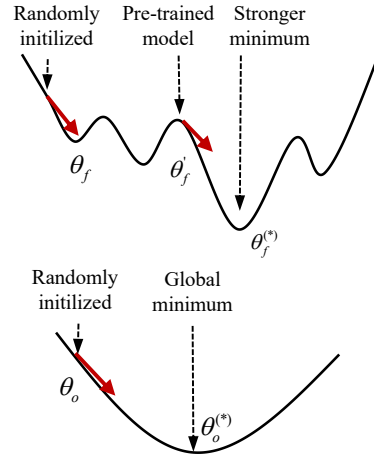


Figure 3: Optimizing hidden layer (upper) and output layer (lower) parameters. $\theta^{(*)}$ denotes optimized parameters.

Table 1: Object detection performance on the MS COCO dataset. Comparison of the proposed imTED detector with the state-of-the-art detectors using vision transformers as backbones. † denotes using soft-nms [41].

Approach	Backbone	Pre-train	Epochs	Faster R-CNN			Mask R-CNN	
				AP	AP ₅₀	AP ₇₅	AP ^{box}	AP ^{mask}
Baseline [42]	ResNeXt101	1k, sup	36	43.1	63.6	47.2	44.5	39.7
Baseline [18]	Swin-B	1k, sup	36	-	-	-	48.5	43.4
Baseline [43]	MViTv2-B	1k, sup	36	-	-	-	51.0	45.7
Baseline [1]	ViT-B	1k, MAE	36	49.4	70.2	54.4	50.1	44.8
MIMDet [35]	ViT-B	1k, MAE	36	-	-	-	51.5	46.0
ViTDet† [11]	ViT-B	1k, MAE	100	-	-	-	51.6	45.9
imTED (ours)	ViT-S	1k, MAE	36	47.3	68.6	51.0	48.0	42.8
imTED (ours)	ViT-B	1k, MAE	36	52.2	72.8	57.1	52.6	46.7

By adding four linear output layers and parameter-less interpolation operations atop the pre-trained encoder-decoder, the imTED detector is constructed. The detectors are evaluated on the MS COCO dataset [37], which consists of $\sim 118k$ training images and 5k validation images. Data augmentation strategies are defined by resizing image with shorter size between 480 and 800 while the longer side no larger than 1333 [38]. The detector is trained using the AdamW optimizer [39] with a learning rate $1e-4$, a weight decay of 0.05. The training lasts for $3 \times \text{schedule}$ (36 epochs with the learning rate decayed by 10 at epochs 27 and 33). The batch size is 16, distributed across 8 GPUs (2 images per GPU). For the ViT-S/B models, a layer-wise lr decay [40] of 0.75 and a drop path rate of 0.1/0.2 are also applied.

4.2 Detection Performance

In Table 1, the proposed imTED detectors are evaluated and compared with the state-of-the-art detectors using vision transformer backbones. By replacing the ResNeXt101 backbone with an pre-trained ViT model pre-trained with the MAE method, the baseline (Faster R-CNN detector) it improves the average precision (AP) from 43.1% to 49.4%, which validates the effectiveness of using pre-trained ViT models for object detection. Given the strong baseline, imTED improves the AP by 2.8% (from 49.4% to 52.2%), which is a large margin. In specific, it respectively improves the AP50 by 2.6% (from 70.2% to 72.8), and the AP75 by 2.7% (from 54.4% to 57.1). When using the Mask R-CNN framework, imTED respectively improves the AP^{box} by 2.5% and the AP^{mask} by 1.9%, which are all significant margins.

imTED also significantly outperforms the state-of-the-art detectors *i.e.*, MIMDet and ViTDet, which use MAE pre-trained vision transformers as backbones. ViTDet solely leverages the pre-trained MAE encoder but consistently deprecates the pre-trained decoder, and thereby does not fully explore the potential of the pre-trained models. MIMDet leverages both the encoder and decoder for feature extraction but remains using a randomly initialized detector head, which deteriorates its generalization capability. The proposed imTED overcomes these disadvantages and achieves higher detection performance.

In Fig. 4 we compared some detection results of the baseline detector and our imTED approach. It can be seen that the baseline detector misses some occluded objects, for the reason that they have only partially valid features. By contrast, imTED can correctly localize and classify these occluded objects. The reason lies in that the transformer encoder-decoders have been pre-trained to have the capability to recover masked/occluded object parts. Such capability is transferred to the detectors when integrally migrating the encoder-decoder models.

4.3 Ablation Study

In ablations, we fine-tune the detector for $1 \times \text{schedule}$ (12 epochs with the learning rate decayed by $10 \times$ at epochs 9 and 11) on the *train2017* split and evaluate on the *val2017* split. By default, the ViT-S [44] is set as the backbone (encoder), and a 4-layer decoder with dimension 196 is used for the detector head. Unless otherwise specified, our ablation experiments are performed on Faster R-CNN.

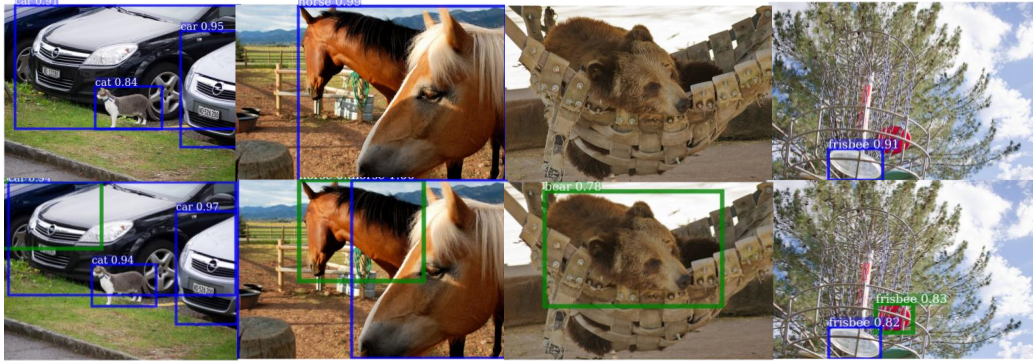


Figure 4: Comparison of detection results. The first row presents the results of the baseline detector and second row the results of the proposed imTED detector. Objects in blue bounding boxes are detected by both the baseline detector and imTED. Objects in green bounding boxes are missed by the baseline detector but correctly detected by imTED. (best viewed in color)

Table 2: Ablation studies using ViT-S as the backbone (encoder). * indicates that the module is initialized with MAE pre-trained weights. FPS is tested on a Tesla A100 GPU.

Detector Head	FPN	Params	FLOPs	FPS	AP	AP ₅₀	AP ₇₅	AP _S	AP _M	AP _L
FC Layers	✓	41.1M	343G	20.3	41.2	62.5	44.8	24.1	44.2	55.1
Decoder	✓	30.1M	415G	14.1	42.2	62.4	45.8	25.8	45.0	57.0
Decoder*	✓	30.1M	415G	14.1	42.5	63.0	46.1	25.6	45.4	57.7
Decoder*	×	30.1M	415G	14.2	43.1	64.1	46.9	25.0	46.5	58.6

Integral migration. We replace the Faster R-CNN detector head with the pre-trained MAE decoder, and skip the FPN when preparing decoder’s input to construct a integrally pre-trained feature extraction-operation path. The baseline detector (Faster R-CNN) only uses a pre-trained encoder as backbone following [10]. Its predictions are obtained from FPN and some fully connected layers in the detector head.

In Table 2, when replacing the detector head with a decoder without pre-training, 1.0% (42.2% vs. 41.2%) AP gain is observed. When the decoder is initialized using the MAE pre-trained weights, imTED improves the performance by 1.3% (42.5% vs. 41.2%) over the baseline detector. By skipping FPN and constructing a fully pre-trained feature extraction-operation path, imTED improves by 1.9% (43.1% vs. 41.2%). These significant performance gains, considering the extensively investigated problem and the challenging aspects of the dataset, validate the effect of the proposed imTED approach.

In Table 2, we notice that replacing the fully connection layers with the pre-trained decoder brings a moderate increase of computational cost, *i.e.*, the FLOPs increases from 343G to 415G while FPS decrease from 20.3 to 14.2.

Output layers. The analysis in Sec. 3.3 indicates that the optimization of the output layers is easier, as the most of the parameters of the detector head have been pre-trained while the loss function with

Table 3: Evaluation of output layers.

Encoder-decoder	Classification Layer	Localization layer	AP	AP ₅₀	AP ₇₅
Migrated from MAE	Randomly initialized	Randomly initialized	43.2	63.9	46.9
Migrated from MAE	Pre-train initialized	Randomly initialized	43.3	64.0	46.9
Migrated from MAE	Randomly initialized	Pre-train initialized	43.1	64.1	46.8
Migrated from MAE	Pre-train initialized	Pre-train initialized	43.3	64.1	47.1


Table 4: Ablation study for instance segmentation on the MS COCO dataset.

Backbone	Detector Head	Mask Head	AP^{mask}	AP_S^{mask}	AP_M^{mask}	AP_L^{mask}
Encoder*	FC Layers	4× Conv	37.8	20.4	40.7	52.5
Encoder*	MAE Decoder*	4× Conv	38.5	20.3	41.8	54.3
Encoder*	MAE Decoder*	MAE Decoder	38.7	20.4	42.3	54.6
Encoder*	MAE Decoder*	MAE Decoder*	39.5	20.8	42.7	55.5


respect to the output layer parameters is convex. To validate that the output layers can be randomly initialized, we conduct comparable experiments in Table 3, where the output layer parameters are initialized using pre-trained weights. Due to the fact that the output layers of the detector are not included in the pre-trained encoder-decoder, we initialize the output layers by using the output layer parameters from a fine-tuned object detector. The comparison experiments show that using randomly initialized output layers, in either the classification layer or the localization, has negligible impact on detection performance.

Instance segmentation. The imTED detector can be used for instance segmentation by updating Faster R-CNN to Mask R-CNN [4]. The original mask head is mainly composed of four convolutional layers. We gradually replace it with the decoder structure in MAE and load the corresponding pre-trained weights. Experiments in Table 4 show that the migration of pre-trained MAE decoder as the detector head improves the AP^{mask} by 0.7%. Replacing the mask head with the decoder brings about 0.9% performance gain. By using fully-pre-trained decoders as detector and mask heads, imTED improves the AP^{mask} by 1.7% in total.

Generalization capability. imTED has greater generalization capability because its feature extraction-operation procedure is consistent with the pre-trained representation models. To validate this capability, we evaluate the performance drops of detectors by gradually reducing the size of the training data, Fig. 5(a). When the percentage of training data reduces, the performance gains of imTED over the baseline detector monotonously increases. Larger performance gains with less training data demonstrate greater generalization capability. We also divide the different categories of the MS COCO dataset according to the number of training instances, and count the imTED’s performance improvements. In Fig. 5(b), for object categories of less training instances, imTED outperforms the baseline detector by larger margins.

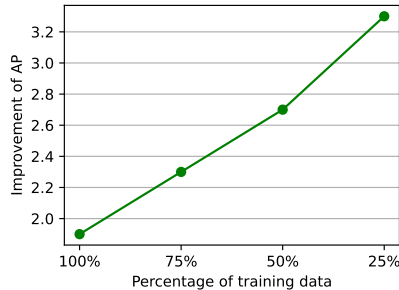

(a) Training dataset sizes

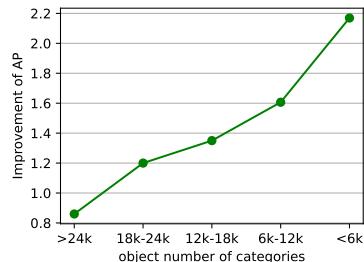

(b) Imbalanced categories

Figure 5: Generalization capability.

4.4 Few-shot Object Detection

imTED can be applied for few-shot object detection without any modification. Following Meta YOLO [45], the object categories in MS COCO are divided into two groups: base classes with adequate annotations and novel classes with K -shot annotated instances. On MS COCO, 20 classes are selected as novel ones and the remaining 60 classes as base ones. The base classes are used to initialize the detector, *i.e.*, endowing it the ability to localize objects, through base training. The detector is then finetuned upon the novel classes for few-shot object detection. In Table 5, imTED respectively improves the state-of-the-arts of few-shot detection by 3.5% (19.0% to 22.5%) and 7.6% (22.6% to 30.2%) under 10-shot and 30-shot settings. The large performance gains further validate imTED’s generalization capability.

Table 5: Performance comparison of few-shot object detection.

Shots	Method	Detector	AP	AP50	AP75	APS	APM	APL
10	Meta YOLO [45]	YOLOv2	5.6	12.3	4.6	0.9	3.5	10.5
	CME [46]	FasterR-CNN + R101	15.1	24.6	16.4	4.6	16.6	26.0
	FCT [47]	PVTv2-B2-Li	17.1	-	-	-	-	-
	Meta-DETR [48]	DETR + R101	19.0	30.5	19.7	-	-	-
	DeFRCN [49]	FasterR-CNN + R101	18.5	-	-	-	-	-
	imTED(ours)	imTED + ViT-S	15.0	25.7	15.2	6.0	13.5	23.0
	imTED(ours)	imTED + ViT-B	22.5	36.6	23.7	6.8	20.7	36.1
30	Meta YOLO [45]	YOLOv2	9.1	19.0	7.6	0.8	4.9	16.8
	CME [46]	FasterR-CNN + R101	16.9	28.0	17.8	4.6	18.0	29.2
	FCT [47]	PVTv2-B2-Li	21.4	-	-	-	-	-
	Meta-DETR [48]	DETR + R101	22.2	35.0	22.8	-	-	-
	DeFRCN [49]	FasterR-CNN + R101	22.6	-	-	-	-	-
	imTED(ours)	imTED + ViT-S	21.0	34.5	21.8	7.2	18.8	33.7
	imTED(ours)	imTED + ViT-B	30.2	47.4	32.5	11.6	28.8	45.4

5 Conclusion

We explored a novel object detection approach by integrally migrating pre-trained transformer encoder-decoders (imTED). The key idea was to construct a feature extraction-operation path that was not only “fully pre-trained” but also consistent with pre-trained models. By migrating the MAE decoder to the detector head, removing FPN on the feature extraction path, imTED superseded Faster R-CNN, being a simpler yet more effective detector.

Experiments on object detection, instance segmentation and few-shot object detection demonstrated the performance gains brought by imTED, with striking contrast with the baseline and the state-of-the-arts. imTED provides a fresh insight to the design of object detectors using pre-trained vision transformer models.

Limitations. There are several limitations to the novel imTED approach which ought to be mentioned. (i) By using the decoder as the detector head, imTED has a moderate computational cost (FLOPS improves from 343 to 415G). (ii) It is not applicable to pre-trained models without decoders. These limitations should be solved in the future work.

Societal Impacts Our research focus on (i) designing novel approaches for object detection and (ii) instance segmentation. These two topics have been widely studied in the community, and our work does not have further societal impacts than others.

References

- [1] Shaoqing Ren, Kaiming He, Ross B. Girshick, and Jian Sun. Faster R-CNN: towards real-time object detection with region proposal networks. In *NIPS*, pages 91–99, 2015.
- [2] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *IEEE CVPR*, pages 770–778, 2016.
- [3] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale. In *ICLR*, 2021.
- [4] Kaiming He, Georgia Gkioxari, Piotr Dollar, and Ross Girshick. Mask r-cnn. In *IEEE ICCV*, 2017.
- [5] Tsung-Yi Lin, Piotr Dollár, Ross B. Girshick, Kaiming He, Bharath Hariharan, and Serge J. Belongie. Feature pyramid networks for object detection. In *IEEE CVPR*, pages 936–944, 2017.
- [6] Ross Girshick. Fast r-cnn. In *IEEE ICCV*, pages 1440–1448, 2015.
- [7] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. *arXiv preprint arXiv:2111.06377*, 2021.

- [8] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *NeurIPS*, 30, 2017.
- [9] Wuyang Chen, Xianzhi Du, Fan Yang, Lucas Beyer, Xiaohua Zhai, Tsung-Yi Lin, Huizhong Chen, Jing Li, Xiaodan Song, Zhangyang Wang, et al. A simple single-scale vision transformer for object localization and instance segmentation. *arXiv preprint arXiv:2112.09747*, 2021.
- [10] Yanghao Li, Saining Xie, Xinlei Chen, Piotr Dollár, Kaiming He, and Ross Girshick. Benchmarking detection transfer learning with vision transformers. *arXiv preprint arXiv:2111.11429*, 2021.
- [11] Yanghao Li, Mao Hanzi Mao, Ross Girshick, and Kaiming He. Exploring plain vision transformer backbones for object detection. *arXiv preprint arXiv:2203.16527*, 2022.
- [12] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. *NeurIPS*, 25, 2012.
- [13] Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. *arXiv preprint arXiv:1409.1556*, 2014.
- [14] Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich. Going deeper with convolutions. In *IEEE CVPR*, pages 1–9, 2015.
- [15] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *IEEE CVPR*, pages 770–778, 2016.
- [16] Saining Xie, Ross Girshick, Piotr Dollár, Zhuowen Tu, and Kaiming He. Aggregated residual transformations for deep neural networks. In *IEEE CVPR*, pages 1492–1500, 2017.
- [17] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. In *ICLR*, 2020.
- [18] Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. In *IEEE CVPR*, pages 10012–10022, 2021.
- [19] Haoqi Fan, Bo Xiong, Karttikeya Mangalam, Yanghao Li, Zhicheng Yan, Jitendra Malik, and Christoph Feichtenhofer. Multiscale vision transformers. In *IEEE CVPR*, pages 6824–6835, 2021.
- [20] Wenhai Wang, Enze Xie, Xiang Li, Deng-Ping Fan, Kaitao Song, Ding Liang, Tong Lu, Ping Luo, and Ling Shao. Pyramid vision transformer: A versatile backbone for dense prediction without convolutions. In *IEEE CVPR*, pages 568–578, 2021.
- [21] Hangbo Bao, Li Dong, and Furu Wei. Beit: Bert pre-training of image transformers. *arXiv preprint arXiv:2106.08254*, 2021.
- [22] Jinghao Zhou, Chen Wei, Huiyu Wang, Wei Shen, Cihang Xie, Alan Yuille, and Tao Kong. ibot: Image bert pre-training with online tokenizer. *arXiv preprint arXiv:2111.07832*, 2021.
- [23] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. *arXiv preprint arXiv:2111.06377*, 2021.
- [24] Tsung-Yi Lin, Piotr Dollár, Ross Girshick, Kaiming He, Bharath Hariharan, and Serge Belongie. Feature pyramid networks for object detection. In *IEEE CVPR*, pages 2117–2125, 2017.
- [25] Wei Liu, Dragomir Anguelov, Dumitru Erhan, Christian Szegedy, Scott Reed, Cheng-Yang Fu, and Alexander C Berg. Ssd: Single shot multibox detector. In *ECCV*, pages 21–37. Springer, 2016.
- [26] Tsung-Yi Lin, Priya Goyal, Ross Girshick, Kaiming He, and Piotr Dollár. Focal loss for dense object detection. In *IEEE ICCV*, pages 2980–2988, 2017.
- [27] Ross Girshick. Fast r-cnn. In *IEEE ICCV*, pages 1440–1448, 2015.
- [28] Shaoqing Ren, Kaiming He, Ross Girshick, and Jian Sun. Faster r-cnn: Towards real-time object detection with region proposal networks. *NeurIPS*, 28, 2015.
- [29] Kaiming He, Georgia Gkioxari, Piotr Dollár, and Ross Girshick. Mask r-cnn. In *IEEE ICCV*, pages 2961–2969, 2017.

- [30] Nicolas Carion, Francisco Massa, Gabriel Synnaeve, Nicolas Usunier, Alexander Kirillov, and Sergey Zagoruyko. End-to-end object detection with transformers. In *ECCV*, pages 213–229. Springer, 2020.
- [31] Xizhou Zhu, Weijie Su, Lewei Lu, Bin Li, Xiaogang Wang, and Jifeng Dai. Deformable detr: Deformable transformers for end-to-end object detection. *arXiv preprint arXiv:2010.04159*, 2020.
- [32] Yanghao Li, Saining Xie, Xinlei Chen, Piotr Dollar, Kaiming He, and Ross Girshick. Benchmarking detection transfer learning with vision transformers. *arXiv preprint arXiv:2111.11429*, 2021.
- [33] Yanghao Li, Hanzi Mao, Ross Girshick, and Kaiming He. Exploring plain vision transformer backbones for object detection. *arXiv preprint arXiv:2203.16527*, 2022.
- [34] Hwanjun Song, Deqing Sun, Sanghyuk Chun, Varun Jampani, Dongyoon Han, Byeongho Heo, Wonjae Kim, and Ming-Hsuan Yang. Vidt: An efficient and effective fully transformer-based object detector. *arXiv preprint arXiv:2110.03921*, 2021.
- [35] Yuxin Fang, Shusheng Yang, Shijie Wang, Yixiao Ge, Ying Shan, and Xinggang Wang. Unleashing vanilla vision transformer with masked image modeling for object detection. *arXiv preprint arXiv:2204.02964*, 2022.
- [36] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Fei-Fei Li. Imagenet: A large-scale hierarchical image database. In *IEEE CVPR*, pages 248–255. IEEE CS, 2009.
- [37] Tsung-Yi Lin, Michael Maire, Serge J. Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C. Lawrence Zitnick. Microsoft COCO: common objects in context. In *ECCV*, pages 740–755, 2014.
- [38] Nicolas Carion, Francisco Massa, Gabriel Synnaeve, Nicolas Usunier, Alexander Kirillov, and Sergey Zagoruyko. End-to-end object detection with transformers. In *ECCV*, volume 12346, pages 213–229, 2020.
- [39] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2018.
- [40] Hangbo Bao, Li Dong, and Furu Wei. Beit: Bert pre-training of image transformers. *arXiv preprint arXiv:2106.08254*, 2021.
- [41] Navaneeth Bodla, Bharat Singh, Rama Chellappa, and Larry S. Davis. Soft-nms - improving object detection with one line of code. In *IEEE ICCV*, pages 5562–5570, 2017.
- [42] Saining Xie, Ross B. Girshick, Piotr Dollár, Zhuowen Tu, and Kaiming He. Aggregated residual transformations for deep neural networks. In *IEEE CVPR*, pages 5987–5995, 2017.
- [43] Yanghao Li, Chao-Yuan Wu, Haoqi Fan, Karttikeya Mangalam, Bo Xiong, Jitendra Malik, and Christoph Feichtenhofer. Improved multiscale vision transformers for classification and detection. *arXiv preprint arXiv:2112.01526*, 2021.
- [44] Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Hervé Jégou. Training data-efficient image transformers & distillation through attention. In *ICML*, volume 139, pages 10347–10357, 2021.
- [45] Bingyi Kang, Zhuang Liu, Xin Wang, Fisher Yu, Jiashi Feng, and Trevor Darrell. Few-shot object detection via feature reweighting. In *IEEE ICCV*, pages 8420–8429, 2019.
- [46] Bohao Li, Boyu Yang, Chang Liu, Feng Liu, Rongrong Ji, and Qixiang Ye. Beyond max-margin: Class margin equilibrium for few-shot object detection. In *IEEE CVPR*, pages 7363–7372, 2021.
- [47] Guangxing Han, Jiawei Ma, Shiyuan Huang, Long Chen, and Shih-Fu Chang. Few-shot object detection with fully cross-transformer. *arXiv preprint arXiv:2203.15021*, 2022.
- [48] Gongjie Zhang, Zhipeng Luo, Kaiwen Cui, and Shijian Lu. Meta-detr: Few-shot object detection via unified image-level meta-learning. *arXiv preprint arXiv:2103.11731*, 2(6), 2021.
- [49] Limeng Qiao, Yuxuan Zhao, Zhiyuan Li, Xi Qiu, Jianan Wu, and Chi Zhang. Defrcn: Decoupled faster r-cnn for few-shot object detection. In *IEEE ICCV*, pages 8681–8690, 2021.

1. For all authors...

- (a) Do the main claims made in the abstract and introduction accurately reflect the paper’s contributions and scope? [\[Yes\]](#) See Abstract and Introduction.

- (b) Did you describe the limitations of your work? [Yes] See Section 5.
 - (c) Did you discuss any potential negative societal impacts of your work? [N/A]
 - (d) Have you read the ethics review guidelines and ensured that your paper conforms to them? [Yes]
2. If you are including theoretical results...
- (a) Did you state the full set of assumptions of all theoretical results? [Yes]
 - (b) Did you include complete proofs of all theoretical results? [Yes]
3. If you ran experiments...
- (a) Did you include the code, data, and instructions needed to reproduce the main experimental results (either in the supplemental material or as a URL)? [Yes]
 - (b) Did you specify all the training details (e.g., data splits, hyperparameters, how they were chosen)? [Yes]
 - (c) Did you report error bars (e.g., with respect to the random seed after running experiments multiple times)? [Yes]
 - (d) Did you include the total amount of compute and the type of resources used (e.g., type of GPUs, internal cluster, or cloud provider)? [N/A]
4. If you are using existing assets (e.g., code, data, models) or curating/releasing new assets...
- (a) If your work uses existing assets, did you cite the creators? [Yes]
 - (b) Did you mention the license of the assets? [N/A]
 - (c) Did you include any new assets either in the supplemental material or as a URL? [N/A]
 - (d) Did you discuss whether and how consent was obtained from people whose data you're using/curating? [N/A]
 - (e) Did you discuss whether the data you are using/curating contains personally identifiable information or offensive content? [N/A]
5. If you used crowdsourcing or conducted research with human subjects...
- (a) Did you include the full text of instructions given to participants and screenshots, if applicable? [N/A]
 - (b) Did you describe any potential participant risks, with links to Institutional Review Board (IRB) approvals, if applicable? [N/A]
 - (c) Did you include the estimated hourly wage paid to participants and the total amount spent on participant compensation? [N/A]