

# What Is Fairness? On the Role of Protected Attributes and Fictitious Worlds

LUDWIG BOTHMANN, LMU Munich, Germany and Munich Center for Machine Learning (MCML), Germany

KRISTINA PETERS, LMU Munich, Germany

BERND BISCHL, LMU Munich, Germany and Munich Center for Machine Learning (MCML), Germany

A growing body of literature in fairness-aware ML (fairML) aspires to mitigate machine learning (ML)-related unfairness in automated decision-making (ADM) by defining metrics that measure fairness of an ML model and by proposing methods that ensure that trained ML models achieve low values in those metrics. However, the underlying concept of fairness, i.e., the question of what fairness is, is rarely discussed, leaving a considerable gap between centuries of philosophical discussion and recent adoption of the concept in the ML community. In this work, we try to bridge this gap by formalizing a consistent concept of fairness and by translating the philosophical considerations into a formal framework for the training and evaluation of ML models in ADM systems. We derive that fairness problems can already arise without the presence of protected attributes (PAs), pointing out that fairness and predictive performance are not irreconcilable counterparts, but rather that the latter is necessary to achieve the former. Moreover, we argue why and how causal considerations are necessary when assessing fairness in the presence of PAs by proposing a fictitious, normatively desired (FiND) world where the PAs have no causal effects. In practice, this FiND world must be approximated by a warped world, for which the causal effects of the PAs must be removed from the real-world data. Eventually, we achieve greater linguistic clarity for the discussion of fairML. We propose first algorithms for practical applications and present illustrative experiments on COMPAS data.

Additional Key Words and Phrases: automated decision-making, causality, COMPAS, counterfactuals, machine learning, philosophical analysis of fairness

## 1 INTRODUCTION

The machine learning (ML) community has produced numerous contributions on the topic of fairness-aware ML (fairML) in recent years. However, a fundamental question remains: *What is fairness?* This question is not easily answered and is often circumvented; instead of asking “what is fairness”, the questions of “how to measure fairness of ML models” and “how to make ML models fair” are pursued.

This paper does not intend to criticize individual approaches that address those latter questions and, in doing so, often propose important solutions. Rather, the aim is to make explicit the premises that underlie the various understandings of fairness and the approaches to solving fairness problems. In doing so, a largely concordant understanding can be elaborated that is based on a rich foundation in the history of philosophy. Subsequently, we show that the conception of fairness depends on multilayered normative evaluations; any discussion of fairML relies on adopting those normative stipulations. The basis for fair decisions is always the question of the *equality* of the people treated *with respect to the subject matter* concerned. On this basis, a decision rule is to be established, which in turn can be adapted to the concrete needs as a result of normative stipulations. Based on this essential concept of fairness, we turn to the questions of to what extent ML models can induce unfair treatments in automated decision-making (ADM), and of how to implement these normative stipulations both in training an ML model and in using its predictions in ADM.

### 1.1 Our Contributions

In this paper, we formalize a *consistent concept of fairness* derived from philosophical considerations and translate it into a formal framework for the design of ML models in ADM systems, hence bridging the gap between centuries of philosophical discussion and the recent adoption in the ML community (Section 2). We precisely delineate fairML’s contribution to questions of fairness in ADM from the responsibilities of other scientific fields as well as from the

socio-political discussion and from fundamental legislative decisions; this distinction offers *greater linguistic clarity* for the discussion of algorithmic fairness (Sections 2 and 3.1). We argue that an ML model cannot be unfair per se because a predictive model alone does not make decisions or execute material actions. Rather, *fairness problems can arise* using ML models in ADM systems if the model is not individually well-calibrated – *even if no protected attributes (PAs) are present*. Hence, we point out that predictive performance is paramount for fairness rather than a tradeoff to it (Section 3.2). *In the presence of PAs*, a fictitious, normatively desired (FiND) world is conceived, where the PAs have no causal effects. This FiND world must be approximated by a warped world, and ML models are to be trained and evaluated in the warped world. We emphasize that *fairness criteria must make causal considerations* (Section 3.3). A practical advantage of our approach (compared to, e.g., “fairness through awareness” by [22], who acknowledge that “[...] access to the distance metric [...] is one of the most challenging aspects of our framework”) is that we only require non-ML users to answer three normative questions that they are already accustomed to answering – also without using ML. In addition, our concept offers the possibility for fair but unequal treatment of unequal individuals – also called vertical equity [10]. Finally, we outline first *algorithms for practical applications* and show illustrative *empirical results* (Section 4). We focus on the theoretical problems and fundamental challenges surrounding fairML. While we investigate and diagnose these thoroughly, we also indicate how these problems might be overcome. We do not present final solutions to all open questions but put the necessary emphasis on clarifying the structural problems in fairML in order to enable future research to investigate proper solutions that could help mitigate ethical issues of ADM.

## 1.2 Related Work

What exactly is understood by fairness is not disclosed by central laws [19, 23] or statements from politics [24]. Because of this, there exists a broad and now almost unmanageable body of literature on the topic of fairness in general and, in particular, on the fairness of ADM – especially in the social sciences, law, and more recently in ML [for overviews see, e.g., 1, 5, 8, 14, 18, 54]. However, most of their arguments are presuppositional and start a step further than we do here. When attempted, explanations of what fairness really means usually settle on vague definitions [7, 21, 30, 36, 44] – notable exceptions being [52] and [45]. A fundamental critique of statistical criteria as fairness measures such as “false positive rate equality does not track anything about fairness, and thus sets an incoherent standard for evaluating the fairness of algorithms” by [53] is also formulated by [25, 34, 52], pointing out a special role of calibration. Reflections on fairness as not (only) a technical challenge can be found in, e.g., [31, 51, 62, 67].

There is a growing awareness in ML literature that basic assumptions that are not made explicit do indeed matter [27, 50, 55, 61], but the reappraisal of these basic assumptions is still in its infancy. Adding to the many concepts of *group fairness* [see, e.g., 66, for an overview], most recently, the notion of *individual fairness*, highlighted in particular by [22], has resonated considerably [6, 18, 27, 47]. This concept requires that similar individuals should be treated similarly and reflects a demand already comparably formulated by [32] more than 50 years ago [see also 35, 65, regarding the debate on test (un)fairness in the mid-20th century]. For ranking tasks, [63] assume that “[u]nfairness occurs when an agent with higher merit obtains a worse outcome than an agent with lower merit”. *Individual counterfactual fairness* [47] goes in a different direction, stating that a fair decision exists if it turns out to be the same in the real world and in a fictitious world in which the individual in question belongs to a different group. This is arguably the work that is most related to our concept; after introducing our framework, we differentiate our proposal from that of [47] in Section 3.3. As described later, these definitions – which take up causal concepts [see also 15–17, 29, 39, 42, 48] – seem to produce useful results and are also supported by our considerations, but nevertheless do not represent essential

aspects of the fairness concept. We note that our concept can be used to resolve confusions that have recently arisen in view of supposedly different definitions of fairness [27, 47, 48, 55].

In order to reveal the basic formal structure of the concept of fairness, it is not enough to go back to the great works of the 20th century, since these also proceed a step further and usually focus on which material criteria should be taken into account in the context of a just or fair distribution [12]. These considerations already build on the concept that we will present below [59, 60]. For this reason, our considerations lend themselves equally well as a complement to the manageable ML literature that ties in with corresponding theories of distributive justice [9, 28, 39, 46].

## 2 THE BASIC STRUCTURE OF FAIRNESS

The general understanding of fairness is regularly characterized as (i) typically concerning the treatment of people by people [3, 13, 21, 44] and (ii) not being described as a concept, but merely by referring to normatively charged synonyms – such as justice, equality, or absence of discrimination. At first glance, one might think that a more detailed definition of the term is superfluous and that fairness may be difficult to define, yet intuitively graspable. Suppose, e.g., that we have a cake from which two people are to receive a portion. It seems (initially) “fair” if each person gets one half of the cake. Fairness, then, is equated with “equality” or “equal treatment”. But what if one person is starving and the other is well-fed and satiated? What if the cake is supposed to be a reward for a service previously rendered and one person has done twice as much as the other?

### 2.1 Basis for Decision: Task-specific (In-)Equality

In these considerations – sometimes referred to as the difference between “equality” and “equity” – lies the basic problem of arguments about fairness. These arguments always depend on the reference point of the evaluation: Is it solely the distribution of the asset at hand? Or should the point of reference also be the person concerned? What is fair is then determined by who is affected.

These rather trivial considerations can be translated into a theoretical framework, i.e., a *formal basic structure*. The fundamental aspects of this concept were already developed by Aristotle in his analysis of the nature of justice [3] – which is not considered by [50, 51, 68] in their approaches to invite Aristotle into the discussion about fairness – and still provide a viable foundation for contemplating fairness today. Here, justice can be understood as mere adherence to the standards agreed upon in society (e.g., in laws) but also refers to the idea of equality. This idea of equality is the common root of what is meant by “justice” or “fairness” when used as a critical concept. Equality demands that *equals are to be treated equally and unequals unequally*. In other words, if unequals are treated equally, this is unfair. If equals are treated unequally, this is also unfair.

Consequently, the decision-making basis for treatment is the question of whether or not people are equal. However, *equality is a strongly normatively loaded term*, because people possess infinitely many qualities and are therefore never equal. In relation to certain situations, however, there is a normative stipulation that this difference between people should be irrelevant. Aristotle stated that this is particularly the case in private relations: if two people conclude a contract and it is a question of whether performance and consideration are balanced, it is irrelevant who these people are. Similarly, for the assessment of a penalty, it is irrelevant whether a rich person kills a poor person or vice versa. Because the decision here can be made by means of a simple calculation, Aristotle speaks in this respect of *arithmetic or continuous proportionality*.

In other situations, equality is said to depend on some characteristics of the people concerned; the relevance of the characteristics for the assessment of equality is decided normatively. Aristotle calls this the *worthiness* of people. We

will also use the – more contemporary – term *task-specific equality* to refer to that concept. For example, take the tax rate: usually, those who earn more also pay a higher tax rate, and vice versa. Because this kind of distribution decision must consider the balance of a more complex ratio, Aristotle speaks here of the *geometric or discrete proportionality*. The distribution ratio results in dependence on the worthiness negotiated in the political dispute: the ratio of the worthiness of person *i* to the assets distributed to them must correspond to the ratio of the worthiness of person *j* to the assets distributed to them.

As evidenced, *equality is always the result of a normative stipulation*. This is accompanied by an evaluation of what is to be brought into a relationship of equality – only the things or assets that are distributed (arithmetic proportionality), or also the people (geometric proportionality). For Aristotle, this depends on the subject area concerned: private dealings are decided by arithmetic proportionality, and government distribution is decided by geometric proportionality. Today, it is part of the political dispute whether private matters may be left in this sphere or whether state intervention according to the principles of the state distributive system is deemed necessary. Due to the normativity of the concept of equality, the assessment of whether actions constitute equal or unequal treatment – and are “fair” or “unfair” – can vary widely depending on the system of norms involved. However, certain moments of consensus are now emerging, at least in certain regions of the world – for example, with regard to the unequal treatment of women or ethnic groups.

Nowadays, the so-called *Protected Attributes* (PAs) play a special role in the decision-making process, e.g., the characteristics listed in the US Civil Rights Act of 1964, in the Charter of Fundamental Rights of the European Union, or in Article 3 of the German Constitution. In some cases, the comparison of two people must not be based on these PAs (*PA-neutrality*). Because the attributes, if they do not exist, cannot act as causal factors either, this decision is accompanied by the consideration to ignore the consequences of these attributes as well, e.g.: if ethnicity has an influence on an offender’s probability of recidivism, it seems natural to choose not to take this into account. Here, an underlying consideration may be that ethnicity is not the direct reason for the higher probability of recidivism, but rather that ethnicity has complex consequences for socialization processes, which then in turn have an effect on the higher recidivism probability, e.g., an average lower level of education or a certain place of residence. Society may take responsibility for these consequences, wanting to keep them out of the decision-making process. However, because processes occurring in the life of an individual are usually not monocausal – i.e., in the example, ethnicity is not the only causal factor for the level of education – this is again a social negotiation process, at the end of which a normative decision is made as to who is to be attributed responsibility for which processes. These considerations make it evident that eventually a fictitious world massively corrected by normative evaluations becomes the basis for deciding on the treatments of individuals.

Conversely, there are constellations in which the PAs are specifically targeted in order to justify the inequality of people and, thus, their unequal treatment in the form of a preference for the feature bearers (*PA-focus* or *affirmative action*, see, e.g., [20, 26, 37, 41]). The perspective depends on a normative decision as to whether the protection of the feature bearers in the respective task is to be ensured “only” by means of exclusion of these features and their effects, or whether reality is to be actively reshaped according to certain objectives. In the words of Aristotle, in the first case, diminished worthiness must not be based on the protected attributes, while in the second case, the same attribute is invoked to establish a higher worthiness. Thus, even the complex reality of today still fits into Aristotle’s concept, while at the same time, it is evident that multi-layered normative questions are involved here. Even in the area of PAs, there is thus no fixed “equal treatment” or “fairness”.

## 2.2 Decision Rule: Equal Treatment

Once the basis for a decision has been established, a decision rule must be drawn up in a second step, which determines the extent to which equality or inequality is to be taken into account. In general, this is given by the idea of proportionality. In the case of geometric proportionality, it must hold that the ratio of treatment  $t$  to worthiness  $w$  is the same for any comparison of two individuals  $i$  and  $j$ , i.e.,

$$\frac{t^{(i)}}{w^{(i)}} = \frac{t^{(j)}}{w^{(j)}} = k \quad \forall i, j \in \{1, \dots, n\}, k \in \mathbb{R}.$$

In other words, we can define a treatment function  $s : W \rightarrow T$ ,  $w \mapsto t$ , where typically  $W \subseteq \mathbb{R}$  and  $T \subseteq \mathbb{R}$ :

*Definition 2.1 (Geometrically fair treatment).* A treatment  $t^{(i)}$  of an individual  $i$  is called *geometrically fair* iff it is a linear function of the individual's worthiness  $w^{(i)}$ , i.e.,

$$t^{(i)} = s(w^{(i)}) = k \cdot w^{(i)} \quad \forall i \in \{1, \dots, n\}, k \in \mathbb{R}.$$

In the simpler case of arithmetic proportionality, a fair treatment does not depend on the worthiness:

*Definition 2.2 (Arithmetically fair treatment).* A treatment  $t^{(i)}$  of an individual  $i$  is called *arithmetically fair* iff it is the same as for any other individual, i.e., does not depend on the individual's worthiness  $w^{(i)}$

$$t^{(i)} = s(w^{(i)}) = k \quad \forall i \in \{1, \dots, n\}, k \in \mathbb{R}.$$

However, it may be decided to modify the treatment function  $s(\cdot)$  in a more flexible way, e.g., if a tax rate  $s(\cdot)$  is raised with higher income  $w^{(i)}$ , but this is done step-wise rather than continuously – and above a certain income, not at all. The function  $s(\cdot)$  can thus be normatively corrected:

*Definition 2.3 (Fair treatment).* A treatment  $t^{(i)}$  of an individual  $i$  is called *fair* iff it is determined by a monotonic<sup>1</sup> function of the individual's worthiness  $w^{(i)}$ , i.e.,

$$t^{(i)} = s(w^{(i)}) \quad \forall i \in \{1, \dots, n\}.$$

This guarantees (i) equal treatment of equals and (ii) unequal treatment of unequals in a normatively defined way that is then considered to be fair. Even if it would be mathematically straightforward to allow for  $s(\cdot)$  to be more flexible, a non-monotonic  $s(\cdot)$  would not be in line with the above philosophical concept. One will demand strict monotonicity if unequals are always to be treated unequally, and geometrically and arithmetically fair treatments result from special choices of  $s(\cdot)$ . Thus, again, valuation decisions arise that add a normative dimension, making it three normative questions: (1) How is the worthiness  $w^{(i)}$ , i.e., the measure of task-specific equality of individuals, defined? (2) Which attributes are defined as PAs (if there are any)? (3) How is the treatment function  $s(w^{(i)})$  defined?

The worthiness  $w^{(i)}$  may be directly identified with some observable feature  $v^{(i)}$  (such as the income in the tax rate example), but it may also be defined as a latent and non-observable feature  $z^{(i)}$ . Finally, it may be a combination of observable and non-observable features, i.e.,  $w^{(i)} = f(v^{(i)}, z^{(i)})$ , where  $f(\cdot)$  is another normative function. In the example of pretrial decisions – such as in the COMPAS example introduced shortly in this paper –  $v^{(i)}$  and  $z^{(i)}$  may be the type of crime and probability of recidivism, respectively. The duty of ML in the ADM process will be to provide an estimate of the non-observable feature(s)  $z^{(i)}$ , which serves as the basis for assessing the task-specific equality of individuals, i.e., the worthiness  $w^{(i)}$ , which in turn is the basis for the decision of their treatment  $t^{(i)}$  via  $s(w^{(i)})$ .

<sup>1</sup>Note that we do not require the function  $s(\cdot)$  to be *strictly* monotonic in general; the function is allowed to have plateaus, such as in the tax example. The concrete form of the function and the concrete value of  $k$  are normative choices.

### 3 ROLE OF ML IN THE ADM PROCESS

Now that we have defined the general concept of fairness, we can turn to answer the question of to what extent an ML model used in the context of an ADM process can be unfair. First, in Section 3.1, we will review the steps of an ADM process with respect to the applicability of the notion of fairness and illustrate it using the COMPAS example.

#### 3.1 Fairness in the ADM Process

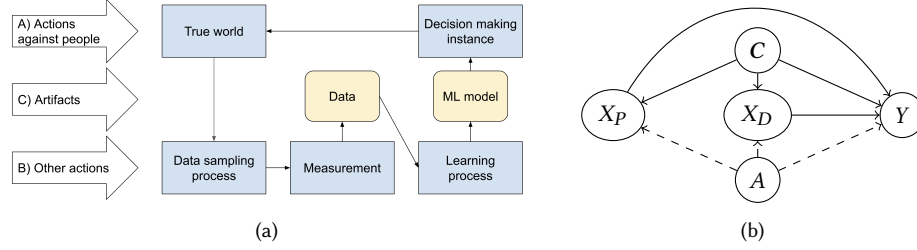


Fig. 1. (a) Simplified ADM process, following [64]. (b) Illustrative DAGs for the COMPAS example. In the FiND world, only solid arrows exist, and in the real world, all arrows exist. Features are *ethnicity* (protected attribute  $A$  with classes *Non-White* and *White*), *age*, *gender* (confounder  $C$ ), *number of priors* ( $X_P$ ), and *charge degree* ( $X_D$ ). The target is *recidivism in two years* ( $Y$ ).

The ADM process is explained in detail in [64], while here we consider a reduced version (see Figure 1a). We divide the process into three categories: (A) actions against people, (B) other actions, and (C) artifacts. As shown in Section 2, the notion of fairness is applicable only to category (A) and, hence, not directly applicable to the ML model. However, the results of categories (B) and (C) affect the “worthiness”, i.e., the measure of task-specific equality of individuals that is the basis of decisions for actions against people. As mentioned above, the worthiness  $w^{(i)}$  may consist of observable features  $v^{(i)}$  (like the type of crime) and non-observable features  $z^{(i)}$  (like the recidivism probability), i.e.,  $w^{(i)} = f(v^{(i)}, z^{(i)})$ . For ease of presentation, we will ignore any observable features in the following and set  $w^{(i)} = z^{(i)}$ . For a classification task,  $z^{(i)}$  is the individual probability of success  $\mathbb{P}(y = 1|i) = \pi^{(i)}$  of an event  $y \in \{0, 1\}$ ; for a regression task, it is the individual expected value  $\mathbb{E}(y|i) = \mu^{(i)}$ . Thus, indirectly, the elements of categories (B) and (C) can induce unfair actions. We will hold to the classification scenario in the following for notational clarity, but switching to the regression – or survival – scenario is straightforward, thereby remedying a critique towards fairML’s focus on classification formulated by [35]. Before we shed more light on the role of ML in this process, we highlight the crucial difference between the ML model and actions based on the model as well as analyze the effect of the occurrence of PAs.

In the much-cited COMPAS example [2], the individual probability  $\pi^{(i)}$  of recidivism within two years ( $y \in \{0, 1\}$ ) [49] is the basis for deciding how to treat defendant  $i$ . Since  $\pi^{(i)}$  is unknown, an ML model  $\hat{\pi}(\cdot)$  is used to estimate this probability, based on a feature vector  $\mathbf{x}^{(i)}$ . The goal of the ML model [see, e.g., 58] is to assign different recidivism probabilities as accurately as possible to different individuals, based on the observed features:

*Definition 3.1 (Statistically discriminative model w.r.t. feature  $X$ ). An ML model  $\hat{\pi}(\cdot)$  is called *statistically discriminative w.r.t. feature  $X$*  if there is at least one pair of individuals  $i$  and  $j$  who differ only with respect to feature  $X$  and are assigned different predicted probabilities  $\hat{\pi}^{(i)} \neq \hat{\pi}^{(j)}$ .*

This is either the case or not the case for each feature. However, a fairness evaluation can only be applied to the action based on this evaluation. From this, we derive similar to [32]:

*Definition 3.2 (Descriptively unfair treatment).* Assume a pair of individuals  $i$  and  $j$  who differ only with respect to feature  $X$ . Assume that feature  $X$  is not a causal reason for a difference in the true probabilities, i.e.,

$$\pi^{(i)} = \pi^{(j)}.$$

A treatment is called *descriptively unfair w.r.t. feature  $X$*  if these individuals are treated differently, i.e.,

$$t^{(i)} (= s(\hat{\pi}^{(i)})) \neq t^{(j)} (= s(\hat{\pi}^{(j)})),$$

in a process due to differing estimated individual probabilities  $\hat{\pi}^{(i)} \neq \hat{\pi}^{(j)}$ .

*Example 3.3.* Assuming that the recidivism probability  $\pi$  does not causally depend on the ethnicity  $X$ , yet two persons who differ only with respect to ethnicity (i.e., have the same true recidivism probability) would be assumed by the ML model to have different recidivism probabilities, and therefore there would be different judicial decisions, then this unequal treatment would be descriptively unfair – regardless of whether ethnicity is a PA or not, because equals (equal worthiness  $\pi^{(i)} = \pi^{(j)}$ ) would be treated unequally (unequal  $t^{(i)} \neq t^{(j)}$ ).

If, on the other hand,  $X$  is causal for a difference in  $\pi$ , i.e.,  $\pi^{(i)} \neq \pi^{(j)}$ , then a differing decision basis due to  $X$ , i.e.,  $\hat{\pi}^{(i)} \neq \hat{\pi}^{(j)}$ , and a resulting difference in treatment, i.e.,  $t^{(i)} \neq t^{(j)}$ , cannot be said to be descriptively unfair; unequals are treated unequally. This evaluation may change with the introduction of PAs, as derived in Section 2 and similarly noted by [50], as the assessment of task-specific equality changes:

*Definition 3.4 (Normatively unfair treatment).* Assume a pair of individuals  $i$  and  $j$  who differ only with respect to feature  $A$ . Assume that feature  $A$  is a causal reason for a difference in the true probabilities, i.e.,

$$\pi^{(i)} \neq \pi^{(j)}.$$

Assume that feature  $A$  is a PA. A treatment is called *normatively unfair w.r.t. feature  $A$*  if these individuals are treated differently, i.e.,

$$t^{(i)} (= s(\hat{\pi}^{(i)})) \neq t^{(j)} (= s(\hat{\pi}^{(j)}))$$

in a process due to differing estimated individual probabilities  $\hat{\pi}^{(i)} \neq \hat{\pi}^{(j)}$ , as feature  $A$  must not be invoked for the determination of task-specific equality.

*Example 3.5.* Suppose that the probability of recidivism  $\pi$  depends causally on the ethnicity  $A$ , but the judicial decision should not – for normative reasons – depend on differences in  $\pi$  due to ethnicity, e.g., because society decides not to let the individual bear the responsibility for the grievance that ethnicity is causal for the probability of recidivism (e.g., via racial profiling and higher re-arrest rates), but to take it from them and bear it as a whole society.

So, the measure of task-specific equality is no longer the true recidivism probability  $\pi$  in the real world, but the true recidivism probability  $\psi$  in a fictitious, normatively desired (FiND) world:

*Definition 3.6 (FiND world).* The FiND world is a fictitious, normatively desired world, where the PAs have no causal effects on the target variable, neither directly nor indirectly, i.e.,  $\psi^{(i)} = \psi^{(j)}$  for the pair considered in Definition 3.4.

This mirrors the demand of several laws to not differentiate between individuals based on their PA (e.g., gender, ethnicity), which means that individuals are to be considered as being equal if they only differ in their PA. This also



means that subsequent effects of their PA on other features must be eliminated, which is why we advocate for removing all direct and indirect effects of the PA on the target to reach the FiND world (i.e., remove dashed arrows in the Directed Acyclic Graph (DAG) shown in Figure 1b). Several current papers in fairML argue for removing just some path-specific effects, where the path itself is deemed unfair; however, this does not reflect the legal requirements of many current laws. Of course, these norms may change in the future, asking for methods that deal with path-specific effects.

Once we have moved to this world after defining the PAs, we use  $\psi^{(i)}$  (instead of  $\pi^{(i)}$ ) as a measure of task-specific equality, i.e., introducing PAs has changed the definition of worthiness in the specific use-case normatively; hence, a fair treatment would result by  $t^{(i)} = s(\psi^{(i)})$ . The role of ML is to estimate  $\pi^{(i)}$  or  $\psi^{(i)}$  accurately, respectively.

### 3.2 Contribution of ML – without PAs

We first consider the situation where no PA is present and show that, even then, the use of an ML model can induce fairness problems. In Section 3.3, we turn to the situation where PAs are present.

**3.2.1 Can ML induce unfairness, and if so, how?** In Section 2, we observed that the treatment  $t^{(i)}$  of an individual  $i$  based on worthiness  $w^{(i)}$  is fair iff it follows the normative decision rule  $s(\cdot)$ , i.e., iff  $t^{(i)} = s(w^{(i)})$ . In Section 3.1, we observe that in the context of an ADM process, the worthiness  $w^{(i)}$  often corresponds to the individual probability  $\pi^{(i)} = \mathbb{P}(y = 1|i)$ . Since the true individual probability  $\pi^{(i)}$  is unknown in practice, we use data to estimate  $\pi^{(i)}$ . In doing so, two key steps introduce imprecision that can induce unfair treatment and are described below (see also Table 1).

Table 1. Coarse information due to finite feature space  $\mathcal{X}$  and estimation via ML introduce errors. The point of reference changes with the presence of PAs (columns, see Section 3.3).

	Real world	Warped world	FiND world
Fair treatment	$s(\pi^{(i)})$	$s(\varphi^{(i)})$	$s(\psi^{(i)})$
Treatm. w/ coarse inf.	$s(\pi(\mathbf{x}^{(i)}))$	$s(\varphi(\tilde{\mathbf{x}}^{(i)}))$	$s(\psi(\mathbf{x}_F^{(i)}))$
Treatm. w/ ML model	$s(\hat{\pi}(\mathbf{x}^{(i)}))$	$s(\hat{\varphi}(\tilde{\mathbf{x}}^{(i)}))$	$s(\hat{\psi}(\mathbf{x}_F^{(i)}))$

*Coarsening of Information.* The first step is to coarsen the information by basing the treatment not on the individual probability  $\pi^{(i)}$  but on a group probability  $\pi(\mathbf{x}^{(i)})$  that assigns the same value to all individuals  $I_{\mathbf{x}} = \{i : \mathbf{x}^{(i)} = \mathbf{x}\}$  with the same combination of observed features  $\mathbf{x}$ . Naturally, the function  $\pi : \mathcal{X} \rightarrow [0, 1]$  is as true and unknown as the individual probabilities  $\pi^{(i)}$ . For any feature combination  $\mathbf{x}$ , this function is the best possible approximation of the different  $\pi^{(i)}$  of the different individuals  $I_{\mathbf{x}}$  sharing that feature combination, based on the available  $p$  features.

This coarsening of information introduces fairness problems, since individuals  $I_{\mathbf{x}}$  are treated the same even though they are – except for the features collected – not the same. With the exception of degenerate special cases where all individuals in a group  $I_{\mathbf{x}}$  are identical or for a few individuals where  $\pi^{(i)} = \pi(\mathbf{x}^{(i)})$  happens to hold, this results in

$$\pi^{(i)} \neq \pi(\mathbf{x}^{(i)}) \Rightarrow s(\pi^{(i)}) \neq s(\pi(\mathbf{x}^{(i)})) = t^{(i)} \quad \forall i \in \{1, \dots, n\}$$

(if  $s(\cdot)$  is injective), so (almost) all individuals are treated unfairly – even if  $\pi(\cdot)$  is known.

This step is only appreciated in a few works, such as [27, 44, 55, 63]. However, it is very important for fairness considerations of ADM systems, since this means that already reducing the information regarding an individual to finitely many features is a gateway to unfairness – even if we knew the true  $\pi(\cdot)$  and before introducing PAs.



*Estimation by ML.* Estimating the unknown function  $\pi(\cdot)$  by  $\hat{\pi}(\cdot)$  introduces two types of error: The *estimation error* comes from the fact that the learner has only a finite amount of training data  $\mathcal{D} = \left( \left( \mathbf{x}^{(1)}, y^{(1)} \right), \dots, \left( \mathbf{x}^{(n)}, y^{(n)} \right) \right)$  available. This error converges to 0 for  $n \rightarrow \infty$ . Should the true  $\pi(\cdot)$  not be part of the hypothesis space  $\mathcal{H}$ , a non-reducible *approximation error* remains.

**3.2.2 Evaluation regarding fairness.** Evaluation of the ML model  $\hat{\pi}(\cdot)$  can be done at two levels, namely (i) with respect to  $\pi(\cdot)$  or (ii) with respect to  $\pi^{(i)}$ . Considering level (i), for cases in which every conceivable feature combination  $\mathbf{x} \in \mathcal{X}$  is represented sufficiently often (only possible in the case of few categorical features), the mean observed and predicted probabilities can be compared directly – for example, via the L2 norm of the differences of the group means. This value should be as small as possible on a test set. (Note, however, that using the L2 norm is another normative choice.) Since this (a) is only conceivable for special data situations and (b) ignores the imprecision introduced by coarsening  $\pi^{(i)}$  via  $\pi(\mathbf{x}^{(i)})$ , an evaluation with respect directly to  $\pi^{(i)}$  seems more purposeful: We recall that a treatment  $t^{(i)}$  is fair iff  $t^{(i)} = s(\pi^{(i)})$ , so here, iff  $s(\hat{\pi}(\mathbf{x}^{(i)})) = s(\pi^{(i)})$ . Thus, a sufficient condition for fair treatment is  $\hat{\pi}(\mathbf{x}^{(i)}) = \pi^{(i)}$ , which can be seen as an individual version of well-calibration [44, 66]:

*Definition 3.7 (Individually well-calibrated model).* An ML model  $\hat{\pi}(\cdot)$  is called *individually well-calibrated for individual  $i$*  if  $\hat{\pi}(\mathbf{x}^{(i)}) = \pi^{(i)}$ ; the model is called *individually well-calibrated* if  $\hat{\pi}(\mathbf{x}^{(i)}) = \pi^{(i)} \quad \forall i \in \{1, \dots, n\}$ .

Note that a direct generalization to regression, survival tasks, etc., is possible by replacing the probabilities with expected values. For a strictly monotone function  $s(\cdot)$ , this is also a necessary condition for fairness, i.e., a treatment  $s(\hat{\pi}(\mathbf{x}^{(i)}))$  is to be called unfair if the model is not individually well-calibrated for individual  $i$ .

Although the notion of fairness refers to actions against individuals, empirical evaluation cannot be performed individually; evaluation is only possible by considering appropriate groups. This poses a massive problem, since any group definition runs the risk of assigning individuals to a group that is inappropriate with respect to their true probability  $\pi^{(i)}$ . In particular, it falls short to define a group based only on a single feature. Rather, it is necessary to consider all computationally identifiable subgroups as is done in, e.g., [27, 33, 40, 43], and check well-calibration on all these subgroups. Since exact equality  $\hat{\pi}(\mathbf{x}^{(i)}) = \pi^{(i)}$  is not achievable in practice, a pragmatic tolerance range should be conceived. The above equalities in the definitions of individual well-calibration are then relaxed to  $\hat{\pi}(\mathbf{x}^{(i)}) \in (\pi^{(i)} - \epsilon, \pi^{(i)} + \epsilon)$  with a tolerated deviation of  $\epsilon \in \mathbb{R}^+$ .

### 3.3 Contribution of ML – with PAs

We have observed that even without the presence of PAs, the use of empirical methods can induce fairness problems. We now analyze what changes through the introduction of PAs. First, we elaborate on the FiND world and its approximation via warping, and then we turn to the question of evaluating the model regarding fairness.

**3.3.1 FiND world and approximation via warping.** In Section 3.1, it was shown that in the presence of a PA, the basis for decisions must be PA-neutral to be able to achieve fair treatment, i.e., the normative decision can be made to use the PA-neutral true probability  $\psi^{(i)}$  instead of  $\pi^{(i)}$  as a measure of task-specific equality. This  $\psi^{(i)}$  describes for an individual  $i$  the probability  $\mathbb{P}(y_F = 1|i)$  for an event  $y_F \in \{0, 1\}$  in a FiND world in which the PA has no causal effect on this event, neither directly nor indirectly. As above, treatment  $t^{(i)}$  of an individual  $i$  is then said to be fair iff it follows the normatively specified decision rule  $s(\psi^{(i)})$ , with changed decision basis  $\psi^{(i)}$ . Thus, in the example, we consider the individual recidivism probability  $\psi^{(i)}$ , in a fictitious world where the PA has no causal effect on recidivism.

Since the PA is not supposed to have a causal effect on  $y_F$ , the normative decision can be made to exclude certain indirect effects of the PA on  $y_F$  via other features. Therefore, *the feature vector of individual  $i$  is also to be considered PA-neutral*, i.e.,  $\mathbf{x}_F^{(i)}$ . This does not mean that the PA is removed (hence, goes beyond “fairness through unawareness”, see [28]). Rather, only those influences that (possibly via detours) affect  $y_F$  are removed (see dashed arrows in Figure 1b). In the COMPAS example, individuals might have not only a different recidivism probability when the effect of the PA is removed but also, e.g., a different income or residence, assuming that in the real world, the PA also has a causal effect on these features.

It is also not certain that the relation of event and features is identical in the real and the FiND world after potentially causal effects are removed, so the function  $\psi(\cdot)$  we are looking for is also potentially different from  $\pi(\cdot)$ . In the COMPAS example, the influence of features such as income and residence on the recidivism probability might be different in the two worlds. Thus, we are confronted with a different situation than in Section 3.2, since we want to learn contexts in a fictitious world, with a different data-generating process (see also Table 1, last column).

Since we never have access to FiND-world data in an empirical use case, we must approximate this data. We dub this approximation *warping*, which results in data from the *warped world*. Targets and features in this world are denoted  $\tilde{y}^{(i)}$  and  $\tilde{\mathbf{x}}^{(i)}$ , respectively, and the true target probability is  $\varphi^{(i)} = \mathbb{P}(\tilde{y} = 1|i)$ . In Section 4.1, we propose a concrete warping method; for the remainder of this section, we simply assume that such a warping exists.

**3.3.2 Evaluation regarding fairness.** We assume that we have trained a model  $\hat{\varphi}(\cdot)$  based on warped-world data  $\tilde{\mathcal{D}} = \left( (\tilde{\mathbf{x}}^{(1)}, \tilde{y}^{(1)}), \dots, (\tilde{\mathbf{x}}^{(n)}, \tilde{y}^{(n)}) \right)$ . For an individual  $i$ , we obtain an estimate  $\hat{\varphi}(\tilde{\mathbf{x}}^{(i)})$ , i.e., an approximation of its warped-world probability  $\varphi^{(i)}$  by warped features  $\tilde{\mathbf{x}}^{(i)}$ . Naturally, we introduce imprecision analogously as described above by coarsening information and estimation by ML, but this time in the warped world (see also Table 1, second column). Per definition, the treatment  $t^{(i)} = s(\hat{\varphi}(\tilde{\mathbf{x}}^{(i)}))$  is fair iff  $s(\hat{\varphi}(\tilde{\mathbf{x}}^{(i)})) = s(\psi^{(i)})$ . Thus, no meaningful condition for fairness is  $\hat{\varphi}(\tilde{\mathbf{x}}^{(i)}) = \pi^{(i)} \forall i$ , nor  $\hat{\varphi}(\tilde{\mathbf{x}}^{(i)}) = \varphi^{(i)} \forall i$ , but a sufficient condition includes the FiND world probability  $\psi^{(i)}$ :

**PROPOSITION 3.8.** *A treatment  $s(\hat{\varphi}(\tilde{\mathbf{x}}^{(i)}))$  of individual  $i$  is fair if  $\hat{\varphi}(\tilde{\mathbf{x}}^{(i)}) = \psi^{(i)}$ .*

For a strictly monotonic  $s(\cdot)$ , this condition is also necessary for fair treatment. However, we can only test this condition with access to  $\psi^{(i)}$ , which we do not have. Alternatively, we can formulate a necessary condition:

**PROPOSITION 3.9.** *Let  $s(\cdot)$  be strictly monotonic; a treatment  $s(\hat{\varphi}(\tilde{\mathbf{x}}^{(i)}))$  of individual  $i$  is only fair if  $\hat{\varphi}(\tilde{\mathbf{x}}^{(i)}) = \psi(\mathbf{x}_F^{(i)})$ .*

Then, all who are PA-neutrally equal (same  $\mathbf{x}_F^{(i)}$ ) are treated equally (because of equal predicted worthiness  $\hat{\varphi}(\tilde{\mathbf{x}}^{(i)})$ ). However, this condition is only necessary for fair treatment, since possibly  $\psi^{(i)} \neq \psi(\mathbf{x}_F^{(i)})$ . Moreover, we cannot use this for practical evaluations, since we do not know  $\psi(\cdot)$ . Therefore, let us instead focus on the validity of the warping:

**PROPOSITION 3.10.** *Let  $s(\cdot)$  and  $\hat{\varphi}(\cdot)$  be strictly monotonic. A treatment  $s(\hat{\varphi}(\tilde{\mathbf{x}}^{(i)}))$  of individual  $i$  is only fair if  $\tilde{\mathbf{x}}^{(i)} = \mathbf{x}_F^{(i)}$ .*

Then again, all who are PA-neutrally equal are treated equally. Since Proposition 3.10 is a necessary statement, we must still aim for individual well-calibration, analogously as described in Section 3.2 but here concerning the warped world probabilities  $\varphi^{(i)}$ . We still face the complication that we do not know the true counterfactuals  $\mathbf{x}_F^{(i)}$ . However, the validity of the counterfactuals can at least be qualitatively evaluated in practice, and evaluation of warping is disentangled of evaluation of the prediction model in the warped world. We leave it to future work to develop

concrete measures for the validity of a warping method. In the experiments below, we instead focus on more descriptive evaluations, comparing real-world and warped-world predictions as well as their behavior in the PA-groups.

*Relation to Counterfactual Fairness.* Counterfactual (Cf) fairness [47] also considers a fictitious world in comparison to the real world. While seemingly related at first glance, these concepts differ substantially; see Figure 2 for a comparison with a very simple DAG, where the top left DAG shows the factual, real world. In our FiND world (top middle DAG), the PAs have no causal effect on the target and also not on features mediating this effect. The individual still belongs to its original class of the PA but with changed real-world descendants of the PA. In their Cf world (bottom left DAG), an individual belongs to a different class of the PA, which also affects descendants. This means the FiND world changes (some) features and the target by modifying causal relationships regarding the PA, while the Cf world intervenes on the PA, maintaining real-world causal relationships. We then approximate the FiND world through the warped world, train an ML model, evaluate the model, and predict new observations with the model in the warped world (dashed box). Cf fairness trains an ML model in the factual, real world, and evaluates it by comparing its predictions using factual and counterfactual values for the PA and remaining features to assess fairness (dotted box).

Despite these differences, we fulfill Cf fairness in a certain sense: Consider a Non-White person  $i$ . Cf fairness demands that its prediction (using its factual feature vector  $\mathbf{x}^{(i)}$ ) is the same as for its counterfactual  $j$ , where the person belongs to class White, i.e., using  $\mathbf{x}^{(j)} = \mathbf{x}_{a'}^{(i)}$  ( $\neq \mathbf{x}^{(i)}$  in general). Since these two fictitious persons have the same worthiness and hence the same FiND-world feature vectors  $\mathbf{x}_F^{(i)} = \mathbf{x}_F^{(j)}$  in our concept, we demand that they have the same warped world feature vectors  $\tilde{\mathbf{x}}^{(i)} = \tilde{\mathbf{x}}^{(j)}$ , which leads to equal predictions  $\hat{\phi}(\tilde{\mathbf{x}}^{(i)}) = \hat{\phi}(\tilde{\mathbf{x}}^{(j)})$ . In this world, the PA has no effect, which means that  $\tilde{\mathbf{x}}$  does not contain descendants of the PA. With Lemma 1 of [47], this fulfills Cf fairness. However, as shown above, this is just a necessary condition for fairness and a form of individual well-calibration is paramount for achieving fairness. Measuring predictive performance must take place in the “correct” world, i.e., in the real world (if no PAs are present), or in the FiND world – approximated by the warped world – (if PAs are present).

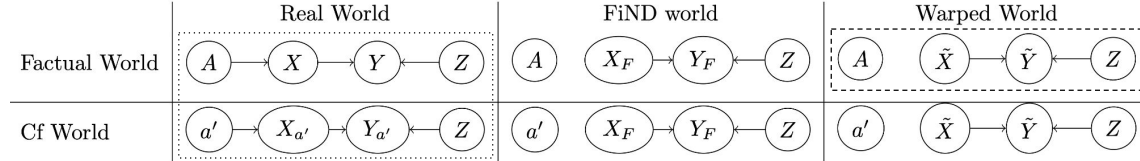


Fig. 2. Relating our concept to counterfactual (Cf) fairness by [47] on DAGs comprising PAs ( $A$ ), features descending from  $A$  ( $X$ ), other features ( $Z$ ), and a target  $Y$ . We argue to train, evaluate, and predict in the warped world (dashed box), while Cf fairness compares predictions in the factual world and the Cf world (dotted box).

#### 4 PROPOSED IMPLEMENTATION OF THE CONCEPT

In this section, we tie together what was introduced so far and outline how our framework could be used for tackling fairness issues in an applied use case. Section 4.1 outlines how to assess the FiND world via warping and how to train and predict in the warped world. Section 4.2 presents illustrative experiments with the COMPAS data. In the Appendix, Section A describes a workflow for an applied ADM use case.

#### 4.1 Warping via Rank-Preserving Interventional Distributions

We have observed that for valid training of a model as well as for its evaluation regarding fairness, a warping approach must be found to create an approximation of the FiND world. For this, we propose rank-preserving interventional distributions (RPID). We sketch the idea in the following and refer to [11] for details.

The core idea of RPID is to make the variables neutral with respect to the PA while maintaining any individual merits, sequentially, for all descendants of the PA. For example, a Non-White person, who is at the 5%-quantile of the age-specific distribution of  $X_P$  in the Non-White subgroup will be “warped” to the 5%-quantile of the age-specific distribution of  $X_P$  in the White subgroup. RPID defines interventions on the structural causal model (SCM, see [56]) that lead to a FiND world that respects both the requirements on the PAs and individual merits. Our estimands are defined on the joint counterfactual post-intervention distribution, e.g., the counterfactual  $X_P$ -distribution. Whether the desired estimand can be identified, i.e., expressed as a function of the observed data, requires considerations on, e.g., confounders of the mediator-outcome relationship. Additionally, we propose an estimation method based on a particular g-formula factorization to estimate the distributions of the FiND world. We propose a model-based residual approach for estimating FiND world distributions and for warping real-world data: We assume an additive, homoscedastic error term in all models of mediators and target variable, given parents of these variables in the DAG, where we consider separate models per subgroup of the PA.

This ultimately leads to a warping function from the real world to the warped world. Model training, validation, and prediction for new observations take place in the warped world. This means that we focus on estimating a well-performing model, and try to achieve individual well-calibration – but this time in the warped world. There is no longer a need for special evaluation measures in order to assess (un)fairness. The complexity is shifted to estimating the SCMs. Note that it is of paramount importance for a successful practical use case to implement a close collaboration between subject-matter experts and machine learning experts, since expert knowledge will have to go hand-in-hand with empirical findings (as also pointed out by others before, e.g., [25, 38, 45, 52]) in order to derive realistic causal models. The practical usability of this approach depends on the extent to which the causal relationships in the real world can be estimated as well as on the success of removing certain causal relationships without modifying others.

#### 4.2 Experiments

As an example, we show experiments on the COMPAS data [2]. These experiments illustrate how our framework could be applied in practice and show how the warping approach affects the predictions for the different subgroups regarding the PA. However, this must not be misunderstood as a fully applied use case. As Section A in the Appendix demonstrates, several normative questions must be answered carefully, followed by cautious modeling of the data. We use the DAGs of Figure 1b, noting again that this is just an illustration, and the true DAG will be more complex, contain more features, and must be developed together with domain experts.

We apply the residual warping approach of RPID outlined above: We sequentially warp  $X_P$ ,  $X_D$ , and  $Y$  of the Non-White individuals, using a Poisson model for  $X_P|A = a, C$ , and logit models for  $X_D|A = a, C$  and  $Y|A = a, C, X_D, X_P$ , with  $a = \text{Non-White}$  (see Figure 1b for variable descriptions). White individuals’ features and target are not warped, i.e.,  $\tilde{\mathbf{x}}^{(i)} = \mathbf{x}^{(i)}$ , but the predicted recidivism rates also change from real-world rates  $\hat{\pi}^{(i)}$  to warped-world rates  $\hat{\phi}^{(i)}$  due to differing training data of Non-White individuals. As prediction models for the recidivism rate, we train logit models on real-world and warped data, respectively. We train all models (warping and recidivism rates) on an 80% random subsample of the data and test on the remaining observations. Table 2 shows the individuals of the test data where the

(a)									(b)							
<i>gender</i>	<i>age</i>	$X_P$	$X_D$	$\tilde{X}_P$	$\tilde{X}_D$	$\hat{\pi}^{(i)}$	$\hat{\phi}^{(i)}$	<i>diff</i>	<i>gender</i>	<i>age</i>	$X_P$	$X_D$	$\hat{\pi}^{(i)}$	$\hat{\phi}^{(i)}$	<i>diff</i>	
Male	63	23	0	15	0	0.83	0.30	-0.53	Female	50	30	1	0.94	0.53	-0.41	
Male	53	26	0	18	0	0.93	0.41	-0.52	Female	47	28	0	0.94	0.54	-0.40	
Male	56	22	0	15	0	0.85	0.35	-0.50	Male	55	33	0	0.97	0.60	-0.37	
Male	63	22	1	14	1	0.77	0.28	-0.49	Male	57	21	1	0.80	0.44	-0.36	
...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	
Male	54	0	1	0	1	0.15	0.22	0.07	Male	52	0	1	0.17	0.26	0.09	
Male	55	0	1	0	1	0.15	0.22	0.07	Male	52	0	1	0.17	0.26	0.09	
Male	56	0	1	0	1	0.14	0.21	0.07	Male	53	0	1	0.16	0.26	0.10	

Table 2. Strongest warped individuals for (a) Non-White and (b) White individuals in test data, where  $diff = \hat{\phi}^{(i)} - \hat{\pi}^{(i)}$ . Individuals above the dots are negatively discriminated in the real world, while individuals below the dots are positively discriminated in the real world. Overall, negative discrimination is higher for Non-White individuals and positive discrimination is higher for White individuals.

predicted recidivism rate changed most between real world and warped world (column *diff*). We can observe that (a) this is associated with a decrease from  $X_P$  to  $\tilde{X}_P$  for Non-White individuals who had the strongest change, and also that (b) the predicted recidivism probability is lower in the warped world for White individuals with a high value of  $X_P$  (values range between 0 and 38 in the data). This is due to a lower coefficient in the logit model related to this feature, which is 0.15 (se 0.0076) in the real world and 0.05 (se 0.0075) in the warped world.

Figure 3a visualizes the prediction differences  $\hat{\phi}^{(i)} - \hat{\pi}^{(i)}$  between the worlds for both PA groups. While White prediction differences vary around 0 (mean:  $-0.0047$ , p-value of t-test against 0: 0.254), Non-White prediction differences show a trend towards lower values (mean:  $-0.0918$ , p-value of t-test:  $< 10^{-91}$ ), which means that – on average – their recidivism rates are 9.2% points lower in the warped world. While 76% of Non-White individuals receive lower predictions in the warped world (41% for White), 24% receive higher predictions (59% for White). Figure 3b visualizes the predictions in both worlds for the Non-White subgroup. We see the overall negative trend, where the ranking within the group changes between the two worlds. This indicates differing individual strengths of discrimination in the real world and illustrates the individual perspective of our proposal.

## 5 CONCLUSION AND DISCUSSION

Despite a rapidly growing body of literature in fairML, a unified theoretical foundation is still lacking. By drawing on basic philosophical ideas, such a foundation to support the fairness debate may be derived. In this work, the basic axioms that underlie the fairness debate even today – without being made explicit – were identified, and their relationship to one another was elaborated. It was necessary to separate the basic structure of fairness from material aspects. Based on this, the normative stipulations could be precisely identified, which must take place outside ML. In the case of PA-neutrality, three normative questions must be addressed for the task at hand:

- (1) Which attributes are defined as PAs (if there are any)?
- (2) How is the worthiness ( $w^{(i)}$ ), i.e., the measure of task-specific equality of individuals, defined (e.g., by identifying it with an (un-)observable feature or with a function of several such features)?
- (3) How is the treatment function ( $s(w^{(i)})$ ) defined?

ML models provide estimates of the worthiness and are not unfair per se, but can induce unfairness. Regardless of the presence of PAs, fairness problems can arise with ML, e.g., if the model is not individually well-calibrated. Thus,

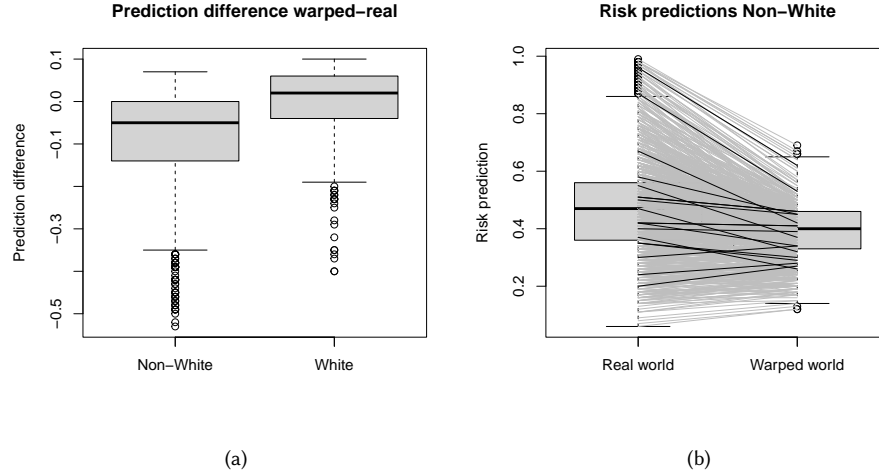


Fig. 3. Recidivism predictions in the warped world and the real world. (a) shows differences in predictions for both groups and (b) shows predictions in both worlds for the Non-White group, where lines connect the same individuals (a random subsample has black lines for better readability).

we do not see a tradeoff between fairness and predictive performance; rather, predictive performance is essential for fairness. Since individual well-calibration cannot be checked empirically, approaches that consider all computationally identifiable subgroups should be pursued. In general, once PAs are defined, fairness cannot be evaluated easily because the ground truth of the FiND world – where the causal effects of PAs have been removed – is missing. The concept of fairness is intrinsically related to causal considerations. However, causal questions are generally hard to answer with observational data [42, 47, 57]; for fairML, this means that causal approaches must come into focus even more.

*Limitations and Future Research.* While we present first algorithms and a workflow for applying our framework in practice, working out detailed warping methods and concrete techniques to measure the validity of the warped data is left to future research.

This paper considers fairness questions of ADM systems, where an ML model is used to predict some characteristic of interest in the subject matter concerned. Other applications of ML models – such as diagnostic usage as advocated in, e.g., [4] – are out of scope. Considering PAs, we focus on how to reflect *PA-neutrality* in the ADM process. For future studies, we posit that a worthwhile direction could be to tackle the incorporation of *PA-focus* as well.

As mentioned above, the focus of this work is on the theoretical problem of fairML, pointing out weaknesses in current proposals of fairML and showing a direction to overcome these. We did not want to hide these fundamental challenges by presenting a fully applied use case, hence pretending that we would have the perfect solution for all challenges. Therefore, we limited ourselves to some illustrative examples that we considered helpful to understand our framework. The investigation of proper solutions for these challenges is important for future research in this field, and we hope that this work inspires other researchers to pursue this path, eventually leading to improved methods to deal with fairness issues in ML and ADM.

## ETHICAL STATEMENTS

*Ethical Considerations Statement.* Our work has a rather theoretical, philosophical perspective, and we do not propose a concrete application that could harm individuals. One goal of this paper is to disentangle normative choices and ML-related methodology to provide greater linguistic clarity when discussing fairness in ML and ADM systems. While conducting this work, it was important for us to be as specific as possible about this distinction between normative and methodological questions. We emphasize that the answers to these normative questions (as summarized in Section 5) must be the product of careful ethical considerations and, in many cases, the result of a broader societal discussion.

*Researcher Positionality Statement.* Part of the author group is educated and based in the field of statistics. While working in methodological research of ML, the authors appreciate philosophical questions surrounding the analysis of data and are skeptical of technical proposals that seem not to deeply interrogate *why* they are proposing these solutions. The other part of the author group is educated and based in the fields of law and philosophy. They work on the very philosophical foundations of law and, thereby, also engage closely with ethical questions.

The interdisciplinary nature of our team contributes to a more comprehensive understanding of fairness in ML.

*Adverse Impact Statement.* As for other technical solutions, blindly trusting techniques to overcome fairness problems can have negative societal impacts. However, we hope that by explicitly tasking non-ML users with answering three broadly understandable normative questions and by linking the ML model evaluation to the respective answers, we contribute a step in the direction of bringing societal needs and technical solutions closer together. Nevertheless, if the answers establish undesirable, e.g., discriminatory norms, then there is no technical possibility to remedy this. Therefore, it is of paramount importance that the normative stipulations – especially in critical applications – are transparent and result in a broad societal discussion.

## REFERENCES

- [1] Alekh Agarwal, Alina Beygelzimer, Miroslav Dudik, John Langford, and Hanna Wallach. 2018. A Reductions Approach to Fair Classification. In *Proceedings of the 35th International Conference on Machine Learning*, Jennifer Dy and Andreas Krause (Eds.). PMLR, 60–69. <https://proceedings.mlr.press/v80/agarwal18a.html>
- [2] Julia Angwin, Jeff Larson, Surya Mattu, and Lauren Kirchner. 2016. Machine bias: There’s software used across the country to predict future criminals. and it’s biased against blacks. *ProPublica* (2016). <https://www.propublica.org/article/machine-bias-risk-assessments-in-criminal-sentencing>
- [3] Aristotle. 2009. *The Nicomachean ethics (book V)*. Oxford University Press. <https://doi.org/10.1093/actrade/9780199213610.book.1>
- [4] Chelsea Barabas, Madars Virza, Karthik Dinakar, Joichi Ito, and Jonathan Zittrain. 2018. Interventions over Predictions: Reframing the Ethical Debate for Actuarial Risk Assessment. In *Proceedings of the 1st Conference on Fairness, Accountability and Transparency*. PMLR, 62–76. <https://proceedings.mlr.press/v81/barabas18a.html>
- [5] Solon Barocas, Moritz Hardt, and Arvind Narayanan. 2019. *Fairness and Machine Learning*. <http://www.fairmlbook.org>
- [6] Yahav Bechavod, Christopher Jung, and Steven Z. Wu. 2020. Metric-Free Individual Fairness in Online Learning. In *Advances in Neural Information Processing Systems*, H. Larochelle, M. Ranzato, R. Hadsell, M. F. Balcan, and H. Lin (Eds.), Vol. 33. Curran Associates, Inc., 11214–11225. <https://proceedings.neurips.cc/paper/2020/file/80b618ebcac7aa97a6dac2ba65cb7e36-Paper.pdf>
- [7] Susanne Beck, Armin Grunwald, Kai Jacob, and Tobias Matzner. 2019. *Künstliche Intelligenz und Diskriminierung. Lernende Systeme*, München. <https://www.plattform-lernende-systeme.de/publikationen-details/kuenstliche-intelligenz-und-diskriminierung-herausforderungen-und-loesungsansaetze.html>
- [8] Richard Berk, Hoda Heidari, Shahin Jabbari, Michael Kearns, and Aaron Roth. 2021. Fairness in Criminal Justice Risk Assessments: The State of the Art. *Sociological Methods & Research* 50, 1 (2021), 3–44. <https://doi.org/10.1177/0049124118782533> Publisher: SAGE Publications Inc.
- [9] Reuben Binns. 2018. Fairness in Machine Learning: Lessons from Political Philosophy. In *Proceedings of the 1st Conference on Fairness, Accountability and Transparency*, Sorelle A. Friedler and Christo Wilson (Eds.). PMLR, 149–159. <https://proceedings.mlr.press/v81/binns18a.html>
- [10] Emily Black, Hadi Elzayn, Alexandra Chouldechova, Jacob Goldin, and Daniel Ho. 2022. Algorithmic Fairness and Vertical Equity: Income Fairness with IRS Tax Audit Models. In *2022 ACM Conference on Fairness, Accountability, and Transparency*. ACM, Seoul Republic of Korea, 1479–1503. <https://doi.org/10.1145/3531146.3533204>



- [11] Ludwig Bothmann, Susanne Dandl, and Michael Schomaker. 2023. Causal Fair Machine Learning via Rank-Preserving Interventional Distributions. In *Proceedings of the 1st Workshop on Fairness and Bias in AI co-located with 26th European Conference on Artificial Intelligence (ECAI 2023)*. CEUR Workshop Proceedings. <https://ceur-ws.org/Vol-3523/>
- [12] Caterina Calsamiglia. 2005. *Decentralizing equality of opportunity and issues concerning the equality of educational opportunity*. Yale University. <https://economics.mit.edu/sites/default/files/inline-files/Calsamiglia.pdf>
- [13] Cambridge Dictionary. 2022. Fairness. <https://dictionary.cambridge.org/de/worterbuch/englisch/fairness>
- [14] Simon Caton and Christian Haas. 2023. Fairness in Machine Learning: A Survey. *Comput. Surveys* (Aug. 2023), 3616865. <https://doi.org/10.1145/3616865>
- [15] Silvia Chiappa. 2019. Path-Specific Counterfactual Fairness. *Proceedings of the AAAI Conference on Artificial Intelligence* 33, 01 (2019), 7801–7808. <https://doi.org/10.1609/aaai.v33i01.33017801>
- [16] Silvia Chiappa and William S. Isaac. 2019. A Causal Bayesian Networks Viewpoint on Fairness. In *Privacy and Identity Management. Fairness, Accountability, and Transparency in the Age of Big Data: 13th IFIP WG 9.2, 9.6/11.7, 11.6/SIG 9.2.2 International Summer School, Vienna, Austria, August 20-24, 2018, Revised Selected Papers*, Eleni Kosta, Jo Pierson, Daniel Slamanig, Simone Fischer-Hübner, and Stephan Krenn (Eds.). Springer International Publishing, Cham, 3–20. [https://doi.org/10.1007/978-3-030-16744-8\\_1](https://doi.org/10.1007/978-3-030-16744-8_1)
- [17] Yoichi Chikahara, Shinsaku Sakaue, Akinori Fujino, and Hisashi Kashima. 2021. Learning Individually Fair Classifier with Path-Specific Causal-Effect Constraint. In *Proceedings of The 24th International Conference on Artificial Intelligence and Statistics*. PMLR, 145–153. <https://proceedings.mlr.press/v130/chikahara21a.html>
- [18] Alexandra Chouldechova and Aaron Roth. 2020. A snapshot of the frontiers of fairness in machine learning. *Commun. ACM* 63, 5 (2020), 82–89. <https://doi.org/10.1145/3376898>
- [19] Yvette D. Clarke. 2019. Text - H.R.2231 - 116th Congress (2019-2020): Algorithmic Accountability Act of 2019. <https://www.congress.gov/bill/116th-congress/house-bill/2231/text> Archive Location: 2019/2020.
- [20] Stephen Coate and Glenn Loury. 1993. Will Affirmative-Action Policies Eliminate Negative Stereotypes? *American Economic Review* 83, 5 (1993), 1220–40. <https://EconPapers.repec.org/RePEc:aea:aecrev:v:83:y:1993:i:5:p:1220-40>
- [21] Jim Dator. 2017. Chapter 3. What Is Fairness? In *Fairness, Globalization, and Public Institutions*, Jim Dator, Richard C. Pratt, and Yongseok Seo (Eds.). University of Hawaii Press, Honolulu, 19–34. <https://www.degruyter.com/document/doi/10.1515/9780824841966-004/html>
- [22] Cynthia Dwork, Moritz Hardt, Toniann Pitassi, Omer Reingold, and Richard Zemel. 2012. Fairness through awareness. In *Proceedings of the 3rd Innovations in Theoretical Computer Science Conference*. Association for Computing Machinery, New York, NY, USA, 214–226. <https://doi.org/10.1145/2090236.2090255>
- [23] EU. 2016. EUR-Lex - 32016R0679 - EN - EUR-Lex. <https://eur-lex.europa.eu/eli/reg/2016/679/oj> Doc ID: 32016R0679 Doc Sector: 3 Doc Title: Regulation (EU) 2016/679 of the European Parliament and of the Council of 27 April 2016 on the protection of natural persons with regard to the processing of personal data and on the free movement of such data, and repealing Directive 95/46/EC (General Data Protection Regulation).
- [24] Executive Office of the President, Cecilia Muñoz, Megan Smith, and DJ Patil. 2016. Big Data: A Report on Algorithmic Systems, Opportunity, and Civil Rights. [https://obamawhitehouse.archives.gov/sites/default/files/microsites/ostp/2016\\_0504\\_data\\_discrimination.pdf](https://obamawhitehouse.archives.gov/sites/default/files/microsites/ostp/2016_0504_data_discrimination.pdf)
- [25] Will Fleisher. 2023. Algorithmic Fairness Criteria as Evidence. *SSRN* (2023). <https://doi.org/10.2139/ssrn.3974963>
- [26] Dean P. Foster and Rakesh V. Vohra. 1992. An Economic Argument for Affirmative Action. *Rationality and Society* 4, 2 (1992), 176–188. <https://EconPapers.repec.org/RePEc:sae:ratsoc:v:4:y:1992:i:2:p:176-188>
- [27] Sorelle A. Friedler, Carlos Scheidegger, and Suresh Venkatasubramanian. 2016. On the (im)possibility of fairness. *arXiv:1609.07236* (2016). <https://doi.org/10.48550/arXiv.1609.07236>
- [28] Pratik Gajane and Mykola Pechenizkiy. 2017. On formalizing fairness in prediction with machine learning. *arXiv:1710.03184* (2017). <http://arxiv.org/abs/1710.03184> arXiv: 1710.03184.
- [29] Przemysław A. Grabowicz, Nicholas Perello, and Aarshee Mishra. 2022. Marrying Fairness and Explainability in Supervised Learning. In *2022 ACM Conference on Fairness, Accountability, and Transparency (FACT '22)*. Association for Computing Machinery, New York, NY, USA, 1905–1916. <https://doi.org/10.1145/3531146.3533236>
- [30] Ben Green. 2018. Fair Risk Assessments: A Precarious Approach for Criminal Justice Reform. *5th Workshop on Fairness, Accountability, and Transparency in Machine Learning* (2018). [https://www.fatml.org/media/documents/fair\\_risk\\_assessments\\_criminal\\_justice.pdf](https://www.fatml.org/media/documents/fair_risk_assessments_criminal_justice.pdf)
- [31] Ben Green. 2022. Escaping the Impossibility of Fairness: From Formal to Substantive Algorithmic Fairness. *Philosophy & Technology* 35, 4 (2022), 90. <https://doi.org/10.1007/s13347-022-00584-6>
- [32] Robert M Guion. 1966. Employment tests and discriminatory hiring. *Industrial Relations: A Journal of Economy and Society* 5, 2 (1966), 20–37. <https://doi.org/10.1111/j.1468-232X.1966.tb00449.x> Publisher: Wiley Online Library.
- [33] Ursula Hebert-Johnson, Michael Kim, Omer Reingold, and Guy Rothblum. 2018. Multicalibration: Calibration for the (Computationally-Identifiable) Masses. In *Proceedings of the 35th International Conference on Machine Learning*, Jennifer Dy and Andreas Krause (Eds.). PMLR, 1939–1948. <https://proceedings.mlr.press/v80/hebert-johnson18a.html>
- [34] Brian Hedden. 2021. On statistical criteria of algorithmic fairness. *Philosophy & Public Affairs* 49, 2 (2021), 209–231. <https://doi.org/10.1111/papa.12189>
- [35] Ben Hutchinson and Margaret Mitchell. 2019. 50 Years of Test (Un)Fairness: Lessons for Machine Learning. In *Proceedings of the Conference on Fairness, Accountability, and Transparency (FAT\* '19)*. Association for Computing Machinery, New York, NY, USA, 49–58. <https://doi.org/10.1145/3287560.3287600>

- [36] Marc-Thorsten Hütt and Claudia Schubert. 2020. Fairness von KI-Algorithmen. In *Philosophisches Handbuch Künstliche Intelligenz*, Klaus Mainzer (Ed.). Springer Fachmedien Wiesbaden, Wiesbaden, 1–22. [http://link.springer.com/10.1007/978-3-658-23715-8\\_39-1](http://link.springer.com/10.1007/978-3-658-23715-8_39-1)
- [37] Alexandra Kalev, Frank Dobbin, and Erin Kelly. 2006. Best Practices or Best Guesses? Assessing the Efficacy of Corporate Affirmative Action and Diversity Policies. *American Sociological Review* 71, 4 (2006), 589–617. <https://doi.org/10.1177/000312240607100404>
- [38] Atoosa Kasirzadeh and Andrew Smart. 2021. The Use and Misuse of Counterfactuals in Ethical Machine Learning. In *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency*. ACM, Virtual Event Canada, 228–236. <https://doi.org/10.1145/3442188.3445886>
- [39] Maximilian Kasy and Rediet Abebe. 2021. Fairness, Equality, and Power in Algorithmic Decision-Making. In *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency*. ACM, Virtual Event Canada, 576–586. <https://doi.org/10.1145/3442188.3445919>
- [40] Michael Kearns, Seth Neel, Aaron Roth, and Zhiwei Steven Wu. 2018. Preventing Fairness Gerrymandering: Auditing and Learning for Subgroup Fairness. In *Proceedings of the 35th International Conference on Machine Learning*, Jennifer Dy and Andreas Krause (Eds.). PMLR, 2564–2572. <https://proceedings.mlr.press/v80/kearns18a.html>
- [41] Stephen N. Keith, Robert M. Bell, August G. Swanson, and Albert P. Williams. 1985. Effects of Affirmative Action in Medical Schools. *New England Journal of Medicine* 313, 24 (1985), 1519–1525. <https://doi.org/10.1056/NEJM198512123132406>
- [42] Niki Kilbertus, Mateo Rojas Carulla, Giambattista Parascandolo, Moritz Hardt, Dominik Janzing, and Bernhard Schölkopf. 2017. Avoiding Discrimination through Causal Reasoning. In *Advances in Neural Information Processing Systems*, Vol. 30. Curran Associates, Inc. <https://proceedings.neurips.cc/paper/2017/hash/f5f8590cd58a54e94377e6ae2eded4d9-Abstract.html>
- [43] Michael P Kim, Amirata Ghorbani, and James Zou. 2019. Multiaccuracy: Black-box post-processing for fairness in classification. In *Proceedings of the 2019 AAAI/ACM Conference on AI, Ethics, and Society*. Association for Computing Machinery, New York, NY, USA, 247–254. <https://doi.org/10.1145/3306618.3314287>
- [44] Jon Kleinberg, Sendhil Mullainathan, and Manish Raghavan. 2017. Inherent Trade-Offs in the Fair Determination of Risk Scores. In *8th Innovations in Theoretical Computer Science Conference (ITCS 2017) (Leibniz International Proceedings in Informatics (LIPIcs)*, Vol. 67), Christos H. Papadimitriou (Ed.). Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, Dagstuhl, Germany, 43:1–43:23. <https://doi.org/10.4230/LIPIcs.ITCS.2017.43>
- [45] Youjin Kong. 2022. Are “Intersectionally Fair” AI Algorithms Really Fair to Women of Color? A Philosophical Analysis. In *2022 ACM Conference on Fairness, Accountability, and Transparency*. ACM, Seoul Republic of Korea, 485–494. <https://doi.org/10.1145/3531146.3533114>
- [46] Matthias Kuppler, Christoph Kern, Ruben L. Bach, and Frauke Kreuter. 2021. Distributive Justice and Fairness Metrics in Automated Decision-making: How Much Overlap Is There? *arXiv:2105.01441* (2021). <http://arxiv.org/abs/2105.01441>
- [47] Matt J Kusner, Joshua Loftus, Chris Russell, and Ricardo Silva. 2017. Counterfactual Fairness. In *Advances in Neural Information Processing Systems*, I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett (Eds.), Vol. 30. Curran Associates, Inc. <https://proceedings.neurips.cc/paper/2017/file/a486cd07e4ac3d270571622f4f316ec5-Paper.pdf>
- [48] Matt J. Kusner and Joshua R. Loftus. 2020. The long road to fairer algorithms. *Nature* 578, 7793 (2020), 34–36. <https://doi.org/10.1038/d41586-020-00274-3>
- [49] Jeff Larson, Surya Mattu, Lauren Kirchner, and Julia Angwin. 2016. How We Analyzed the COMPAS Recidivism Algorithm. *ProPublica* (2016). <https://www.propublica.org/article/how-we-analyzed-the-compas-recidivism-algorithm>
- [50] Michelle Lee, Luciano Floridi, and Jat Singh. 2020. From Fairness Metrics to Key Ethics Indicators (KEIs): A Context-Aware Approach to Algorithmic Ethics in an Unequal Society. *SSRN Electronic Journal* (2020). <https://doi.org/10.2139/ssrn.3679975>
- [51] Michelle Seng Ah Lee, Luciano Floridi, and Jatinder Singh. 2021. Formalising trade-offs beyond algorithmic fairness: lessons from ethical philosophy and welfare economics. *AI and Ethics* 1, 4 (2021), 529–544. <https://doi.org/10.1007/s43681-021-00067-y>
- [52] Michele Loi and Christoph Heitz. 2022. Is calibration a fairness requirement? An argument from the point of view of moral philosophy and decision theory. In *2022 ACM Conference on Fairness, Accountability, and Transparency (FAccT ’22)*. Association for Computing Machinery, New York, NY, USA, 2026–2034. <https://doi.org/10.1145/3531146.3533245>
- [53] Robert Long. 2021. Fairness in Machine Learning: Against False Positive Rate Equality as a Measure of Fairness. *Journal of Moral Philosophy* 19, 1 (2021), 49–78. <https://doi.org/10.1163/17455243-20213439> Publisher: Brill.
- [54] Ninareh Mehrabi, Fred Morstatter, Nripsuta Saxena, Kristina Lerman, and Aram Galstyan. 2022. A Survey on Bias and Fairness in Machine Learning. *Comput. Surveys* 54, 6 (July 2022), 1–35. <https://doi.org/10.1145/3457607>
- [55] Shira Mitchell, Eric Potash, Solon Barocas, Alexander D’Amour, and Kristian Lum. 2021. Prediction-Based Decisions and Fairness: A Catalogue of Choices, Assumptions, and Definitions. *Annual Review of Statistics and Its Application* 8, 1 (2021), 141–163. <https://doi.org/10.1146/annurev-statistics-042720-125902>
- [56] Judea Pearl. 2009. *Causality: Models, Reasoning and Inference* (2nd ed.). Cambridge University Press. <https://yzhu.io/courses/core/reading/04.causality.pdf>
- [57] Judea Pearl, Madelyn Glymour, and Nicholas P Jewell. 2016. *Causal Inference in Statistics*. John Wiley & Sons Ltd. <https://www.wiley.com/eng/Causal+Inference+in+Statistics:+A+Primer-p-9781119186847>
- [58] Dino Pedreshi, Salvatore Ruggieri, and Franco Turini. 2008. Discrimination-aware data mining. In *Proceedings of the 14th ACM SIGKDD international conference on Knowledge discovery and data mining (KDD ’08)*. Association for Computing Machinery, New York, NY, USA, 560–568. <https://doi.org/10.1145/1401890.1401959>
- [59] John A Rawls. 2003. *A Theory of Justice*. Belknap Press of Harvard Univ. Press. <https://www.hup.harvard.edu/catalog.php?isbn=9780674000780>
- [60] John E Roemer. 2018. *Theories of Distributive Justice*. Harvard University Press. <https://www.hup.harvard.edu/catalog.php?isbn=9780674879201>

- [61] Pola Schwöbel and Peter Remmers. 2022. The Long Arc of Fairness: Formalisations and Ethical Discourse. In *2022 ACM Conference on Fairness, Accountability, and Transparency*. ACM, Seoul Republic of Korea, 2179–2188. <https://doi.org/10.1145/3531146.3534635>
- [62] Andrew D. Selbst, Danah Boyd, Sorelle A. Friedler, Suresh Venkatasubramanian, and Janet Vertesi. 2019. Fairness and Abstraction in Sociotechnical Systems. In *Proceedings of the Conference on Fairness, Accountability, and Transparency*. ACM, Atlanta GA USA, 59–68. <https://doi.org/10.1145/3287560.3287598>
- [63] Ashudeep Singh, David Kempe, and Thorsten Joachims. 2021. Fairness in Ranking under Uncertainty. In *Advances in Neural Information Processing Systems*, M. Ranzato, A. Beygelzimer, Y. Dauphin, P. S. Liang, and J. Wortman Vaughan (Eds.), Vol. 34. Curran Associates, Inc., 11896–11908. <https://proceedings.neurips.cc/paper/2021/file/63c3ddcc7b23daa1e42dc41f9a44a873-Paper.pdf>
- [64] Harini Suresh and John V. Guttag. 2021. A Framework for Understanding Sources of Harm throughout the Machine Learning Life Cycle. *Equity and Access in Algorithms, Mechanisms, and Optimization* (2021), 1–9. <https://doi.org/10.1145/3465416.3483305>
- [65] Robert L Thorndike. 1971. Concepts of culture-fairness. *Journal of Educational Measurement* 8, 2 (1971), 63–70. <http://www.jstor.org/stable/1433959>
- [66] Sahil Verma and Julia Rubin. 2018. Fairness definitions explained. In *Proceedings of the International Workshop on Software Fairness*. ACM, Gothenburg Sweden. <https://doi.org/10.1145/3194770.3194776>
- [67] Pak-Hang Wong. 2020. Democratizing Algorithmic Fairness. *Philosophy & Technology* 33, 2 (2020), 225–244. <https://doi.org/10.1007/s13347-019-00355-w>
- [68] Rebecca Zwick and Neil J Dorans. 2016. Philosophical perspectives on fairness in educational assessment. In *Fairness in educational assessment and measurement*. Routledge, 283–298. <https://doi.org/10.4324/9781315774527>

## A WORKFLOW FOR APPLIED USE CASE

Figure 4 shows a workflow of how to use our framework in an applied ADM use case. Three normative questions must be answered, although it is important to note that these can never be answered empirically:

- (1) How is the worthiness  $w^{(i)}$ , i.e., the measure of task-specific equality of individuals, defined?
- (2) Which attributes are defined as PAs (if there are any)?
- (3) How is the treatment function  $s(w^{(i)})$  defined?

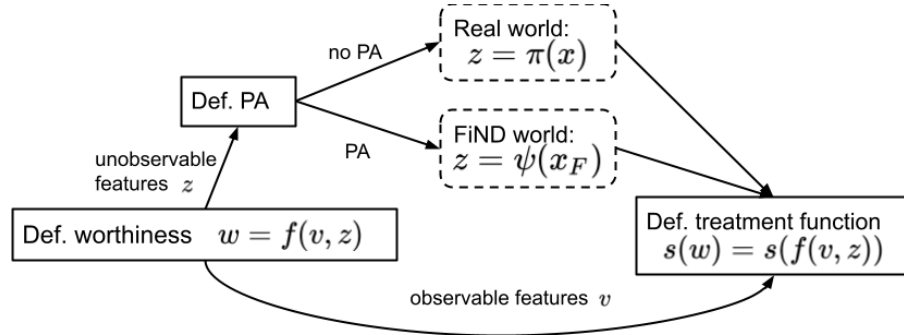


Fig. 4. Workflow for an applied use case. Solid rectangles refer to normative decisions.

(1) *Worthiness*: For the task at hand, the normative decision must be made of which features  $w$  are used to define individuals as equal. In other words, two individuals  $i$  and  $j$  are considered equal *for this specific task* iff  $w^{(i)} = w^{(j)}$  and, hence, have the same worthiness. Worthiness may consist of (a function of) observable  $v^{(i)}$  and unobservable  $z^{(i)}$  features,  $w^{(i)} = f(v^{(i)}, z^{(i)})$ . In the COMPAS example,  $v^{(i)}$  might be the type of crime and  $z^{(i)}$  might be the two-year recidivism rate. In an example where individuals apply for credit in a bank,  $v^{(i)}$  might be the amount of credit and  $z^{(i)}$  the probability of default. In a tax example, there might be no unobservable variables because all features for the tax declaration are observable at decision time.

(2) *Protected attributes*: Next, the normative decision must be made if there are PAs – and if there are any PAs, to which feature they correspond. This is a delicate question and surely the result of a broader, societal discussion; the presence of PAs means that for some groups, the unobservable features are not used as-is, but they will be transformed into their FiND world counterpart. This might potentially change the (numerical) worthiness of some or all individuals and have a large impact on how people are ranked overall (as exemplified in the experiments in Section 4.2). As a result, without PAs, the unobservable features will be identified with the estimand in the real world, i.e.,  $z^{(i)} = \pi(\mathbf{x}^{(i)})$ , whereas in the presence of PAs, the unobservable features will be identified with the estimand in the FiND world, i.e.,  $z^{(i)} = \psi(\mathbf{x}_F^{(i)})$ .

(3) *Treatment function*: Finally, the treatment function  $s(w^{(i)}) = s(f(v^{(i)}, z^{(i)}))$  must be defined normatively. Again, this results from a societal or expert discussion regarding the use case at hand. In the COMPAS example, a binary decision on concrete treatment might be made using a threshold on the recidivism probability, where the threshold varies between different types of crime. In the credit example, a binary decision on granting credit might be made using a threshold on the probability of default, where the threshold varies between different amounts of credit. In the tax rate example, the decision only relies on observable features and is subject to regular political discussion.

Once these questions are answered, algorithms as outlined in Section 4.1 can be used to approximate the FiND world via warping. Then, warped-world data are used to train ML models and to predict from these trained ML models for new, unseen individuals.

In summary, the task of subject matter researchers is to define the PAs, the DAG in the real world, and other variables that are part of the worthiness (outside of the DAG), where the tasks of ML experts are to find good warping methods to approximate the such defined FiND world and to train well-performing prediction models in the warped world.

*Remark on PAs and observable features.* Figure 4 shows that observable features are used as-is, no matter if there are PAs. However, the normative result of a discussion on this could be that not only the unobservable but also the observable features may be subject to historic unfairness (e.g., income with the PA gender) and that these features should also be transferred to the FiND world (e.g., asking “what would the income be in a world where gender has no causal effect on income”). This is a straightforward extension of our framework: Instead of using the observable feature  $v$  directly, it will be replaced by its FiND world counterpart  $v_F$ , which then must be estimated, e.g., by an ML model, yielding  $\hat{v}$ .