

CELEST: Federated Learning for Globally Coordinated Threat Detection

Talha Ongun*, Simona Boboila, Alina Oprea, Tina Eliassi-Rad
Northeastern University
Jason Hiser, Jack Davidson
University of Virginia

Abstract—The cyber-threat landscape has evolved tremendously in recent years, with new threat variants emerging daily, and large-scale coordinated campaigns becoming more prevalent. In this study, we propose CELEST (Collaborative Learning for Scalable Threat detection), a federated machine learning framework for global threat detection over HTTP, which is one of the most commonly used protocols for malware dissemination and communication. CELEST leverages federated learning in order to collaboratively train a global model across multiple clients who keep their data locally, thus providing increased privacy and confidentiality assurances. Through a novel active learning component integrated with the federated learning technique, our system continuously discovers and learns the behavior of new, evolving, and globally-coordinated cyber threats. We show that CELEST is able to expose attacks that are largely invisible to individual organizations. For instance, in one challenging attack scenario with data exfiltration malware, the global model achieves a three-fold increase in Precision-Recall AUC compared to the local model. We deploy CELEST on two university networks and show that it is able to detect the malicious HTTP communication with high precision and low false positive rates. Furthermore, during its deployment, CELEST detected a set of previously unknown 42 malicious URLs and 20 malicious domains in one day, which were confirmed to be malicious by VirusTotal.

*Authors are ordered by contribution.

I. INTRODUCTION

Modern cyber attacks have become sophisticated, coordinated, and are operating at global scale. We have witnessed globally-coordinated campaigns with the ability to spread to hundred of thousands of victim machines on the Internet [65], [3]. While attackers exploit a wide range of vulnerabilities in various protocols, HTTP has become one of the prevalent communication protocols for malware dissemination [28]. To attackers' advantage, malicious communication over the HTTP protocol can easily blend in with the large volumes of benign traffic and is rarely blocked. Existing defenses for HTTP malware include network intrusion detection systems, as well as machine learning (ML) methods applied to domain names [9], [21], URLs [39], [40] or HTTP logs [6], [12], [27], [46], [50], [51]. However, these methods are usually used inside a single organizational network and have limited capabilities of detecting attacks not seen at training time.

An important open question for thwarting global malware on the Internet is how to leverage defender collaboration and enable coordinated cyber defenses. To date, inter-organizational cooperation is used primarily for sharing threat intelligence in the form of Indicators of Compromise (IoC), such as IP addresses, domain names, and URL patterns used

during an attack [29], [73]. However, this approach has well-known limitations as it relies on detection of ongoing attacks and their associated IoCs, while attackers can change their infrastructure and behavior to make the detected IoCs obsolete [23], [41], [69]. This observation leads to the natural question: *Are there other, more proactive and reliable approaches to global defense coordination that could be effective against evolving, sophisticated cyber threats?*

In this work, we answer the above question affirmatively by presenting CELEST, a federated machine learning framework for global HTTP-based threat detection. CELEST enables collaboration among defenders to globally train neural network models for HTTP malware detection.

The main insight in designing CELEST is to facilitate *knowledge transfer* among participants through a collectively trained model. A global machine learning model captures data diversity and thus becomes a powerful tool for uncovering a wider range of malware behavior characteristics. This approach enables clients to detect malware seen for the first time in their networks, which a locally trained ML model will not identify. An additional advantage compared to direct sharing of IoCs among clients is the enhanced resilience to malware evasion. CELEST leverages a new URL embedding method for semantics-aware representation of HTTP logs, trained in a federated manner. CELEST also preserves the privacy of logs collected at clients' networks, as clients only share local model updates in training.

In real-world deployments of ML threat detection systems, the vast majority of data is unlabeled, and the ground truth of malicious samples is usually limited. Additionally, supervised defenses often fail to detect novel attacks not encountered in training, and it is difficult to get accurate labels of malicious activity on a network. To address these concerns, we propose integrating an active learning component into the CELEST federated learning framework with the goal of increasing the labeled set during the training phase and, eventually, enhancing the global model's detection capabilities. In our design, we use active learning to identify a small set of anomalous samples for investigation in each round of training, and augment the training set with maliciously labeled samples.

We evaluate CELEST using a large dataset of HTTP logs collected at the border of two university networks. We also use three public datasets from different malware families (Mirai, Gafgyt, and the data exfiltration malware dataset from [12]), as well as attack recreation data generated on the university networks. We show that, across all the malware families

we considered, the global model outperforms local models trained on a single client’s data. The improvements obtained by global models are significant: For instance, the global model is able to detect a data exfiltration malware family with three times higher Precision Recall AUC (PR-AUC) than the local model. Importantly, global defenses enable clients to detect new malware in their environments (i.e., malware that they have not seen in training), which is learned from the models shared by other clients participating in the federated protocol. We further demonstrate that when the active learning is enabled, CELEST is able to detect *completely new malware, for which labels are not available in training at any of the clients*. In particular, the key intuition to enable new malware discovery is to include an anomaly detection module trained on each client network with the goal of detecting and labeling anomalies in the network. Often, new attack instances will result in anomalous traffic relative to the benign traffic. Once the anomalies are confirmed as attack instances, they are added to the next round of federated learning training, and the global model will learn to recognize these newly discovered attacks.

Finally, we deploy CELEST on the two university networks using three attack recreation exercises performed at intervals of several months. We show that CELEST detects the malicious communication carried out during the attack recreation with high precision and false positive rates lower than 3.3×10^{-5} on both networks. Moreover, the model trained during the first experiment still has strong performance on an evasive attack exercise performed four months later. In addition, CELEST detected a set of 42 previously-unknown malicious URLs and 20 domains on the two networks, which were confirmed malicious by VirusTotal.

To summarize, our contributions are:

- **Federated learning for global cyber defense:** We design CELEST, a scalable and privacy-preserving framework for federated training of global neural network models, which enables early-stage HTTP malware detection at participating organizations.
- **URL embeddings:** We create new URL embedding representations via federated training of word embedding models that preserve the semantic URL structure.
- **Active learning for limited ground truth:** We introduce an active learning component in our federated design, which selects samples for investigation and labeling using an anomaly detection module, and thus enables the discovery of completely new attacks.
- **Comprehensive evaluation:** We evaluate CELEST using large-scale datasets from two university networks, three public malware traces, and three attack recreation exercises. We show that global models trained in CELEST have high precision and recall, and low false positive rates, improving significantly upon locally trained models. We also demonstrate the resilience to adversarial evasion in one of the attack exercises.
- **Deployment and detection of unknown malware:** We deploy CELEST on the two university networks and find instances of previously-unknown malware (42 malicious URLs and 20 malicious domains).

II. PROBLEM DEFINITION, THREAT MODEL, AND BACKGROUND

In this section, we discuss the problem of HTTP malware detection, the limitations of existing solutions, and introduce our system requirements and threat model. We also provide the required background in federated learning and NLP text representation.

A. Detection of HTTP-based malware

HTTP is one of the most widely used protocols by adversaries to perpetrate malicious activities, such as data exfiltration [4], vulnerability exploitation [70], and covert channel communication [26]. Command-and-control (C2) servers often use HTTP to send commands to compromised systems and receive stolen data [71], [64]. Prior work proposed a variety of methods for detecting malicious network activity over HTTP, including URL-based detection [40], [42], detection using web-proxy logs [6], [27], [46], [50], [51], and application fingerprinting [12], [13], [53]. We focus on malicious activity detection using HTTP logs for several reasons. First, while malicious URL detection is shown to be successful in mitigating certain attacks (e.g., phishing), HTTP-based detection methods are able to address a variety of attack surfaces used by different malware families. Second, the HTTP-based methods avoid deep inspection of the payload which could be obfuscated by attackers, and rely only on the HTTP headers for increased scalability and lower computation costs. Lastly, these approaches utilize common HTTP logs collected by web proxies installed at the border of enterprise networks, which most enterprises’ use as part of their perimeter control.

Most of the existing machine learning detection techniques on HTTP logs attempt to detect malware activity within a single network by training local models on labeled data available in that network [27], [6], [50], [51]. As attackers employ various techniques to evade detection, such as changing the C2 protocol, or changing the domain names and the IP addresses of the C2 infrastructures, local models will fail at detecting these. In this work, we address the problem of *designing global detection of HTTP malware by coordination among multiple participating organizations*. We believe that collaboration among multiple defenders is critical in enabling a better and more resilient cyber defense strategy and will lead to more effective threat detection methods. Unfortunately, the state of the art in collaboration among multiple defenders is based on threat intelligence sharing platforms, which enable sharing of indicators of compromise (IoCs) after attacks are detected. IoCs have limited utility at detecting cyber threats, particularly as IoCs become stale with small changes to attackers’ malicious infrastructures or communication protocols. We are interested in more proactive, coordinated approaches among defenders that can resist evolving cyber attacks.

In designing our system, we identified several requirements for real-world deployment in participating organizations:

- **Globally coordinated detection:** We are interested in global methods that expose attacks promptly, when they are still largely invisible to individual organizations.
- **Real-time processing:** We require real-time processing of HTTP logs to generate predictions on individual HTTP logs when the model is deployed. This approach enables

early-stage attack detection and thus minimizes the damage inflicted by an attack.

- **Scalability:** We would like to run the system on multiple networks with large volumes of logs.
- **Log privacy:** The system should require minimal data sharing across the participating clients, in order to ensure the privacy of sensitive security logs (which might include users' browsing history and machine configurations).
- **High accuracy:** To be used in production, the system should have high accuracy, precision, and recall, as well as low false positive rates across different classes of HTTP-based malware attacks.

Challenges. Detecting malicious communication over the HTTP protocol is challenging for multiple reasons: First, the malicious traffic transmitted on the HTTP protocol is blending in with large volumes of legitimate traffic generated by users, making detection very difficult. Second, there is a high imbalance among the malicious and benign samples on a single network, making it challenging to train supervised learning methods with high accuracy and low false positive rates [63]. Third, most existing systems for HTTP malware detection employ some form of aggregation of events from multiple logs. For instance, beaconing detection methods apply time series analysis on multiple communication events to the C2 server to detect periodic communication [27]. It is challenging to detect malicious HTTP communication in real-time, as it requires generating a prediction on individual log events.

B. Threat Model

We aim to design a globally coordinated system with multiple participating clients for detection of malicious activity over the HTTP protocol. The malicious communication could be part of multiple stages of a malware campaign, including malware delivery, the C2 communication with the malicious server, and data exfiltration activities. We assume that the attacker compromises one or multiple victim machines within the participating client networks. Hosts in the network can be infected in a variety of ways, such as vulnerability exploits, social-engineering, and drive-by download attacks. The infection vector might not occur over HTTP and therefore, our system might not be able to detect the initial infection. However, our goal is to detect any subsequent malicious communication over HTTP, which is a common communication channel once attackers have established foothold in a network.

Our system analyzes HTTP logs collected at the border of the monitored networks. We assume that these logs are not compromised by the attacker. Many enterprise networks deploy web proxies that act as man-in-the-middle agents in TLS communication, therefore the techniques we design can also be applied to malware communication over HTTPS. The participating clients run local computation on the collected logs for training local models, and share those with a central server for aggregation. We assume that the attacker does not compromise the machine learning training process, and we also assume that the central aggregator correctly follows the protocol for aggregating the local updates into a global model.

We recognize that clients participating in the protocol might be subject to data poisoning attacks (in which the logs they collect are under the control of an adversary), or

model poisoning attacks (in which the adversary controls the updates sent to the central aggregator). We believe that this is an orthogonal problem, for which we could apply existing defenses against poisoning attacks [16]. We therefore leave resilience against poisoning for globally coordinated cyber defenses as future work.

C. Background on Federated Learning and NLP

Federated Learning. Federated Learning (FL) [43] is a machine learning technique designed for collectively training a global model among multiple clients interacting with an aggregation server. There are three main steps involved in federated training. First, the global model is initialized on the central server and shared with all participating clients, along with initial parameters. Next, the clients train the global model locally, on their individual data, and send the updated parameters back to the central server. Using the updated parameters from all clients, the server updates the global model and shares the updated model with the clients to start a new iteration. We consider the cross-silo FL setting, suitable for a relatively small number of clients, in which all clients participate in each round of training [31]. In settings with millions of clients (such as Google GBoard training on mobile phones [75]), the cross-device FL approach performs sampling of clients in each round of training.

FL has been successfully used in multiple domains, including NLP, authentication, privacy preservation, trust management and intrusion detection [1], [17], [35], [75]. Applications of FL in threat detection are promising for two main reasons: 1) safeguarding the data is ensured by keeping it locally on the client organizations, and 2) since attack examples are significantly fewer on each individual client, the collaborative nature of FL enables the design of better performing machine learning threat detection systems. Thus, local models can be improved by taking advantage of previously-detected threats from other clients, which will be included in the global model via local model updates.

Text representation in NLP. There are a number of different ways to represent text proposed in the natural language processing (NLP) community.

The traditional count-based technique for extracting word features is based on the family of models called Bag-of-Words, which includes methods like term frequencies, TF-IDF (term frequency-inverse document frequency), N-grams, etc.

This feature representation was shown to have several limitations, such as the large feature space, inability to capture context, and limited generalization [5], [34], [58], [59].

These shortcomings have been the motivation of recent research to explore deep learning strategies to capture the context of words in a vector representation called word embeddings. Some well-known methods successfully used in the NLP community are Word2Vec and FastText.

Word2Vec [44], [45] uses neural networks to generate dense word embeddings that capture contextual and semantic similarities such that similar words will be closer in the embedded vector space.

FastText is an extension of Word2Vec [11], [30], where each word is treated as composed of character n-grams. Thus,

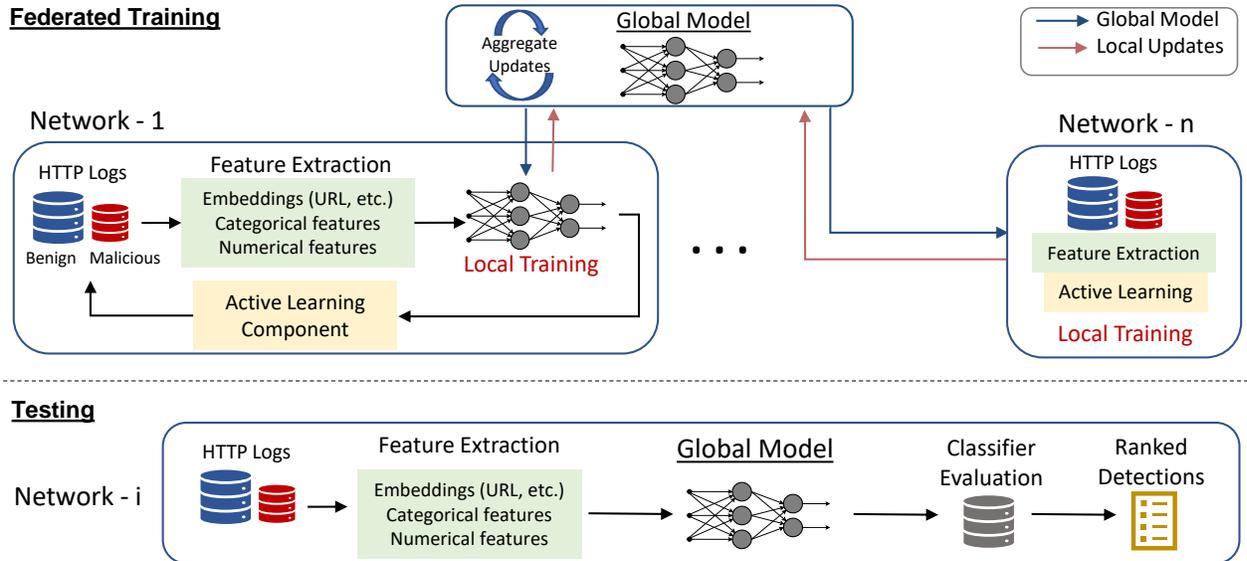


Fig. 1: Overview of the CELEST federated learning (FL) framework used to train a global model for HTTP malware detection. Multiple networks participate as clients in the FL protocol. Feature extraction is performed using an embedding model and local model updates are shared with a central server, which aggregates them into a global model. A novel active learning component is used to augment the ground truth through sample selection. At testing time, the global model is applied to each network and detections are prioritized for investigation.

rare words generalize better at the expense of training space and time requirements, which depend on the choice of hyper-parameters controlling the minimum and maximum n-gram sizes.

III. SYSTEM OVERVIEW AND METHODOLOGY

In this section, we provide an overview of our CELEST system for global cyber defense. We then introduce our federated word embedding method used to represent semantic information from URL strings and our HTTP log feature extraction. Finally, we provide details of the federated learning methodology employed in our system for global model training, and we introduce our active learning design.

A. System Overview

An overview of the CELEST federated learning framework for global defense is given in Figure 1. Each participating client collects HTTP logs at its network border, and the training data is labeled as Malicious or Benign. The feature extraction phase processes individual HTTP logs and generates a set of 5862 features (Section III-B). The embedding model for URL representation is trained in a federated manner among clients (Section III-C and Figure 2). Once the features are extracted from training data, the clients start the federated training protocol with a central aggregator. In each round of training, the global model is sent to the clients, which update it using their local HTTP feature vectors, and send their updates to the server (Section III-D). We also introduce an Active Learning component which uses a local anomaly detection module to augment the ground truth of malicious activities through sample selection (Section III-D and Figure 3). We detail each component of CELEST in the following sections.

B. Feature Extraction from HTTP Logs

There are several important aspects that need to be considered when designing an ML system for cyber defense. These include: 1) what features to use to distinguish malicious and benign activity, and also 2) how to represent these features in order to capture semantic information from log data. Previous work on HTTP malware detection has used a wide range of feature representations, including:

- Lexical features generated from bag-of-word representations of URLs [10], [39], [40] and other text characteristics such as domain length, entropy and character types [14], [33].
- Character and word embeddings of URLs [34], [60].
- Host-based features to include IP address, domain name, and AS properties [39], [50].
- Timing-based features for detecting beaconing C2 activities [27].
- Aggregated features over multiple connections to a domain [6], [50], [51].

Our system is unique in its requirement for real-time processing of HTTP log events. Thus, timing features and aggregated features over multiple HTTP logs or flows are not applicable in our setting. We represent each HTTP log event as a vector of numerical representations of individual HTTP header fields, as shown in Table I. We leverage all the available fields in HTTP logs, except the source IP address (since our detection methods are not specific to the host machine), and source port (which does not carry information related to our detection task). We include three feature categories: *embedding features* for domain, URL, and web referer representation, *categorical features* for external IP subnet, port, user agent string, method, status code, and content type, and *numerical*

features for request and response size, transaction depth, and browser version. We justify the selected representation for each category below.

Embedding features for URL representation. URLs are used by malware to communicate information with C2 servers, through various parts of the URLs, including sub-domain, parameters, query string, file name, and fragment. Therefore, it is important to have an effective, semantics-aware feature representation of URLs. The most common method to capture textual properties of URLs is based on lexical features using Bag-of-Words (BOW) representation. In this approach, the URL string is split into component words delimited by special characters, and all the distinct words in the training set become features [10], [39], [40]. Given N distinct features represented by words (w_1, w_2, \dots, w_N) , each URL is encoded as a vector $v \in R^N$, where v_i is 1 if the word w_i is present in the URL, and 0 otherwise. However, this feature representation results in a large feature space, and is not able to capture semantic aspects or to generalize to new words not encountered in training. Other syntactic feature representations capture statistics on character distribution, domain and URL length, entropy of characters [33], and can be easily evaded by malware. There are a few existing works that have used embedding methods for URL representation, but they are either using character-level embeddings (which do not account for the URL structure and are also syntactic) [60], or word-based embeddings which cannot generalize to new tokens [34].

To address these limitations, we train our own embedding models using NLP methods – Word2Vec or FastText – to construct semantic token embeddings for URL representation. Different from prior work, we create an embedding model which preserves the semantic structure of the URL, handles new tokens at deployment time, and can be trained in a federated fashion. In Figure 2, we illustrate our process for creating the embedding representation, First, we parse the URLs into tokens to preserve the structure of an URL, consisting of multiple components: protocol, subdomain, domain, suffix and other optional parts like path, query and fragment. Each URL is viewed as a sentence of words (i.e., tokens) and is used for training a token-based embedding model in an unsupervised manner. We will discuss the details of our federated method for the URL embedding training in the next section. After the training is finalized, each URL component (e.g., domain, path, query string, parameter) is allocated a fixed number n_c of token vectors, where n_c is a configurable hyper-parameter selected based on the training data distribution. For instance, we use five tokens for parameter representation and ten tokens for the query field. This way, we generate an embedding vector representation of fixed size for each URL component.

In addition to generating embedding representations for the URL field in HTTP logs, we also include embedding representations for domain names and web referer using the same embedding model.

Categorical and numerical features. Several fields in the URL are categorical (e.g., user-agent string, port) and we generate one-hot encodings of these features. We first parse the user-agent string to extract device, browser, and OS information before generating one-hot representations of these attributes. We parse IP addresses into 4 tokens and we generate one-hot encodings of the first 3 tokens to capture subnet

information. For instance, two IP addresses in the same /24 subnet will have the first 3 IP tokens identical, and this will capture malware that rotates the C2 IP address in the same subnet. We also incorporate a series of numerical features including request and response length, version, and several binary features that indicate the presence of a specific field in the HTTP log (i.e., host, URI, referer, user agent and method). Lastly, we use a binary feature to indicate that domain name is an IP address. In total, we define a feature representation comprised of 5862 features for each HTTP log event.

Type	Fields	Description
Embedding features	URL, Domain Name and Referer	Based on embedding models that preserve URL and domain structure. (2176 features)
Numerical features	Request and Response Size, Transaction Depth, Version	Represented as float. (4 features)
	UA Browser Information	Browser version from UA represented as float. (2 features)
	Binary Features for host, URI, referer, user agent, method	Binary features to indicate the existence of certain fields in the HTTP log. (5 features)
Categorical features	External IP	IP subnets are represented as a sequence of three tokens corresponding to the octets, and then one-hot-encoded. (768 features)
	Port	Destination port, one-hot-encoded. (100 features)
	User Agent	User agents are parsed to retrieve device, browser, and OS, which are one-hot encoded. (2542 features)
	HTTP Method, Status Code, Content Type	Represented as one-hot-encoded vectors. (267 features)

TABLE I: Features extracted from HTTP logs. Each HTTP log is represented as a fixed-size vector containing numerical representations of these features.

C. Federated Embeddings for URL Representation

We now discuss the considered approaches for generating URL embeddings. We also present our final design for training the embedding model in a federated fashion, which is illustrated in the top part of Figure 2.

The first option we considered is a centralized training of the word models using either Word2Vec or FastText architectures. The training of the embeddings model is carried out on the server using the data collected from all the clients. Thus, a single entity (i.e., the server) has access to the entire data, and uses it to learn the vector embeddings from the URLs (or domain, referer). This approach suffers from scalability and privacy issues, as all the raw URL data has to be collected in a central server to perform the training.

We are interested in a more privacy-preserving and scalable approach for distributed training of the embeddings among multiple participants. In theory, it is possible to apply the Federated Averaging algorithm to train Word2Vec or FastText models. However, in practice, there are a number of challenges that prevented us for adopting this solution. First, existing libraries for word embedding generation such as GenSim are highly optimized (e.g., they have custom C implementations and parallelize gradient updates using multiple cores), and it is not immediately clear how to leverage these libraries in combination with the Federated Averaging algorithm (which

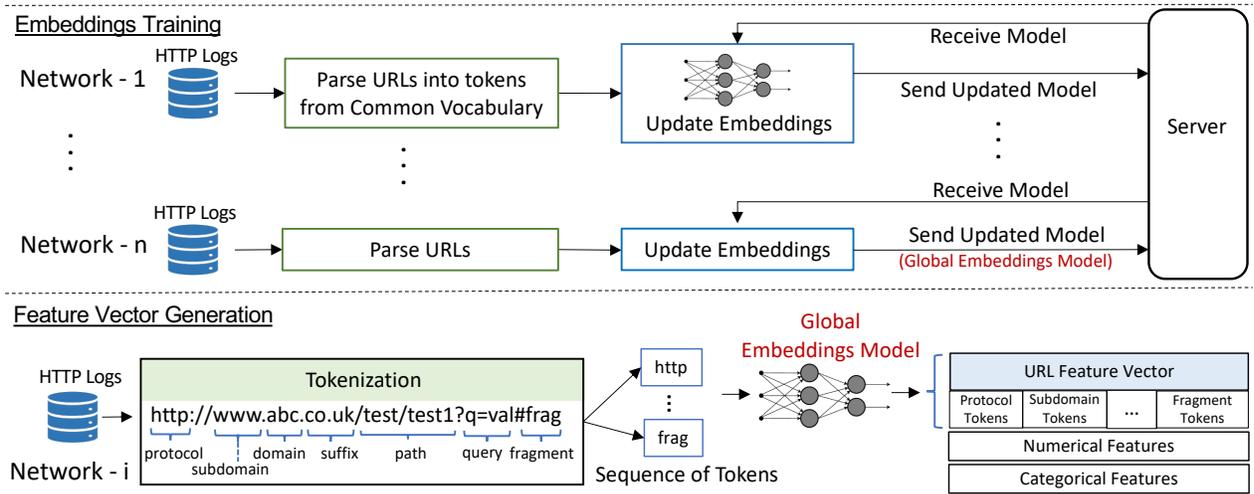


Fig. 2: Federated embedding model generation for URL representation.

requires server-side aggregation of local model updates). Second, Federated Averaging for Word2Vec has been shown to exhibit slow convergence due to the large size of updates sent in each iteration [8].

Based on these considerations, we developed a distributed approach using integrated sequential client updates. In this approach, each client has access to its own data and updates the global embeddings model locally, using its entire corpus. The client sends the updated global model back to the server, who acts as a trusted central coordinator. The clients apply their updates sequentially, in a round robin fashion, over multiple iterations. Algorithm 1 describes the federated word embedding generation procedure.

When instantiated with Word2Vec, this method still requires a common word (i.e., token) vocabulary. To address this requirement, the clients send their token frequencies to the server in a pre-processing phase. The server aggregates them, deciding on a lower bound frequency (e.g., all tokens that appear more than once), and sends the global vocabulary back to each client. The privacy of the system can be further enhanced with FastText embeddings, which use n-grams (i.e., sequences of n characters) as tokens. This method will alleviate the need to share tokens in advance, as we can consider all the possible n-grams to constitute the vocabulary. FastText has the additional advantage of supporting new tokens not observed at training time by generating n-gram representations for them. This property is an important one, as adversaries can change parts of the URLs to evade detection (for example, the query string, path, and parameters can be easily updated). As we show in our evaluation, FastText and Word2Vec perform similarly in performance (and have higher performance than lexical features, as expected). For these reasons, we select federated FastText as the preferred embedding method for CELEST URL representation.

D. Global Model Training for HTTP Malware Detection

During the training phase of CELEST, multiple client organizations learn a global model for HTTP malware detection. We use the Federated Averaging algorithm [43] to train global

Algorithm 1 FederatedEmbeddings. V is the vocabulary, E is the word embedding model, C is the set of participating clients, D_c is the local dataset at client c .

```

1: Initialize  $E$ 
2:  $V \leftarrow \text{CreateVocabulary}()$ 
3: procedure SERVERTRAINEMBEDDINGS
4:   for each client  $c \in C$  do
5:      $\text{SendModel}(E, c)$ 
6:      $\text{ClientUpdate}(E, c)$ 
7:      $E \leftarrow \text{ReceiveModel}(c)$ 
8:   end for
9: end procedure
10: procedure CLIENTUPDATE( $E, c$ ) ▷ Update the
11:    $E \leftarrow \text{trainEmbeddings}(V, E, D_c)$ 
12:    $\text{Send } E$  to server
13: end procedure

```

neural network models using a central aggregation server. The training of the neural network models is based on the HTTP log representation described in Section III-B. To train supervised models, labels of HTTP logs need to be obtained, a known challenge in cyber security [63]. For this requirement, we use multiple sources of malicious data, including three public datasets, a network intrusion detection system available in one of the university networks, and labeled data from three attack recreation exercises.

Active Federated Learning. In real-world deployments of threat detection systems, the labeled set of malicious logs is usually limited, as the vast majority of data is unlabeled. Additionally, as new attacks occur on the Internet, existing defenses fail to detect them, and therefore it is not easy to get accurate labels of malicious activity on a network. To address these concerns, we integrate an active learning component into the CELEST with the goal of augmenting the ground truth of malicious activities during the training phase and, eventually, improving the global model's detection capabilities in an online fashion [38].

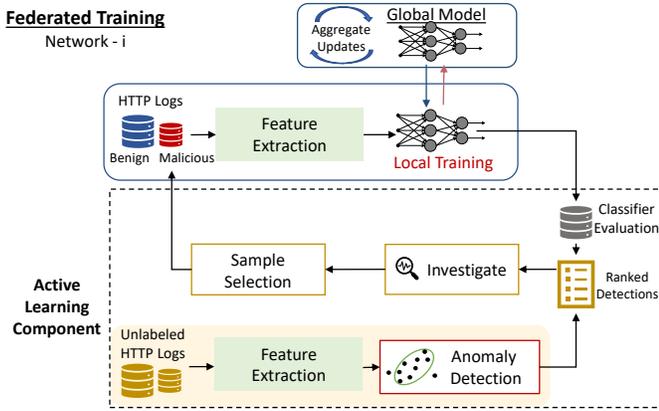


Fig. 3: Overview of the active federated learning framework.

The goal of active learning, shown in Figure 3, is to facilitate sample selection and utilize the limited budget available for analyst investigation for labeling the selected log samples. The newly labeled samples will be added back to training and used in the next iteration of federated learning. This approach fits particularly well with federated learning, which is designed for continuous training over time, and thus can account for malware evolution over time.

To the best of our knowledge, CELEST is the first threat detection system using active learning in a federated method of training with limited labeled data. The main remaining design decision is how to select samples at each iteration for analyst labeling. For this task we propose a local anomaly detection module at each client, which will be trained on the unlabeled client data in order to detect the highest ranked anomalies. Prior work [7], [48], [49] shows that anomaly detection can find new malicious behavior in unlabeled data, and we leverage this observation in our design. In addition, we also select samples for labeling from the top ranked HTTP log events obtained with the current global model at each client. Intuitively, the selected samples will also contribute to enhancing the ground truth of malicious logs. Given a fixed budget $2U$ denoting the number of samples that can be investigated in an iteration, we use half of it (U samples) for anomalous samples, and the remaining U samples for highest ranked samples by the global model. The Active Federated Learning procedure is illustrated in Algorithm 3.

IV. EVALUATION

We design experiments to address the following research questions:

RQ-1: What is the performance of embedding models for URL feature representation? Can a *federated* embedding approach achieve comparable performance to a *centralized* embedding model? Do embedding models offer performance gains over lexical feature representations? (Section IV-B1)

RQ-2: What feature group is most relevant in detecting HTTP malware? We define several feature groups to represent an HTTP event and investigate the utility of each of these groups at detecting malicious samples. How does

Algorithm 2 ActiveFederatedLearning. Parameters: w_t global model at time t ; D_c^t local dataset at client c and time t ; A_c^t anomaly models at client c and time t ; U budget.

```

1: procedure CLIENTUPDATE( $c, w_t$ ) ▷ Update the global
   model at client  $c$ 
2:    $D_c^t \leftarrow D_c^t \cup \text{SampleSelection}(w_t, t)$ 
3:    $w_{local} \leftarrow \text{localTraining}(w_t, D_c^t)$ 
4:   Send  $w_{local}$  to the server
5:    $A_c^t \leftarrow \text{trainAnomalyModel}(D_c^t)$ 
6: end procedure
7: procedure SAMPLESELECTION( $w, t$ )
8:    $D^r \leftarrow \text{rank}(w, D_c^t)$ 
9:    $L_c \leftarrow \text{investigate}(D^r, U)$ 
10:   $D^a \leftarrow \text{anomalyDetection}(A_c^{t-1}, D_c^t)$ 
11:   $L_a \leftarrow \text{investigate}(D^a, U)$ 
12:  return  $L_c \cup L_a$ 
13: end procedure

```

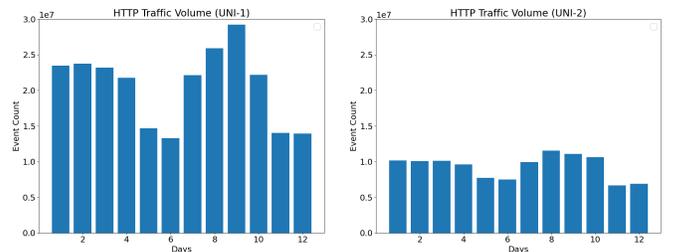


Fig. 4: Volume of HTTP logs in UNI-1 (left) and UNI-2 (right) during a period of 12 days. UNI-1 is a larger network and has more traffic. There are on average 20 million logs at UNI-1 and 9 million logs at UNI-2 daily.

detection perform when *all* the features are used together? (Section IV-B2)

RQ-3: Does federated learning improve malware detection compared to locally trained models? We assess the advantage of global models that use coordinated detection over local models for a variety of malware families. Can FL expose *new* attacks that are largely invisible to individual organizations? (Section IV-C)

RQ-4: How well does the global model scale? Is the federated training scalable to handle more clients? We are looking at the impact of increasing the number of participating clients on detection performance. (Section IV-D)

RQ-5: Does active learning help when there are unknown threats in the networks? We study a particularly challenging case: faced with new malware, neither of the clients have labeled data available. Can active FL discover anomalous traffic and aid detection? (Section IV-E)

A. Experimental Setting

1) *Datasets:* We use a number of data sources to evaluate our system. We use the two university networks' traffic as background data, and use different malicious data sources for different experiments as explained below.

University Network Dataset. We obtained access to Zeek [55] HTTP logs from two large university networks. The networks contain an average of 20 and 9 millions of HTTP log events per day, respectively, and were used actively during the period of data collection. Sensitive fields in the logs (such as internal IP addresses and URL parameter values) are anonymized in a consistent manner to protect user personal information. We performed all our analysis on servers within the university network. The IRB office at one of the universities reviewed our data collection process and determined that this research does not qualify as Human Subject Research. However, our team members participated in IRB training and used best practices to handle the network data.

Figure 4 shows the daily data volume in the two networks. We filter this dataset based on domain popularity using Tranco [54] to exclude top 10,000 domains. We further remove external domains contacted more than 10,000 times. Both of these sets of domains are unlikely to serve malware, and similar methodology was used in previous work for data reduction [27], [50], [51]. After filtering the traffic, we have between 1,900 and 31,000 logs per 30-minute time interval.

IoT Malware Dataset (Mirai, Gafgyt). We collect a dataset of IoT malware (Mirai and Gafgyt) from CyberLoCs, Virus-Total, VirusShare, and malicious samples shared by Alrawi et al. [2]. We build a dynamic analysis framework to execute the malware in a sandboxed environment to collect the HTTP logs for each malware family. In total, we use 300 malware samples from each family, containing 20,627 and 13,889 HTTP events.

Data Exfiltration Malware Dataset (DEM). Bortolameotti et al. [12] collected HTTP logs for data exfiltration malware samples in a sandbox and released the dataset. This dataset contains multiple malware families: Shakti, FareIT, CosmicDuke, Ursnif, Pony, Spyware, and SpyEye, and has more variability. In total, 79 malware samples containing 8,843 HTTP events are used in the experiments.

Network IDS logs (NIDS). In one of the university networks, a commercial off-the-shelf network IDS is available, and alerts are collected in real-time for potentially malicious events. We have access to the historical samples, and we collect malicious domains and IP addresses from the malware-callback alerts. We process 28,985 alerts, containing 9,124 unique requests and 687 unique hosts (domain and IP addresses). We use the collected indicators to match and label connections in each network during the training period.

Attack Recreation Dataset (ARD). To conduct a realistic experiment for evaluation, we set up an attack recreation infrastructure and run controlled attacks on the two networks. We vary the C2 infrastructure, including the C2 domains and IP addresses, to emulate adversarial evasion capabilities and test the performance of CELEST. The details of the exercises are given in Section V.

2) *Implementation:* We implemented the system on Python 3.8, and used *Keras* [18] and *TensorFlow Federated* [66] for federated training. We use the *Gensim* framework [56] for training embedding models. We ran all our experiments on a server with 64GB of RAM using a 16-core 2.00 GHz Intel Xeon Processor.

There are several hyper-parameters which need to be

URL Representation	Precision	Recall	F1	PR-AUC
Word2vec (federated)	0.96	0.78	0.86	0.88
FastText (federated)	0.96	0.79	0.87	0.88
Word2vec (centralized)	0.96	0.78	0.87	0.88
FastText (centralized)	0.95	0.78	0.86	0.88
Lexical Features	0.94	0.69	0.80	0.83

TABLE II: Feature representation comparison for detecting malicious URLs. Our federated approach using Word2Vec and FastText is similar to centralized embeddings, and they outperform the baseline lexical features.

selected before training. Federated learning updates happen within rounds, and we set the duration of a round to $t = 30$ minutes. Parameter t is tuned to balance the trade-off between communication cost and convergence speed: increasing the training time of each round results in smaller communication cost overall, but slows down the convergence process. The neural network hyper-parameters are selected after a grid-search: we use a single hidden layer of size 128, a dropout layer with rate 0.1, and learning rate of 0.01.

3) *Evaluation Metrics:* In cybersecurity settings, there is usually a large class imbalance, and evaluation metrics are important in measuring the strength of the models. We evaluate our system using Precision and Recall metrics, as our dataset is also imbalanced. We measure the performance with Precision-Recall Area Under Curve (PR-AUC), a single metric that captures the performance across all thresholds. We also use False Positive Rate (FPR) as an important metric for the models to be deployed in a real-world setting.

B. Feature Set Comparison

1) *URL Representation:* We evaluate our embedding-based approach for malicious URL detection in both centralized and federated settings. We also evaluate a previous approach using lexical features [40], [33], in order to compare with the embedding representation.

Embedding Model Training: We train both Word2Vec and FastText models in centralized and federated settings. We use the domain and URL fields of HTTP logs to evaluate different representations. We train on one day containing 537,448 background samples, together with 18,853 malicious samples from the three malware families (Mirai, Gafgyt, and DEM). We test on the next day with 89,139 background samples, and 4,267 malicious samples. The training corpus consists of 7,060,904 URL instances, and a vocabulary of 995,059 unique tokens. The size of the embedding vectors is 32, and we use Continuous-Bag-Of-Words, with a context window of size 5. We selected these hyper-parameters after experimenting with several choices. We compare the following embedding methods:

- **Centralized Embeddings.** The training is performed at the server using the data shared by the clients.
- **Federated Embeddings.** Each university network is a client, which gets access to its own data and performs the federated embedding protocol with the server.

Lexical Features: We use the code by Khramtsova et al. [33] to generate 72 lexical features (e.g., length and entropy of each

Feature Groups	PR-AUC	Training Time
All_Features	0.95	36m 55s
Domain_URL	0.88	13m 23s
UA_Referer	0.53	24m 6s
External_Host	0.63	8m 4s
HTTP_Metadata	0.52	8m 1s

TABLE III: Feature group comparison for detecting malicious HTTP events. We use four feature groups and compare to all our extracted features using PR-AUC. All combined features achieve highest PR-AUC at detecting malware.

URL category, number of letters in each category, etc.).

Table II shows the comparison of different feature representations in terms of precision, recall, F1 scores, and PR-AUC. We make three observations: First, we note that FastText provides similar performance to Word2Vec, and the training time on our corpus is comparable. Since FastText provides better generalization by handling out-of-dictionary words, we choose FastText as the default URL embedding method in our framework. Second, we note that the federated embedding models provide similar performance to the centralized models, and we used this approach due to its increased privacy assurances. Third, we see that the lexical feature representation provides worse performance on our data, with 10% lower recall and similar precision compared to the federated FastText method. This result implies that the embedding method generalizes better at detecting a larger number of malware samples, which can evade the lexical features. The cost of training the federated embedding is 75 minutes in our setup.

2) *Feature Groups*: We investigate here the need for additional features extracted from HTTP logs to augment the URL embeddings. URLs are not always explicitly used in malicious communication, and other HTTP fields, such as IP address, referer and user agent string could also be attack indicators. We compare several feature groups, as defined below:

- **Domain_URL**: Embeddings of domain and URL.
- **UA_Referer**: User agent categorical features and referer with embedding representation.
- **External_Host**: External IP and port represented as categorical features.
- **HTTP_Metadata**: Method, status, content type as categorical features, and trans depth, request length, response length as numerical features.
- **All_Features**: Full feature vector from Table I.

For this experiment, we used the same dataset as for URL detection, but with full HTTP logs. Table III shows the PR-AUC for these feature groups. The results demonstrate that the domain and URL features have the highest performance in the 4 considered feature groups (PR-AUC of 0.88), but using all HTTP features improves PR-AUC to 0.95. There is an increase in the training time using all features, due to the larger dimension of the neural network model.

C. Federated Models vs Local Models

In this section, we investigate how a network can benefit from federated training when a new malware has been previously detected in one of the collaborating networks, but is seen locally for the first time. We design experiments to

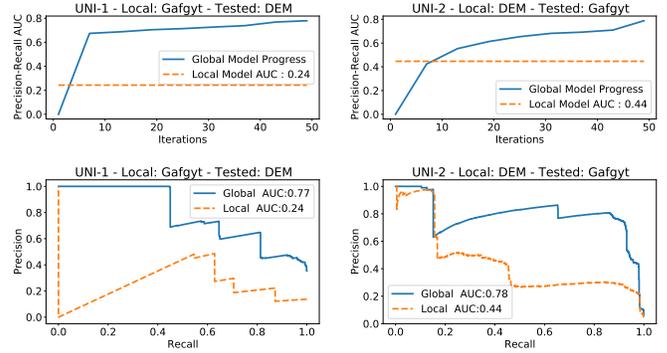


Fig. 5: Federated model progress for detecting malware families over multiple iterations (top plots) and Precision-Recall curves (bottom plots) evaluated on the two networks. The two sites are seeing a new malware for the first time (DEM at UNI-1 and Gafgyt at UNI-2) and attempt to detect it with their own local model and with the federated model. Each iteration processes 30 minutes of data, and the global model exceeds the local model performance in less than 10 iterations. Global models always outperform local models at detecting malware seen in the network for the first time.

use different malware families in the two networks during training, and show how the global model helps detection of a malware family seen for the first time in one of the networks. In particular, we generate a set of controlled experiments with the two university networks as clients. We merge malware traces from the three families (Mirai, Gafgyt, and DEM) in both networks to determine the performance of the local and global models under multiple scenarios. We split each of the malware family into 80% samples for training and 20% for testing, and distribute them to the networks across rounds.

Table IV shows the PR-AUC of the global models trained with federated learning and the local model in various settings. The results show the improvements achieved by the global model, which successfully transfers the detection from one network to other participating clients. For example, when Mirai and DEM malware families are used for training at UNI-1 and UNI-2, respectively, the federated model achieves a PR-AUC of 0.75 at detecting DEM in UNI-1, a significant improvement over the local model’s 0.26 PR-AUC. Similarly, at UNI-2, the global model achieves a PR-AUC of 0.87, compared to the local model’s PR-AUC of 0.54 at detecting Mirai. In other cases, malware families share some common characteristics, which aids the local detection. In the case of Mirai and Gafgyt, a local model that trains on Mirai and later attempts to detect Gafgyt (or the other way around) performs relatively well (at 0.87-0.9 PR-AUC). Nonetheless, the global model outperforms it consistently, achieving a PR-AUC of about 0.93-0.95. False positive rates are consistently low for the global models, between 0.002 and 0.01, at a recall of 0.9.

Figure 5 shows in the top plots the progress during federated training for two of the experiments. As more training data is consumed, the PR-AUC increases and the global model outperforms the local model in less than 10 iterations (5 hours). Figure 5 also shows the precision and recall curves for the global and local models, illustrating a clear performance gain

Training Malware Family		Deployed Network: UNI-1				Deployed Network: UNI-2			
UNI-1	UNI-2	Test Family	Local Model PR-AUC	Global Model PR-AUC	Global Model FPR at Recall > 0.9	Test Family	Local Model PR-AUC	Global Model PR-AUC	Global Model FPR at Recall > 0.9
Mirai	Gafgyt	Gafgyt	0.8751	0.934	0.002	Mirai	0.8806	0.9591	0.002
Mirai	DEM	DEM	0.2647	0.7522	0.01	Mirai	0.5483	0.8774	0.002
Gafgyt	Mirai	Mirai	0.8952	0.9308	0.003	Gafgyt	0.9055	0.9568	0.001
Gafgyt	DEM	DEM	0.2429	0.7548	0.01	Gafgyt	0.4464	0.8016	0.002
DEM	Mirai	Mirai	0.7231	0.8508	0.003	DEM	0.5483	0.7958	0.009
DEM	Gafgyt	Gafgyt	0.6013	0.7983	0.005	DEM	0.4736	0.7939	0.009

TABLE IV: Federated model comparison with the locally trained models for detecting malware families in multiple scenarios with different training sets. Each row shows the training malware family in each network, and the PR-AUC for detecting the malware that is not locally seen during training. The results show the PR-AUC improvements of the global models compared to locally trained models and the low FPR of the global models.

Global Model	Network: UNI-1			Network: UNI-2		
	Mirai	Gafgyt	DEM	Mirai	Gafgyt	DEM
4 Clients	0.96	0.90	0.71	0.94	0.88	0.59
10 Clients	0.96	0.93	0.72	0.95	0.91	0.64
16 Clients	0.96	0.94	0.74	0.95	0.92	0.69
20 Clients	0.95	0.90	0.70	0.95	0.93	0.64
24 Clients	0.96	0.95	0.74	0.95	0.94	0.66
30 Clients	0.95	0.89	0.81	0.94	0.91	0.70

TABLE V: Federated model PR-AUC as more clients participate during training. Each row shows the total number of clients, and the PR-AUC for detecting different malware families in the two networks. As the number of clients increases and more data is used during training, overall detection performance generally improves.

with the federated model.

D. Scaling to Multiple Clients

CELEST is designed for multiple clients, but in cyber settings it is challenging to obtain data from multiple organizations. We have access to two large university network logs, and we use subnet-level information in each network to create multiple clients. For this experiment, we generate all the subnets at each university network, and create 15 clients in each network, each using data from several subnets. We then consider a subset of these clients, varied between 2 and 15 at each network, to test the impact of the number of clients participating in the FL training protocol. We split the malware samples from the three families equally across the 30 clients in both networks.

Table V shows the global model PR-AUC at detecting the three malware families on the two university networks. We observe that for Mirai, four clients is enough to obtain good performance (PR-AUC above 0.94), whereas for DEM and Gafgyt families the performance improves as more clients participate in the protocol and more malicious data is available. The improvements are particularly large for DEM, which consists of multiple malware families and has more variability. The experiment shows that the system can scale to multiple clients and its detection performance improves with more clients participating in the FL protocol. Small variations in performance are due to differences in data distributions of clients joining the training process.

Active Learning Budget	Network: UNI-1			Network: UNI-2		
	Mirai	Gafgyt	DEM	Mirai	Gafgyt	DEM
0	0.19	0.13	0.21	0.18	0.06	0.22
10	0.48	0.38	0.59	0.40	0.28	0.38
100	0.70	0.60	0.66	0.63	0.49	0.52
200	0.79	0.73	0.69	0.76	0.69	0.59
300	0.83	0.76	0.66	0.81	0.73	0.61
400	0.84	0.77	0.68	0.83	0.75	0.68
500	0.87	0.81	0.70	0.84	0.76	0.69
Fully Labeled	0.97	0.96	0.82	0.96	0.93	0.72

TABLE VI: Federated active learning at different budgets U from 0 to 500 in a challenging scenario in which none of the malware families is labeled in training. We show PR-AUC for detecting three malware families at two university networks. The federated model without active learning (budget 0) cannot identify new malware (top row). The active learning component achieves higher PR-AUC at larger budgets, and gets close to the model trained with all labeled malicious data (last row).

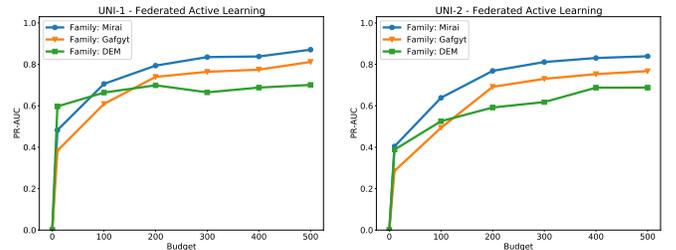


Fig. 6: Model performance for the three malware families on the two networks as the investigation budget increases. Higher budget improves the PR-AUC of the global model. Results are similar on both networks, but vary slightly across malware families (DEM includes multiple types of malware and is more challenging to detect).

E. Federated Active Learning

We showed how federated learning can transfer knowledge about malware observed in some networks to detect attacks seen for the first time in other networks. However, the global model will not detect a completely new attack that has not been observed in either of the participating clients in training. To overcome this challenge, we propose extending the federated

learning framework with an active learning component based on a local anomaly detection module. Section III-D details our sample selection algorithm to discover and label new samples with active learning.

We design a challenging scenario to test the detection capabilities of federated active learning. The two university networks start training the global model using NIDS alerts labeled as malicious data. We merge the malware logs from the three malware families (Mirai, Gafgyt, and DEM) into the client networks, but without using the malicious labels to simulate a situation when clients are infected with unknown malware. The global model trained with NIDS alerts uses a different malicious distribution for training and will not be able to detect these malicious samples. We would like to test if the anomaly detection module identifies some of the malicious samples in the local networks, and, furthermore, if the federated model with active learning is able to detect these unknown malware attacks when no labeled data from these families is initially available in training.

For the anomaly detection module, we train Isolation Forest [37] models on HTTP logs, on k previous time windows of 30 minutes each, and use an ensemble of these models to detect anomalies within the current time window. We set $k = 3$, after experimenting with multiple values of k . We vary the budget used in investigation U between 0 (which results in the federated model without active learning) and 500. Figure 6 and Table VI show the PR-AUC for the three malware families as a function of the investigation budget. As expected, for a budget of 0, the global model performs poorly without active learning at detecting these completely new malware families (e.g., PR-AUC 0.19 at detecting Mirai at UNI-1). Active learning used in federated training significantly helps detect new malware: as we increase the budget for investigation, the PR-AUC also increases, and with a budget of 500 samples it reaches PR-AUC of 0.87 in the same experiment for detecting Mirai.

We also ran the active learning system for sample selection using only the anomaly detection module. This setup identified fewer samples per round, and the detection performance was slightly worse. For instance, using both anomaly detection and the highly ranked samples generated by the classifier resulted in an increase of 11% PR-AUC compared to using only the anomaly detection module for detecting DEM. This result shows that both components for sample selection contribute to the success of federated active learning.

V. MODEL DEPLOYMENT

In this section, we discuss results of our system deployment on two university networks to demonstrate its performance and feasibility in a real-world setting. We design several attack recreation exercises to run real malware on the two networks in a controlled manner, and then evaluate the detection capabilities of CELEST.

A. Attack Recreation Exercises

We deploy a set of vulnerable virtual machines to recreate a malware infection and propagation on the two networks. We use a modified instance of Mirai [3], which scans and propagates to other vulnerable virtual machines under our control. To ensure there were no unintended side effects or

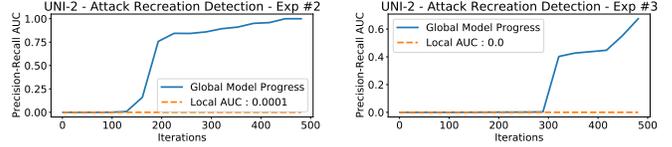


Fig. 7: PR-AUC of global model trained at various time intervals. Training data includes labeled attack recreation samples used at UNI-1, but not at UNI-2, in Exp 1. Testing is done on Exp 2 and Exp 3 at UNI-2. Federated model reaches almost perfect PR-AUC in Exp 2, after the model is trained with sufficient data, due to the similarity of Exp 1 and Exp 2. On Exp 3, the PR-AUC is lower and the model needs more training data, due to adversarial evasion.

Training Time (Days)	Detection on UNI-2		
	Experiment #1	Experiment #2	Experiment #3
3	0.2449	0.1601	0.0006
6	0.8258	0.8592	0.4025
10	0.9272	1.0	0.6746

TABLE VII: PR-AUC at UNI-2 during the 3 attack recreation experiments for the global model trained with 3, 6, and 10 days of Exp 1 data. Training data includes labeled attack recreation samples used at UNI-1, but not at UNI-2. The model trained after 3 days has relative low PR-AUC, but this increases as more training data is used. Results on Exp 1 and Exp 2 have higher PR-AUC than Exp 3, which employs evasion.

damage to other nodes on the internet, the Mirai malware was modified by updating the dictionary used to brute-force passwords to include only randomly selected user names and passwords. Mirai’s infection component was enhanced to verify that the IP to infect was on the controlled IP list before malware propagates and infects the target host.

We also host a C2 server on the Chameleon [32] service outside the university networks. This deployment allows the network data to be collected at the edge of the university networks and we observe the C2 communication in the HTTP logs. We further enhanced Mirai to deploy a reverse shell component, called Sandcat, from Mitre Caldera [20], to maintain a permanent C2 connection with beaconing between 700 and 900 seconds on port 2323.

We start an experiment by infecting a few of the machines with the Mirai malware. The lateral movement process scans public IPs across the two universities, and takes approximately two weeks to infect approximately half of the vulnerable nodes. We run three exercises with different configurations, each over a two-week interval:

- **Exp 1:** A total of 282 end points were deployed, and the C2 server IP was configured to change every 30 minutes. The new server IP was detected by the infected end points by querying a DNS server for a single domain name. This experiment occurred in June of 2021.
- **Exp 2:** Similar to Exp 1, but with 429 end points deployed. This experiment occurred in August of 2021.
- **Exp 3:** Both the C2 server IP and domain change every 30 hours. The new domain name is found by

Ranked Samples	Deployed Network: UNI-1						Deployed Network: UNI-2					
	ARD	Verified by IDS	Verified by VirusTotal	Unknown	Prec	FPR	ARD	Verified by IDS	Verified by VirusTotal	Unknown	Prec	FPR
Top-10	8	2	0	0	1.0	0	9	1	0	0	1.0	0
Top-30	28	2	0	0	1.0	0	28	2	0	0	1.0	0
Top-50	39	7	2	2	0.96	2.7×10^{-6}	31	12	1	6	0.98	1.4×10^{-5}
Top-80	46	19	10	5	0.93	6.9×10^{-6}	42	14	16	9	0.88	2.1×10^{-5}
Top-100	59	19	12	10	0.90	1.3×10^{-5}	42	14	30	14	0.86	3.3×10^{-5}

TABLE VIII: Detection statistics for global model deployment in the two networks on a test day part of Exp 1 (June 20). The majority of detected samples are attack recreation (ARD) logs (59 out of 100 at UNI-1), and several samples are confirmed malicious by IDS (19 at UNI-1 and 14 at UNI-2). The system detected 42 new malicious samples with unique URLs (a total of 20 malicious domains), confirmed by VirusTotal, which are not part of ARD and not detected by IDS. The model detects all ARD samples with high precision and low false positive rates in both networks.

using a domain generation algorithm (DGA) configured to pseudo-randomly select 100 domains from 10,000 possible domain names. This experiment used 364 end points, and occurred in October of 2021.

Exp 2 is designed to be similar to Exp 1, but is run after two months to test if the global model maintains its detection performance over time. Exp 3 is designed to emulate an adversarial evasion strategy, in which the adversary rotates both its C2 domain and IP infrastructure to evade detection.

B. Deployment and Evaluation

We deploy the federated learning framework in the two networks, and perform training over ten days in June 2021, starting two days before Exp 1 began to account for some intervals without any attack recreation samples. Commercial off-the-shelf network IDS (NIDS) logs which are commonly available as part of the organization’s security infrastructure are used to label traffic in both networks during training. In this scenario, we have two client organizations, and one of the networks (UNI-1) has resources to detect and label the attack recreation data as malicious. The second network (UNI-2) has no attack recreation labels during training. These two networks participate in federated training, and try to detect the various attack recreation experiments.

We are interested in measuring global model detection at UNI-2, for which the local model has 0 PR-AUC (as there is no labeled attack recreation data). Table VII shows the PR-AUC results at UNI-2 for three models trained on Exp 1, using 3, 6, and 10 days of training data, respectively. Figure 7 shows the increase in PR-AUC on Exp 2 and Exp 3 testing days (August 15 and October 15) for the same model trained on Exp 1 data, at various time intervals. Initially, there is no infected host at UNI-1 (we start the training 2 days before Exp 1), so the model has no malicious detections until the third day. In the third day, the model has relatively low PR-AUC (0.24 on Exp 1 testing), but the performance increases steadily with more training data (and reaches a perfect PR-AUC on Exp 2 after 10 days). Interestingly, the global model trained on Exp 1 generalizes very well on Exp 2, which occurs two months later. This outcome is explained by the similarity in the attack recreation data in the two experiments, which has a higher relevance than the changes in the benign data distribution over time. Results on Exp 3 are surprisingly good (PR-AUC of 0.67), considering the evasion performed by malware, which changes both the C2 server domain and IP address. These results suggest that,

while IP and domain features are important, CELEST relies on a larger number of features extracted from HTTP logs and provides some resilience to evasion.

We further analyze the highest ranked HTTP logs on the test day, June 20, in Exp 1 to determine what the model considers suspicious in addition to attack recreation events. Table VIII includes the results of our investigation of top ranked samples in both networks. We observe that most of the detections are attack recreation samples (28 in top 30, and 46 in top 80 samples), and a large number (19 on UNI-1 and 14 on UNI-2) are verified as malicious by the commercial IDS. We query the remaining samples on VirusTotal [72] and determine 12 samples at UNI-1 and 30 at UNI-2 with positive scores (a total of 42 malicious URLs and 20 malicious domains). These detections are interesting as they are new malicious detections identified by CELEST, which were not part of the attack recreation exercises and the IDS failed to detect. The rest (10 URLs at UNI-1 and 14 at UNI-2) have an unknown status at the time of the investigation. We report high precision and FPR lower than 3.3×10^{-5} in both networks, considering the unknown samples as false positives.

We also deployed our model for real-time detection during attack recreation experiments. We ran a network monitoring service that consumes the HTTP log streams from the live network traffic. Features are generated in real-time from raw log samples, and evaluated on the global model to generate a score. For high-certainty detections with scores above 0.85, we trigger a firewall rule to prevent future communications with the detected C2 server. Our model was able to detect the C2 malicious communications, and deployed the firewall successfully to block the attack in progression.

VI. DISCUSSION AND EXTENSIONS

In this paper we showed that global models that leverage coordinated detection across multiple participating organizations perform better at detecting malware threats compared to local models that only rely on limited local data. Federated learning is often able to expose new attacks which are largely invisible to individual organizations. FL is particularly effective when used in conjunction with active learning, which progressively enhances the labeled dataset used in training with new malicious samples. When deployed on two university networks, CELEST was able to detect new malicious activity and identify evasive adversarial activity in real time.

Real-world Deployment. Active learning adds a major boost to the malware detection capabilities of a federated learning framework. Through the anomaly detection module integrated with the classifier that progressively improves its detection, CELEST can discover and learn the behavior of completely new attacks for which no labeled data is available. Our current framework uses a generic anomaly detector (Isolation Forest); however, in order to tap into its full potential, a more sophisticated anomaly detector specifically designed for HTTP logs can be used (prior work proposed DECANTeR [12]). Given its low false positive rates and high discovery rates in top ranked samples, it is feasible to have active learning integrated with security operations centers for sample labeling and selection. Periodic training is necessary in order to learn changing patterns in background traffic, as well as to discover and incorporate new attack behaviors in the model.

While CELEST is currently designed to detect malware communication from HTTP logs, it can be extended to other types of security logs (e.g., authentication logs, DNS logs, etc.). Furthermore, many enterprise networks nowadays deploy web proxies for HTTPS interception. These proxies act as man-in-the-middle agents in TLS communication, making it possible to temporarily decrypt and inspect otherwise encrypted data in order to detect malware, data breaches, etc. Using this traffic, our system can also support malware detection over HTTPS.

Moreover, our framework can be extended to support P2P architectures, where a group of autonomous peers jointly train a common model without using a trusted server. A decentralized FL approach avoids having a single-point-of-failure and relies on the agents to implement consensus techniques by exchanging local model updates. Such P2P architectures have recently been proposed [19], [25], [74].

Federated Training Security. Federated learning is susceptible to poisoning attacks by malicious participants, who may tamper with the local data or the local model parameters on the compromised clients. There has been substantial progress in recent years on modeling possible attacks and proposing defense methods against data poisoning [68] and model poisoning [22], [57], [62], [16]. Existing defenses can be adapted and integrated in CELEST to counter malicious interference during the federated learning training process.

Resilience to Evasion. In Section V we presented a case study (Exp 3) designed to emulate an adversarial evasion strategy, in which the adversary rotates both its C2 domain and IP infrastructure to evade detection. We showed that CELEST is still able to detect the malware attack when faced with this evasion method. Evading local models is relatively easy, but evading federated models becomes more difficult, because training global models with multiple clients provides certain resilience to evasion. In future work, we plan to explore more advanced evasion strategies where the attacker uses multiple compromised clients in a coordinated effort to evade detection.

VII. RELATED WORK

Malicious URL and domain detection. A large body of work has looked at URL-based detection [15], [34], [39], [40], [60], [76], [67] and domain-based detection [9], [14], [21], [36], [78] of malicious traffic. Some of these studies focus

on one type of malware like phishing [76] or spam [15], [67] in social media contexts, while others attempt to capture a larger set of malware behaviors, e.g, Mamun et al. [40] group malicious URLs into categories like spam, phishing, malware, and defacement URLs using public datasets. Previous studies employ various techniques to detect malicious URL and domains. These include lexical features generated from bag-of-words representation [39], behavioral analysis [15], DNS data analysis [9], [78], webpage content analysis combined with some URL and domain properties [14], [67], and deep-learning methods [34], [36], [40], [60], [76]. For example, Mamun et al. [40] propose to detect malicious URLs with KNN and Random Forests; other studies use character-level embeddings [60] or both character-level and word-level embeddings [34] in conjunction with CNNs to generate features that are passed to a feed-forward neural network for classification; Li et al. [36] introduce a deep neural network framework using a time-series prediction model for malicious domain classification, while Yuan et al. [76] use word2vec to detect phishing malware from URLs.

Malicious HTTP-based detection. Efforts on malware detection in this area have focused on HTTP-based detection using web-proxy logs [6], [27], [42], [46], [50], [51] and HTTP-based application fingerprinting [12], [13], [53]. Machine learning detection methods on HTTP logs attempt to detect malware activity within a single network by training supervised classification models locally on labeled data available in that network [6], [27], [50], [51]. In other approaches, Nelms et al. [46] use control protocol templates derived from labeled samples to detect new C2 domain names, while Bortolameotti et al. [12] use application fingerprinting techniques for clustering HTTP connections in order to detect anomalous traffic indicative of data exfiltration.

Federated learning for cyber security. Federated learning has been proposed for enhancing cyber security in various settings including mobile phones [24], Internet-Of-Things [47], [61], cloud ecosystems [52]. Closer to our work, Khramtsova et al. [33] study federated learning approaches on malicious URL detection to show the benefit of sharing information about local detections. Zhao et al. [77] propose multi-task network anomaly detection using federated learning. Fereidooni et al. [23] proposed federated learning to enable effective cyber-risk intelligence sharing for mobile devices.

VIII. CONCLUSION

In this paper, we present CELEST, a federated learning framework for collaborative threat detection. CELEST leverages a distributed machine learning architecture in which multiple participating organizations train a global model used for HTTP-based malware detection. During training, the clients keep their data locally, without exchanging any sensitive information. Using a novel active learning component, CELEST progressively improves its detection capabilities. Furthermore, an integrated anomaly detection module facilitates the discovery of new unknown attacks that become part of the shared knowledge across participating clients. We evaluate our system using a variety of malware datasets and demonstrate the power of knowledge transfer through the globally trained model, which enables individual organizations to detect attacks that were largely invisible locally. In addition, we deploy the model

on two large university networks and show that CELEST is able to detect real-world malicious traffic (42 malicious URLs and 20 malicious domains). Overall, CELEST is a scalable and effective proactive threat detection solution that leverages collaboration across multiple networks to detect emerging cyber threats.

ACKNOWLEDGEMENTS

We thank Afsah Anwar, Alastair Nottingham, Molly Buchanan, Mark Gardner, Jeffry Lang, and Jeffrey Collyer for their help throughout the project. This research was sponsored by contract number W911NF-18-C0019 with the U.S. Army Contracting Command - Aberdeen Proving Ground (ACC-APG) and the Defense Advanced Research Projects Agency (DARPA), W911NF-21-10322, and by the U.S. Army Combat Capabilities Development Command Army Research Laboratory under Cooperative Agreement Number W911NF-13-2-0045 (ARL Cyber Security CRA). The views contained in this document are those of the authors and should not be interpreted as representing the official policies, either expressed or implied, of the ACC-APG, DARPA, Combat Capabilities Development Command Army Research Laboratory or the U.S. Government. The U.S. Government is authorized to reproduce and distribute reprints for Government purposes notwithstanding any copyright notation here on. This project was also funded by NSF under grant CNS-1717634.

REFERENCES

- [1] M. Alazab, S. P. RM, P. M, P. K. R. Maddikunta, T. R. Gadekallu, and Q.-V. Pham, "Federated learning for cybersecurity: Concepts, challenges, and future directions," *IEEE Transactions on Industrial Informatics*, vol. 18, no. 5, pp. 3501–3509, 2022.
- [2] O. Alrawi, C. Lever, K. Valakuzhy, R. Court, K. Snow, F. Monrose, and M. Antonakakis, "The circle of life: A large-scale study of the iot malware lifecycle," in *30th USENIX Security Symposium (USENIX Security 21)*, 2021.
- [3] M. Antonakakis, T. April, M. Bailey, M. Bernhard, E. Bursztein, J. Cochran, Z. Durumeric, J. A. Halderman, L. Invernizzi, M. Kallitsis *et al.*, "Understanding the Mirai botnet," in *USENIX Security Symp.*, 2017.
- [4] "Data Exfiltration Techniques," <https://azeria-labs.com/data-exfiltration>, Azeria-Labs, 2020, [Online; accessed 3. May 2022].
- [5] M. Baroni, G. Dinu, and G. Kruszewski, "Don't count, predict! a systematic comparison of context-counting vs. context-predicting semantic vectors," in *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Baltimore, Maryland: Association for Computational Linguistics, Jun. 2014, pp. 238–247. [Online]. Available: <https://aclanthology.org/P14-1023>
- [6] K. Bartos, M. Sofka, and V. Franc, "Optimized invariant representation of network traffic for detecting unseen malware variants," in *USENIX Security Symposium*, 2016, pp. 807–822.
- [7] A. Beaunon, P. Chifflier, and F. Bach, "Ilab: An interactive labelling strategy for intrusion detection," in *International Symposium on Research in Attacks, Intrusions, and Defenses*. Springer, 2017, pp. 120–140.
- [8] D. G. Bernal, L. Giaretta, S. Girdzijauskas, and M. Sahlgren, "Federated word2vec: Leveraging federated learning to encourage collaborative representation learning," *arXiv preprint arXiv:2105.00831*, 2021.
- [9] L. Bilge, S. Sen, D. Balzarotti, E. Kirda, and C. Kruegel, "Exposure: A passive dns analysis service to detect and report malicious domains," *ACM Transactions on Information and System Security (TISSEC)*, vol. 16, no. 4, pp. 1–28, 2014.

- [10] A. Blum, B. Wardman, T. Solorio, and G. Warner, "Lexical feature based phishing url detection using online learning," in *Proceedings of the 3rd ACM Workshop on Artificial Intelligence and Security*, 2010, pp. 54–60.
- [11] P. Bojanowski, E. Grave, A. Joulin, and T. Mikolov, "Enriching word vectors with subword information," 2016, cite arxiv:1607.04606Comment: Accepted to TACL. The two first authors contributed equally. [Online]. Available: <http://arxiv.org/abs/1607.04606>
- [12] R. Bortolameotti, T. van Ede, M. Caselli, M. H. Everts, P. Hartel, R. Hofstede, W. Jonker, and A. Peter, "Decanter: Detection of anomalous outbound http traffic by passive application fingerprinting," in *Proceedings of the 33rd Annual Computer Security Applications Conference*, 2017, pp. 373–386.
- [13] R. Bortolameotti, T. Van Ede, A. Continella, T. Hupperich, M. H. Everts, R. Rafati, W. Jonker, P. Hartel, and A. Peter, "Headprint: detecting anomalous communications through header-based application fingerprinting," in *Proceedings of the 35th Annual ACM Symposium on Applied Computing*, 2020, pp. 1696–1705.
- [14] D. Canali, M. Cova, G. Vigna, and C. Kruegel, "Prophiler: A fast filter for the large-scale detection of malicious web pages," in *Proceedings of the 20th International Conference on World Wide Web*, 2011, pp. 197–206.
- [15] C. Cao and J. Caverlee, "Detecting spam URLs in social media via behavioral analysis," in *European Conference on Information Retrieval*. Springer, 2015, pp. 703–714.
- [16] X. Cao, J. Jia, and N. Gong, "Provably secure federated learning against malicious clients," in *AAAI*, 2021.
- [17] Z. Chen, N. Lv, P. Liu, Y. Fang, K. Chen, and W. Pan, "Intrusion detection for wireless edge networks based on federated learning," *IEEE Access*, vol. 8, pp. 217463–217472, 2020.
- [18] F. Chollet *et al.*, "Keras," 2015. [Online]. Available: <https://github.com/fchollet/keras>
- [19] L. Chou, Z. Liu, Z. Wang, and A. Shrivastava, "Efficient and less centralized federated learning," *ArXiv*, vol. abs/2106.06627, 2021.
- [20] T. M. Corporation, "Sandcat agent plugin," 2022. [Online]. Available: <https://github.com/mitre/sandcat>
- [21] R. De Silva, M. Nabeel, C. Elvitigala, I. Khalil, T. Yu, and C. Keppitiyagama, "Compromised or attacker-owned: A large scale classification and study of hosting domains of malicious URLs," in *30th USENIX Security Symposium*, 2021.
- [22] M. Fang, X. Cao, J. Jia, and N. Gong, "Local model poisoning attacks to Byzantine-Robust federated learning," in *29th USENIX Security Symposium (USENIX Security 20)*. USENIX Association, Aug. 2020, pp. 1605–1622. [Online]. Available: <https://www.usenix.org/conference/usenixsecurity20/presentation/fang>
- [23] H. Fereidooni, A. Dmitrienko, P. Rieger, M. Miettinen, A.-R. Sadeghi, and F. Madlener, "Fedcri: Federated mobile cyber-risk intelligence," in *Network and Distributed Systems Security (NDSS) Symposium*, 2022.
- [24] R. Gálvez, V. Moonsamy, and C. Diaz, "Less is more: A privacy-respecting android malware classifier using federated learning," *Proceedings on Privacy Enhancing Technologies*, vol. 4, pp. 96–116, 2021.
- [25] A. Gholami, N. Torzaban, and J. S. Baras, "Trusted decentralized federated learning," in *2022 IEEE 19th Annual Consumer Communications Networking Conference (CCNC)*, 2022, pp. 1–6.
- [26] "HTTP Status Codes Command This Malware How to Control Hacked Systems," <https://thehackernews.com/2020/05/malware-http-codes.html>, Hacker News, 2020, [Online; accessed 3. May 2022].
- [27] X. Hu, J. Jang, M. P. Stoecklin, T. Wang, D. L. Schales, D. Kirat, and J. R. Rao, "BAYWATCH: Robust beaconing detection to identify infected hosts in large-scale enterprise networks," in *DSN*. IEEE, 2016.
- [28] L. Invernizzi, S. ju Lee, S. Miskovic, M. Mellia, R. Torres, C. Kruegel, S. Saha, and G. Vigna, "Nazca: Detecting malware distribution in large-scale networks," in *NDSS*, 2014.
- [29] C. Johnson, L. Badger, D. Waltermire, J. Snyder, C. Skorupka *et al.*, "Guide to cyber threat information sharing," *NIST special publication*, vol. 800, no. 150, 2016.
- [30] A. Joulin, E. Grave, P. Bojanowski, and T. Mikolov, "Bag of tricks for efficient text classification," 2016, cite arxiv:1607.01759. [Online]. Available: <http://arxiv.org/abs/1607.01759>

- [31] P. Kairouz, H. B. McMahan, B. Avent, A. Bellet, M. Bennis, A. N. Bhagoji, K. Bonawitz, Z. Charles, G. Cormode, R. Cummings, R. G. L. D'Oliveira, H. Eichner, S. E. Rouayheb, D. Evans, J. Gardner, Z. Garrett, A. Gascón, B. Ghazi, P. B. Gibbons, M. Gruteser, Z. Harchaoui, C. He, L. He, Z. Huo, B. Hutchinson, J. Hsu, M. Jaggi, T. Javidi, G. Joshi, M. Khodak, J. Konecny, A. Korolova, F. Koushanfar, S. Koyejo, T. Lepoint, Y. Liu, P. Mittal, M. Mohri, R. Nock, A. Özgür, R. Pagh, H. Qi, D. Ramage, R. Raskar, M. Raykova, D. Song, W. Song, S. U. Stich, Z. Sun, A. T. Suresh, F. Tramèr, P. Vepakomma, J. Wang, L. Xiong, Z. Xu, Q. Yang, F. X. Yu, H. Yu, and S. Zhao, "Advances and Open Problems in Federated Learning," *Foundations and Trends® in Machine Learning*, vol. 14, no. 1–2, Jun. 2021. [Online]. Available: <https://www.nowpublishers.com/article/Details/MAL-083>
- [32] K. Keahey, J. Anderson, Z. Zhen, P. Riteau, P. Ruth, D. Stanzione, M. Cevik, J. Colleran, H. S. Gunawi, C. Hammock, J. Mambretti, A. Barnes, F. Halbach, A. Rocha, and J. Stubbs, "Lessons learned from the chameleon testbed," in *Proceedings of the 2020 USENIX Annual Technical Conference (USENIX ATC '20)*. USENIX Association, July 2020.
- [33] E. Khramtsova, C. Hammerschmidt, S. Lagraa, and R. State, "Federated learning for cyber security: SOC collaboration for malicious URL detection," in *2020 IEEE 40th International Conference on Distributed Computing Systems (ICDCS)*. IEEE, 2020, pp. 1316–1321.
- [34] H. Le, Q. Pham, D. Sahoo, and S. C. Hoi, "URLNet: Learning a URL representation with deep learning for malicious URL detection," *arXiv preprint arXiv:1802.03162*, 2018.
- [35] B. Li, Y. Wu, J. Song, R. Lu, T. Li, and L. Zhao, "Deepfed: Federated deep learning for intrusion detection in industrial cyber-physical systems," *IEEE Transactions on Industrial Informatics*, vol. 17, no. 8, pp. 5615–5624, 2021.
- [36] Y. Li, K. Xiong, T. Chin, and C. Hu, "A machine learning framework for domain generation algorithm-based malware detection," *IEEE Access*, vol. 7, pp. 32 765–32 782, 2019.
- [37] F. T. Liu, K. M. Ting, and Z.-H. Zhou, "Isolation forest," in *8th IEEE Int'l. Conf. on Data Mining*. IEEE, 2008, pp. 413–422.
- [38] E. Lughofer, "Single-pass active learning with conflict and ignorance," *Evolving Systems*, vol. 3, no. 4, pp. 251–271, 2012.
- [39] J. Ma, L. K. Saul, S. Savage, and G. M. Voelker, "Beyond blacklists: learning to detect malicious web sites from suspicious URLs," in *Proceedings of the 15th ACM SIGKDD international conference on Knowledge discovery and data mining*, 2009, pp. 1245–1254.
- [40] M. S. I. Mamun, M. A. Rathore, A. H. Lashkari, N. Stakhanova, and A. A. Ghorbani, "Detecting malicious URLs using lexical analysis," in *International Conference on Network and System Security*. Springer, 2016, pp. 467–482.
- [41] V. Mavroeidis and S. Bromander, "Cyber threat intelligence model: an evaluation of taxonomies, sharing standards, and ontologies within cyber threat intelligence," in *2017 European Intelligence and Security Informatics Conference (EISIC)*. IEEE, 2017, pp. 91–98.
- [42] J. McGahagan, D. Bhansali, M. Gratian, and M. Cukier, "A comprehensive evaluation of http header features for detecting malicious websites," in *2019 15th European Dependable Computing Conference (EDCC)*. IEEE, 2019, pp. 75–82.
- [43] B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. A. y Arcas, "Communication-efficient learning of deep networks from decentralized data," in *Artificial intelligence and statistics*. PMLR, 2017, pp. 1273–1282.
- [44] T. Mikolov, K. Chen, G. Corrado, and J. Dean, "Efficient estimation of word representations in vector space," 2013.
- [45] T. Mikolov, I. Sutskever, K. Chen, G. S. Corrado, and J. Dean, "Distributed representations of words and phrases and their compositionality," in *NIPS*. Curran Associates, Inc., 2013, pp. 3111–3119. [Online]. Available: <http://papers.nips.cc/paper/5021-distributed-representations-of-words-and-phrases-and-their-compositionality.pdf>
- [46] T. Nelms, R. Perdisci, and M. Ahamad, "Execscent: Mining for new c&c domains in live networks with adaptive control protocol templates," in *Proceedings of the 22nd USENIX Conf. on Security*. USA: USENIX Association, 2013, p. 589–604.
- [47] T. D. Nguyen, S. Marchal, M. Miettinen, H. Fereidooni, N. Asokan, and A.-R. Sadeghi, "Diot: A federated self-learning anomaly detection system for iot," in *2019 IEEE 39th International Conference on Distributed Computing Systems (ICDCS)*. IEEE, 2019, pp. 756–767.
- [48] T. Ongun, O. Spohngellert, B. Miller, S. Boboila, A. Oprea, T. Eliassi-Rad, J. Hiser, A. Nottingham, J. Davidson, and M. Veeraraghavan, "PORTFILER: Port-level network traffic profiling for self-propagating malware detection," in *Proceedings of 9th Annual IEEE Conference on Communications and Network Security*, ser. CNS, 2021.
- [49] T. Ongun, J. W. Stokes, J. B. Or, K. Tian, F. Tajaddodianfar, J. Neil, C. Seifert, A. Oprea, and J. C. Platt, "Living-off-the-land command detection using active learning," in *24th International Symposium on Research in Attacks, Intrusions and Defenses*, 2021, pp. 442–455.
- [50] A. Oprea, Z. Li, R. Norris, and K. Bowers, "MADE: Security analytics for enterprise threat detection," in *ACSAC*, 2018, pp. 124–136.
- [51] A. Oprea, Z. Li, T.-F. Yen, S. H. Chin, and S. Alrwais, "Detection of early-stage enterprise infection by mining large-scale log data," in *2015 45th Annual IEEE/IFIP Int'l. Conf. on Dependable Systems and Networks*. IEEE, 2015, pp. 45–56.
- [52] J. Payne and A. Kundu, "Towards deep federated defenses against malware in cloud ecosystems," in *2019 First IEEE International Conference on Trust, Privacy and Security in Intelligent Systems and Applications (TPS-ISA)*. IEEE, 2019, pp. 92–100.
- [53] R. Perdisci, W. Lee, and N. Feamster, "Behavioral clustering of http-based malware and signature generation using malicious network traces," in *NSDI*, vol. 10, 2010, p. 14.
- [54] V. L. Pochat, T. Van Goethem, S. Tajalizadehkhoo, M. Korczyński, and W. Joosen, "Tranco: A research-oriented top sites ranking hardened against manipulation," *arXiv preprint arXiv:1806.01156*, 2018.
- [55] T. Z. Project, "Zeek docs," 2019. [Online]. Available: <https://docs.zeek.org/en/current/scripts/base/protocols/conn/main.zeek.html>
- [56] R. Rehurek, "Gensim: Topic modelling for humans," *URL: https://radimrehurek.com/gensim/[accessed 2021-05-30]*, 2019.
- [57] P. Rieger, T. D. Nguyen, M. Miettinen, and A. Sadeghi, "Deepsight: Mitigating backdoor attacks in federated learning through deep model inspection," *CoRR*, vol. abs/2201.00763, 2022. [Online]. Available: <https://arxiv.org/abs/2201.00763>
- [58] D. Sahoo, C. Liu, and S. C. H. Hoi, "Malicious URL detection using machine learning: A survey," *CoRR*, vol. abs/1701.07179, 2017. [Online]. Available: <http://arxiv.org/abs/1701.07179>
- [59] D. D. Sarkar, "A hands-on intuitive approach to deep learning methods for text data — word2vec, glove and fasttext," <https://towardsdatascience.com/understanding-feature-engineering-part-4-deep-learning-methods-for-text-data-96c44370bbfa>, 2018.
- [60] J. Saxe and K. Berlin, "eXpose: A character-level convolutional neural network with embeddings for detecting malicious URLs, file paths and registry keys," *arXiv preprint arXiv:1702.08568*, 2017.
- [61] W. Schneble and G. Thamarasu, "Attack detection using federated learning in medical cyber-physical systems," in *28th International Conference on Computer Communications and Networks (ICCCN)*, 2019, pp. 1–8.
- [62] V. Shejwalkar and A. Houmansadr, "Manipulating the byzantine: Optimizing model poisoning attacks and defenses for federated learning," *NDSS*, 2021.
- [63] R. Sommer and V. Paxson, "Outside the closed world: On using machine learning for network intrusion detection," in *2010 IEEE Symp. on security and privacy*. IEEE, 2010, pp. 305–316.
- [64] A. K. Sood, S. Zeadally, and R. J. Enbody, "An empirical study of http-based financial botnets," *IEEE Transactions on Dependable and Secure Computing*, vol. 13, no. 2, pp. 236–251, 2014.
- [65] Symantec Security Response, "What you need to know about the wannacry ransomware," <https://symantec-blogs.broadcom.com/blogs/threat-intelligence/wannacry-ransomware-attack>, 2017.
- [66] "Tensorflow federated: Machine learning on decentralized data," *Tensorflow*, 2022. [Online]. Available: <https://www.tensorflow.org/federated>
- [67] K. Thomas, C. Grier, J. Ma, V. Paxson, and D. Song, "Design and evaluation of a real-time URL spam filtering service," in *2011 IEEE symposium on security and privacy*. IEEE, 2011, pp. 447–462.
- [68] V. Tolpegin, S. Truex, M. E. Gursoy, and L. Liu, "Data poisoning attacks against federated learning systems," in *Computer Security – ESORICS*

2020: 25th European Symposium on Research in Computer Security, ESORICS 2020, Guildford, UK, September 14–18, 2020, Proceedings, Part I. Berlin, Heidelberg: Springer-Verlag, 2020, p. 480–501.

- [69] W. Tounsi and H. Rais, “A survey on technical threat intelligence in the age of sophisticated cyber attacks,” *Computers & security*, vol. 72, pp. 212–233, 2018.
- [70] “New Mirai Variant Uses Multiple Exploits,” https://www.trendmicro.com/en_us/research/19/e/new-mirai-variant-uses-multiple-exploits-to-target-routers-and-other-devices.html, Trend Micro, 2019, [Online; accessed 3. May 2022].
- [71] “What is C2? Command and Control Infrastructure Explained,” <https://www.varonis.com/blog/what-is-c2>, Varonis, 2021, [Online; accessed 3. May 2022].
- [72] VirusTotal, <https://www.virustotal.com/>. [Online]. Available: <https://www.virustotal.com/>
- [73] C. Wagner, A. Dulaunoy, G. Wagener, and A. Iklody, “MISP: The design and implementation of a collaborative threat intelligence sharing platform,” in *Proceedings of the 2016 ACM on Workshop on Information Sharing and Collaborative Security*, 2016, pp. 49–56.
- [74] T. Wink and Z. Nochta, “An approach for peer-to-peer federated learning,” in *2021 51st Annual IEEE/IFIP International Conference on Dependable Systems and Networks Workshops (DSN-W)*, 2021, pp. 150–157.
- [75] T. Yang, G. Andrew, H. Eichner, H. Sun, W. Li, N. Kong, D. Ramage, and F. Beaufays, “Applied federated learning: Improving Google keyboard query suggestions,” *arXiv preprint arXiv:1812.02903*, 2018.
- [76] H. Yuan, Z. Yang, X. Chen, Y. Li, and W. Liu, “URL2Vec: URL modeling with character embeddings for fast and accurate phishing website detection,” in *2018 IEEE Intl Conf on Parallel Distributed Processing with Applications, Ubiquitous Computing Communications, Big Data Cloud Computing, Social Computing Networking, Sustainable Computing Communications (ISPA/UCC/BDCloud/SocialCom/SustainCom)*, 2018, pp. 265–272.
- [77] Y. Zhao, J. Chen, D. Wu, J. Teng, and S. Yu, “Multi-task network anomaly detection using federated learning,” in *Proceedings of the tenth international symposium on information and communication technology*, 2019, pp. 273–279.
- [78] Y. Zhauniarovich, I. Khalil, T. Yu, and M. Dacier, “A survey on malicious domains detection through dns data analysis,” *ACM Computing Surveys (CSUR)*, vol. 51, no. 4, pp. 1–36, 2018.