

Investigating Information Inconsistency in Multilingual Open-domain Question Answering

Shramay Palta, Haozhe An, Yifan Yang, Shuaiyi Huang, Maharshi Gor

Department of Computer Science

University of Maryland, College Park

{spalta, haozhe, yang7832, huangshy, mgor}@umd.edu

Abstract

Retrieval based open-domain QA systems use retrieved documents and answer-span selection over retrieved documents to find best-answer candidates. We hypothesize that multilingual Question Answering (QA) systems are prone to information inconsistency when it comes to documents written in different languages, because these documents tend to provide a model with varying information about the same topic. To understand the effects of the biased availability of information and cultural influence, we analyze the behavior of multilingual open-domain question answering models with a focus on retrieval bias. We analyze if different retriever models present different passages given the same question in different languages on TyDi QA and XOR-TyDi QA, two multilingual QA datasets. We speculate that the content differences in documents across languages might reflect cultural divergences and/or social biases.

1 Introduction

The answer to a question is not always unique under different cultural or language backgrounds. When one asks a search engine¹ in English, "How old do you need to be to be able to drink?", the first relevant passage retrieved states "nationally, the legal drinking age is 21." However, if the same question is asked in Chinese, the search engine retrieves a Chinese passage that indicates, "Usually one has to be at least 16 years old to drink, but there is no minimum legal age." Given the same question in different languages, it is possible that a QA system gives inconsistent answers as a result of training on a corpus that reflects various cultural, historical, and social landscapes. We hypothesize that information bias in documents causes models to deliver varying performance. Information bias occurs when key information is either measured,

collected, or interpreted differently in the training documents. We empirically investigate the validity of our hypothesis by comparing and contrasting the performance of QA models trained on multilingual dataset.

In addition, in-depth investigations of cultural and/or social biases, specifically in the context of open-domain question answering, are still under explored. We speculate that the content differences in documents across languages are effective indicators of some cultural divergences and/or social biases.

In this work, the focus is on understanding retrieval inconsistencies in multilingual open-domain question answering. Specifically, given a question in any language (e.g. Korean), we feed it into a multilingual passage retriever to retrieve multilingual passages as its context from a huge Wikipedia corpus covering 13 languages including English, Arabic, Finnish, Japanese, Korean, Russian, Bengali, Telugu, Indonesian, Thai, Hebrew, Swedish, and Spanish. We then propose a strategy to get paired questions (questions having the same content but in different languages) and their in-language context. In this way, the difference in retrieved context given questions in different languages (e.g. Korean context for a Korean question, English context for a paired English question) would be a good indicator of information inconsistency in a multilingual setting.

In order to have a quantitative analysis of retrieval differences, we feed the question and its retrieved in-language passage into a shared multilingual answer generator and directly compare the final answer results. We investigate two different settings (oracle and non-oracle setting) for a comprehensive analysis.

Our contributions are summarized as follows:

- We investigate whether QA datasets exhibit information discrepancy or not.

¹<https://www2.bing.com/>

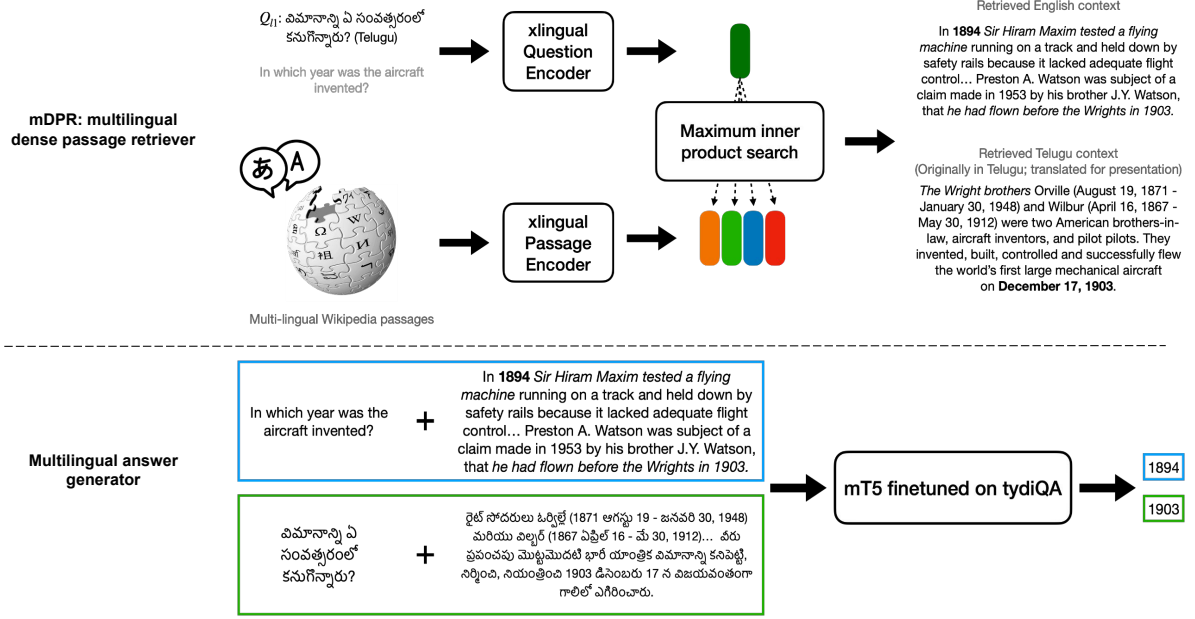


Figure 1: Our pipeline consists of a multilingual dense passage retriever and a multilingual answer generator. Given a question in any language, it is first fed into the question encoder to get an encoding of the question. Relevant multilingual Wikipedia passages are retrieved via maximum inner product search (MIPS). The question and its retrieved in-language context are fed into multilingual answer generator to generate the final answer.

- We propose a strategy to obtain paired questions for cross-lingual analysis.
- We evaluate to what extent each component in the QA system contributes to inconsistent answers on the XOR-TyDi QA benchmark across different languages, with a focus on retrieval inconsistencies.

2 Methods

2.1 Overview

An overview of our pipeline is shown in Fig. 1. Our framework consists of a multilingual Dense Passage Retriever (mDPR) and a multilingual answer generator. Given a question in any language, we feed it into the question encoder to get an encoding of the question. We retrieve relevant multilingual passages from a huge Wikipedia corpus covering multiple languages by comparing the similarity between question encodings and passage encodings. We select the proper in-language context as its final retrieved context. We then feed the question and its retrieved context into the multilingual answer generator to generate the final answer. We will first describe the details of the mDPR in Sec. 2.2 followed by the multilingual answer generator in Sec. 2.3. Finally, we elaborate on the two settings for analysis as described in Sec. 2.4.

2.2 Multilingual Dense Passage Retriever

We follow Asai et al. (2020) for training a multilingual dense passage retriever.² We use a multilingual dense passage retriever fine-tuned on XOR-TyDi QA benchmark. The details are as below:

Training: mDPR extends Dense Passage Retriever (DPR; Karpukhin et al. (2020)) to a multilingual setting. mDPR uses an iterative training approach to fine-tune a pre-trained multilingual language model (e.g., mBERT; Devlin et al. (2018)) to encode passages and questions separately. Once training is done, the representations for all passages are computed offline and stored locally. We refer the reader to (Asai et al., 2020) for more details.

Inference: We get a passage encoding from multilingual BERT given a passage with fixed-length sequence of tokens from multilingual documents. At inference, mDPR independently obtains a d -dimensional ($d = 768$) encoding of the questions from multilingual BERT. It retrieves k passages with the k highest relevance scores to the question, where the relevance score between a passage and a question q is estimated by the inner product of their encoding vectors.

²<https://github.com/mia-workshop/MIA-Shared-Task-2022>

With the trained DPR, we retrieve relevant passages across all available languages including English, Arabic, Finnish, Japanese, Korean, Russian, Bengali, Telugu, Indonesian, Thai, Hebrew, Swedish, and Spanish. For each question in its original language, we get its paired question by translating it into other languages and applying the mDPR module for retrieval.

2.3 Multilingual Answer Generator

We follow Clark et al. (2020a) for training the multilingual answer generator.³ Our multilingual answer generator is MT5 (Xue et al., 2021) pre-trained from m4C corpus covering 101 languages. We then finetune the MT5 answer generator on the TyDi-QA training split (Clark et al., 2020a) covering 11 languages.

2.4 Inconsistency and Error Analysis

Oracle Setting: For the oracle setting, we use the ground truth answer as a filter to select the context and the questions to be fed into the answer extractor for analysis. Specifically, we keep the top 20 retrieval results. We keep questions whose retrieval results contain context in at least two languages, and have the ground truth answers contained within the multilingual languages.

Non-Oracle Setting: For the non-oracle setting, we do not use the ground truth answer as a filter to select the context and the questions. Instead, we only keep the *top-one* score passage. We believe that using the oracle gives bias towards retrieving consistent answers across different languages, and by removing the filter, we can acquire samples that are more likely to reveal information inconsistency.

3 Experiments

In this section, we first elaborate on our implementation details in Sec. 3.1, and follow that with the quantitative and qualitative results in Sec. 3.2.

3.1 Implementation Details

3.1.1 Datasets

TyDi QA (Clark et al., 2020a) is a question answering dataset containing 204K question-answer pairs in 11 typologically diverse languages. It contains instances of language phenomena that would not be found in English-only corpora. In order to reduce the priming effects and provide a realistic

and a robust information seeking task, the questions in TyDi QA are written by people who don’t know the answer, and want to know what it is, (unlike SQuAD (Rajpurkar et al., 2016) and its descendants) and the data is collected directly in each language without implementing any translation module (unlike MLQA (Lewis et al., 2019) and XQuAD (Artetxe et al., 2019)). We use TyDi QA for fine-tuning our multilingual answer extractor.

XOR-TyDi QA is a dataset based on TyDi QA. To support research in multilingual open-domain QA, Asai et al. (2020) constructed a dataset, XOR-TyDi QA, of 40K annotated questions across 7 diverse non-English languages. The questions in this dataset are inherited from TyDi QA (Clark et al., 2020) and consists of questions that TyDi QA could not find the same-language answers for. The rationale behind choosing XOR-TyDi QA is that it is the first large-scale cross-lingual open-retrieval QA dataset that consists of information-seeking questions from native speakers and multilingual reference documents. We use the XOR-TyDi QA training split for fine-tuning our multilingual Dense Passage Retriever. The XOR-TyDi QA dev split is used for generating paired questions across languages and for analysing the different types of inconsistencies observed.

3.1.2 Evaluation Metric

We follow the same setup as Lewis et al. (2019). For Chinese, we use the *jieba* package to perform tokenization; for all other languages, we use white-space tokenization. We remove punctuation characters by checking the corresponding character type in Unicode. We adopt the mean token F1 score to estimate the performance metrics in line with previous extractive QA work to evaluate multilingual question answering accuracy. We also examine the discrepancies in the models by comparing the percentage of answers that are different. Finally, we manually annotate the types of discrepancies/errors observed.

3.1.3 Experimental Configuration

For fine-tuning the multilingual Dense Passage Retriever, we first fine-tune a pretrained multilingual BERT on the Natural Questions (NQ) (Kwiatkowski et al., 2019) dataset. Then we fine-tune our mDPR on the XOR-TyDi QA training split. For fine-tuning the multilingual Answer Generator, we use a pretrained MT5 and then fine-tune it on the TyDi QA training split. We use the AdamW

³<https://github.com/google-research-datasets/tydiqa>



Figure 2: Analysis in Oracle Setting: (a) Inconsistent answer distribution across multiple languages. Each row stands for one question with the same meaning but translated into different languages. Given a selected row, the different color indicates the different F1 scores obtained from questions asked in different languages. (b) Error type distribution across languages. Refer text for details.

optimizer with a learning rate of $3e - 5$ for fine-tuning the answer generator, with a batch size of 12 and two training epochs.

3.2 Multilingual QA Results

We describe our analysis for multilingual question answering results as below. We identify five types of inconsistency errors which we categorize as translation issues, retriever issues, answer extractor issues, inconsistent facts, and different levels of granularity.

3.2.1 Oracle Setting

In the oracle setting, we use the ground truth answer as a filter to select the context and the questions to be fed into the answer extractor for analysis as described in Sec. 2.4.

Answer Inconsistency Results: There are 146 questions obtained for analysis from a total of $5K$ questions in the dev set. We observe that 66 questions yield inconsistent answers across languages. We visualize the first 20 questions for simplicity as shown in Fig. 2. We observe that given questions with same meaning but in different languages (e.g. sample index 52 shows question in English (*en*) and Finnish (*fi*)), the answers could be different (e.g. the answer asked in *fi* is correct while the answer asked in *en* is wrong). This confirms our

hypothesis that QA datasets exhibit information discrepancy across languages.

Inconsistency Error Analysis Results: The distribution of the error types is shown in Fig.2. We manually analyze the different inconsistency errors, and find that only three question samples consist of inconsistent facts in different languages.

Some error are due to issues with the answer translation. The current pipeline translates the gold answer to the target language to compute F1 and Exact Match scores. While this is reasonable, answer translations are not consistent all the time. For examples, name translations across different languages (for example, *es* \rightarrow *ja*) can be different.

3.2.2 Non-Oracle Setting

In the non-oracle setting, instead of only selecting the context with the gold answer, we return the top scored context for each language in the total top 1,000 retrieved passages and use them for generating answers as described in Sec. 2.4.

Answer Inconsistency Results: We perform the same process as mentioned previously for all the $5K$ samples in the dev set. We observe that almost all questions give inconsistent answers in different languages. We visualize the first 200 questions for simplicity as shown in Fig. 3.

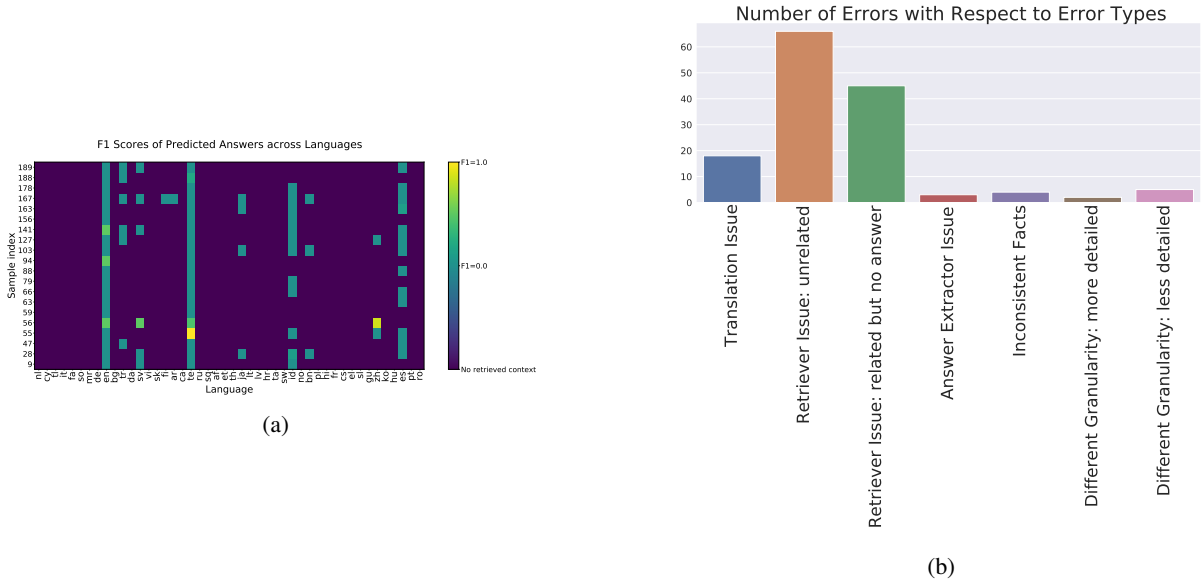


Figure 3: Analysis in Non-Oracle Setting: (a) Inconsistent answer distribution across multiple languages. Each row stands for one question with the same meaning but translated into different languages. Given a selected row, the different color indicates the different F1 scores obtained from questions asked in different languages. (b) Error type distribution across languages.

Inconsistency Error Analysis Results: The distribution of the error types is shown in Fig. 3. We manually analyze the different inconsistency errors. As we expand the search space to the top 1,000 retrieved passages, we find that most of the retrieved context is either unrelated or related but does not contain the answer to the question asked. For context that are related, we find that 4 of the question samples consist of inconsistent facts in different languages.

One of these samples asks the question "What is the British population?". Answers retrieved in different languages present statistics in different years (some language's Wiki have data for 2010, some has 2007) whereas the context in the English Wiki gives a detailed break-down of population in different areas. Given these different contexts, the answer extractor returns different answers.

We also observe bias in the retrieved context. For a question that asks about the governor of the state of Punjab, all the retrieved context, although in different languages, is either related to Afghanistan or Pakistan.

4 Related Work

4.1 Open-domain Question Answering

Open-Domain QA (OpenQA) has been studied closely with research in Natural Language Processing (NLP), Information Retrieval (IR), and Infor-

mation Extraction (IE). Traditional OpenQA systems mostly follow a pipeline with three stages, i.e. Question Analysis, Document Retrieval and Answer Extraction (Zhu et al., 2021).

With the advancement of deep learning techniques, OpenQA systems have seen significant developments in every stage. Lei et al. (2018) and Xia et al. (2018) used a CNN-based model and a LSTM-based model in order to develop a question classifier. Khattab et al. (2020), Karpukhin et al. (2020) and Nishida et al. (2018) have worked on developing neural retrieval models for searching documents in a latent space. With the development of large-scale datasets like SQuAD (Rajpurkar et al., 2016), there has been significant progress in the area of neural Machine Reading Comprehension (MRC) methods (Wang et al., 2017b; Seo et al., 2016; Devlin et al., 2018). The traditional OpenQA systems have now developed into the "Retriever-Reader" architecture (Chen et al., 2017; Wang et al., 2017a; Das et al., 2019; Guu et al., 2020). Here the Retriever retrieves the relevant documents for a given question, hence behaving like an IR system. The Reader, which is mostly a neural MRC model, tries to infer the answer from the retrieved documents. Based on this "Retriever-Reader" architecture, there has been progress along the lines of re-ranking the retrieved documents before feeding them into the Reader (Lee et al., 2018; Lin

et al., 2018), using an iterative method to retrieve the relevant documents for a question, (Feldman and El-Yaniv, 2019), and doing end-to-end training on the OpenQA System (Lee et al., 2019).

4.2 Multilingual Question Answering

A lot of research has been going on in the domain of multilingual question answering. Recently, Asai et al. (2020) introduced a new task framework named Cross-lingual Open Retrieval Question Answering (XOR QA), that consists of three new tasks involving cross-lingual document retrieval from multilingual resources.

In order to overcome the issue of data-scarcity in non-English languages, several non-English QA datasets have been created like TyDi QA (Clark et al., 2020b), XOR-TyDi QA (Asai et al., 2020) etc. Along similar lines is the dataset MLQA (Lewis et al., 2019), which consists of over 12K QA instances in English and 5K each in other languages (Arabic, German, Spanish, Hindi, Vietnamese and Simplified Chinese). Each QA instance is parallel between at least 4 languages on average. MLQA serves as a cross-lingual extension to existing extractive QA datasets, given it’s built using a novel alignment context strategy on articles from Wikipedia. Recently, Hardalov et al. (2020) developed a cross-lingual and multilingual dataset for high school examinations. Liu et al. (2019) developed XQA which has a great degree of lexical overlap between reference paragraphs and the questions.

4.3 Bias in Question Answering

Although current linguistic machine learning models achieve numerically-high performance on the question answering task, they often lack optimization for reducing implicit biases. There are many works that try to analyze or tackle biases in QA. Zhu et al. try to capture and eliminate position bias in large language models in question answering. Ahn and Oh (2021) developed a metric called Categorical Bias score and attempted to reduce ethnic bias in BERT models for multilingual question answering. Recent attempts to tackle bias try to either automatically generate additional language sources to balance the training data distribution (Chen et al., 2020; Abbasnejad et al., 2020) or to learn a biased model with the source of bias as the input, and then attempt to debias it through logits re-weighting or logits ensembling (Clark et al., 2019; Cadène et al., 2019).

5 Conclusion

In this work, we investigate whether multilingual QA tasks expose information consistencies across different languages. We evaluate to what extent each component of the QA system contributes to inconsistent answers on the XOR-TyDi QA benchmark across nine languages. We observe inconsistent answers given questions with the same content, but in different languages. We analyze the potential reasons that could lead to such inconsistencies including retriever issues, answer extractor issues, different levels of granularity, translation issues, and inconsistent facts, of which retriever issues and answer extractor issues are the most prominent. Our analysis provides new insights into inconsistencies in multilingual question answering, and is one step closer towards a more realistic application of this task.

References

- Ehsan Abbasnejad, Damien Teney, Amin Parvaneh, Javen Shi, and Anton van den Hengel. 2020. [Counterfactual vision and language learning](#). In *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10041–10051.
- Jaimeen Ahn and Alice Oh. 2021. Mitigating language-dependent ethnic bias in bert. *arXiv preprint arXiv:2109.05704*.
- Mikel Artetxe, Sebastian Ruder, and Dani Yogatama. 2019. [On the cross-lingual transferability of monolingual representations](#). *CoRR*, abs/1910.11856.
- Akari Asai, Jungo Kasai, Jonathan H Clark, Kenton Lee, Eunsol Choi, and Hannaneh Hajishirzi. 2020. Xor qa: Cross-lingual open-retrieval question answering. *arXiv preprint arXiv:2010.11856*.
- Rémi Cadène, Corentin Dancette, Hedi Ben-younes, Matthieu Cord, and Devi Parikh. 2019. [Rubi: Reducing unimodal biases in visual question answering](#). *CoRR*, abs/1906.10169.
- Danqi Chen, Adam Fisch, Jason Weston, and Antoine Bordes. 2017. Reading wikipedia to answer open-domain questions. *arXiv preprint arXiv:1704.00051*.
- Long Chen, Xin Yan, Jun Xiao, Hanwang Zhang, Shiliang Pu, and Yueting Zhuang. 2020. Counterfactual samples synthesizing for robust visual question answering. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10800–10809.
- Christopher Clark, Mark Yatskar, and Luke Zettlemoyer. 2019. Don’t take the easy way out: ensemble

English questions	Russian questions translated into English	Cosine similarity
How many people died during WW1?	How many Germans were captured in the Battle of Stalingrad?	0.71
When was the Nazi party founded?	When was the KPSS founded?	0.78
When was the University of Maryland football team established?	When was the Rome Football Club established?	0.78
When was Siri introduced by Apple?	What year was Apple formed?	0.74
When was the term anthropology first used?	What does the word "anthropology" mean?	0.72

Table 1: An example of the question pairs from the English and Russian subsets of TyDi QA found by using question embedding cosine similarity as the metric.

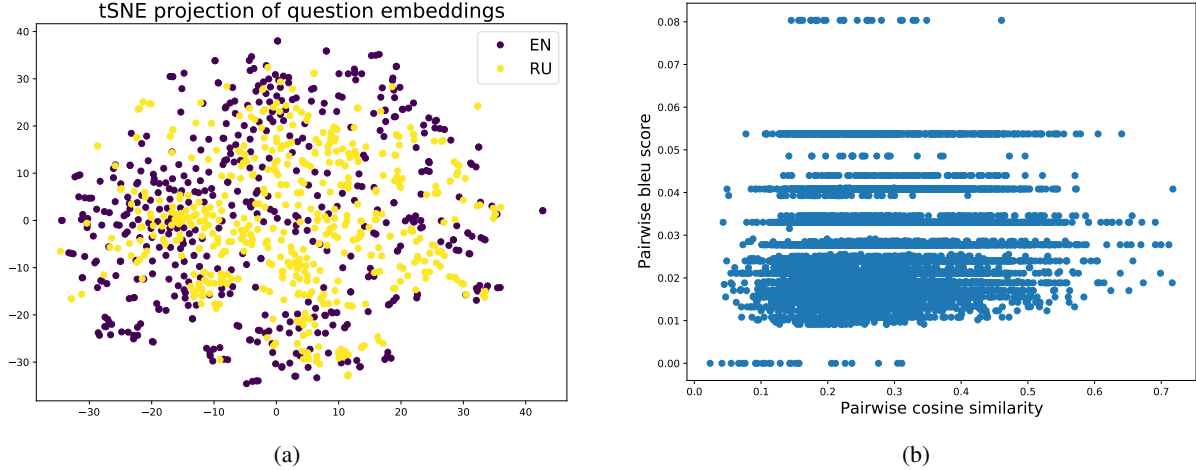


Figure 4: (a)t-SNE projection of 500 English question embeddings and 500 Russian question embeddings. The well-mixed scatters indicate the existence of similar questions across English and Russian. (b) No significant correlation between sentence embedding similarity and translation BLEU score is observed.

based methods for avoiding known dataset biases. *arXiv preprint arXiv:1909.03683*.

Jonathan H Clark, Eunsol Choi, Michael Collins, Dan Garrette, Tom Kwiatkowski, Vitaly Nikolaev, and Jennimaria Palomaki. 2020a. Tydi qa: A benchmark for information-seeking question answering in typologically diverse languages. *Transactions of the Association for Computational Linguistics*, 8:454–470.

Jonathan H. Clark, Eunsol Choi, Michael Collins, Dan Garrette, Tom Kwiatkowski, Vitaly Nikolaev, and Jennimaria Palomaki. 2020b. [TyDi QA: A benchmark for information-seeking question answering in typologically diverse languages](#). *Transactions of the Association for Computational Linguistics*, 8:454–470.

Rajarshi Das, Shehzaad Dhuliawala, Manzil Zaheer, and Andrew McCallum. 2019. [Multi-step retriever-reader interaction for scalable open-domain question answering](#). *CoRR*, abs/1905.05733.

Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.

Yair Feldman and Ran El-Yaniv. 2019. Multi-hop paragraph retrieval for open-domain question answering. *arXiv preprint arXiv:1906.06606*.

Kelvin Guu, Kenton Lee, Zora Tung, Panupong Pasupat, and Ming-Wei Chang. 2020. [REALM: retrieval-augmented language model pre-training](#). *CoRR*, abs/2002.08909.

Momchil Hardalov, Todor Mihaylov, Dimitrina Zlatkova, Yoan Dinkov, Ivan Koychev, and Preslav Nakov. 2020. [EXAMS: A multi-subject high school examinations dataset for cross-lingual and multilingual question answering](#). *CoRR*, abs/2011.03080.

Vladimir Karpukhin, Barlas Oğuz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. Dense passage retrieval for open-domain question answering. *arXiv preprint arXiv:2004.04906*.

Omar Khattab, Christopher Potts, and Matei Zaharia. 2020. [Relevance-guided supervision for openqa with colbert](#). *CoRR*, abs/2007.00814.

Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Matthew Kelcey, Jacob Devlin, Kenton Lee, Kristina N. Toutanova, Llion Jones, Ming-Wei Chang, Andrew Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. Natural questions: a benchmark for question answering research. *Transactions of the Association of Computational Linguistics*.

Jinhyuk Lee, Seongjun Yun, Hyunjae Kim, Miyoung Ko, and Jaewoo Kang. 2018. Ranking paragraphs

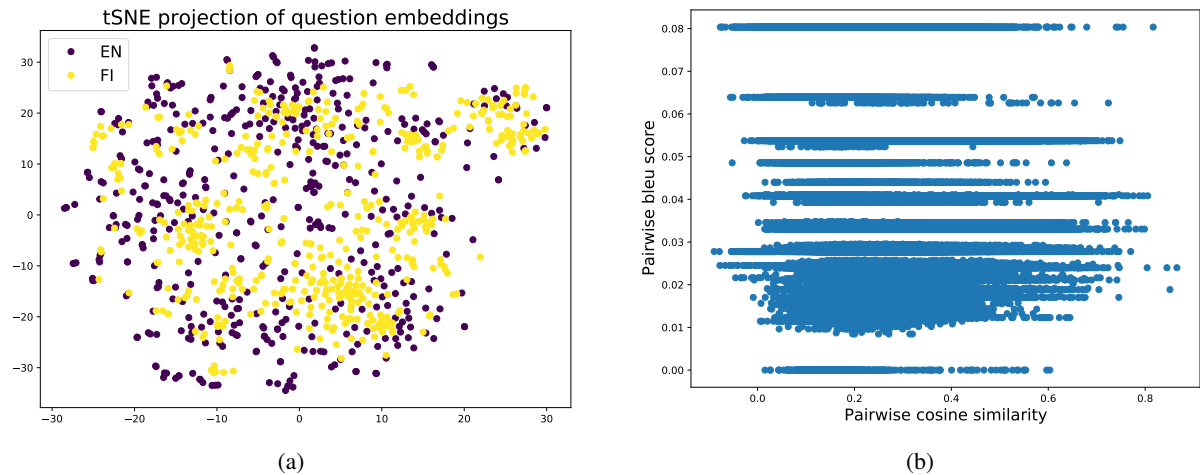


Figure 5: (a) t-SNE projection of 500 English question embeddings and 500 Finnish question embeddings. The well-mixed scatters indicate the existence of similar questions across English and Finnish. (b) No significant correlation between sentence embedding similarity and translation BLEU score is observed.

for improving answer recall in open-domain question answering. *arXiv preprint arXiv:1810.00494*.

Kenton Lee, Ming-Wei Chang, and Kristina Toutanova. 2019. Latent retrieval for weakly supervised open domain question answering. *arXiv preprint arXiv:1906.00300*.

Tao Lei, Zhizhong Shi, Duoxing Liu, Lei Yang, and Feng Zhu. 2018. A novel cnn-based method for question classification in intelligent question answering. In *Proceedings of the 2018 International Conference on Algorithms, Computing and Artificial Intelligence*, pages 1–6.

Patrick Lewis, Barlas Ögüz, Ruty Rinott, Sebastian Riedel, and Holger Schwenk. 2019. Mlqa: Evaluating cross-lingual extractive question answering. *arXiv preprint arXiv:1910.07475*.

Yankai Lin, Haozhe Ji, Zhiyuan Liu, and Maosong Sun. 2018. Denoising distantly supervised open-domain question answering. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1736–1745, Melbourne, Australia. Association for Computational Linguistics.

Jiahua Liu, Yankai Lin, Zhiyuan Liu, and Maosong Sun. 2019. XQA: A cross-lingual open-domain question answering dataset. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2358–2368, Florence, Italy. Association for Computational Linguistics.

Kyosuke Nishida, Itsumi Saito, Atsushi Otsuka, Hisako Asano, and Junji Tomita. 2018. Retrieve-and-read: Multi-task learning of information retrieval and reading comprehension. *CoRR*, abs/1808.10628.

Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. Squad: 100,000+ questions

for machine comprehension of text. *arXiv preprint arXiv:1606.05250*.

Nils Reimers and Iryna Gurevych. 2019. Sentencebert: Sentence embeddings using siamese bert-networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics.

Min Joon Seo, Aniruddha Kembhavi, Ali Farhadi, and Hannaneh Hajishirzi. 2016. Bidirectional attention flow for machine comprehension. *CoRR*, abs/1611.01603.

Jörg Tiedemann and Santhosh Thottingal. 2020. OPUS-MT — Building open translation services for the World. In *Proceedings of the 22nd Annual Conference of the European Association for Machine Translation (EAMT)*, Lisbon, Portugal.

Shuohang Wang, Mo Yu, Xiaoxiao Guo, Zhiguo Wang, Tim Klinger, Wei Zhang, Shiyu Chang, Gerald Tesauro, Bowen Zhou, and Jing Jiang. 2017a. R³: Reinforced reader-ranker for open-domain question answering. *CoRR*, abs/1709.00023.

Wenhui Wang, Nan Yang, Furu Wei, Baobao Chang, and Ming Zhou. 2017b. Gated self-matching networks for reading comprehension and question answering. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 189–198.

Wei Xia, Wen Zhu, Bo Liao, Min Chen, Lijun Cai, and Lei Huang. 2018. Novel architecture for long short-term memory used in question classification. *Neurocomputing*, 299:20–31.

Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. 2021. mT5: A massively multilingual pre-trained text-to-text transformer. In

Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, pages 483–498, Online. Association for Computational Linguistics.

Beier Zhu, Tan Wang, and Lingdong Kong. Counterfactual qa: Eliminating bias in question answering.

Fengbin Zhu, Wenqiang Lei, Chao Wang, Jianming Zheng, Soujanya Poria, and Tat-Seng Chua. 2021. [Retrieving and reading: A comprehensive survey on open-domain question answering](#). *CoRR*, abs/2101.00774.

A Multilingual Question Answering Examples

We provide more multilingual question answering examples with analysis in Fig. 6 and Fig. 7.

B Crafting Multilingual QA Test set

B.1 Finding similar questions

TyDi QA (Clark et al., 2020a) is a benchmark for information-seeking question answering in typologically diverse languages, including English and Russian. We first attempt to find a subset of questions that are present in multiple languages but with potentially controversial and different answers. To identify similar questions across different languages, we compare their contextual sentence embeddings (Reimers and Gurevych, 2019). For each English question Q^{en} and each Russian question Q^{ru} , we obtain their respective sentence embeddings $\mathbf{e}^{en}, \mathbf{e}^{ru} \in \mathbb{R}^{768}$. We then compute the pairwise cosine similarities of these embeddings to find similar questions.

Similarly, we project 500 English question embeddings and 500 Russian question embeddings via t-SNE as shown in Fig. 5a. Through this visualization, we see that there exist some embeddings that are quite close to each other. The inseparability of the two clusters in this two-dimensional space indicates that some questions share considerable semantic and syntactic similarities.

We then filter the question pairs whose embeddings have cosine similarity greater than 0.7. To evaluate if it is effective to use the sentence embeddings cosine similarity as a metric for question similarity, we translate the Russian questions into English (Tiedemann and Thottingal, 2020). We hypothesize that a higher cosine similarity between a pair of English and Russian question embeddings would lead to a higher BLEU score after we translate. However, Fig. 5b does not indicate this trend.

There is little correlation between sentence embedding cosine similarity and the BLEU score. This result is likely due to the short length of questions and a small overlap of the same named entities in questions across the two languages. We observe a similar trend between English and Finnish as well as shown in Fig. 5.

Nonetheless, using the cosine similarity as a metric gives us some questions on similar topics. We illustrate a few examples in Table. 1. We find that questions about similar topics tend to have higher cosine similarities. For example, both the English and the Russian questions ask about wars in history or sports clubs. Through these limited number of examples, we already see some different cultural divergences in the two subsets. For example, the question "When was the KPSS founded?" is equivalent to "When is the Communist Party of the Soviet Union established?" This question is more culturally specific to Russia and will be less likely to appear in the English question subset.

Error Type	Question	Context	Context translated in English (for demonstration only)	Pred Answers	Pred Answers in English (for demonstration only)
Inconsistency Facts	EN: What's the first mode of transportation in the world?	The history of road transport started with the development of tracks by humans and their beasts of burden. The first forms of road transport were horses, oxen carrying goods over tracks that often followed game trails, such as the Natchez Trace. In the Paleolithic Age, humans did not need constructed tracks in open country. The first improved trails would have been at fords, mountain passes and through swamps. The first improvements would have consisted largely of clearing trees and big stones from the path. As commerce increased, the tracks were often flattened or widened to accommodate human and animal traffic.	The history of road transport started with the development of tracks by humans and their beasts of burden. The first forms of road transport were horses, oxen carrying goods over tracks that often followed game trails, such as the Natchez Trace. In the Paleolithic Age, humans did not need constructed tracks in open country. The first improved trails would have been at fords, mountain passes and through swamps. The first improvements would have consisted largely of clearing trees and big stones from the path. As commerce increased, the tracks were often flattened or widened to accommodate human and animal traffic.	horses, oxen carrying goods over tracks that often followed game trails	horses, oxen carrying goods over tracks that often followed game trails
	JA: 世界初の交通手段とは?	集落間で物や情報の交換や連絡などが行われるようになると人の往来が頻繁になり、初めは人ひとりがやったり通がた道が何人かできるとで道が広い道へと変わり、生活していく中から自然発生的に発展していった。最初の素朴な道は土が見える状態だった。現在発見されているなかで「最古の道路整備跡」とされること	When things and information are exchanged and marriages are carried out between villages, people come and go frequently, and at first the road that each person finally took turns into a wide road as many people come and go, and life it developed spontaneously as it went on. The first rustic road was where the soil was visible. To be regarded as the "oldest road maintenance trace" currently discovered	土が見える状態	Roads walked by many people
Retrieval Error	SV: När gick Pennsylvania med i USA?	tilhörde till största delen kväkare, som bodde i England och förvaldade det genom ombud. 1776 upphävdes den gamla författningen, och folket beslutade om en ny, på republikanska principer grundad författning. I befrielsekriget tog Pennsylvania verksam del, och flera avgörande drabbningar stod på dess område. Nordvästra delen av staten (intill Eriejön och norr om 42:a breddgraden), som New York och Massachusetts överlämnat till förbundsregeringen, köpte Pennsylvania 1792. 13 december 1787 antog Pennsylvania unionens författning. Under kolonialtiden i Amerika fanns olika regionala penningssystem. Det system som upprättades i Pennsylvania var särskilt framgångsrikt, eftersom de lyckades att finansiera delstatens verksamheter i 30 år	belonged for the most part to Quakers, who lived in England and managed it through agents. In 1776, the old constitution was repealed, and the people decided on a new constitution based on republican principles. During the War of Independence, Pennsylvania took an active part, and several decisive battles took place in its territory. The northwestern part of the state (adjacent to Lake Erie and north of the 42nd parallel), which New York and Massachusetts handed over to the federal government, bought Pennsylvania in 1792. On December 13, 1787, Pennsylvania adopted the Constitution of the Union. During colonial America, there were various regional monetary systems. The system established in Pennsylvania was particularly successful, as they managed to fund the state's activities for 30 years.	13 December 1787	13 December 1787
	FI: Milloin Pennsylvania liitty USA?	suotuisia lakeja, joista tärkeimpiä oli täydellinen uskonnonvapaus. Nämä houkuttelivat sinne tuhansia siirtolaisia: englantilaisia kveekareita, skottilaisia ja irlantilaisia presbyteerejä, saksalaisia mennonitteja sekä ranskalaisia hugenotteja. Siirtokunta sääteli vuonna 1683 ensimmäisen perustuslakinsa, joka pohjautui yleiseen äänioikeuteen. Kansaa tulisi valitsemaan kaikki virkamiehensä ja päättämään myös verotuksesta. William Penn piti itsellään ainoastaan kuvernöörin oikeudet. Pennsylvanian ja Marylandin välinen raja oli pitkään kiistanalainen, minkä takia 1763–1767 tehtiin päätös niin sanotusta Masonin–Dixonin linjasta. Myöhemmin tämä raja tuli kuuluisaksi vapaiden pohjoisvaltioiden ja orjuutta harjoittavien etelävaltioiden välillä. Siirtokunnan maa-alueet kuuluivat suurimmaksi osaksi kveekareille, jotka asuivat Englannissa. Vuonna 1776 vanhasta perustuslaista luovuttiin ja siirtokunnan väestö omaksui uuden tasavaltalaisen periaatteen pohjautuvan	favorable laws, the most important of which was complete freedom of religion. These attracted thousands of migrants there: English Quakers, Scottish and Irish Presbyterians, German Mennonites, and French Huguenots. In 1683, the colony enacted its first constitution, based on universal suffrage. The people should elect all their officials and also decide on taxation. William Penn reserved only the governor's rights. The border between Pennsylvania and Maryland was long disputed, which is why the so-called Mason-Dixon line was decided in 1763–1767. This border later became famous between the free northern states and the southern states practicing slavery. The lands of the colony belonged for the most part to the Quakers who lived in England. In 1776, the old constitution was abandoned and the population of the settlement adopted a new republican principle.		
Inconsistent Facts	FI: Milloin GP2-sarja on alkanut?	Aasian GP2-sarja eli Aasian GP2 oli GP2-kiilpa-autosarja, joka perustettiin 24. toukokuuta 2007. Sarjan järjestäjänä toimi Bruno Michel. Sarjan ensimmäinen kausi ajettiin vuonna 2008, jolloin mestaruuden voitti ranskalainen Romain Grosjean. Sarja muistutti hyvin paljon Euroopan GP2-sarjaa, mutta sitä ajettiin pekkastään aasialaisilla kilpajadilla. Aasian sarjassa käytettiin sen kolmena ensimmäisenä kautena ensimmäisen sukupolven GP2-auttoja (Dallara GP2/05), jolla ajettiin GP2-sarjaa vuosina 2005–2007. Sarjan neljännellä kaudella otettiin käyttöön sama Dallara GP2/11 -auto, jolla ajettiin kilpaa myös GP2-luokan pääsarjassa kaudella 2011. Vuoden 2011 jälkeen Aasian GP2-sarja lopetti toimintansa ja yhdistyi virallisen Euroopan GP2-sarjan kanssa.	The Asian GP2 Series, or Asian GP2, was a GP2 racing car series founded on May 24, 2007. The series was organized by Bruno Michel. The first season of the series was run in 2008, when the Frenchman Romain Grosjean won the championship. The series was very similar to the European GP2 series, but was run exclusively on Asian racetracks. For the first three seasons, the Asian series used the first-generation GP2 car (Dallara GP2 / 05), which ran the GP2 series from 2005 to 2007. In the fourth season of the series, the same Dallara GP2 / 11 car was introduced, which also raced in the main series of the GP2 class in the season 2011. After 2011, the Asian GP2 series ceased operations and merged with the official European GP2 series.	24. toukokuuta 2007	May 24, 2007
	SV: När började GP2-serien?	GP2 Series var en formelbilsklass strax under Formel 1 som år 2005 ersatte formel 3000. Till skillnad från Formel 1 körde man två race per helg, som i många andra klasser. Under vintertid körde man, mellan 2008 och 2011, en asiatisk serie, kallad GP2 Asia Series. Säsongen 2012 slogs GP2 Asia ihop med huvudserien för att bilda ett så starkt startfält som möjligt. Serien ersattes 2017 med FIA Formula 2 Championship.	GP2 Series was a formula car class just below Formula 1 which in 2005 replaced formula 3000. Unlike Formula 1, they ran two races per weekend, as in many other classes. During the winter, between 2008 and 2011, they ran an Asian series, called the GP2 Asia Series. In the 2012 season, GP2 Asia merged with the main series to form as strong a starting field as possible. The series was replaced in 2017 with the FIA Formula 2 Championship.	2005	2005
Inconsistency Facts	KO: 세상에서 가장 오래된 시집은 무엇인가?	스페인 문학사의 최고(最古) 걸작은 12세기에 쓰인 〈시드의 노래〉(이다. 가장 오래된 작품으로 알려져 있는 이 서사시는 국토 회복 운동 당시 국민 영웅으로 칭송 받았던 로드리고 디아스 비바르를 기린 작품이다. 13세기에는 여러 지방에서 서사시의 형태가 출현했다. 스페인 최초의 시인이었던 곤잘로 데 베르세오는 성직자로서 아랍어와 히브리어 작품을 카스티야어로 번역하는 한편 종교적인 시를 썼다. 10세기와 11세기 동안 무어인과 유대인이 남긴 문학 작품의 영향은 상당히 커서 스페인 문학사에 적잖은 영향을 끼쳤으나, 20세기의 스페인 문학 연구는 이들 작품에 대해서는 다루지 않았다. 스페인의 미술은 유럽 전역에서 영향력이 가장 크다. 역사적·지리적 다양성에 기초한 스페인의 미술은 과거 무어인이 여러 높은 수많은 예술 작품으로부터 많은 영향을 받기도 했다. 스페인의 미술사는	The oldest masterpiece in Spanish literary history is The Song of Sid (/), written in the 12th century. This epic, known as the oldest work, honors Rodrigo Dias Vivar, who was praised as a national hero during the movement to restore the country. In the 13th century, epic forms appeared in various provinces. Gonzalo de Versao, Spain's first poet, wrote religious poetry as a clergyman, translating Arabic and Hebrew works into Castilian. The literary works of the Moors and Jews during the 10th and 11th centuries were so influential that they had a considerable influence on the history of Spanish literature, but Spanish literature studies in the 20th century did not deal with these works. Spanish art is the most influential in all of Europe. Spanish art, based on historical and geographical diversity, was also greatly influenced by the numerous works of art made by the Moors in the past. Spanish art history	시드의 노래	Sid's Song

Figure 6: Multilingual Question Answering Examples with Analysis

Error Type	Question	Context	Context translated in English (for demonstration only)	Pred Answers	Pred Answers in Enlish (for demonstration only)
	EN: What is the oldest collection of poems in the world?	meaning through non-musical grammatical, tonal and rhythmic rules intiating speech. Although, these performances could be included in those of gongs. The oldest surviving speculative fiction poem is the "Tale of the Shipwrecked Sailor", written in "Heraotic" and ascribed a date around 2500 B.C.E. Other sources ascribe the earliest written poetry to the "Epic of Gilgamesh" written in "cuneiform", however, it is most likely that "The Tale of the Shipwrecked Sailor" predates "Gilgamesh" by half a millennium. The oldest epic poetry besides the "Epic of Gilgamesh" are the Greek epics "Iliad" and "Odyssey" and the Indian Sanskrit epics "Ramayana" and "Mahabharata".	meaning through non-musical grammatical, tonal and rhythmic rules intiating speech. Although, these performances could be included in those of gongs. The oldest surviving speculative fiction poem is the "Tale of the Shipwrecked Sailor", written in "Heraotic" and ascribed a date around 2500 B.C.E. Other sources ascribe the earliest written poetry to the "Epic of Gilgamesh" written in "cuneiform", however, it is most likely that "The Tale of the Shipwrecked Sailor" predates "Gilgamesh" by half a millennium. The oldest epic poetry besides the "Epic of Gilgamesh" are the Greek epics "Iliad" and "Odyssey" and the Indian Sanskrit epics "Ramayana" and "Mahabharata".	"Tale of the Shipwrecked Sailor"	"Tale of the Shipwrecked Sailor"
	TE: అణు బాణము ఎందు కుప్పగిస్తాయి?	ఒకల్లా బాణము ఒక రైలు, చిక్కిలా చిక్కిలా పడ్డాయి. బాణాబాటకు బాటకు చాచి అటగనుడు కాకదు, ఒక రవాణా వ్యవస్థలో ఒక బాణము పడినప్పుడు, ఆ వ్యవస్థ ముగ్గురలో చాచి కలిగి ఉండాలి. అంటే కొద్ది పాళ్లు అదే ఉండాలి కూడా కావచ్చు. రైల్వేలు, ఎయిలను, రోడ్లను మరియు రేవులకు ఇది వచ్చింది. కొంత మేరకు రవాణావారు కూడా ఇది వచ్చింది. అలాగే నావిక బాణము రావడంలో, వచ్చి తీసు కలిసే దాని బాణము వచ్చినందుకు రోలు ఒక వారానంతో వచ్చి ఉంది అలాగే సమస్యలూ. బాణాబాటు కూడా పెనుపెట్టే టూల్స్ అణు బాణము యుద్ధం సమయములో రావడానికి ఉద్దేశించబడింది. కలిపేటే వంటకంలో వల్లభము పెని రూపొందించబడ్డాయి. ఒక డిజైనులో రోలు వ్యాక్చీ బాణము పెట్టబడుతుంది. డిజైనులో అది చిక్కిలాగే గిరియాబాటు రోలు ఇంట్లో వేసి ఎంతో రిమోట్ నియంత్రణలూ రోలు బండి (పెట్టె), రాకెట్, ఊటలు, స్పెర్లు.	A grenade explodes, causing a train to derail. Not only can vehicles cause harm to the public, but when a bomb explodes in a transportation system, the system as a whole can be harmed. Sometimes it can be the same intention. This applies to railways, bridges, runways and harbors. This also applies to roads to some extent. In a suicide bombing, the person either drops the bomb on his own body or puts it in a vehicle and runs towards his target. Blue Peacock nuclear mines, also known as bombs, are intended for use during wartime. They are designed to explode in ten seconds if moved. The bomb is detonated with a detonator or fuse. Remote controls such as clocks or cell phones or pressure (altitude), radar, oscilation, touch to detonate detonators	టూ పెంకాక్	Blue Peacock
Retriever: unrelated passage					
	EN: Who invented the atomic bomb?	In thermodynamics and solid state physics, the Debye model is a method developed by Peter Debye in 1912 for estimating the phonon contribution to the specific heat (heat capacity) in a solid. It treats the vibrations of the atomic lattice (heat) as phonons in a box, in contrast to the Einstein model, which treats the solid as many individual, non-interacting quantum harmonic oscillators. The Debye model correctly predicts the low temperature dependence of the heat capacity, which is proportional to formula_1 – the Debye T³-³law. Just like the Einstein model, it also recovers the Dulong–Pettit law at high temperatures.	In thermodynamics and solid state physics, the Debye model is a method developed by Peter Debye in 1912 for estimating the phonon contribution to the specific heat (heat capacity) in a solid. It treats the vibrations of the atomic lattice (heat) as phonons in a box, in contrast to the Einstein model, which treats the solid as many individual, non-interacting quantum harmonic oscillators. The Debye model correctly predicts the low temperature dependence of the heat capacity, which is proportional to formula_1 – the Debye T³-³law. Just like the Einstein model, it also recovers the Dulong–Pettit law at high temperatures.	Peter Debye	Peter Debye
	TE: పాదాల మార్గపులో ఎన్ని గంటలు నిద్రి ఉంటుంది ? (How many hours of sleep does a normal human need?)	కూడా పరిగిని మరణి కాదు డియోల్ నే సలుపుతుంది కలిగి ఉంది. ఒక రాత్రికి అడుగుదొర గంటలముది సెప్పుంగు గంటలు నిద్రితో యువరాజులో మరణి కాదు కనిపించింది. ఇంకామూ కేవలం ఒక రాత్రి 4.5 గంటలు చదువుకు రావోలీ కూడా దాదా తక్కువగా పరిగిని మరణి కాదు ఉంది. ఆ విషయము, దాదా ముందుకి దిక్కునాని నుంచి ముప్పుగలగా ఉంది నిద్రికమే విజులంగా దిక్కుయ్యపును పెనుపెట్టెలను మరియు వాస్తవికమే మార్గం మరణానంత మేర దాదా తక్కువ ప్రభావం చూపుతుంది. మరణానంత గుఱుని నిద్రికములను దాదామే ముంపులో కొంత కూడా మరణి కూడా పరిగిని కానీ అయ్యపు పరిగిని మార్గం కనిపించింది. అందుకు కొరకు నిద్రికమే ఉన్నాదు కొద్ది పాళ్లు మేరకాదు కానీ నిద్రికమే ఉన్నా కూడా, నిద్రికమే పరిగిని దిక్కుయ్యపుతో సలుపుతుంది ఉన్నట్లు కనిపించింది. అంతకు మరణానంతో సలుపుతుంది ఉన్నట్లును మరియు 7.5 గంటల దిక్కు పెట్టెను సమర్థించాలి అనే ప్రశ్నకు సుస్పష్టమైన సమాధానం	Also associated with an increased mortality rate. The mortality rate was found in those who slept between six and a half and seven and a half hours a night. Yet even those who slept just 4.5 hours a night had a very low increased mortality rate. Thus, for most people, mild to moderate insomnia actually increases longevity and severe insomnia has very little effect on mortality. The mortality rate did not increase even slightly as long as people stopped using sedatives but life expectancy did increase. Thus patients with insomnia sometimes appear to be associated with increased longevity of insomnia, even if they have uncomfortable insomnia. The obvious answer to the question of why sleep more than 7.5 hours when associated with a high mortality rate	7.5 గంటలు	7.5 hours
Retriever: related but no answer					

Figure 7: Multilingual Question Answering Examples with Analysis