

# Nitriding: A tool kit for building scalable, networked, secure enclaves

Philipp Winter  
*Brave Software*

Ralph Giles  
*Brave Software*

Moritz Schafhuber  
*Brave Software*

Hamed Haddadi  
*Brave Software*  
*Imperial College London*

## Abstract

Enclave deployments often fail to simultaneously be *secure* (e.g., resistant to side channel attacks), *powerful* (i.e., as fast as an off-the-shelf server), and *flexible* (i.e., unconstrained by development hurdles). In this paper, we present nitriding, an open tool kit that enables the development of enclave applications that satisfy all three properties. We build nitriding on top of the recently-proposed AWS Nitro Enclaves whose architecture prevents side channel attacks by design, making nitriding more secure than comparable frameworks. We abstract away the constrained development model of Nitro Enclaves, making it possible to run unmodified applications inside an enclave that have seamless and secure Internet connectivity, all while making our code user-verifiable. To demonstrate nitriding’s flexibility, we design three enclave applications, each a research contribution in its own right: (i) we run a Tor bridge inside an enclave, making it resistant to protocol-level deanonymization attacks; (ii) we built a service for securely revealing infrastructure configuration, empowering users to verify privacy promises like the discarding of IP addresses at the edge; (iii) and we move a Chromium browser into an enclave, thereby isolating its attack surface from the user’s system. We find that nitriding enables rapid prototyping and alleviates the deployment of production-quality systems, paving the way toward usable and secure enclaves.

## 1 Introduction

Real-world enclave deployments tend to fall short in either providing security (e.g., resisting side channel attacks), flexibility (i.e., supporting diverse use cases and being easy to develop), or powerfulness (i.e., enabling computationally demanding applications). While reasonably flexible and powerful, Intel’s SGX failed to be secure because of its susceptibility to side channel attacks [1, 2, 3]. Newer developments like Apple’s Secure Enclave appear secure but is limited to cell phones and therefore lacks powerfulness and flexibility.

In this work, we propose nitriding, a free software tool kit that satisfies the aforementioned properties. By building on top of the recently proposed Nitro Enclaves [4], nitriding inherits its strong security properties. Unlike Intel’s SGX, Nitro Enclaves run on dedicated CPU and memory that is not shared with untrusted code, which promises to mitigate side channel attacks. By default, Nitro Enclaves are however severely constrained and difficult to develop applications for because (i) Nitro Enclaves are not meant to run networked applications; (ii) remote attestation is not designed to involve third parties; (iii) and enclave features like horizontal scaling require proprietary Amazon technology whose privacy promises cannot be verified. Our work abstracts away these constraints, to make nitriding flexible and user-verifiable. Our tool kit provides enclave applications with seamless networking via a tunneled network interface, and it facilitates the creation of secure and authenticated channels based on HTTPS. We also design a new mechanism for the horizontal scaling of enclaves, all while empowering third parties (i.e., users) to audit these features using remote attestation.

To demonstrate nitriding’s usefulness, we put it to the test by developing three new enclave application, each a research contribution in its own right. First, we build an application that allows a service provider to “publish” its infrastructure configuration, allowing the provider’s users to verify that privacy promises (e.g., the stripping of IP addresses) are properly configured. Second, we show how a Tor bridge<sup>1</sup> can be run inside an enclave, which protects its users from protocol-level attacks such as the infamous 2015 attack run by CMU [5]. We found that this enclave-enabled Tor bridge allows for convenient Web browsing—4K YouTube videos played smoothly and without buffering. Finally, to show that nitriding can sustain computationally demanding low-latency use cases, we launch a Chromium browser inside an enclave and make it available to users via a remote desktop interface. This protects users from browser exploits by constraining the browser to a virtual machine that’s phys-

<sup>1</sup>A Tor bridge is a “private” Tor relay whose purpose is to help users circumvent Internet censorship.

ically separate from the user’s machine.

Summing up, this work makes the following contributions:

- We design and implement *nitriding*, a free software enclave tool kit that enables the rapid development of secure and computationally demanding enclave applications.
- We evaluate the latency and throughput guarantees of both nitriding and the underlying Nitro Enclaves, finding that low-latency and high-throughput applications are possible despite there being room for much improvement.
- We put nitriding to the test by developing three new enclave applications, finding that these applications can comfortably support computationally demanding, low-latency, and high-throughput use cases, all while enabling rapid prototyping.

Next, we provide background (§ 2), we present nitriding’s design (§ 3), we propose three enclave applications built on top of nitriding (§ 4), we evaluate nitriding’s latency and throughput (§ 5), we discuss its limitations (§ 6), we discuss related work (§ 7), and we finally conclude this paper (§ 8).

## 2 Background

Secure enclaves can take many shapes and offer various security properties, but in this work we only require the following three. In the rest of this section, we provide background on how Nitro Enclaves achieve the above three security properties.

**Confidentiality:** An unauthorized entity (e.g., the host operating system) must not be able to observe the data that an enclave is processing.

**Integrity:** An unauthorized entity must not be able to modify the data that the enclave is processing, or the code that it is running.

**Verifiability:** Any entity (e.g., a user) must be able to verify if the enclave is running the code that its operator claims it is running.

### 2.1 The AWS Nitro system

Nitro Enclaves are virtual machines that run on dedicated hardware that is not shared with an enclave’s EC2 host. The technology that enforces isolation between the enclave and its EC2 host also enforces isolation between any two given EC2 instances: the Nitro system. Before covering enclaves, we explain how the Nitro system works—first by discussing its three key components.

**Nitro cards:** While physically connected to a server’s main board via PCIe, Nitro cards are dedicated and custom-built hardware and software that runs independently of a

server’s main board. Nitro cards implement the interfaces that allow for the management of a server’s computational, memory, and storage needs, among other things. A Nitro card also provides a server’s hardware root of trust and is responsible for firmware updates, secure boot, and acts as an interface between the server and the EC2 control plane [6, pp. 7–10].

**Nitro security chip:** The Nitro card acts independently of the system main board. The purpose of the Nitro security chip, which is controlled by the Nitro card, is to extend the Nitro card’s control over the system main board. One of the chip’s responsibilities is to prevent the CPU from updating the system’s firmware when run in bare metal mode [6, pp. 10–11].

**Nitro hypervisor:** The hypervisor is a firmware-like component that receives commands from the Nitro card. The hypervisor is stripped of any non-essential code: it does not contain networking code, file systems, shells, or other utilities that would allow a successful attacker to access other infrastructure [6, pp. 11–12].

Other design decisions are meant to provide defense in depth. First, by design, the Nitro system has no operator access, i.e., operators are unable to log in to an EC2 Nitro system and inspect memory or access customer data [6, p. 15]. Second, the Nitro system is designed to communicate passively, i.e., system components never initiate outgoing connections during production operations.

Of particular interest is how the Nitro system aims to prevent side channel attacks: customer instances never share a given CPU core in parallel. If two customers use a CPU core sequentially, the hypervisor ensures that state is cleared in between use. Depending on the instance, cores may be exclusively allocated to a customer, which includes Nitro Enclaves. This means that L1 and L2 caches are also never shared. Last-level cache lines may be shared but only non-simultaneously. Amazon’s documentation further states [6, p. 19]:

By virtue of its function, only relatively infrequently accessed data is referenced in last-level cache lines. Side-channels typically require a very large and statistically relevant number of samples in order to over-come the noise present in systems.

### 2.2 Nitro Enclaves

Nitro Enclaves inherit the isolation and security properties of the Nitro system. When an EC2 host system launches a Nitro Enclave, it “sacrifices” at least one of its CPUs and some of its memory pages to the enclave. These resources are subsequently unavailable to the EC2 host and exclusively used by the enclave. The same isolation mechanism that protects individual customer EC2 instances from each other also protects the Nitro Enclave from its host.

On the software level, Nitro Enclaves are virtual machines. They have their own Linux kernel that is independent from




Figure 1: The development workflow for compiling enclave applications.

PCR #	SHA-384 hash of . . .
0	Enclave image file
1	Linux kernel
2	Application
3	IAM role assigned to the host instance
4	Instance ID of the host instance
8	Enclave image file signing certificate

Table 1: The available platform configuration registers (PCRs) and the meaning behind them.

the host. Customers can create enclave images from a Docker image that contains the enclave application. Amazon provides a command line tool, `nitro-cli` [7], which compiles a Docker image into an enclave image file (EIF). Figure 1 illustrates the process. After compilation, `nitro-cli` prints a number of platform configuration registers (PCRs) that contain SHA-384 hashes over different layers of the enclave image file. Table 1 shows the six available PCRs. PCR0 is of particular importance for remote attestation as we will explain later.

By design, Nitro Enclaves have very limited abilities to communicate with the outside world. Lacking a dedicated networking interface, Nitro Enclaves can only communicate with their EC2 host via a VSOCK interface [8]. Originally proposed for communication between a hypervisor and its virtual machines, AWS repurposed the VSOCK interface to serve as communication channel between an enclave and its parent EC2 instance. From a developer’s point of view, the VSOCK interface is a point-to-point interface connecting the two. On the network layer, 32-bit context IDs take the role of IP addresses in VSOCK interfaces. For example, the enclave may have context ID 4 while its parent EC2 instance may have context ID 3. On the transport layer, one can use the same protocols that one would use over the IP-based address family; namely TCP, UDP, et cetera.

### 3 Nitriding’s design

We now discuss nitriding’s design by first laying out our trust assumptions and by providing an informal design overview (§ 3.1), followed by a discussion of the two major aspects of our tool kit: the reproducible build system (§ 3.2) and nitriding itself (§ 3.3).

#### 3.1 Trust assumptions and design overview

Our setting has three participants that make the following trust assumptions: The *service provider* runs a service for clients. As part of its operations, the service provider wants to process sensitive client information.

The *client* is a user of the service provider. It does not trust the service provider with its sensitive information and demands verifiable guarantees that the service provider will never see the client’s sensitive information in plain text.

The *enclave provider* makes available enclaves to the service provider. Both the client and the service provider trust that the enclave provider’s enclaves have the advertised security attributes of integrity, confidentiality, and verifiability.

We begin with an informal overview of nitriding to provide intuition. Subsequent sections are going to elaborate on the details. The life cycle of an enclave application that uses nitriding involves six steps:

- ❶ The service provider wants to run an existing service in an enclave. Assuming that the service builds reproducibly, the service provider then publishes the service’s source code for its clients to audit.
- ❷ The service provider bundles its service with nitriding and launches the enclave, which is now ready to receive incoming connections.
- ❸ Users audit the service’s (freely available) source code. Once a user is convinced that the code is free of security bugs, she compiles the service using the deterministic build system, which results in an image checksum.
- ❹ The client establishes an end-to-end encrypted network connection with the enclave. Right *after* establishing the secure channel but *before* revealing any sensitive information, the client provides a nonce and asks the enclave for an attestation document.
- ❺ The enclave receives the nonce and asks its hypervisor to generate an attestation document that contains the client-provided nonce *and* the public key that the enclave uses to establish the secure channel. The enclave returns the resulting attestation document (which contains the image checksum) to the client.
- ❻ The client performs various checks (see § 3.3.2 for details) and trusts the enclave if all checks pass. The client is then convinced that it’s communicating with the code that the user audited in the previous steps and is willing to reveal her sensitive information to the enclave.

#### 3.2 Enabling reproducible builds

Once a user audited the service’s code, she compiles the code to obtain the PCR0 value (cf. Table 1).<sup>2</sup> Crucially, we need a *deterministic mapping* between the code and its corresponding image ID because the service provider and clients must agree on the image ID that’s running in the enclave. Docker

<sup>2</sup>We use the terms “PCR0 value” and “image ID” interchangeably.

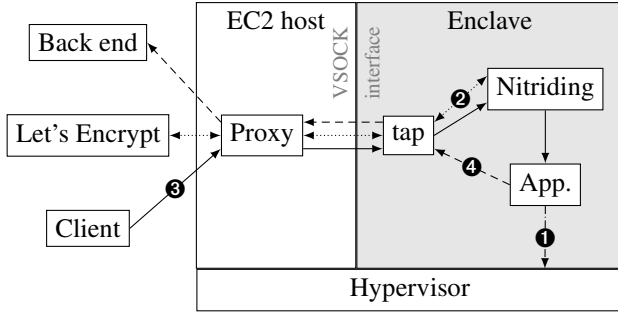


Figure 2: An architectural diagram illustrating the data flow as nitriding first boots and as clients talk to the enclave application.

by itself does not provide a deterministic mapping because—among other things—Docker records timestamps in its build process, causing subsequent builds of identical code to result in different image IDs.<sup>3</sup> To obtain reproducible builds, we take advantage of kaniko [9], which is straightforward to integrate into existing Docker-based workflows. Kaniko’s purpose is to build container images from a Dockerfile while itself in a container, but we use kaniko because it can do so reproducibly. As long as the client and service provider use the same source code, kaniko version, and compiler, they can build identical images—even when compiling the code on different platforms, like macOS and Linux. Equipped with a locally-generated PCR0 value (henceforth simply called “image ID”), the client is now ready to interact with the enclave.

### 3.3 Nitriding’s components

Having discussed how the client and service provider can independently arrive at identical image IDs, we now turn to nitriding’s architecture. The following sections discuss how nitriding communicates securely with the outside world (§ 3.3.1); how we facilitate remote attestation (§ 3.3.2); how enclaves can share their key material to allow for horizontal scaling (§ 3.3.3); how to thwart side-channel attacks (§ 3.3.4); and how to ingest secrets (§ 3.3.5). Appendix A provides an example of a simple enclave application.

#### 3.3.1 Enabling seamless and secure networking

Nitro Enclaves have no networking interface. Their only way to talk to the outside world is a VSOCK interface connected to the EC2 host. Nitriding works around this limitation by creating a TAP interface [10] inside the enclave as illustrated in Figure 2. The TAP interface is a virtual networking interface that acts as a network bridge between the enclave and the EC2 host. This interface routes traffic to a cooperating

proxy application running on the EC2 host, which provides the enclave application with seamless Internet connectivity for both IPv4 and IPv6. The proxy supports port forwarding to both nitriding and the enclave application (which are independent processes), allowing clients to talk to either directly. Nitriding supports two modes for the enclave application to receive connections from clients:

**Reverse proxy:** Nitriding acts as an HTTP reverse proxy and forwards incoming HTTP requests to the enclave application. Nitriding terminates the TLS connection, meaning that the enclave application can use plain HTTP. This mode is only applicable if the enclave application exposes an HTTP API.

**Direct:** In this mode, the enclave application receives incoming connections directly from the cooperating proxy. Nitriding is not involved. This is useful for enclave applications that speak protocols other than HTTP, or require greater flexibility than what the reverse proxy provides.

Having established how the enclave application can send and receive network packets, we now turn our attention to secure channels; specifically: how can clients establish a secure channel that is terminated *inside the enclave*? Enclave applications that receive connections in “direct” mode must implement their own secure channel. For enclave applications that take advantage of the “reverse proxy” mode, nitriding offers a secure channel in the form of HTTPS. When the enclave first starts, nitriding fetches a CA-signed certificate from Let’s Encrypt using the ACME protocol [11] and its TLS-ALPN-01 challenge [12] (step ②).<sup>4</sup> Crucially, this certificate *lives and dies* inside the enclave and its private key cannot be extracted (or injected) by the service provider because enclaves are sealed at runtime. The EC2 host (which is untrusted as per our threat model) can obtain a CA-signed certificate for the same FQDN because the enclave and the EC2 host share an IP address. This however is of little use to the EC2 host because we tie the enclave’s certificate to an attestation document as we will discuss next.

#### 3.3.2 Authenticating secure channels

Assume a client established a TLS connection with an enclave. How does the client know that the TLS session is terminated inside the enclave and not by the EC2 host? Our trust assumptions state that all parties trust the enclave provider, Amazon. We use an enclave’s attestation document as the root of trust and therefore authenticate a secure channel by *binding it to the enclave’s attestation document*. By including the enclave application’s public key in the attestation document, clients know that they are talking to *an enclave*. And by auditing the enclave code and building it reproducibly, clients know that they are talking to *their trusted enclave*.

<sup>3</sup>In essence, a Docker image is an archive of a file system. A Docker image is reproducible when separate build processes arrive at the exact same file system, including meta data like timestamps.

<sup>4</sup>Unlike the DNS-01 and the HTTP-01 challenge, TLS-ALPN-01 works entirely in the context of TLS and does not rely on other ports or protocols, which simplifies deployment.

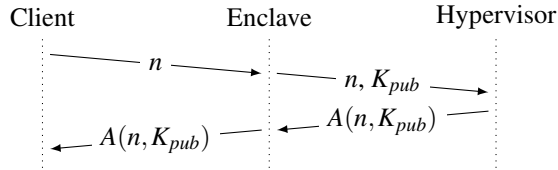


Figure 3: Clients provide a nonce  $n$  when requesting an attestation document from the enclave. The enclave asks its hypervisor for the attestation document  $A$ , providing the client’s nonce and its public key  $K_{pub}$ . The hypervisor responds with the attestation document  $A(n, K_{pub})$ , which the enclave forwards to the client.

We now discuss how we allow clients to retrieve and verify an enclave’s attestation over the Internet because Nitro Enclaves only allow for local attestation. After the client established a secure channel with the enclave, it needs to know that (i) the channel it just established is terminated inside the enclave (instead of by the EC2 host) and (ii) the enclave is running the code that the user audited in the previous step. To that end, the client requests the enclave’s attestation document—a hypervisor-signed document that attests to the image ID that the enclave is running. The client begins by provides a *nonce*—a 160-bit random value—whose purpose is to prevent the service provider from replaying outdated attestation documents. Phrased differently, the client provides a nonce to convince itself that it’s talking to a live enclave. Nitriding exposes an HTTP endpoint that clients use to request an attestation document. An example request looks as follows:

```
curl -i "https://enclave/attestation?nonce=abcd..."
HTTP/2 200
content-type: text/plain; charset=utf-8
date: Fri, 27 Jan 2023 16:58:55 GMT

hEShATgioFkQ9alpbW9kdWxLX2lkeCdpLTA2Y...
```

Upon receiving this client request, the enclave requests an attestation document from its hypervisor via an `ioctl` system call, which makes use of `/dev/nsm`, a device that is available inside the Nitro Enclaves. As illustrated in Figure 3, nitriding asks the hypervisor to include both the nonce *and* the public key of the enclave’s secure channel in the attestation document and sends the resulting attestation document to the client.<sup>5</sup> Upon receiving the attestation document, the client then verifies the following in order:

**First**, the attestation document is signed by the AWS root CA whose public key (which serves as the root of trust) is known to all parties. This prevents all parties except Amazon from issuing malicious attestation documents.

<sup>5</sup>If the enclave application runs in “reverse proxy” mode, the public key is a hash over the X.509 certificate; otherwise, it’s the public key of whatever secure channel the enclave application uses.

**Second**, the challenge nonce is part of the attestation document. This prevents adversaries from replaying old attestation documents.

**Third**, the fingerprint of the enclave’s X.509 certificate from the TLS session is part of the attestation document. This prevents adversaries from intercepting the secure channel.

**Fourth**, the enclave’s image ID is identical to the image ID that the client compiled locally. This prevents adversaries from tricking clients into talking to a malicious enclave.

Only if all four conditions hold is the client convinced that it is talking to an enclave running the previously-audited code *and* that the secure channel is terminated inside the enclave. Note that the EC2 host is able to intercept the secure channel with its own CA-signed certificate but clients will only trust the EC2 host if (and only if) it can present an attestation document that is valid for the enclave image, which it can’t because it is unable to spoof the AWS root CA signature that authenticates the attestation document. The only way for the EC2 host to obtain such an attestation document is to spawn an enclave that runs the exact code that the client is expecting—and it already does exactly that. Now that the client has established a trust relationship with the enclave, it is ready to reveal sensitive information to the enclave.

### 3.3.3 Syncing key material among enclaves

Enclaves are sealed at runtime, preventing anyone (including both Amazon and the service provider) from extracting key material that was generated inside the enclave. While a desirable property, this complicates horizontal scaling. If a single enclave proves unable to handle traffic load, one must scale horizontally by starting new enclaves. In some applications, it is unacceptable for each enclave to use distinct key material. Instead, enclaves must synchronize their key material to appear to the outside world like a single machine. While it is possible to accomplish key synchronization using tools like the AWS key management service (KMS),<sup>6</sup> we refrain from using KMS because users currently cannot verify that a KMS “key policy” is truly immutable. We therefore devise a novel, user-verifiable protocol that enables key synchronization without having to rely on external services.

We solve this problem in two steps: *discovery*, followed by *synchronization*. First, enclaves must be able to discover each other, i.e., learn each other’s IP addresses. Then, enclaves can establish connections with each other and initiate key synchronization. Our protocol dictates that when a new enclave bootstraps, it first tries to discover already-existing enclaves. If there are none, the enclave knows that it is the “origin” enclave. It then generates new key material that it will share with future enclaves. If however it discovers other enclaves, the new enclave establishes a connection with another,

<sup>6</sup>One could encrypt the keys using a KMS policy that dictates that only enclaves are allowed to decrypt it, and store the encrypted key in a location that all enclaves can access, e.g., an S3 bucket.

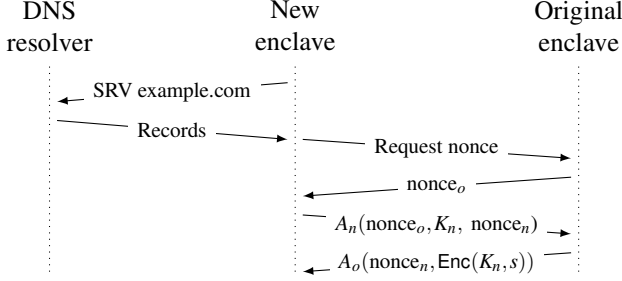


Figure 4: When a new enclave bootstraps, it discovers existing enclaves by obtaining the DNS SRV record for its own, hard-coded FQDN. The enclave then initiates key synchronization by first requesting a nonce. Then, the new enclave requests the origin enclave’s key material by submitting its own attestation document, followed by receiving the origin enclave’s attestation document, which contains encrypted key material.

randomly-chosen enclave and initiates key synchronization. Crucially, key material is only shared after *mutual attestation*, i.e., the origin and new enclaves verify each other, and exchange key material only if remote attestation succeeds. Key synchronization happens in three steps, as illustrated in Figure 4.

**First**, once a new enclave is spun up, it queries the DNS SRV record of the FQDN that is hard-coded in the enclave, e.g., example.com. The DNS resolver will return the record, containing a list of enclaves that are already running and initialized. The new enclave picks a random enclave from the list and initiates key synchronization. Running Nitro Enclaves as part of Kubernetes can handle DNS record generation automatically.

**Second**, the new enclave asks the existing enclave for a random nonce,  $\text{nonce}_o$ . Both enclaves cache  $\text{nonce}_o$  for one minute to mitigate denial-of-service attacks.

**Third**, the new enclave now requests the key material from the existing enclave. As part of the request, it provides its attestation document that contains  $\text{nonce}_o$  (to prove freshness to the existing enclave);  $\text{nonce}_n$  (the existing enclave is expected to add this nonce to its attestation document); and  $K_n$  (a NaCl public key [13] to which the key material should be encrypted). Upon receipt of the new enclave’s attestation document, the existing enclave verifies the attestation document’s signature and ensures that the new enclave is running the same code, i.e., the image ID that uniquely identifies the enclave image is identical. Once the existing enclave is convinced that it is dealing with a genuine new enclave, it creates an attestation document by including  $\text{nonce}_n$  (to prove freshness to the new enclave) and  $\text{Enc}(K_n, s)$ —the key material  $s$  is encrypted using the public key that the new enclave provided in the request. Finally, the new enclave verifies the attestation document, decrypts the key material, and uses it

to finish bootstrapping.

The security of key synchronization is paramount. We take advantage of mutual remote attestation to protect the key material. As an optional layer of defense-in-depth, synchronization should be configured to use a private network, which prevents arbitrary Internet hosts from talking to the synchronization endpoint. While not required, we recommend running enclaves as part of Kubernetes because it provides a private network that is shared by enclaves.

In their 2022 USENIX Security paper, Chen and Zhang present MAGE, a protocol that allows enclaves to mutually verify each other without relying on a trusted third party [14]. We could have built key synchronization on top of MAGE but found that our setting is considerably simpler because only *identical* enclaves request each other’s key material, eliminating the need for the more flexible—but also more complex—MAGE protocol.

### 3.3.4 Side-channel attacks

The enclave’s EC2 host cannot see *what* clients send to the enclave but it can see *how much* clients send and *how long* it takes the enclave to process data. The EC2 host can exploit these side channels to learn more about the client’s confidential information and computation. While such side channels must be avoided, nitriding is not the place to do so. Instead, it is the enclave application developer’s responsibility to identify and address this class of attacks, e.g., by implement constant-time processing.

### 3.3.5 Ingesting secrets

A key design requirement of nitriding is that users must be able to audit the enclave application’s code. The service provider is therefore unable to hide any software configuration (e.g., confidential API keys) from the user. Service providers can work around this shortcoming by exposing an authenticated HTTP handler that takes as input arbitrary data that updates the enclave’s state. Consider a system that takes as input client IP addresses, anonymizes them, and forwards the anonymized addresses to a back end. The service provider now wants to compare submitted IP addresses to a confidential deny list. If however the deny list is hard-coded in the publicly available enclave application, it is readily visible to anyone. The service provider can solve this problem by adding to the enclave application a new HTTP handler that takes as input the confidential data it seeks to protect from the users’ eyes. Once the enclave is running, the service provider loads the confidential deny list. To prevent users from submitting bogus data, the endpoint must be authenticated. One could accomplish this by hard-coding the service provider’s public key in the enclave application, and only accepting deny lists that carry a valid signature. Another possibility is to expose this endpoint only to the EC2 host, so only

the service provider has access to it. We provide an example of this in Section 4.1.

This technique for ingesting secrets is flexible—so flexible, in fact, that the service provider could abuse it to ingest code at runtime, which would nullify the enclave’s verifiability requirement. Vigilant users would never trust an enclave whose code can change at runtime. We therefore argue that an HTTP handler for the purpose of ingesting secrets must be constrained so that only well-defined data of a certain type (like a deny list) can be ingested.

## 4 Nitriding-based applications

In this section, we build three applications on top of nitriding, each a research contribution in its own right. First, we build an application that allows a service provider to disclose its infrastructure configuration in a user-verifiable way, thus eliminating the trust that users have to have in third-party infrastructure (§ 4.1). Second, we launch a Tor bridge inside an enclave, which mitigates several classes of attacks that the Tor network has struggled with in the past (§ 4.2). Third, we show that nitriding can handle computationally expensive workloads by moving a Web browser into an enclave and letting users interact with it via a remote desktop environment (§ 4.3).

### 4.1 Verifiable configuration transparency

Service providers typically outsource their infrastructure to third-party providers like content delivery networks or cloud computing vendors. The way these third-party providers are configured often affects user privacy. For example, a service provider may configure a third-party reverse proxy to strip client IP addresses before requests are forwarded to the servers that are under the service provider’s control. How can users know that the reverse proxy is in fact configured to strip client IP addresses? We built an enclave application that solves this problem by disclosing infrastructure configuration in a user-verifiable way. The idea, illustrated in Figure 9 in Appendix B, consists of a lightweight enclave application whose sole purpose is to answer client requests by querying the API of the third-party infrastructure provider. We built our proof-of-concept implementation for Cloudflare but the code is easily adapted for other providers.

To interact with Cloudflare’s API endpoint, one needs a confidential bearer token for authentication and a semi-confidential zone ID [15]. Unlike the API endpoint’s URL, these two values cannot be hard-coded in the (public) source code of the enclave application. We therefore add a second Web server to the enclave application whose only purpose is to receive as input the bearer token and the zone ID (cf. § 3.3.5). We carefully constrained this Web server’s HTTP handlers, making it impossible to inject anything into the enclave *but* the bearer token and the zone ID. We further con-

figured the proxy to only forward to this Web server connections originating at the EC2 host. Internet-connected adversaries cannot reach this Web server. After the administrator launches the enclave, she injects the confidential values into the enclave by calling the private HTTP endpoint from the EC2 host. Users have no reason to be concerned about this secret endpoint because the enclave application’s source code shows that the secret values are only used for the API request to Cloudflare. Clients talk to this enclave application via a single endpoint, which returns the JSON-encoded Cloudflare configuration in the HTTP body, and the enclave’s attestation document in a custom HTTP header. Section 3.3.2 explained that the attestation document must contain a client-provided nonce. The client provides this nonce as part of the HTTP request URL. In summary, clients make the following request:

```
GET /verify?nonce=3a26d...a937f HTTP/2
Host: enclave.example.com
```

And the server responds with:

```
HTTP/2 200 OK
Date: Mon, 13 Mar 2023 18:34:29 GMT
Content-Type: application/json
X-Attestation-Document: hEShATgioFkRJalpbW9kdWx...

{
  "domain": "service.provider.com",
  "modified_on": "2021-09-08T18:04:10.711156Z",
  ...
}
```

Upon receiving the enclave’s response, the client first verifies the authenticity of the attestation document (cf. § 3.3.2). Once convinced that the enclave’s response is authentic, the client inspects the body of the response—which comes directly from Cloudflare’s API. In particular, the client consults Cloudflare’s API documentation to verify that the service provider configured Cloudflare as promised. Finally, the user verifies that the domain inside the enclave’s response matches the domain that the service provider makes available to its users.

### 4.2 Tamper-resistant Tor bridge

The Tor network’s security rests on the assumption that certain relays in a user’s circuit do not collude. This assumption does not always hold, as in the 2014 attack that sought to deanonymize onion service users [5]. The attack consisted of several malicious relays that injected a sequence of Tor cells to encode a messages along the circuit [16, § 5.6]. Being an active attack, this required a modified relay that deviated from the Tor protocol. If done well, such attacks can be difficult to spot.

Nitriding can help mitigate such attacks by running Tor infrastructure inside an enclave. By taking advantage of remote

attestation, Tor clients can rest assured that they are communicating with an authentic Tor implementation that does not deviate from the Tor protocol. We demonstrate that this is possible by setting up a Tor bridge inside an enclave.<sup>7</sup>

**Proof-of-concept deployment:** Running the Tor executable inside an enclave is straightforward: the Dockerfile and startup script are nearly identical to Listing 8. Remote attestation however is more complicated. Ideally, Tor clients would attest the authenticity of their Tor bridge as part of the Tor protocol itself but for the sake of this prototype, we are content with handling remote attestation outside the Tor protocol: Once the Tor bridge is done bootstrapping, it registers its long-term identity key with nitriding. The enclave then exposes two TCP ports: port 443 for nitriding and port 9001 for Tor. A Tor client first remotely attests the enclave, followed by establishing a circuit over the bridge and—while establishing the circuit—verifies that the bridge’s long-term identity key is identical to the key in the attestation document. If so, the client can rest assured that it’s talking to a publicly verifiable Tor bridge.

We implemented the aforementioned prototype and configured Tor Browser v12.0.1 to use our in-enclave bridge. Using this setup, we were able to watch 4K YouTube videos without buffering delays. The above setup works well for an ad-hoc setup but is insufficient for network-wide deployment of in-enclave relays and bridges. In this case, relays and bridges need a way to announce if they support relay attestation. This is the job of the Tor network’s consensus, which is generated every hour by the distributed directory authorities. Changes to the network consensus are complex and need to be addressed in the protocol specification and Tor’s reference implementation.

**Comparison to SGX-Tor:** In their NSDI’17 paper, Kim et al. augmented the Tor code with Intel SGX, thus giving clients, relays, and directory authorities the ability to remotely verify each other [17]. Our approach differs in the following aspects: Clients that seek to verify an SGX enclave’s attestation document need to talk to Intel’s attestation service, which brings with it an array of privacy problems [18, § 1.2]. With Nitro Enclaves, clients can verify an attestation document without having to contact a third party, provided that they have a copy of Amazon’s root CA public key. Next, the authors envision the entire Tor network to take advantage of SGX, which is not feasible in our approach: Nitro Enclaves can only run in Amazon-controlled AWS. If all Tor relays ran inside AWS, Amazon would see both traffic entering and exiting the network—ideal conditions for end-to-end correlation attacks. We therefore believe that only select Tor bridges benefit from running in nitriding, lest anonymity is jeopardized. As for practicality, Kim et al. had to go to great lengths to patch Tor to support SGX [17, § 5]. Our proof-of-concept im-

plementation took one afternoon. Finally, since Kim et al.’s paper was published, Intel announced the discontinuation of SGX support for consumer-grade Core CPUs, which further limits the number of SGX-capable Tor clients.

### 4.3 An in-enclave Web browser

The previous enclave application focused on a low-latency, high-throughput use case. We now build an application that requires low latency in addition to being *computationally demanding*: we move a modern Web browser into an enclave, thus isolating the browser from its user’s desktop environment. If a browser is compromised by, say, a malicious Web site, then the malicious code is constrained to the enclave, unable to interact with the user’s desktop environment. In addition, users benefit from not having to provide the ever-increasing computational resources to run the browser. The downside of this approach is that the enclave’s EC2 host gets to see the browser’s traffic—but this can be solved by using a VPN or Tor. Alternatively, the pervasive deployment of HTTPS helps protect page contents from the EC2 host’s prying eyes and one could configure the browser to use DNS-over-HTTPS to further protect DNS traffic.

We start with an Ubuntu Docker image, which we extend by installing basic X11 graphical utilities, OpenSSH, TigerVNC, the i3 window manager, and a Chromium browser, all via Ubuntu’s package manager.<sup>8</sup> We used OpenSSH port forwarding to tunnel TigerVNC’s TCP traffic, which prevents the EC2 host from spying on VNC traffic. The enclave’s SSH public key acts as the root of trust, and it lives and dies inside the enclave. We configure nitriding to add a hash over this public key to the attestation document. Before establishing an SSH connection, clients fetch the enclave’s attestation document from the nitriding port to learn what SSH public key to expect. By default, AWS’s tooling for Nitro Enclaves assumes applications smaller than what we need for a remote desktop environment. Depending on the instance size and tool version, we sometimes had out-of-memory errors converting container images to enclave images. Additionally, the enclave manager allows a maximum allocation of 512 MB to each container, which isn’t enough to run most graphical desktop software by default. This limit needs to be raised.

There is plenty of room for improvement, both in reducing the enclave’s image size and in reducing the latency that our VNC server induces. One can also take advantage of AWS’s numerous data centers by launching the browser enclave in a region that is close to the user, to further minimize latency.

**Subjective user experience:** Upon using a VNC client to interact with the in-enclave Web browser, we found that navigation was relatively painless but large screen updates were spread over a noticeable amount of time, usually obscuring

<sup>7</sup>We chose to set up a Tor bridge instead of a relay because bridges can be configured to remain private and therefore cause no harm to the network in case our implementation had bugs.

<sup>8</sup>We used Ubuntu 20.04.4 from docker.io.



the underlying animation. Video played at less than full framerate, and VNC doesn't support audio playback. However, the user-perceptible latency is dominated by the round-trip time between the client and the enclave. In any case, this application demonstrates that the enclave itself is no barrier to achieving similar performance to any other remote desktop service.

**Alternative approaches:** Wang et al.'s WebEnclave work sets out to protect Web sites from malicious browser extensions: Web developers can use the `<web-enclave>` tag to instruct the browser to execute code inside WebEnclave [19]. Unlike WebEnclave, our application protects the user's operating system from the browser, instead of Web pages from browser extensions.

## 5 Evaluation

We now evaluate nitriding with respect to security, financial cost, and performance. We ran all our performance measurements on a `c5.xlarge` EC2 instance [20], which is on the lower end of enclave-capable instance types. Our performance numbers therefore represent a lower bound of what's possible with Nitro Enclaves. More powerful instance types will yield better performance.

### 5.1 Security considerations

There are three key components to the overall security of a nitriding application: (i) Amazon's Nitro system itself, (ii) nitriding, and (iii) the application running on top of nitriding.

The security foundation lies in the soundness of the design of Nitro Enclaves. While Amazon published the conceptual design [6], the concrete hardware and software implementation is closed source. The decision to allocate physically separate resources to enclaves is sound but only time will tell if Nitro Enclaves can resist the types of attacks that have been plaguing SGX.

Nitriding's security reduces to the complexity of our code and the security of its cryptographic building blocks. These building blocks are SHA-256 (to hash public key material that is embedded in the attestation document), the NaCl cryptographic library [13] (to implement key synchronization),<sup>9</sup> TLS in at least version 1.2 (to provide a secure channel between clients and the enclave), and Go's CSPRNG, which is seeded with randomness from the Nitro hypervisor. One measure of our code complexity is its size. Excluding unit tests, nitriding counts less than 1,700 lines of code and has nine direct dependencies that are not maintained by either us or the Go project.<sup>10</sup> Nine is worse than zero, but is still man-

<sup>9</sup>Specifically, we use NaCl's `box` API, which uses `Curve25519`, `X25519`, and `Poly1305` to encrypt and authenticate messages.

<sup>10</sup>Most dependencies provide networking functionality like a user-space TCP stack, code that provides a TAP interface, and a wrapper for Linux's `netlink` interface.

ageable and auditable in its entirety. Our choice of using the memory-safe Go and the (comparatively) small trusted computing base reduces—but does not eliminate!—the attack surface.

The highest layer in the software stack is the enclave application itself. The most significant security issues are side channel attacks and programming bugs. It is the application developer's responsibility to prevent side channel attacks and write bug-free code. As we pointed out in Section 6, programming bugs can be intentional, i.e., the service provider may deliberately introduce bugs that leak sensitive information. From the user's point of view, eternal vigilance is therefore the price of security.

### 5.2 Financial cost

Nitro Enclaves do not incur any extra cost in addition to that of the underlying EC2 host—they can be considered a “free” extension to EC2. Nitro enclaves are however only available for select types of EC2 instances because they require their own CPU and a minimum amount of memory, and those instance types are pricier than the lowest tier that AWS offers. We tested all of the practical applications of Section 4 on a `c5.xlarge` instance, which is on the lower end of enclave-enabled EC2 instance types. This instance comes with four vCPUs and 8 GiB of memory. As of March 2023, a `c5.xlarge` instance costs USD 0.17 per hour, which amounts to approximately USD 125 per month.

### 5.3 Attestation document request rate

The fetching of attestation documents is a critical part of our framework's overall performance. We built a stress test enclave application that runs a busy loop for 60 seconds to request as many attestation documents as possible. For each request, we ask the hypervisor to include an incrementing nonce in the attestation document to eliminate any speedups by caching. Figure 5 illustrates the results. We were able to obtain approximately 860 documents per second with the median request taking 1.1 ms to complete. 99% of requests finished in less than 1.31 ms. Our experience from building enclave applications (cf. § 4) suggests that the attestation document request rate is unlikely to be a bottleneck for real-world deployments.

### 5.4 Application latency

We seek to measure two types of latency: (i) the latency induced by the interface between an EC2 host and its Nitro Enclave and (ii) the latency induced by nitriding, both with and without nitriding's reverse proxy configuration. The former is outside our control while the latter is entirely controlled by us. We built a lightweight enclave application to measure these latencies. The application implements a Web server

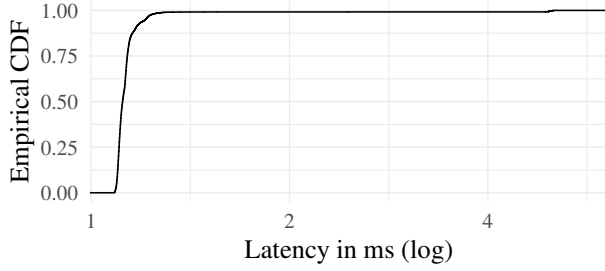


Figure 5: The latency distribution (as CDF) of requesting 51,821 attestation documents from the Nitro hypervisor.

written in Go that responds with the string “hello world” upon receiving requests for its index page. We made this application minimal because we’re only interested in the latency *before* a request reaches the enclave application. For this reason, the Web server only speaks the computationally inexpensive HTTP (instead of HTTPS). To simulate clients, we use the HTTP load test tool Baton [21] in git commit 576339. We patched Baton’s source code to add VSOCK support (to send requests directly to the enclave, via the VSOCK interface) and to log latency percentiles. Equipped with both an HTTP server and a client, we measure HTTP request latencies for five setups:

**Loopback** The client talks to the Web server via the loopback interface. No enclave is involved. This setup constitutes the latency baseline we compare against.

**Enclave** The Web server runs inside a Nitro Enclave but *without nitriding*. All traffic goes over the VSOCK interface. This measures the latency that the Nitro Enclave’s VSOCK interface introduces.

**Nitriding-nrp** The Web server runs inside a Nitro Enclave but without a reverse proxy. The suffix “nrp” is short for “no reverse proxy”. This measures the latency introduced by nitriding’s TAP forwarding code.

**Nitriding** The Web server runs inside a Nitro Enclave with nitriding acting as a reverse HTTP proxy. This measures the latency introduced by nitriding’s TAP forwarding code *and* its reverse HTTP proxy.

We run Baton on the parent EC2 host and instruct it to send 100,000 requests in six sequential experiments, using 1, 5, 10, 25, 50, and 100 concurrent threads. Note that our measurements are designed to measure the *lower bound* for latency. Real-world applications will exhibit higher latency because clients send their requests over the Internet (which adds considerable networking latency) and the enclave application is likely to be more complex (which adds computational latency).

Figure 6 illustrates the results. In all setups, the requests per second increase as the number of threads increases, but

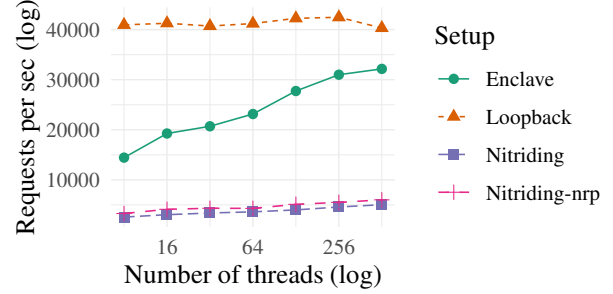


Figure 6: The number of HTTP requests per second as requests are sent from an increasing number of threads.

only up to 25 threads, at which point we see diminishing returns. As expected, the loopback interface—our baseline—performs the best, handling 41,000 requests per second for 25 threads. The Enclave setup can sustain approximately half of that, namely 20,000 reqs/s. Recall that the Enclave setup constitutes the maximum achievable performance for nitriding.

We find that both nitriding and nitriding without a reverse proxy (denoted as Nitriding-nrp) can sustain 2,300 and 2,600 reqs/s, respectively—13% of what is achievable over the enclave interface. As expected, nitriding performs better without reverse proxy because less complexity is involved. We attribute the performance difference between nitriding and the Enclave baseline to the user-space TCP stack that our software dependency gVisor introduces.

Figure 7 shows how long it takes to answer the HTTP requests we issued as part of this experiment. The four charts show a latency CDF for 1, 10, 50, and 100 threads, respectively. We omitted charts for 5 and 25 threads because of page constraints.

## 5.5 Application throughput

Next, we measure the throughput that we can achieve over the VSOCK interface. To that end, we use a VSOCK-enabled fork of the iperf3 performance measurement tool in git commit 9245f9a [22]. iperf3 measures the throughput of a networking link using a client/server model. In our experiment, we start an iperf3 server instance inside the enclave and the corresponding client instance on the parent EC2 host.<sup>11</sup> The client then talks to the server via the VSOCK interface and determines the throughput. Table 2 shows the results of this experiment. When running both the iperf3 client *and* server on the EC2 host—which effectively measures the throughput of the EC2 host’s loopback interface—we achieve 57 Gbit/s of throughput. Running the iperf3 server inside an enclave limits throughput to 3 Gbit/s while nitriding results in approximately 0.3 Gbit/s. Iperf3 does not use HTTP and we

<sup>11</sup>The command that we ran on the server was “iperf3 --vsock -s” and on the client “iperf3 --vsock -c 4.”

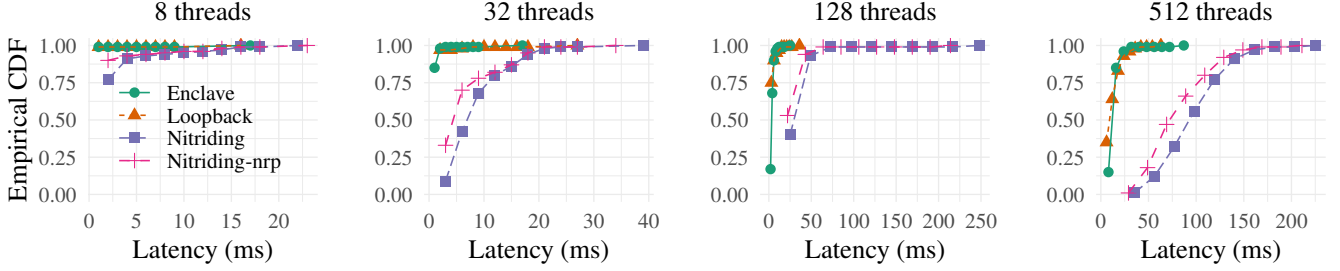


Figure 7: The round-trip time distributions (as CDF) of stress-testing an in-enclave Web server as the number of concurrent requesters increases from 1 to 100 threads.

Setup	C $\rightarrow$ S (Gbits/s)	S $\rightarrow$ C (Gbit/s)
Loopback	57.0	57.0
Enclave	3.6	3.2
Nitriding-nrp	0.3	1.1

Table 2: The TCP throughput of running iperf3 over the loopback interface, inside an enclave, and inside an enclave using nitriding (without reverse proxy).

therefore cannot measure nitriding in its reverse proxy mode.

## 6 Limitations

An obvious limitation of nitriding is its reliance on Amazon, which acts as the root of trust. Our trust assumptions state that all parties must trust Amazon. Placing one’s trust in a single corporation’s proprietary technology is problematic but this is a common limitation of enclaves—SGX-based applications must trust Intel while TrustZone-based applications must trust ARM.

Next, our system relies on at least some users auditing the service provider’s enclave application. Needless to say, not many users have the skills to audit code. In fact, even among programmers, only a fraction may be qualified to audit source code for vulnerabilities. So what are the non-programmers to do? We envision users to congregate in forums where matters related to the service provider are discussed. A tech-savvy subset of users is going to organize code reviews and publish their findings. Non-technical users may then trust the users who audited the source code. This is no different from other free software projects: nobody audits all the software that they use, ranging from the kernel to the myriad of user space applications.

The Underhanded C Coding Contest’s [23] goal was the implementation of benign-looking code that was secretly malicious. The contest attracted numerous impressive submissions which showed that it is surprisingly difficult to find bugs *even if one knows* that there is a bug in a given piece of

code. Analogously, the service provider could try to hide subtle, yet critical bugs in the code to exfiltrate information from the enclave. On top of that, if the service provider ever gets caught, it may have plausible deniability and pretend that the exfiltration bug was an honest programming error. We are unable to solve this class of attacks but we can mitigate it by keeping the trusted computing base small.

## 7 Related work

Arnautov et al. present in their OSDI’16 paper a mechanism that allows Docker containers to run in an SGX enclave [24]—conceptually similar to Nitro Enclaves, which are effectively compiled Docker images. In their 2022 arXiv report, King and Wang [25] propose HTTPPA—an SGX-based extension to HTTP that makes a Web server attestable to clients. Our framework also allows for attestable Web services, but without modifications to HTTP.

**Applications of enclaves:** Researchers have proposed numerous and diverse enclave-enabled systems, ranging from DeFi oracles [26], to health apps for COVID-19 [27], to networking middleboxes [28]. Despite avid interest in academia, large-scale, real-world deployments of enclaves are sparse. In 2017, the Signal secure messenger published a blog post on private contact discovery [29], which makes it possible for Alice to discover which of the contacts in her address book use Signal without revealing her contact list. The Signal team accomplished this by relying on an SGX enclave that runs the contact discovery code. Two years later, in 2019, the Signal team built its “secure value recovery” feature on SGX as well [30].

**Frameworks for enclave development:** To facilitate working with enclaves, several frameworks have emerged that abstract away complicated and error-prone low-level aspects of enclaves. Examples are Asylo [31] and Open Enclave [32]—both libraries are implemented in C/C++ and are hardware agnostic, meaning that the “enclave backend” can be switched from, say, TrustZone to SGX. While frameworks render enclave development more convenient, memory un-

safe languages like C and C++ make it dangerously easy to introduce memory corruption bugs that jeopardize the security of the enclave [33]. Cognizant of this issue, Wang et al. implemented a performant Rust layer on top of Intel’s C++-based SGX SDK, making it possible to develop memory-safe applications in SGX [34].

Nitriding is built in the memory-safe Go programming language, which eliminates an entire class of bugs that could jeopardize the security of enclave applications, and unlike Asylo and Open Enclave, nitriding only supports Nitro Enclaves because the security guarantees of a framework are only as strong as the underlying enclave hardware, and in the case of Intel, ARM, and AMD, side channel attacks remain a serious concern.

**Nitro Enclaves versus Intel SGX:** We now make an attempt to compare how Nitro Enclaves and SGX differ in their threat model, their development model, and in the way they can address security vulnerabilities.

*Threat model:* Both Nitro Enclaves and SGX protect against compromise of the host operating system. SGX further protects against compromise of any component other than the CPU itself, which includes—if present—the hypervisor. Specifically, SGX assumes that there are no flaws in the CPU’s silicon or microcode, and the private key is not compromised. While not explicitly stated, Amazon’s design document suggests that Nitro Enclaves assume that the Nitro system (including the Nitro card, the security chip, and the hypervisor) is trusted. Both Nitro enclaves and SGX assume that side channel attacks are not feasible. For SGX, this assumption has not held [35, 36].

*Development:* Intel’s SGX was not designed to seamlessly move entire applications into the context of an enclave because the libc that is provided by Intel’s SDK lacks support for many functions and system calls. Instead, application developers were meant to partition their application, i.e., move trusted code fragments into the enclave while the remaining code ran outside the enclave. However, projects like Haven [37] and SCONE [24] made it possible to run entire unmodified applications inside an SGX enclave. Nitro enclaves in contrast provide by default what Arnaudov et al. developed in their OSDI’14 paper [24]: a way to seamlessly run a Docker container inside an enclave.

*Addressing vulnerabilities:* What means do Intel and Amazon have to mitigate attacks against their enclave technology? Amazon is in possession and control of all hardware and software. A hardware flaw in Nitro cards may prove expensive and complicated to fix but a fix is feasible without involving the customer. Intel has less flexibility considering that their CPUs are under customer possession. Some SGX vulnerabilities have been addressed by updating CPU microcode, which may be a standard procedure for cloud providers but certainly less so for end users.

Finally, as of March 2023, Intel is in the process of rolling out their “Trusted Domain Extensions” processor feature,

which is conceptually similar to Nitro Enclaves in the sense that it aims to protect virtual machines from both the hypervisor and all other software, including the operating system [38].

**Attacks against enclaves:** Enclaves based on Intel’s SGX technology share a CPU with untrusted code, which raises the flood gates for side channel attacks. Consequently, attacks have taken advantage of speculative execution [1, 39], branch “shadowing” [40], the interface between SGX and non-SGX code [41], software faults [2], shared caches [3], and memory management [42]. Despite the considerable number of practical attacks, there is opportunity to strengthen SGX against side channel attacks. Oleksenko et al. introduce in their ATC’18 paper a system that protects unmodified SGX applications from side channel attacks by executing the enclave code on a CPU separate from the untrusted code. Note that this is the default for Nitro Enclaves.

For a comprehensive overview of attacks against SGX, refer to Fei et al.’s survey [36], Nilsson et al.’s arXiv report [35], and Van Schaik et al.’s technical report [43].

Among all currently-available commodity enclaves, Intel’s SGX has received the most attention from academia but ARM’s TrustZone and AMD’s SEV have not been spared and share SGX’s conceptual security flaws. In a CCS’19 paper, Ryan demonstrates an attack that exfiltrates ECDSA private keys from Qualcomm’s implementation of a hardware-backed keystore which is based on TrustZone [44]. Similarly, Li et al. showed in a USENIX Security’21 paper how an attacker can exfiltrate private keys from AMD SEV-protected memory regions. In a CCS’21 paper, Li et al. showed how an attacker-controlled VM can read encrypted page tables, and how an attacker can create an oracle for encryption and decryption.

While Nitro Enclaves are still young and have received nowhere near the same scrutiny as SGX and friends, we believe that their dedicated hardware resources provides stronger protection from side channel attacks than enclaves that are based on shared CPU resources.

## 8 Conclusion

This work presents nitriding, a tool kit that facilitates the rapid development of flexible, powerful, and secure enclaves. By building nitriding on top of AWS Nitro Enclaves, we inherit their strong security properties; and we carefully engineered nitriding to provide seamless and secure networking, scalability, and remote attestation while remaining entirely user-verifiable. Our performance evaluation and our three prototypes suggest that nitriding can handle low-latency, high-throughput, and computationally demanding applications like watching HD video streams in an in-enclave Chromium browser.

## Availability

Our source code is available online at:  
<https://github.com/brave/nitriding-daemon>

## References

- [1] Jo Van Bulck et al. “Foreshadow: Extracting the Keys to the Intel SGX Kingdom with Transient Out-of-Order Execution”. In: *USENIX Security*. 2018. URL: <https://foreshadowattack.eu/foreshadow.pdf> (cit. on pp. 1, 12).
- [2] Kit Murdock et al. “Plundervolt: Software-based Fault Injection Attacks against Intel SGX”. In: *IEEE Security & Privacy*. 2020. URL: <https://plundervolt.com/doc/plundervolt.pdf> (cit. on pp. 1, 12).
- [3] Ferdinand Brasser et al. “Software Grand Exposure: SGX Cache Attacks Are Practical”. In: *USENIX WOOT*. 2017. URL: <https://www.usenix.org/system/files/conference/woot17/woot17-paper-brasser.pdf> (cit. on pp. 1, 12).
- [4] AWS Nitro Enclaves. URL: <https://aws.amazon.com/ec2/nitro/nitro-enclaves/> (visited on 04/15/2022) (cit. on p. 1).
- [5] Roger Dingledine. *Did the FBI Pay a University to Attack Tor Users?* Nov. 2015. URL: <https://blog.torproject.org/did-fbi-pay-university-attack-tor-users/> (visited on 01/19/2023) (cit. on pp. 1, 7).
- [6] J. D. Bean et al. *The Security Design of the AWS Nitro System*. Nov. 2022. URL: <https://docs.aws.amazon.com/pdfs/whitepapers/latest/security-design-of-aws-nitro-system/security-design-of-aws-nitro-system.pdf> (cit. on pp. 2, 9).
- [7] *Tooling for Nitro Enclave Management*. URL: <https://github.com/aws/aws-nitro-enclaves-cli> (visited on 03/13/2023) (cit. on p. 3).
- [8] *vsock(7) — Linux manual page*. URL: <https://man7.org/linux/man-pages/man7/vsock.7.html> (visited on 06/06/2022) (cit. on p. 3).
- [9] *kaniko*. URL: <https://github.com/GoogleContainerTools/kaniko> (visited on 04/20/2022) (cit. on p. 4).
- [10] Maxim Krasnyansky and Florian Thiel. *Universal TUN/TAP device driver*. 2002. URL: <https://docs.kernel.org/networking/tuntap.html> (cit. on p. 4).
- [11] Richard Barnes, Jacob Hoffman-Andrews, Daniel McCarney, and James Kasten. *RFC 8555: Automatic Certificate Management Environment (ACME)*. 2019. URL: <https://datatracker.ietf.org/doc/html/rfc8555> (visited on 06/03/2022) (cit. on p. 4).
- [12] Roland Bracewell Shoemaker. *RFC 8737: Automated Certificate Management Environment (ACME) TLS Application-Layer Protocol Negotiation (ALPN) Challenge Extension*. 2020. URL: <https://datatracker.ietf.org/doc/html/rfc8737> (visited on 12/12/2022) (cit. on p. 4).
- [13] Daniel J. Bernstein. *Cryptography in NaCl*. URL: <https://cr.yp.to/highspeed/naclcrypto-20090310.pdf> (visited on 02/01/2023) (cit. on pp. 6, 9).
- [14] Guoxing Chen and Yinqian Zhang. “MAGE: Mutual Attestation for a Group of Enclaves without Trusted Third Parties”. In: *USENIX Security*. 2022. URL: <https://donnod.github.io/files/papers/sec22.pdf> (cit. on p. 6).
- [15] *Get Spectrum application configuration*. URL: <https://api.cloudflare.com/#spectrum-applications-get-spectrum-application-configuration> (visited on 02/03/2023) (cit. on p. 7).
- [16] Roger Dingledine and Nick Mathewson. *Tor Protocol Specification*. URL: <https://gitweb.torproject.org/torspec.git/tree/tor-spec.txt> (visited on 01/20/2023) (cit. on p. 7).
- [17] Seongmin Kim et al. “Enhancing Security and Privacy of Tor’s Ecosystem by Using Trusted Execution Environments”. In: *USENIX NSDI*. 2017. URL: <https://www.usenix.org/system/files/conference/nsdi17/nsdi17-kim-seongmin.pdf> (cit. on p. 8).
- [18] Guoxing Chen, Yinqian Zhang, and Ten-Hwang Lai. “OPERA: Open Remote Attestation for Intel’s Secure Enclaves”. In: *ACM CCS*. 2019. URL: <https://dl.acm.org/doi/pdf/10.1145/3319535.3354220> (cit. on p. 8).
- [19] Xinyu Wang et al. “WebEnclave: Protect Web Secrets from Browser Extensions with Software Enclave”. In: *Transactions on Dependable and Secure Computing* 19.5 (2021). URL: <https://ieeexplore.ieee.org/document/9436026> (cit. on p. 9).
- [20] Amazon Web Services, Inc. *Amazon EC2 C5 Instances*. URL: <https://aws.amazon.com/ec2/instance-types/c5/> (visited on 05/03/2023) (cit. on p. 9).
- [21] *Baton*. URL: <https://github.com/americanexpress/baton> (visited on 04/18/2022) (cit. on p. 10).
- [22] Stefano Garzarella. *iperf3: A TCP, UDP, SCTP, and VSOCK network bandwidth measurement tool*. URL: <https://github.com/stefano-garzarella/iperf-vsock> (visited on 06/06/2022) (cit. on p. 10).

- [23] *The Underhanded C Contest*. 2015. URL: <http://www.underhanded-c.org> (visited on 04/18/2022) (cit. on p. 11).
- [24] Sergei Arnavtsov et al. “SCONE: Secure Linux Containers with Intel SGX”. In: *USENIX OSDI*. 2016. URL: <https://www.usenix.org/system/files/conference/osdi16/osdi16-arnautov.pdf> (cit. on pp. 11, 12).
- [25] Gordon King and Hans Wang. *HTTP: HTTPS Attestable Protocol*. 2022. arXiv: 2110.07954v2 [cs.CR]. URL: <https://arxiv.org/pdf/2110.07954.pdf> (cit. on p. 11).
- [26] Fan Zhang et al. “Town Crier: An Authenticated Data Feed for Smart Contracts”. In: *ACM CCS*. 2016. URL: <https://dl.acm.org/doi/pdf/10.1145/2976749.2978326> (cit. on p. 11).
- [27] Vikram Sharma Mailthody et al. “Safer Illinois and RokWall: Privacy Preserving University Health Apps for COVID-19”. In: *CoronaDef*. The Internet Society, 2021. URL: [https://www.ndss-symposium.org/wp-content/uploads/coronadef2021\\_23001\\_paper.pdf](https://www.ndss-symposium.org/wp-content/uploads/coronadef2021_23001_paper.pdf) (cit. on p. 11).
- [28] Juhyeng Han, Seongmin Kim, Jaehyeong Ha, and Dongsu Han. “SGX-Box: Enabling Visibility on Encrypted Traffic using a Secure Middlebox Module”. In: *ACM APNet*. 2017. URL: <https://conferences.sigcomm.org/events/apnet2017/papers/sgxbox-han.pdf> (cit. on p. 11).
- [29] Moxie Marlinspike. *Technology preview: Private contact discovery for Signal*. Sept. 2017. URL: <https://signal.org/blog/private-contact-discovery/> (cit. on p. 11).
- [30] Joshua Lund. *Technology Preview for secure value recovery*. Dec. 2019. URL: <https://signal.org/blog/secure-value-recovery/> (cit. on p. 11).
- [31] *Asylo*. URL: <https://github.com/google/asylo> (visited on 05/16/2022) (cit. on p. 11).
- [32] *Open Enclave SDK*. URL: <https://github.com/openenclave/openenclave> (visited on 05/16/2022) (cit. on p. 11).
- [33] Jaehyuk Lee et al. “Hacking in Darkness: Return-oriented Programming against Secure Enclaves”. In: *USENIX Security*. 2017. URL: <https://www.usenix.org/system/files/conference/usenixsecurity17/sec17-lee-jaehyuk.pdf> (cit. on p. 12).
- [34] Huibo Wang et al. “Towards Memory Safe Enclave Programming with Rust-SGX”. In: *ACM CCS*. 2019. URL: <https://dl.acm.org/doi/pdf/10.1145/3319535.3354241> (cit. on p. 12).
- [35] Alexander Nilsson, Pegah Nikbakht Bideh, and Joakim Brorsson. *A Survey of Published Attacks on Intel SGX*. 2020. arXiv: 2006.13598 [cs.CR]. URL: <https://arxiv.org/pdf/2006.13598.pdf> (cit. on p. 12).
- [36] Shufan Fei, Zheng Yan, Wenxiu Ding, and Haomeng Xie. “Security Vulnerabilities of SGX and Countermeasures: A Survey”. In: *ACM Computing Surveys* 54.6 (2021). URL: <https://dl.acm.org/doi/pdf/10.1145/3456631> (cit. on p. 12).
- [37] Andrew Baumann, Marcus Peinado, and Galen Hunt. “Shielding Applications from an Untrusted Cloud with Haven”. In: *USENIX OSDI*. 2014. URL: <https://www.usenix.org/system/files/conference/osdi14/osdi14-paper-baumann.pdf> (cit. on p. 12).
- [38] Intel Corporation. *Intel® Trust Domain Extensions (Intel® TDX)*. URL: <https://www.intel.com/content/www/us/en/developer/articles/technical/intel-trust-domain-extensions.html> (visited on 03/29/2023) (cit. on p. 12).
- [39] Stephan van Schaik et al. “CacheOut: Leaking Data on Intel CPUs via Cache Evictions”. In: *IEEE Security & Privacy*. 2021. URL: <https://cacheoutattack.com/files/CacheOut.pdf> (cit. on p. 12).
- [40] Sangho Lee et al. “Inferring Fine-grained Control Flow Inside SGX Enclaves with Branch Shadowing”. In: *USENIX Security*. 2017. URL: <https://gts3.org/assets/papers/2017/lee:sgx-branch-shadow.pdf> (cit. on p. 12).
- [41] Jo Van Bulck et al. “A Tale of Two Worlds: Assessing the Vulnerability of Enclave Shielding Runtimes”. In: *ACM CCS*. 2019. URL: [https://fahrplan.events.ccc.de/rc3/2020/Fahrplan/system/event\\_attachments/attachments/000/004/153/original/ccs19-tale.pdf](https://fahrplan.events.ccc.de/rc3/2020/Fahrplan/system/event_attachments/attachments/000/004/153/original/ccs19-tale.pdf) (cit. on p. 12).
- [42] Wenhao Wang et al. “Leaky Cauldron on the Dark Land: Understanding Memory Side-Channel Hazards in SGX”. In: *ACM CCS*. 2017. URL: <https://donnod.github.io/files/papers/ccs17.pdf> (cit. on p. 12).
- [43] Stephan van Schaik et al. *SoK: SGX.Fail: How Stuff Gets eXposed*. 2022. URL: <https://sgx.fail> (cit. on p. 12).
- [44] Keegan Ryan. “Hardware-Backed Heist: Extracting ECDSA Keys from Qualcomm’s TrustZone”. In: *ACM CCS*. 2019. URL: <https://sci-hub.se/https://doi.org/10.1145/3319535.3354197> (cit. on p. 12).

## A A basic example

Figure 8 illustrates how an enclave application (called enclave-app) can run alongside nitriding. Figure 8a shows a Dockerfile that adds nitriding, the enclave application, and

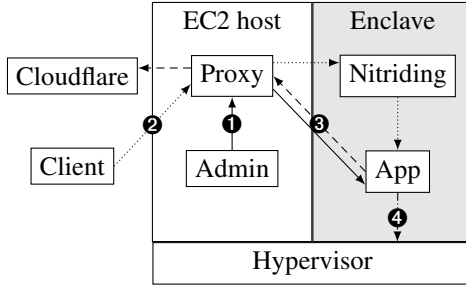


Figure 9: An overview of the enclave application that provides verifiable configuration transparency. After launching the enclave, the operator configures the confidential bearer token and zone ID (❶). Clients can then request the service provider’s Cloudflare configuration (❷). The application makes an HTTP request (containing the bearer token and zone ID) to Cloudflare’s API (❸). Finally, the application asks its hypervisor for an attestation document (❹) and embeds the attestation document in the response to the client, along with Cloudflare’s response.

```

1 FROM alpine:latest
2
3 COPY nitriding /bin/
4 COPY enclave-app /bin/
5 COPY start.sh /bin/
6
7 CMD ["start.sh"]

```

(a) A Dockerfile that embeds nitriding along with the enclave application, enclave-app.

```

1 #!/bin/sh
2
3 # Launch nitriding in the background.
4 nitriding \
5   -fqdn "example.com" \
6   -acme \
7   -appwebsrv "http://127.0.0.1:8080" &
8
9 # Launch the application.
10 enclave-app

```

(b) The start.sh shell script launches nitriding in the background, followed by launching the enclave application

Figure 8: An example of how a simple enclave application can be bundled with nitriding.

a start script to the image, followed by launching the start script, which is illustrated in Figure 8b. All the script does is first launch nitriding in the background followed by launching the enclave application. If the application builds reproducibly, it is possible to run it inside an enclave *without modifications*.

## B Architectural diagrams

Figure 9 illustrates the design of our enclave application which implements verifiable configuration transparency.