

Transformer based Urdu Handwritten Text Optical Character Reader

Mohammad Daniyal Shaiq

FAST NUCES
i191794@nu.edu.pk

Musa Dildar Ahmed Cheema

FAST NUCES
i191765@nu.edu.pk

Ali Kamal

FAST NUCES
i191865@nu.edu.pk

Abstract

Extracting Handwritten text is one of the most important components of digitizing information and making it available for large scale setting. Handwriting Optical Character Reader (OCR) is a research problem in computer vision and natural language processing computing, and a lot of work has been done for English, but unfortunately, very little work has been done for low resourced languages such as Urdu. Urdu language script is very difficult because of its cursive nature and change of shape of characters based on its relative position, therefore, a need arises to propose a model which can understand complex features and generalize it for every kind of handwriting style. In this work, we propose a transformer based Urdu Handwritten text extraction model. As transformers have been very successful in Natural Language Understanding task, we explore them further to understand complex Urdu Handwriting.

Keywords Transformers, Urdu Handwriting, OCR

1. Problem statement

In these current times, there has been an exponential growth in the adoption of technology because of the promises it makes - easy and fast access to information, accuracy, connectivity and security. Hence, there exists a need to digitize information in order to preserve, and make better use of it. One of the potential raw information which needs to be digitized, is handwritten text (HWT), especially low resource text written in low resource languages such as Urdu. Optical Character Reader (OCR) is one way to digitize printed text, but recognizing handwritten text is a challenge because of various different writing styles and other irregularities. There has been a significant amount of work done for English Handwritten Text extraction, however, the same cannot be said for low resource languages such as Urdu, which in itself has a user base of 200 million people. Additionally, Urdu has its largest user base in Pakistan, where countless businesses and other processes still involve handwritten Urdu text. Therefore, there's a need to build such programs that can digitize Urdu Handwritten text, which can impact the lives of about 200 million people. Urdu, unlike Latin languages, is written in Arabic like script, hence it is more challenging because of ligatures, joining of letters leading to change of shape, and a vast variety of writing styles.

2. Introduction

Urdu language has its second largest user base in the Indian Sub-continent, amounting to about 200 million people. The Urdu language is written in Arabic like script, Nastaleeq script. Urdu language has about 45 different characters, and these characters are joined while writing which changes their shape. This concept is known as ligatures. Urdu language has, in total, about 26,000 ligatures [39]. Due to this phenomenon, it makes it exponentially diffi-

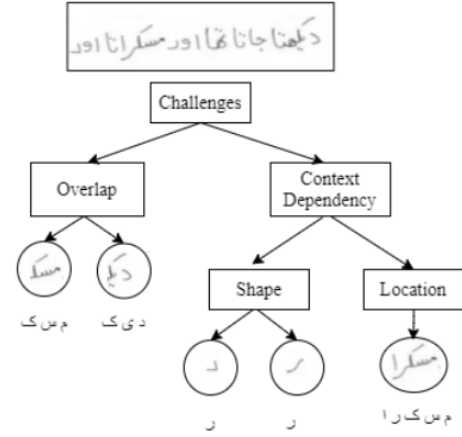


Figure 1. Challenges in extracting Urdu Script, identified by [5]

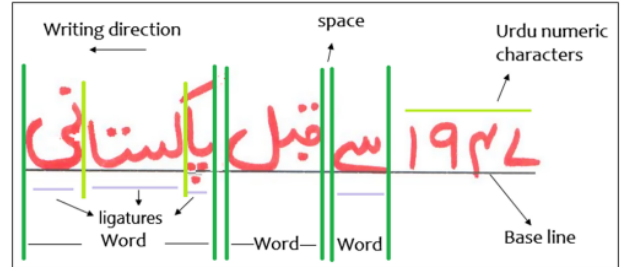


Figure 2. Different characteristics of Urdu Script

cult for OCR systems to extract characters from images. Moreover, there are other complexities in Urdu script, such as lack of word spacing, diagonal writing style, change of shape with context, and an assortment of different styles. Considering these problems in Urdu script, extracting printed Urdu text with a standardised style is a challenge for OCR systems, let alone extracting Urdu Handwritten text. Handwritten Urdu text adds more complexity to the text by adding noise, non standardised format, more overlap, unequal spacing, inconsistent shapes etc. Arabic language, which has a similar script to Urdu, has gained a lot of interest from the research community, and in fact there are many commercial products for Arabic text, but for Urdu there is only one commercially available OCR solution [39], which works only for printed Urdu

text, and so far there has been no commercial product for Urdu Handwriting. Therefore, there exists a dire need to propose a solution for extracting Urdu Handwriting, which can serve as the pillar for commercial handwriting extraction tools. However, the problem for Urdu Handwriting extraction is still in its early days, as there are only two publicly available data sets - NUST-UHWD [40] and UHWD. Written Urdu language is widely used in the Indian subcontinent, as there's still a huge gap in digital penetration in the region. Many forms, cheques, FIR documents, and many historical documents are present in written form, alongside various business processes. Due to all this, overall process from government processes to private processes are very slow, as there's a need of manual verification. Digitizing this problem will have a huge impact in the lives of many and can help organizations in providing efficient and quick service deliveries.

There are two forms of writing scripts available for languages, cursive and non-cursive. Extraction of non-cursive handwritten text is easier as compared to cursive as letters are isolated, i.e. they are not joined together, figure 1 illustrates it. Urdu language is written in cursive style, which makes it a difficult problem. There has been work done for extracting cursive style text such as Arabic, and there are many publicly available data sets for Arabic language, but they cannot be used for Urdu, because despite Arabic and Urdu being sister languages, which share an almost similar script, there exists a difference in writing style in both the languages. Urdu is written in Nastaleeq writing style and Arabic is written in Naskh writing style [32]. Nastaleeq writing style is more complex than Naskh because it has diagonality, filled loops, no fixed baseline, large variation of words/sub words and false loop. Moreover, the number of ligatures and characters in Urdu language are more than Arabic language. Therefore, the data set and OCR models for Arabic language cannot certainly satisfy Urdu language. As of now, collecting a large diverse Urdu Handwritten data set can be a huge contribution. In the handwritten text extraction problem, there are further two divisions, Online Handwriting recognition and Offline Handwriting recognition. Online Handwriting is the form of writing text on a digital pad using a stylus, while on the contrary, Offline Handwriting is written on any piece of paper. Recognizing Online Handwriting is easier, as pixel level information of the handwriting is stored in the computer, which can help in identification of text, while also removing the noise. On the other hand, Offline Handwriting is written on paper, which has no other information apart from the image itself, making it much more difficult for the computer to comprehend. Also, images contain background noise, which adds another layer of difficulty to the problem. We, in this research, worked on offline handwritten Urdu text, as very little work is done in it. Our ultimate goal is digitization of Urdu documents, forms, cheques etc. which come under the umbrella of Offline Urdu Handwriting. Lastly, the most challenging aspect of Urdu Handwriting is change of shape, with change of position or context. This is illustrated in the figure 2.

3. Related work

In [1], the authors study the problem of Urdu Handwriting detection, and identify the issue faced in extraction of Urdu handwriting as compared with other languages. Moreover, they address the problem of data scarcity in offline Urdu Handwriting extraction, in the form of a data set they collected, which handles many different handwriting styles, ligatures and writing conditions. For the data set, they use red color for handwriting as it prevents data loss during noise removal. The methodology used is that Urdu text is passed as a scanned image, afterwards noise is removed and the image is binarized using image processing techniques. Lastly, text lines are segmented, and a Deep learning model extracts the information from each text line segment. The problem of extraction

is dealt as a Sequence to Sequence problem, where a sequence of letters are generated from an input image, which is passed as a sequence. In the paper, a one directional BiLSTM is used as it retains memory for a longer sequence as compared to RNNs, and connectionist temporal classification loss (CTC) function is used as the loss function. The model predicts character by character.

In [5], the authors propose an attention based approach for Urdu Handwriting extraction. In the paper, they argue that attention based mechanisms have been successful in tasks such as machine translation, speech recognition, and image captioning, and that attention mechanism helps extract most relevant features for images. Therefore, in the Handwriting text extraction problem, it can help extracting the relevant features and context for predicting the right character. In Urdu, the shape of characters change with respect to their position and shape, hence the attention based mechanism is more relevant in that aspect. As far as methodology is concerned, the authors deal with this as a sequence to sequence problem, and the problem is dealt with an encoder decoder architecture. Firstly, a convolutional neural network is used to extract features from the Urdu Handwritten text images to get a list of vector representation of the image. Afterwards, the vectors are based into a Gated Recurrent Unit to predict the sequence of characters in the image. In the Gated Recurrent Unit, the attention mechanism is used, where a context vector is used to focus on the relevant part of the image. In this mechanism, the character is predicted based upon the previous character, the hidden state and the context vector. The context vector is also convolved with a learnable filter to smooth out the histories in the context vector. This entire part is the decoder part, and the other part is the encoder part, where an input image is encoded to vectors that can be fed into a GRU. To do this, the authors used DenseNet Convolutional Neural Network. In this specific model, the convolution is applied to all previous layers, which enables diverse learning in the model. As DenseNet model is compute intensive, bottleneck layers (which are 1 X 1 convolutions) are used inside the DenseNet model. Lastly, CTC loss function is used in the model, alongside word beam search, which is used to choose the best word given an input (i.e. looks for word with maximum probability). The authors collected their own data set with the help of 100 writers to evaluate their model. They compared their model with non attention based encoder decoder model, and their model ended up outperforming all the non attention based models.

In [33], the authors firstly collect an Urdu Handwritten text data set. In the paper, the authors explain the 3 entire data preprocessing phase for Urdu Handwriting extraction. The first phase is segmenting text by drawing bounding boxes on the handwritten text in the images. Afterwards, the segmented text is normalized, binarized, and denoised for text extraction. Moreover, the problem of text extraction is dealt as a classification problem, where the input is passed through a convolutional neural network, and in the last layer, there is a Fully connected layer which predicts characters in the image.

In [40], the authors propose an unconstrained dataset for Urdu handwriting that covers more than 73 Urdu ligatures, NUST-UHW. Moreover, the authors also propose an encoder decoder architecture, which deals with this problem as sequence to sequence problem. In the paper, the authors argue that Urdu Handwritten text contains very complex features that are crucial for predicting the characters in the image, therefore low resolution images cannot perform really well. To solve this issue, the author uses high resolution images for Urdu Handwritten text. The images are first encoded into vectors by passing it into a Convolutional Neural Network. In the CNN, the high resolution images are needed to be brought down to low resolution. Max pool layers are used to achieve this. The issue with Max pool layers is that it can lead to loss of data from the image. To address this issue, the authors concatenate the output in the

last layers, instead of Max pooling. This saves information in the last layers as the last layers in CNN hold deeper information about the image. Afterwards, the output from CNN is passed into multiple BiLSTM layers, where again vectors are concatenated. Moreover, an n-gram model is used to correct the language of the output from the BiLSTM layer. For the loss, CTC loss function is used with beam search for predicting the correct word. Also, to diversify the data during training time, a random noise layer is added before the CNN, to add random noise to the image so that at every training step a different image is sent to the model.

4. Methodology

4.1 Dataset

In this research work, we use the Dataset collected by Punjab University College of Information technology titled as PUCIT - Offline Urdu Handwritten Urdu Lines Dataset[5]. The dataset is a multiple line written dataset written by 100 writers. In the dataset, text lines from the long written paragraphs. The dataset considers the slant nature of writing style in Urdu language. The dataset contains 7309 Urdu text lines and 78,870 Urdu words. Lastly, the dataset is available for only non-commercial academic purpose

4.2 Preprocessing

The images in the dataset were not normalized, there were images with different sizes and channels. We standardised it by applying image processing techniques. Moreover, we also applied some image binarization techniques for better results.

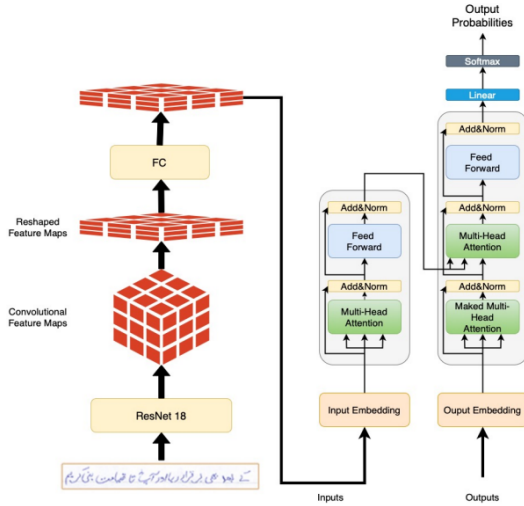


Figure 3. Resnet-Transformer Model Architecture for Urdu Handwriting Extraction

4.3 Procedure

We addressed this problem as a sequence to sequence problem, just like in the previous studies, but instead of using LSTMs or RNN, we used Transformer architecture [41] for predicting the text in the image. Transformer architecture has been popular in the NLP domain as it was able to provide state of the art results in NLP tasks, such as Machine Translation, Question Answering, Named Entity Recognition, Language modeling etc. Transformers are quite good in understanding inter language dependencies, and it also learns a language model for output text. In the transformer architecture,

there are two blocks, encoder and decoder. In the encoder part, there's a self attention mechanism, which focuses on different features of the input for every segment of the input image, whereas in the decoder part there is causal attention mechanism, that only looks into the previous tokens. There also exists attention mechanism between the encoder and decoder. These attention mechanisms can help handwriting problem by focusing on important part of the image for predicting the characters, as Urdu characters are context dependent. Moreover, the language modeling capability of Transformers can help in correct language prediction in the same pass as text extraction. There's no need of separate language model. Moreover, RNNs are not parallelizable, but transformers are parallelizable, which can make training large models scalable. Before passing an input image to a transformer, it needs to be converted into a sequence of vectors as it is required by the transformer architecture, so we used ResNet[22] 18 architecture for extracting high dimensional features from the input image. As Urdu is a complex language, there is a need for extracting complex features, for which ResNet does a good job, as in ResNet there are residual blocks, which retain the information of previous layers as we go deep into the network, so information is not lost. The problem is dealt as a classification problem, where a sequence of characters will be predicted from the Transformer layer.

In this approach, we first take an image, and pass it through a Resnet18 model to extract important features from the image. Afterwards, we pass the output of the Resnet18 model into Linear layers (we tried different combinations) to get a vector (embeddings) representation of the images. We then passed these representations into the transformer model. The transformer model predicts character by character. We trained the model with masking the target. Resnet18 model was pretrained on imagenet, which was finetuned during the training process, while on the other hand transformer was built from scratch without any pretrained weights.



Figure 4. Sample Input and ground truth for training of dataset by [5]

5. Evaluation and Experiments

For the evaluation, we used character error rate (CER) between input and output text. It is illustrated below.

$$CER = \frac{ins + sub + del}{n} \times 100 \quad (1)$$

It is the number of insertions, substitutions, and deletions required to transform output text into the target label. While n is the number of characters in the target label. This equation can also be used to calculate word error rate. The model will be considered good if it achieves low CER or WER.

The model was ran on a machine with the following specifications:

Processor: AMD Ryzen 5 3600 @4.2 GHz 6 Cores/12 Threads
RAM: 32GB DDR4 3200 MHz
GPU: Nvidia GeForce RTX 3070 Ti 8GB

Despite transformers showing great results in Natural Language Understanding, there exists one limitation, that it needs huge amounts of data to train. Unfortunately, that is the limitation of our research, as there is a substantial lack of availability of large Urdu handwritten text datasets. We trained our model for around 12 hours, however, it didn't converge. Due to very limited data, we achieved more than 85% error rate. In our research, we were able to explore transformer architecture for handwritten text extraction, but due to a lack of large datasets, we were not able to achieve good CER. Moreover, we trained the transformer on character level, due to which output sequence had a huge length, which may be the reason for not fitting well on the data. In the future, we can test on pretrained models, where we can use a pretrained Urdu Language decoder, and train our image feature extractor for better results. Lastly, our research has opened pathways for researchers to work on transformer based OCR for low resource languages, such as Urdu.

Acknowledgments

Firstly, we would like to thank Almighty Allah (S.W.T) for granting us the strength to work on this project. Moreover, we would like to thank the contributors to the Urdu datasets that we employed the use of. Lastly, we would like to thank our instructor, Dr. Mirza Omer Beg for giving us the opportunity to work on this problem, while making us stay motivated throughout the entire semester.

References

- [1] S. Ahmed, S. Naz, S. Swati, and M. Razzak. Handwritten urdu character recognition using 1-dimensional blstm classifier. *Neural Computing and Applications*, 31, 04 2019. .
- [2] R. Ali, U. Farooq, U. Arshad, W. Shahzad, and M. O. Beg. Hate speech detection on twitter using transfer learning. *Computer Speech & Language*, 74:101365, 2022.
- [3] H. M. Alvi, H. Sahar, A. A. Bangash, and M. O. Beg. Insights: A tool for energy aware software development. In *2017 13th International Conference on Emerging Technologies (ICET)*, pages 1–6. IEEE, 2017.
- [4] H. M. Alvi, H. Majeed, H. Mujtaba, and M. O. Beg. Mlee: Method level energy estimation—a machine learning approach. *Sustainable Computing: Informatics and Systems*, 32:100594, 2021.
- [5] T. Anjum and N. Khan. An attention based method for offline handwritten Urdu text recognition. In *International Conference on Frontiers in Handwriting Recognition (ICFHR)*, September 2020.
- [6] T. Anwar and O. Baig. Tac at semeval-2020 task 12: Ensembling approach for multilingual offensive language identification in social media. In *Proceedings of the Fourteenth Workshop on Semantic Evaluation*, pages 2177–2182, 2020.
- [7] M. U. Arshad, M. F. Bashir, A. Majeed, W. Shahzad, and M. O. Beg. Corpus for emotion detection on roman urdu. In *2019 22nd International Multi-topic Conference (INMIC)*, pages 1–6. IEEE, 2019.
- [8] M. Asad, M. Asim, T. Javed, M. O. Beg, H. Mujtaba, and S. Abbas. Deepdetect: detection of distributed denial of service attacks using deep learning. *The Computer Journal*, 63(7):983–994, 2020.
- [9] M. N. Awan and M. O. Beg. Top-rank: a topicalpositionrank for extraction and classification of keyphrases in text. *Computer Speech & Language*, 65:101–116, 2021.
- [10] A. A. Bangash, H. Sahar, and M. O. Beg. A methodology for relating software structure with energy consumption. In *2017 IEEE 17th International Working Conference on Source Code Analysis and Manipulation (SCAM)*, pages 111–120. IEEE, 2017.
- [11] M. F. Bashir, A. R. Javed, M. U. Arshad, T. R. Gadekallu, W. Shahzad, and M. O. Beg. Context aware emotion detection from low resource urdu language using deep neural network. *Transactions on Asian and Low-Resource Language Information Processing*, 2022.
- [12] M. Beg. Critical path heuristic for automatic parallelization. *University of Waterloo, David R. Cheriton School of Computer Science, Technical Report CS-2008-16*, 2008.
- [13] M. Beg and P. v. Beek. A constraint programming approach for integrated spatial and temporal scheduling for clustered architectures. *ACM Transactions on Embedded Computing Systems (TECS)*, 13(1): 1–23, 2013.
- [14] M. Beg and M. Dahlin. A memory accounting interface for the java programming language. *Technical Report CS-TR-01-40, University of Texas at Austin*, 2001.
- [15] M. Beg and P. Van Beek. A graph theoretic approach to cache-conscious placement of data for direct mapped caches. In *Proceedings of the 2010 international symposium on Memory management*, pages 113–120, 2010.
- [16] M. Beg and P. Van Beek. A constraint programming approach for instruction assignment. In *2011 15th Workshop on Interaction between Compilers and Computer Architectures*, pages 25–34. IEEE, 2011.
- [17] M. O. Beg. Combinatorial problems in compiler optimization. 2013.
- [18] M. O. Beg, M. N. Awan, and S. S. Ali. Algorithmic machine learning for prediction of stock prices. In *FinTech as a Disruptive Technology for Financial Institutions*, pages 142–169. IGI Global, 2019.
- [19] N. Dilawar, H. Majeed, M. O. Beg, N. Ejaz, K. Muhammad, I. Mehmood, and Y. Nam. Understanding citizen issues through reviews: A step towards data informed planning in smart cities. *Applied Sciences*, 8(9):1589, 2018.
- [20] M. U. Farooq, M. O. Beg, et al. Bigdata analysis of stack overflow for energy consumption of android framework. In *2019 International Conference on Innovative Computing (ICIC)*, pages 1–9. IEEE, 2019.
- [21] M. U. Farooq, S. U. R. Khan, and M. O. Beg. Melta: A method level energy estimation technique for android development. In *2019 International Conference on Innovative Computing (ICIC)*, pages 1–10. IEEE, 2019.
- [22] K. He, X. Zhang, S. Ren, and J. Sun. Deep residual learning for image recognition. *CoRR*, abs/1512.03385, 2015. URL <http://arxiv.org/abs/1512.03385>.
- [23] S. Ismail, H. Mujtaba, and M. O. Beg. Spems: A sustainable parasitic energy management system for smart homes. *Energy and Buildings*, 252:111429, 2021.
- [24] A. R. Javed, M. O. Beg, M. Asim, T. Baker, and A. H. Al-Bayatti. Al-phallogger: Detecting motion-based side-channel attack using smart-phone keystrokes. *Journal of Ambient Intelligence and Humanized Computing*, pages 1–14, 2020.
- [25] A. R. Javed, M. U. Sarwar, M. O. Beg, M. Asim, T. Baker, and H. Tawfik. A collaborative healthcare framework for shared healthcare plan with ambient intelligence. *Human-centric Computing and Information Sciences*, 10(1):1–21, 2020.
- [26] H. T. Javed, M. O. Beg, H. Mujtaba, H. Majeed, and M. Asim. Fairness in real-time energy pricing for smart grid using unsupervised learning. *The Computer Journal*, 62(3):414–429, 2019.
- [27] M. S. Javed, H. Majeed, H. Mujtaba, and M. O. Beg. Fake reviews classification using deep learning ensemble of shallow convolutions. *Journal of Computational Social Science*, 4(2):883–902, 2021.
- [28] M. Karsten, S. Keshav, S. Prasad, and M. Beg. An axiomatic basis for communication. *ACM SIGCOMM Computer Communication Review*, 37(4):217–228, 2007.
- [29] H. S. Khawaja, M. O. Beg, and S. Qamar. Domain specific emotion lexicon expansion. In *2018 14th International Conference on Emerging Technologies (ICET)*, pages 1–5. IEEE, 2018.
- [30] A. Majeed, H. Mujtaba, and M. O. Beg. Emotion detection in roman urdu text using machine learning. In *Proceedings of the 35th IEEE/ACM International Conference on Automated Software Engineering Workshops*, pages 125–130, 2020.

- [31] H. Majeed, A. Wali, and M. Beg. Optimizing genetic programming by exploiting semantic impact of sub trees. *Swarm and Evolutionary Computation*, 65:100923, 2021.
- [32] S. K. Malik. Sa, “urdu online handwriting recognition”, emerging technologies, 2005. In *Proceedings of the IEEE Symposium on Volume, Issue*, pages 17–18, 2005.
- [33] F. Mushtaq, M. M. Misgar, M. Kumar, and S. S. Khurana. Urdu-deepnet: Offline handwritten urdu character recognition using deep neural network. *Neural Comput. Appl.*, 33(22):15229–15252, nov 2021. ISSN 0941-0643. . URL <https://doi.org/10.1007/s00521-021-06144-x>.
- [34] B. Naeem, A. Khan, M. O. Beg, and H. Mujtaba. A deep learning framework for clickbait detection on social area network using natural language cues. *Journal of Computational Social Science*, pages 1–13, 2020.
- [35] S. Naeem, M. Iqbal, M. Saqib, M. Saad, M. S. Raza, Z. Ali, N. Akhtar, M. O. Beg, W. Shahzad, and M. U. Arshad. Subspace gaussian mixture model for continuous urdu speech recognition using kaldii. In *2020 14th International Conference on Open Source Systems and Technologies (ICOSST)*, pages 1–7. IEEE, 2020.
- [36] S. Qamar, H. Mujtaba, H. Majeed, and M. O. Beg. Relationship identification between conversational agents using emotion analysis. *Cognitive Computation*, pages 1–15, 2021.
- [37] H. Sahar, A. A. Bangash, and M. O. Beg. Towards energy aware object-oriented development of android applications. *Sustainable Computing: Informatics and Systems*, 21:28–46, 2019.
- [38] M. Tariq, H. Majeed, M. O. Beg, F. A. Khan, and A. Derhab. Accurate detection of sitting posture activities in a secure iot based assisted living environment. *Future Generation Computer Systems*, 92:745–757, 2019.
- [39] A. Ul-Hasan, S. B. Ahmed, F. Rashid, F. Shafait, and T. M. Breuel. Offline printed urdu nastaleeq script recognition with bidirectional lstm networks. In *Proceedings of the 2013 12th International Conference on Document Analysis and Recognition, ICDAR ’13*, page 1061–1065, USA, 2013. IEEE Computer Society. ISBN 9780769549996. . URL <https://doi.org/10.1109/ICDAR.2013.212>.
- [40] N. ul Sehr Zia, M. F. Naeem, S. M. K. Raza, M. M. Khan, A. Ul-Hasan, and F. Shafait. A convolutional recursive deep architecture for unconstrained urdu handwriting recognition. *Neural Computing and Applications*, 34(2):1635–1648, sep 2021. . URL <https://doi.org/10.1007>.
- [41] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. Kaiser, and I. Polosukhin. Attention is all you need. *CoRR*, abs/1706.03762, 2017. URL <http://arxiv.org/abs/1706.03762>.
- [42] A. Zafar, H. Mujtaba, M. O. Beg, and S. Ali. Deceptive level generator. In *AIIDE Workshops*, 2018.
- [43] A. Zafar, H. Mujtaba, S. Ashiq, and M. O. Beg. A constructive approach for general video game level generation. In *2019 11th Computer Science and Electronic Engineering (CEECE)*, pages 102–107. IEEE, 2019.
- [44] A. Zafar, H. Mujtaba, M. T. Baig, and M. O. Beg. Using patterns as objectives for general video game level generation. *ICGA Journal*, 41(2):66–77, 2019.
- [45] A. Zafar, H. Mujtaba, and M. O. Beg. Search-based procedural content generation for gvg-1g. *Applied Soft Computing*, 86:105909, 2020.