

On the Permanence of Backdoors in Evolving Models

Huiying Li¹ Arjun Nitin Bhagoji¹ Yuxin Chen¹ Haitao Zheng¹ Ben Y. Zhao¹

Abstract

Existing research on training-time attacks for deep neural networks (DNNs), such as backdoors, largely assumes that models are static once trained, and hidden backdoors trained into models remain active indefinitely. In practice, models are rarely static but evolve continuously to address distribution drifts in the underlying data. This paper explores the behavior of backdoor attacks in **time-varying models**, whose model weights are continually updated via fine-tuning to adapt to data drifts. Our theoretical analysis shows how fine-tuning with fresh data progressively “erases” the injected backdoors, and our empirical study illustrates how quickly a time-varying model “forgets” backdoors under a variety of training and attack settings. We also show that novel fine-tuning strategies using smart learning rates can significantly accelerate backdoor forgetting. Finally, we discuss the need for new backdoor defenses that target time-varying models specifically.

1. Introduction

Deep neural networks (DNNs) are vulnerable to backdoor attacks, where attackers corrupt training data in order to introduce incorrect model behavior on inputs with specific characteristics (Chen et al., 2017; Gu et al., 2017; Liu et al., 2018b). Backdoors are challenging to detect and mitigate, and are considered the most worrisome attacks by industry practitioners (Kumar et al., 2020b). Existing proposals to detect and mitigate backdoors (e.g., (Gao et al., 2019; Liu et al., 2018a; 2019; Tran et al., 2018; Wang et al., 2019a)) fall short when examined in a variety of attack settings, including transfer learning (Yao et al., 2019), federated learning (Bhagoji et al., 2019; Bagdasaryan et al., 2020; Wang et al., 2020; Xie et al., 2019) and physical attack scenarios (Lin et al., 2020; Wenger et al., 2021).

Existing works on backdoor attacks and defenses share a common assumption: the model, once trained, will never

¹University of Chicago. Correspondence to: Huiying Li <huiyingli@cs.uchicago.edu>.

change. As such, an injected backdoor will stay in the model permanently. In reality, however, deployed models rarely if ever remain static, but continuously evolve to incorporate more labeled data or adapt to drifts in the underlying data distribution (Kumar et al., 2020a; Nahar et al., 2022; Zhang et al., 2020). As the target distribution shifts, a static model will continue to drop in performance over time.

In this work, we study the permanence of backdoor attacks on **time-varying models**, models that are periodically updated with new training data. Specifically, we consider time-varying models updated regularly via fine-tuning¹, the most widely used method for addressing data distribution drifts (Yosinski et al., 2014; Weiss et al., 2016). We note that existing studies on backdoors have shown that fine-tuning is ineffective as a defense against backdoors, i.e., it fails to remove backdoors from a static model (Liu et al., 2018a). In contrast, our work asks a different question:

“For time-varying models that are periodically updated via fine-tuning, how long can backdoors survive before they are removed or become ineffective?”

Given the lack of robust defenses against backdoor attacks, it is important to first understand the temporal behavior of backdoors as the models evolve themselves.

Our Contributions. In this paper, we report results from a comprehensive study on the permanence of backdoors in time-varying models periodically updated by fine-tuning. Our work makes four key contributions:

(1) We present the first theoretical analysis of backdoor and model behavior during periodic fine-tuning. Our analysis shows that with sufficient training, fine-tuning can remove backdoors inside corrupted models, while more training updates and larger learning rates can accelerate the forgetting process. We also show, for the first time, that the number of iterations required to fine-tune the model to recover benign behavior and proportion of poisoned training data, thus theoretically linking the model convergence and poisoning ratios.

¹While there are multiple ways of updating time-varying models, including transfer learning/fine-tuning, online (incremental) learning and domain adaptation (Hoi et al., 2021; 2014; Read et al., 2012; Sahoo et al., 2018; Yoon et al., 2018), we choose to focus on fine-tuning due to its generality and wide adoption. We leave the study on other model updating methods to future work.

(2) We take an empirical approach to study the behavior of backdoors in time-varying models with complex and realistic training dynamics. We quantify how embedded backdoors gradually degrade in time-varying models until they are “forgotten” and become ineffective. We define a new metric called **backdoor survivability** on time-varying models, and explore the impact of poison ratio, trigger evasiveness and benign data shifts on backdoor survivability.

(3) Leveraging insights from our theoretical analysis, we show that well-chosen training strategies can significantly reduce the backdoor survivability with negligible overhead.

(4) We discuss the need of new backdoor defenses under the time-varying setting, because most existing defense mechanisms cannot be directly adapted to the time-varying setting.

2. Background and Related Works

In this section, we provide the necessary background on backdoor attacks and time-varying DNN models.

2.1. Backdoor Attacks

Backdoors are the most common and effective form of data poisoning attacks, and also the most concerning type of attacks against machine learning systems (Kumar et al., 2020b). The initial backdoor attacks assume the attacker only has access to the training data (Gu et al., 2017; Chen et al., 2017). Later work proposes a rich set of attack variants which consider stronger attackers with white-box access to the models and training process (Liu et al., 2018b; Yao et al., 2019; Nguyen & Tran, 2020; Tang et al., 2020; Liu et al., 2020; Pang et al., 2020). Table 1 in Appendix summarizes the SOTA attacks and their threat models.

Backdoor attacks are also stealthy and hard to detect. Unlike traditional poisoning attacks (Biggio et al., 2012; Xiao et al., 2012; Steinhart et al., 2017), backdoors typically do not affect normal model accuracy, and only cause misclassification on inputs containing attack-specific triggers. While significant efforts were spent on detecting and removing backdoors on DNN models (e.g., (Gao et al., 2019; Tran et al., 2018; Liu et al., 2018a; Wang et al., 2019a; Liu et al., 2019; Qiao et al., 2019)), they all face major limitations (Gao et al., 2020; Veldanda & Garg, 2020).

2.2. Time-Varying Models

Machine learning models are usually trained based on the assumption that the distribution of training and test data is identical. In practice, this is often not true. Test data can come from distributions that have drifted away from the training data distribution, and this can significantly affect model accuracy (Patel et al., 2015; Wang & Deng, 2018).

It is common practice to update a deployed model over time in order to handle distribution drifts (GoogleCloud, 2023;

Tajbakhsh et al., 2016; Kumar et al., 2020a; Nahar et al., 2022). Numerous methods have been proposed to address data distribution drifts, including transfer learning (Torrey & Shavlik, 2010; Yosinski et al., 2014; Weiss et al., 2016; Zhuang et al., 2020), online (incremental) learning (Read et al., 2012; Sahoo et al., 2018; Hoi et al., 2021; Chen et al., 2021) and domain adaptation (Ganin & Lempitsky, 2015; Sankaranarayanan et al., 2018; Liu et al., 2021).

Poisoning attacks on time-varying models. Recent work has studied non-backdoor poisoning attacks on time-varying models, specifically online learning (Wang & Chaudhuri, 2018; Wang et al., 2019b; Pang et al., 2021). These attacks aim at lowering normal model accuracy.

2.3. Model Fine-Tuning

Fine-tuning in transfer learning. Fine-tuning is widely used in the context of transfer learning (Yosinski et al., 2014), where the model trainer starts from a pretrained (teacher) model and updates the model using fresh training data at a small learning rate. Fine-tuning is significantly faster than training-from-scratch, e.g., training AlexNet via fine-tuning takes an hour (Liu et al., 2018a) but > 6 days when training-from-scratch (Iandola et al., 2016).

Fine-tuning as a defense against backdoor attacks. Previous studies have shown that fine-tuning is an ineffective and unstable defense against backdoor attacks (Liu et al., 2018a; Pang et al., 2022), although these studies only considered static models.

To the best of our knowledge, there is no prior study on the behavior/effectiveness of backdoors in time-varying models, where models are periodically updated using fine-tuning and fresh data to handle data drifts. This motivated our study.

3. Definitions and Threat Model

We introduce definitions of time-varying model and backdoor attacks, as well as the threat model for our study. We focus on image-based classification tasks.

3.1. Definitions

Time-varying models. We refer to models that change over time as time-varying models and define them below:

Definition 3.1 (Time-varying models). A time-varying model F , observed between time 0 and t , is a sequence of models $\{F_{\theta_i}\}_{i=0}^t$ trained from sequentially available data $\{D_i\}_{i=0}^t$ such that after the i^{th} update, the model $F_{\theta_i} = g(\{D_k\}_{k \leq i}, \{F_k\}_{k < i})$. Here $g(\cdot)$ is any training function. The new training data available at the i^{th} update (D_i) is drawn from a distribution $\mathcal{D}_i$.

We note that model updates can come from different learning paradigms such as transfer learning, online (incremental) learning, and domain adaptation. In this paper, we focus on

model fine-tuning (transfer learning), as it is the most basic and common way to update time-varying models.

Backdoor attacks. We define a backdoor attack by its trigger with a patch function $\text{PATCH}(\cdot)$ on the inputs, a target label y_t , and a poison ratio (α) where α defines the fraction of training data modified by the attacker. By injecting a collection of poisoned training data $\{(\text{PATCH}(x), y_t) | (x, y) \sim D, y \neq y_t\}$, the attacker is able to inject trigger-specific classification rules into the trained model by minimizing the poison loss:

$$\begin{aligned} L_p(\theta) &= \mathbb{E}_{(x,y) \sim D | y \neq y_t} [\ell_p((x, y), F_\theta)] \\ &= \mathbb{E}_{(x,y) \sim D | y \neq y_t} [\ell(y_t, F_\theta(\text{PATCH}(x)))] \end{aligned} \quad (1)$$

3.2. Threat Model

We use the standard threat model of backdoor attacks where the attacker is only able to control or modify a fraction of the model training data, and has no knowledge of the model architecture, weights, or training hyperparameters and no control of the training process during initial model training and subsequent model updates.

We focus on **one-shot poisoning** where the attacker is only able to poison the training data once. Without loss of generality, we consider two cases: (i) the attacker poisons D_0 and injects a backdoor into F_{θ_0} , the initial model prior to deployment; and (ii) the attacker poisons the data used by a model update D_i and thus injects a backdoor into F_{θ_i} (via fine-tuning). Without loss of generality, we consider $i = 1$.

We note that more powerful attackers can always continuously poison the training data used by subsequent model updates ($\{D_i\}_{i>0}$). Such persistent poisoning increases backdoor survivability (detailed results in Appendix C.2).

4. Theoretical Analysis of Backdoor Attacks during Fine-tuning

In this section, we first state a general proposition on the need of model fine-tuning in the presence of distribution drifts. We then show that for strongly convex loss functions, backdoors can be removed through sufficient fine-tuning with data from the original distribution. Larger learning rates can accelerate this process. However, the number of iterations required is influenced by the proportion of poisoned training data.

It is a well-established result that when the test distribution does not match the training distribution, the model has to be fine-tuned or re-trained for better generalization performance. Formally, the need for model fine-tuning is reflected in the following proposition (Ben-David et al., 2010; Kumar et al., 2020a).

Proposition 4.1 (Need for fine-tuning with distribution drift). *Let $\theta_t^* = \arg \min_{\theta} L_{D_t}(\theta)$ and $\theta_{t-1}^* =$*

$\arg \min_{\theta} L_{D_{t-1}}(\theta)$. Then, $L_{D_t}(\theta_{t-1}^) \geq L_{D_t}(\theta_t^*)$.*

In the following, we analyze the impact of model fine-tuning on backdoor attacks, under the special setting of one-shot poisoning with *strongly convex* loss functions.

Theoretical setting. We assume the classifiers θ lie in a convex set Θ are norm-bounded by B . Both the loss functions ℓ and ℓ_p are strongly convex and γ -smooth with parameters (σ_b, γ_b) and (σ_p, γ_p) respectively. A function f is σ -strongly convex if $(\nabla f(x) - \nabla f(y))^\top (x - y) \geq \sigma \|x - y\|^2$. A differentiable function is γ -smooth if $\|\nabla f(x) - \nabla f(y)\| \leq L \|x - y\|$. We define $L_D(\theta) = \mathbb{E}_{(x,y) \sim D} [\ell((x, y), F_\theta)]$. The attacker trains a poisoned classifier θ_{mix} using a composite loss function $L_{\text{mix}}(\theta) = \alpha L_p(\theta) + (1 - \alpha) L_{D_0}(\theta)$, where α represents the fraction of poisoned data. Proofs for the results in this section are deferred to Appendix A.

We first provide an upper bound on the distance between the poisoned model θ_{mix} and the one trained on the benign distribution, i.e., $\theta_0^* = \arg \min_{\theta} L_{D_0}(\theta)$.

Lemma 4.2. $\|\theta_{\text{mix}} - \theta_0^*\| \leq \frac{\alpha \|\nabla L_p(\theta_0^*)\|}{\alpha \sigma_p + (1 - \alpha) \sigma_b}$.

Note that the upper bound in Lemma 4.2 is a monotonically increasing function of α . The following theorem establishes the convergence rate of stochastic gradient descent for model fine-tuning, assuming that the model is initialized with the poisoned model $\theta_{\text{mix}} = \arg \min_{\theta} L_{\text{mix}}(\theta)$.

Theorem 4.3 (Effectiveness of model fine-tuning for backdoor removal). *Fine-tuning θ_{mix} with stochastic gradient descent with a learning rate of $\eta = \frac{1}{\sigma_b t}$ on D_0 leads to a classifier $\hat{\theta}$ which is ϵ -close to $\theta_0^* = \arg \min_{\theta} L_{D_0}(\theta)$ in $\frac{\alpha \gamma_p}{\epsilon(\alpha \sigma_p + (1 - \alpha) \sigma_b)}$ iterations.*

According to Theorem 4.3, fine-tuning with clean data will remove the backdoor from the poisoned model with sufficient fine-tuning. Intuitively, the model recovers more from the backdoor attack (i.e. gets closer to the benign minimum) with more iterations. However, the stronger the poisoning is, the greater the number of iterations that will be needed to converge to the benign minimum.

Corollary 4.4 (Large initial learning rates speed up backdoor removal). *Using an adaptive learning rate of $\eta_t = \frac{1}{\sigma_b t}$ leads to the fastest rate of convergence to θ_0^* .*

Given limited training resources in reality, we could use a smarter learning rate during the training to speed up the backdoor removal process as shown in Corollary 4.4.

5. Backdoor Survivability against Periodic Model Fine-Tuning

Following our theoretical analysis in §4, we now conduct an empirical study examining the behavior of backdoors

in time-varying models with more complex and realistic training dynamics. We investigate backdoor attacks on state-of-the-art DNNs which are updated through fine-tuning over time to handle data distribution shifts. To the best of our knowledge, this is the first study to comprehensively investigate the effects of periodically updating models through fine-tuning on backdoor attacks.

We formulate our empirical study to examine the “survivability” of a successfully injected backdoor against subsequent model updates, and how backdoor survivability is affected by different attack configurations, data drift behaviors, and model update strategies. We believe these results offer a more in-depth understanding of the behavior of backdoor attacks against production models, in terms of both attack overhead and damage to the models. Later in §6 we leverage these insights to build model training/updating strategies that further reduce backdoor survivability.

In the following, we first introduce the experimental setup (§5.1), and a formal definition of backdoor survivability and some initial observations (§5.2). We present the detailed results in §5.3 – §5.4.

5.1. Experimental Setup

We now describe the configuration of our empirical study to examine backdoor survivability.

Datasets. To build a controlled pipeline for our dynamic data environment, we propose two semi-synthetic datasets for image classification: MNIST (LeCun et al., 1998) and CIFAR10 (Krizhevsky et al., 2009). For each task, we randomly split its training data into two halves. The first half is assigned as D_0 and used to train the initial model F_0 . The second half and the test data are used to emulate the dynamic data environment, where both the training and test data distributions vary over time.

In this work, we produce parameterized data dynamics by applying image transformations progressively (i.e., changing angle for MNIST and hue, brightness, saturation for CIFAR10²), similar to the method used by (Kumar et al., 2020a) to study gradual domain adaptation. We note that these semi-synthetic datasets cannot capture the exact data distribution in the wild, but the drifts are controllable and we can launch fine-grained empirical study on them.

In our experiments, the default data drift p between any two consecutive updates is caused by changing the angle of the current images by a factor of 4° on MNIST and the hue of the current images by a factor of 0.02 on CIFAR10.

²We do not change angles for CIFAR10 given rotating the images from CIFAR10 will lose information from the original images and we do not change hue, brightness, saturation for MNIST since MNIST is mostly black and white and applying these transformation does little change on it.

These drifts, if not addressed, cause significant degradation to model performance (e.g., the classification accuracy drops from 99% to **46%** after 15 rounds of angle change for MNIST and 92% to **74%** after 15 rounds of hue change for CIFAR10 as shown in Figure 10 in Appendix C.1). This is consistent with Proposition 4.1 in our theoretical analysis. More details on distribution drifts are listed in Appendix B.

DNN models and updates. We present the results on the ResNet-9 (Ilyas et al., 2022) model architecture. We also verify our results on ResNet18 (He et al., 2016) and DenseNet121 (Huang et al., 2017) and find that they produce the same trends on backdoor survivability. For brevity, we only present the results for ResNet-9, which is optimized for fast training. For both CIFAR10 and MNIST, we train the initial model F_0 to reach a high normal classification accuracy: 92% for CIFAR10 and 99% for MNIST.

We consider fine-tuning as the model update strategy due to its efficiency and practicality (as discussed in §2.3). At the i^{th} ($i > 0$) update, we fine-tune model F_{i-1} using new training data D_i to produce F_i , by applying stochastic gradient descent (SGD) with weight decay and momentum. We set the default learning rate to 0.01. More details of model training and updating are listed in Appendix B.

Attack configuration. We consider 3 attacks which have the same threat model as ours: Badnets (Gu et al., 2017), Blend (Chen et al., 2017), and Wanet (Nguyen & Tran, 2021). By default, the attacker is able to poison 10% of the training data D_i . Figure 1 gives an example of backdoor data for the 3 different attacks on CIFAR10. We conduct detailed experiments to explore the impact of poison ratio and trigger stealthiness in §5.3. For all our experiments (except the experiments varying poison ratios), we ensure that the backdoor, when injected into the initial model (F_0), is effective, i.e., its attack success rate is at least 99% without affecting the model’s normal accuracy.

For each experiment, we first generate five different trained F_0 instances at random. Then for each instance, we run 15 model updates with even data distribution drifts with step p after the initial training. We report the average results over the 5 instances. We run all the experiments using the FFCV library (Leclerc et al., 2022) on an NVIDIA TITAN RTX GPU with 24,576MB GPU memory.

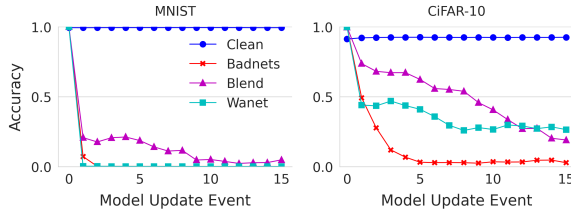
5.2. Defining Backdoor Survivability

We define the survivability of a backdoor as the “window of vulnerability” it produces on the target time-varying models after the poisoning stops:

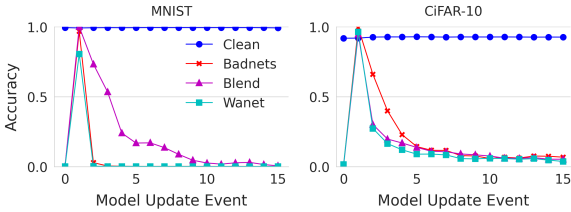
Definition 5.1 (γ -survivability of a backdoor attack). The γ -survivability of a backdoor is the maximum number of subsequent model updates once the poisoning stops, during which the attack success rate on the target model remains above a threshold γ .



Figure 1. Examples of benign and poisoned training data and their magnified ($\times 3$) residual map with labels generated by the three attacks (Badnets (Gu et al., 2017), Blend (Chen et al., 2017), Wanet (Nguyen & Tran, 2021)) on CIFAR10.



(a) One-shot poison in D_0 (Model Update Event 0)



(b) One-shot poison in D_1 (Model Update Event 1)

Figure 2. Normal accuracy and attack success rate for one shot poisoning using different attack methods on MNIST and CIFAR10. ‘Clean’ represents the average normal accuracy (averaged on 15 models, 5 for each attack method), ‘Badnets’, ‘Blend’ and ‘Wanet’ represent the attack success rate for each attack method.

Here γ can vary depending on the definition of “model vulnerability”. Researchers can choose different γ according to the context and application. In this paper, we choose $\gamma = 0.5$. We report the 0.5-survivability for the 14 subsequent model updates after a backdoor is injected for equal comparison between injection to D_0 and D_1 ($\max(\gamma - \text{survivability}) = 14$).

Initial observations. For one-shot poisoning attacks, our initial hypothesis is that the attack success rate should always decrease over time, because as more benign samples are used to train the model, the influence of the poisoned samples should reduce which aligns with our theoretical results (Theorem 4.3). Figure 2 confirms that for all three attacks on both datasets, the backdoor gradually degrades when the model is fine-tuned to learn new (benign) data,

once the poison stops (both for poisoning D_0 and D_1). At the same time, we can see that the normal accuracy stays at the same level during model fine-tuning with data distribution drifts. Thus, we omit the normal accuracy and only report backdoor survivability in the following sections for direct comparison over different attack and training settings.

5.3. Impact of Attack Configurations

We now present the results of γ -survivability under different attack strategies and configurations.

As discussed in §3.2, we consider two attack scenarios based on how backdoors are injected into the target model. The attacker can (i) poison D_0 to inject a backdoor to the original model F_0 via training from scratch (or full training); or (ii) poison D_1 to inject a backdoor to F_1 via fine-tuning. While both can inject backdoors successfully³, we want to understand how injection methods affect the backdoors’ survivability against model updates. We are also interested in if/how backdoor survivability is affected by attacker-side parameters, including poison ratio and trigger evasiveness.

We make 4 key observations from our results.

Fine-tuning based model updates gradually remove one-shot backdoors. Figure 2 shows that using either injection method, one-shot backdoor success rate degrades with additional model updates. After a poisoned model learns backdoors as hidden classification features, each updated version gradually forgets these features over time, if model updates are benign and there are no poisoned samples to reinforce the model’s memory. While they were not designed to address backdoors, fine-tuning based model updates *naturally* degrade one-shot backdoors over time. This finding is consistent with our analytical study.

Backdoors injected via full training usually survive longer than those injected via fine-tuning. Another interesting finding is that backdoors embedded in F_0 usually carry more “strength” and survive longer against model updates compared to those injected into F_1 . As shown in Figure 3, the backdoor survivability for poisoning D_0 (Figure 3(a)) is generally higher than poisoning D_1 (Figure 3(b)) with the same poison ratio. This is likely because backdoors injected via full training embed the hidden features more broadly into the model, making them harder to “remove” by subsequent fine-tuning. On the other hand, poisoning D_0 is generally more challenging, because there is much more opportunity to apply backdoor defenses and detectors on F_0 before its deployment.

Higher poison ratio may degrade backdoor survivabil-

³As shown in Figure 2, the attack success rate is over 98% in most cases except Wanet achieves 80.5% attack success rate when injecting into D_1 on MNIST given the attack is harder in order to make the trigger more invisible.




 (a) One-shot poison in D_0

 (b) One-shot poison in D_1

Figure 3. Backdoor survivability for one shot poisoning using different poison ratios for the 3 attack methods on MNIST and CIFAR10. The results are averaged on 5 instances.

ity. Existing works have shown that higher poison ratios embed a backdoor with a higher success rate. In our theoretical analysis (Theorem 4.3), we also find that larger poison ratios lead to more iterations of fine-tuning for strongly convex loss functions. Surprisingly, larger poison ratio does not always improve backdoor survivability against model updates on DNN models. Our findings indicate that as the proportion of poisoned data increases from zero but remains relatively low, the ability of the backdoor to survive improves. However, as the proportion of poisoned data surpasses a certain threshold, the backdoor survivability decreases and eventually reaches zero across all attack types and datasets. This suggests that a higher proportion of poisoned data can actually hasten the process of backdoor forgetting in DNN models. This also indicates the possible presence of a more complex theoretical relationship between backdoors and feature forgetting for DNN models, since they use more complicated loss functions. We leave this to future work.

There exists a tradeoff between trigger evasiveness and backdoor survivability. Our results indicates that when reducing the trigger evasiveness, which makes the trigger more noticeable, the backdoor survivability increases. As shown in Figure 4, when we increase the size of the trigger for Badnets, the blend ratio of the trigger for Blend or increase the strength factor for Wanet, which all make the backdoor trigger more visible, the backdoor survivability increases correspondingly. As the most invisible attack, Wanet also has the smallest backdoor survivability. This is likely because larger/more obvious triggers introduce stronger deviations on the model’s decision manifolds. However, using larger triggers often means lower attack stealthiness and more visible perturbations. In this case, physical backdoors using real world objects as triggers might achieve a sweet spot of stealth and survivability (Wenger et al., 2021).

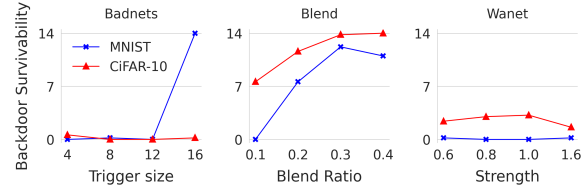
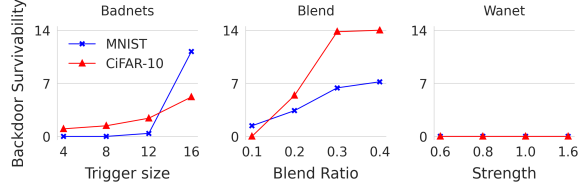

 (a) One-shot poison in D_0

 (b) One-shot poison in D_1

Figure 4. Average backdoor survivability for one shot poisoning using different triggers for the 3 attack methods on MNIST and

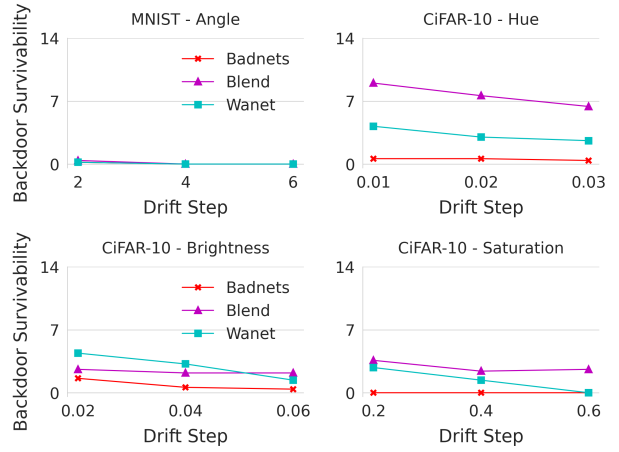


Figure 5. Average backdoor survivability for one shot poisoning on D_0 with different data distribution drift types and steps for the 3 attack methods on MNIST and CIFAR10.

5.4. Impact of Data Distribution Drift

As discussed in §5.1, we emulate a dynamic data environment by introducing parameterized distribution shifts using image transformations. So far our results assume the default data distribution shift (i.e., changing angle by 4° for MNIST and changing hue by a factor of 0.02 for CIFAR10). Next we examine the impact of different distribution shifts on backdoor survivability. Our goal is not to compare different transformation types, but to examine how the volume of distribution shifts affect backdoor survivability. Figure 5 plots, per transformation type, the backdoor γ -survivability for one-shot poisoning on D_0 , when varying the distribution shift step (p). While p is transformation-specific, larger p always means heavier data distribution shifts over time.

Larger data distribution shifts accelerate backdoor forgetting. Our key observation is that, when the production

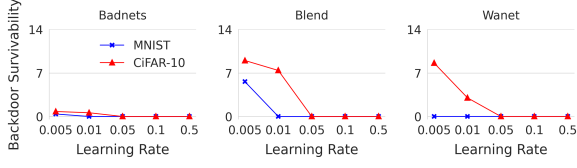
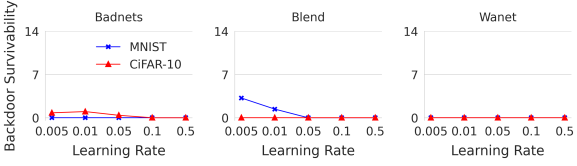

 (a) One-shot poison in D_0

 (b) One-shot poison in D_1

Figure 6. Average backdoor survivability for one shot poisoning with different learning rates during model updates for the 3 attack methods on MNIST and CIFAR10.

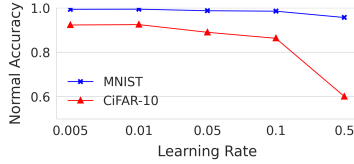


Figure 7. Average normal accuracy after 15 model updates with different fine-tuning learning rates.

data experiences heavier changes over time, the backdoors are more vulnerable to model updates. This is because when model updates “force” the time-varying model to learn more different data features, they also accelerate the process of backdoor forgetting. This observation also aligns with recent work on continual learning on old/new (benign) tasks (Yin et al., 2020), which shows that the larger the distance between two task distributions, the faster the model forgets the old task it has learned previously. Different from (Yin et al., 2020), we focus on backdoor attacks rather than benign tasks. Overall, our findings further demonstrate the importance of studying backdoor survivability, since data distribution shift is a common phenomenon in practice.

6. Smart Training Strategies to Reduce Backdoor Survivability

Our analytical study implies that more training steps and reasonably larger learning rates can accelerate the backdoor forgetting process in Theorem 4.3 and Corollary 4.4. We now empirically verify them on MNIST and CIFAR10 datasets. We start with increasing the training epochs and learning rates during the model fine-tuning for each model update event and confirm that the backdoor survivability degrades correspondingly. However, simply increasing learning rates for stochastic gradient descent (SGD) will reduce the normal accuracy. As suggested in Corollary 4.4, the learning rate cannot be too large as that will cause con-




 (a) One-shot poison in D_0

 (b) One-shot poison in D_1

Figure 8. Average backdoor survivability for one shot poisoning using different poison ratios with STLR with max lr = 0.5.

verge to slow down drastically. Thus, we consider a smarter learning rate scheduler: Slanted Triangular Learning Rates (STLRs) (Howard & Ruder, 2018), which first increases the learning rate to a very large value and then gradually decreases the learning rate for convergence. Our results show that by using STLR the backdoor survivability significantly drops while the normal accuracy stays as high as the initial model training.

Increasing training epochs and learning rate. We empirically find that both training time (epochs) and learning rate can be better configured to reduce backdoor survivability without harming normal accuracy. We find that increasing number of training epochs is inefficient, unstable and costly in terms of decreasing backdoor survivability (detailed results in Appendix C.3). In the meanwhile, increasing learning rate has much more impact on backdoor survivability. As shown in Figure 6, the backdoor survivability decreases all to 0 when increasing the learning rate from 0.005 to 0.5. However, larger learning rates may prevent models from convergence. As shown in Figure 7, we can see that the model normal accuracy after 15 model updates drops significantly when we increase the learning rate (99% to 91% for MNIST and 92% to 60% for CIFAR10).

Smarter learning rate scheduler (STLR). Inspired by Corollary 4.4, we consider a smarter learning rate scheduler: Slanted Triangular Learning Rates (STLRs) (Howard & Ruder, 2018). It first linearly increases the learning rate from 0 to the max value (e.g., up to 0.5) and then linearly decays it back to 0. Interestingly, STLR is highly effective in terms of reducing backdoor survivability.

Figure 8 lists the backdoor survivability for one-shot poisoning attacks (on D_1 and D_0), when updating models using STLR. The baseline version (e.g., model updates using SGD) is in Figure 3. Comparing the two figures, we see that training using STLR naturally removes the backdoor, i.e., an injected backdoor cannot survive past a single model update. Figure 9 shows that STLR significantly reduces

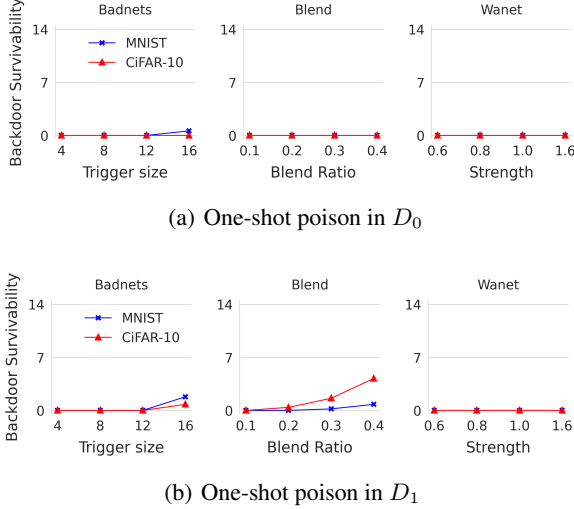


Figure 9. Average backdoor survivability for one shot poisoning using different triggers with STLR with max lr = 0.5.

the backdoor survivability for all different types of triggers (compared to Figure 4). At the same time, STLR maintains the normal accuracy at a high level after 15 model updates (99% for MNIST and 91% for CIFAR10).

Summary. We find that model owners can significantly reduce backdoor survivability by leveraging adaptive learning rate schedulers like STLR, which is much more efficient compared to increasing training epochs. In most cases, all three backdoor survivability metrics drop to 0, meaning the backdoor is immediately removed by a single fine-tuning update. This additional benefit only adds to the existing value of these techniques as ways to enhance model accuracy.

7. Discussion

In this paper, we take a first look at backdoor attacks in the real-world context of time-varying models. Guided by our theoretical analysis, we introduce the first empirical metric on a backdoor’s survivability on time-varying models, study a range of factors that may impact backdoor survivability, and propose an intelligent training strategy using STLR to significantly reduce backdoor survivability.

Looking forward, our study also presents potential directions for future research on the topic of backdoor attacks on time-varying models. We discuss some below.

Novel defenses against backdoor attacks on time-varying models. Existing work has produced numerous defenses against backdoors in static models, e.g., (Gao et al., 2019; Liu et al., 2018a; Wang et al., 2019a; Guo et al., 2020; Liu et al., 2019; Qiao et al., 2019). A natural question arises: “are existing backdoor defenses effective on time-varying models?” We believe the answer is no, and we need new defenses specifically designed for time-varying models.

We believe that time-varying models break common assumptions used in existing backdoor defenses. For example, model inspection defenses such as Neural Cleanse (Wang et al., 2019a) and TABOR (Guo et al., 2020) try to identify the backdoor trigger as the smallest perturbation that makes the model misclassify all perturbed inputs to a target label. If there is a backdoor in the model, the computed perturbation for the target label should be much smaller than other benign labels, i.e., an anomaly. These defenses implicitly assume that an existing backdoor has a very high (e.g. 100%) attack success rate. However, we know that fine-tuning can reduce attack success rate to unpredictable levels over time, making it harder for defenses to reliably detect the anomalous misclassification behavior. We can adapt by lowering the attack success rate threshold to 75%, 50% and 25%, but this approach does not work. The average anomaly index for TABOR on clean models increases to 3.31 when setting the attack success rate threshold to 25% and average anomaly index for Neural Cleanse on clean models increases to 2.27 when setting the attack success rate threshold to 50% (any model with an anomaly index over 2 is considered a backdoored model). Not only is setting new threshold values challenging, but doing so also lowers the detection performance for static backdoored models. More detailed results can be found in Appendix C.4.

Another example is Fine-Pruning (Liu et al., 2018a), a model sanitization defense. It prunes a portion of neurons from the model, and then fine-tunes the model with a small set of pure clean data. However, this approach is problematic for time-varying models, as it would require continuous pruning of neurons, and continued pruning will lower model performance over time (He et al., 2016; Tan & Le, 2019).

Limitations and future work. As the first study on backdoor survivability, our work faces several limitations. First, our study focused on time-varying models updated via fine-tuning (transfer learning). More research is needed to understand survivability of backdoors in time-varying model updated via other mechanisms. Second, our theoretical results consider fine-tuning with data drawn from the original distribution, and we leave the analysis of distribution drift on backdoor forgetting for future work. Third, we focused on two commonly image datasets to demonstrate the property of “backdoor forgetting.” We need more empirical and analytical work to characterize the relationship between model updates and backdoor forgetting on other domains. Finally, we trigger model updates using controlled data dynamics via image transformation. Experiments using a broader and more realistic category of data dynamics may provide more insights on how to leverage natural data variations (and thus model variations) to resist backdoor attacks.

References

- Bagdasaryan, E., Veit, A., Hua, Y., Estrin, D., and Shmatikov, V. How to backdoor federated learning. In *Proc. of International Conference on Artificial Intelligence and Statistics*, pp. 2938–2948. PMLR, 2020.
- Ben-David, S., Blitzer, J., Crammer, K., Kulesza, A., Pereira, F., and Vaughan, J. W. A theory of learning from different domains. *Machine learning*, 79(1):151–175, 2010.
- Bhagoji, A. N., Chakraborty, S., Mittal, P., and Calo, S. Analyzing federated learning through an adversarial lens. In *Proceedings of the 36th International Conference on Machine Learning*, pp. 634–643, 2019.
- Biggio, B., Nelson, B., and Laskov, P. Poisoning attacks against support vector machines. In *Proc. of ICML*, pp. 1467–1474, 2012.
- Boyd, S. and Vandenberghe, L. *Convex Optimization*. Cambridge university press, 2004.
- Chen, X., Liu, C., Li, B., Lu, K., and Song, D. Targeted backdoor attacks on deep learning systems using data poisoning. *arXiv preprint arXiv:1712.05526*, 2017.
- Chen, Y., Luo, H., Ma, T., and Zhang, C. Active online learning with hidden shifting domains. In *International Conference on Artificial Intelligence and Statistics*, pp. 2053–2061. PMLR, 2021.
- Ganin, Y. and Lempitsky, V. Unsupervised domain adaptation by backpropagation. In *International conference on machine learning*, pp. 1180–1189. PMLR, 2015.
- Gao, Y., Xu, C., Wang, D., Chen, S., Ranasinghe, D. C., and Nepal, S. Strip: A defence against trojan attacks on deep neural networks. In *Proc. of the 35th Annual Computer Security Applications Conference*, pp. 113–125, 2019.
- Gao, Y., Doan, B. G., Zhang, Z., Ma, S., Zhang, J., Fu, A., Nepal, S., and Kim, H. Backdoor attacks and countermeasures on deep learning: A comprehensive review. *arXiv preprint arXiv:2007.10760*, 2020.
- GoogleCloud. Mlops: Continuous delivery and automation pipelines in machine learning. <https://cloud.google.com/architecture/mlops-continuous-delivery-and-automation-pipelines-in-machine-learning/>, 2023.
- Gu, T., Dolan-Gavitt, B., and Garg, S. Badnets: Identifying vulnerabilities in the machine learning model supply chain. In *Proc. of Machine Learning and Computer Security Workshop*, 2017.
- Guo, W., Wang, L., Xu, Y., Xing, X., Du, M., and Song, D. Towards inspecting and eliminating trojan backdoors in deep neural networks. In *2020 IEEE International Conference on Data Mining (ICDM)*, pp. 162–171. IEEE, 2020.
- He, K., Zhang, X., Ren, S., and Sun, J. Deep residual learning for image recognition. In *Proc. of CVPR*, pp. 770–778, 2016.
- Hoi, S. C., Wang, J., and Zhao, P. Libol: A library for online learning algorithms. *Journal of Machine Learning Research*, 15(1):495, 2014.
- Hoi, S. C., Sahoo, D., Lu, J., and Zhao, P. Online learning: A comprehensive survey. *Neurocomputing*, 459:249–289, 2021.
- Howard, J. and Ruder, S. Universal language model fine-tuning for text classification. In *Proc. of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 328–339, 2018.
- Huang, G., Liu, Z., Van Der Maaten, L., and Weinberger, K. Q. Densely connected convolutional networks. In *Proc. of CVPR*, pp. 4700–4708, 2017.
- Iandola, F. N., Moskewicz, M. W., Ashraf, K., and Keutzer, K. Firecaffe: near-linear acceleration of deep neural network training on compute clusters. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 2592–2600, 2016.
- Ilyas, A., Park, S. M., Engstrom, L., Leclerc, G., and Madry, A. Datamodels: Predicting predictions from training data. *arXiv preprint arXiv:2202.00622*, 2022.
- Krizhevsky, A. et al. Learning multiple layers of features from tiny images. 2009.
- Kumar, A., Ma, T., and Liang, P. Understanding self-training for gradual domain adaptation. In *Proc. of ICML*, pp. 5468–5479. PMLR, 2020a.
- Kumar, R. S. S., Nyström, M., Lambert, J., Marshall, A., Goertzel, M., Comissioner, A., Swann, M., and Xia, S. Adversarial machine learning-industry perspectives. In *Proc. of 2020 IEEE Security and Privacy Workshops (SPW)*, pp. 69–75. IEEE, 2020b.
- Kuwarananchaoen, K. and Sundaram, S. On the location of the minimizer of the sum of two strongly convex functions. In *2018 IEEE Conference on Decision and Control (CDC)*, pp. 1769–1774. IEEE, 2018.
- Leclerc, G., Ilyas, A., Engstrom, L., Park, S. M., Salman, H., and Madry, A. ffcv. <https://github.com/libffcv/ffcv/>, 2022.

- LeCun, Y., Bottou, L., Bengio, Y., and Haffner, P. Gradient-based learning applied to document recognition. *Proc. of IEEE S&P*, 86(11):2278–2324, 1998.
- Lin, J., Xu, L., Liu, Y., and Zhang, X. Composite backdoor attack for deep neural network by mixing existing benign features. In *Proc. of CCS*, pp. 113–131, 2020.
- Liu, H., Wang, J., and Long, M. Cycle self-training for domain adaptation. *Advances in Neural Information Processing Systems*, 34:22968–22981, 2021.
- Liu, K., Dolan-Gavitt, B., and Garg, S. Fine-pruning: Defending against backdoor attacks on deep neural networks. In *Proc. of RAID*, 2018a.
- Liu, Y., Ma, S., Aafer, Y., Lee, W.-C., Zhai, J., Wang, W., and Zhang, X. Trojaning attack on neural networks. In *Proc. of NDSS*, 2018b.
- Liu, Y., Lee, W.-C., Tao, G., Ma, S., Aafer, Y., and Zhang, X. Abs: Scanning neural networks for back-doors by artificial brain stimulation. In *Proc. of CCS*, pp. 1265–1282, 2019.
- Liu, Y., Ma, X., Bailey, J., and Lu, F. Reflection backdoor: A natural backdoor attack on deep neural networks. In *European Conference on Computer Vision*, pp. 182–199. Springer, 2020.
- Nahar, N., Zhou, S., Lewis, G., and Kästner, C. Collaboration challenges in building ml-enabled systems: Communication, documentation, engineering, and process. In *Proc. of the 44th International Conference on Software Engineering (ICSE)*, 5 2022. URL <https://arxiv.org/abs/2110.10234>.
- Nguyen, A. and Tran, A. Wanet-imperceptible warping-based backdoor attack. 2021.
- Nguyen, T. A. and Tran, A. Input-aware dynamic backdoor attack. *Advances in Neural Information Processing Systems*, 33:3454–3464, 2020.
- Pang, R., Shen, H., Zhang, X., Ji, S., Vorobeychik, Y., Luo, X., Liu, A., and Wang, T. A tale of evil twins: Adversarial inputs versus poisoned models. In *Proceedings of the 2020 ACM SIGSAC Conference on Computer and Communications Security*, pp. 85–99, 2020.
- Pang, R., Zhang, Z., Gao, X., Xi, Z., Ji, S., Cheng, P., Luo, X., and Wang, T. Trojanzoo: Towards unified, holistic, and practical evaluation of neural backdoors. In *2022 IEEE 7th European Symposium on Security and Privacy (EuroS&P)*, pp. 684–702. IEEE, 2022.
- Pang, T., Yang, X., Dong, Y., Su, H., and Zhu, J. Accumulative poisoning attacks on real-time data. *Advances in Neural Information Processing Systems*, 34:2899–2912, 2021.
- Patel, V. M., Gopalan, R., Li, R., and Chellappa, R. Visual domain adaptation: A survey of recent advances. *IEEE signal processing magazine*, 32(3):53–69, 2015.
- Qiao, X., Yang, Y., and Li, H. Defending neural backdoors via generative distribution modeling. *Advances in neural information processing systems*, 32, 2019.
- Rakhlin, A., Shamir, O., and Sridharan, K. Making gradient descent optimal for strongly convex stochastic optimization. *arXiv preprint arXiv:1109.5647*, 2011.
- Read, J., Bifet, A., Pfahringer, B., and Holmes, G. Batch-incremental versus instance-incremental learning in dynamic and evolving data. In *Proc. of International symposium on intelligent data analysis*, pp. 313–323. Springer, 2012.
- Sahoo, D., Pham, Q., Lu, J., and Hoi, S. C. Online deep learning: learning deep neural networks on the fly. In *Proc. of the 27th International Joint Conference on Artificial Intelligence*, pp. 2660–2666, 2018.
- Sankaranarayanan, S., Balaji, Y., Jain, A., Lim, S. N., and Chellappa, R. Learning from synthetic data: Addressing domain shift for semantic segmentation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 3752–3761, 2018.
- Steinhardt, J., Koh, P. W. W., and Liang, P. S. Certified defenses for data poisoning attacks. *Advances in neural information processing systems*, 30, 2017.
- Tajbakhsh, N., Shin, J. Y., Gurudu, S. R., Hurst, R. T., Kendall, C. B., Gotway, M. B., and Liang, J. Convolutional neural networks for medical image analysis: Full training or fine tuning? *IEEE transactions on medical imaging*, 35(5):1299–1312, 2016.
- Tan, M. and Le, Q. V. Efficientnet: Rethinking model scaling for convolutional neural networks. In *International Conference on Machine Learning*, pp. 6105–6114, 2019.
- Tang, R., Du, M., Liu, N., Yang, F., and Hu, X. An embarrassingly simple approach for trojan attack in deep neural networks. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pp. 218–228, 2020.
- Torrey, L. and Shavlik, J. Transfer learning. In *Handbook of research on machine learning applications and trends: algorithms, methods, and techniques*, pp. 242–264. IGI global, 2010.

- Tran, B., Li, J., and Madry, A. Spectral signatures in backdoor attacks. *Advances in neural information processing systems*, 31, 2018.
- Veldanda, A. and Garg, S. On evaluating neural network backdoor defenses. *arXiv preprint arXiv:2010.12186*, 2020.
- Wang, B., Yao, Y., Shan, S., Li, H., Viswanath, B., Zheng, H., and Zhao, B. Y. Neural cleanse: Identifying and mitigating backdoor attacks in neural networks. In *Proc. of IEEE S&P*, pp. 707–723. IEEE, 2019a.
- Wang, H., Sreenivasan, K., Rajput, S., Vishwakarma, H., Agarwal, S., Sohn, J.-y., Lee, K., and Papailiopoulos, D. Attack of the tails: Yes, you really can backdoor federated learning. *Advances in Neural Information Processing Systems*, 33:16070–16084, 2020.
- Wang, M. and Deng, W. Deep visual domain adaptation: A survey. *Neurocomputing*, 312:135–153, 2018.
- Wang, Y. and Chaudhuri, K. Data poisoning attacks against online learning. *arXiv preprint arXiv:1808.08994*, 2018.
- Wang, Y., Jha, S., and Chaudhuri, K. An investigation of data poisoning defenses for online learning. *arXiv preprint arXiv:1905.12121*, 2019b.
- Weiss, K., Khoshgoftaar, T. M., and Wang, D. A survey of transfer learning. *Journal of Big data*, 3(1):1–40, 2016.
- Wenger, E., Passananti, J., Bhagoji, A. N., Yao, Y., Zheng, H., and Zhao, B. Y. Backdoor attacks against deep learning systems in the physical world. In *Proc. of CVPR*, pp. 6206–6215, 2021.
- Xiao, H., Xiao, H., and Eckert, C. Adversarial label flips attack on support vector machines. In *Proc. of the 20th European Conference on Artificial Intelligence*, pp. 870–875, 2012.
- Xie, C., Huang, K., Chen, P.-Y., and Li, B. DbA: Distributed backdoor attacks against federated learning. In *Proc. of ICLR*, 2019.
- Yao, Y., Li, H., Zheng, H., and Zhao, B. Y. Latent backdoor attacks on deep neural networks. In *Proc. of CCS*, pp. 2041–2055, 2019.
- Yin, D., Farajtabar, M., Li, A., Levine, N., and Mott, A. Optimization and generalization of regularization-based continual learning: a loss approximation viewpoint. *arXiv preprint arXiv:2006.10974*, 2020.
- Yoon, J., Yang, E., Lee, J., and Hwang, S. J. Lifelong learning with dynamically expandable networks. In *Proc. of ICLR*, 2018.
- Yosinski, J., Clune, J., Bengio, Y., and Lipson, H. How transferable are features in deep neural networks? *Advances in neural information processing systems*, 27, 2014.
- Zhang, Y., Feng, F., Wang, C., He, X., Wang, M., Li, Y., and Zhang, Y. How to retrain recommender system? a sequential meta-learning method. In *Proc. of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval*, pp. 1479–1488, 2020.
- Zhuang, F., Qi, Z., Duan, K., Xi, D., Zhu, Y., Zhu, H., Xiong, H., and He, Q. A comprehensive survey on transfer learning. *Proc. of IEEE S&P*, 109(1):43–76, 2020.

We first present the proofs for our theoretical analysis in Appendix A. Then, we give more details about our experimental setups in Appendix B, followed by more empirical results on backdoor survivability in Appendix C.

A. Proofs

Lemma 4.2. $\|\theta_{\text{mix}} - \theta_0^*\| \leq \frac{\alpha \|\nabla L_p(\theta_0^*)\|}{\alpha \sigma_p + (1-\alpha)\sigma_b}.$

Proof of Theorem 4.2. Since L_{D_0} and L_p are both strongly convex by assumption, $L_{\text{mix}} = \alpha L_p + (1-\alpha)L_{D_0}$ is also strongly convex. From [Boyd & Vandenberghe \(2004\)](#), the strong convexity parameter of L_{mix} is $\sigma_{\text{mix}} = \alpha \sigma_p + (1-\alpha)\sigma_b$.

Then, from Eq. (4) of [Kuwaranancharoen & Sundaram \(2018\)](#) on necessary conditions for the minimizer of the sum of two strongly convex functions, we have, for all $\theta \in \Theta$,

$$\begin{aligned} (\nabla L_{\text{mix}}(\theta) - \nabla L_{\text{mix}}(\theta_{\text{mix}}))^{\top} (\theta - \theta_{\text{mix}}) &\geq \sigma_{\text{mix}} \|\theta - \theta_{\text{mix}}\|^2 \\ \Rightarrow (\nabla L_{\text{mix}}(\theta_0^*) - \nabla L_{\text{mix}}(\theta_{\text{mix}}))^{\top} \frac{(\theta_0^* - \theta_{\text{mix}})}{\|\theta_0^* - \theta_{\text{mix}}\|} &\geq \sigma_{\text{mix}} \|\theta_0^* - \theta_{\text{mix}}\| \end{aligned} \quad (2)$$

Since θ_{mix} is the minimizer of L_{mix} and θ_0^* is the minimizer of L_0^* , their gradients are zero at those points. Thus, we get,

$$\frac{\alpha \left(\nabla L_p(\theta_0^*)^{\top} \frac{(\theta_0^* - \theta_{\text{mix}})}{\|\theta_0^* - \theta_{\text{mix}}\|} \right)}{\alpha \sigma_p + (1-\alpha)\sigma_b} \geq \|\theta_0^* - \theta_{\text{mix}}\|. \quad (3)$$

Taking the norm on both sides, we get the statement of the lemma. □

We can immediately notice that the L.H.S of Eq. 3 is an increasing function of α .

Theorem 4.3 (Effectiveness of model fine-tuning for backdoor removal). *Fine-tuning θ_{mix} with stochastic gradient descent with a learning rate of $\eta = \frac{1}{\sigma_b t}$ on D_0 leads to a classifier $\hat{\theta}$ which is ϵ -close to $\theta_0^* = \arg \min L_{D_0}(\theta)$ in $\frac{\alpha \gamma_p}{\epsilon(\alpha \sigma_p + (1-\alpha)\sigma_b)}$ iterations.*

Proof of Theorem 4.3. From Lemma 1 from [Rakhlin et al. \(2011\)](#), we know

$$\mathbb{E} [\|\theta_t - \theta_0^*\|] \leq \left(1 - \frac{2}{t}\right) \mathbb{E} [\|\theta_{t-1} - \theta_0^*\|] + \frac{\gamma_b^2}{\sigma_b^2 t^2}. \quad (4)$$

By induction, we get

$$\mathbb{E} [\|\theta_T - \theta_0^*\|] \leq \frac{\max\{\|\theta_{\text{init}} - \theta_0^*\|, \frac{\gamma_b^2}{\sigma_b^2}\}}{T}. \quad (5)$$

With $\theta_{\text{init}} = \theta_{\text{mix}}$, assuming that $\|\theta_{\text{mix}} - \theta_0^*\| > \frac{\gamma_b^2}{\sigma_b^2}$, and using the bound on $\|\theta_{\text{mix}} - \theta_0^*\|$ from Lemma 4.2, we get

$$\mathbb{E} [\|\theta_T - \theta_0^*\|] \leq \frac{\alpha \left(\nabla L_p(\theta_0^*)^{\top} \frac{(\theta_0^* - \theta_{\text{mix}})}{\|\theta_0^* - \theta_{\text{mix}}\|} \right)}{\frac{\alpha \sigma_p + (1-\alpha)\sigma_b}{T}} \quad (6)$$

The theorem is obtained by combining Eq.6 with the assumption on the γ_b -smooth nature of L_{D_0} . □

On the Permanence of Backdoors in Evolving Models

Attack	Training Data	Model Access	Training Process
(Gu et al., 2017)	✓		
(Chen et al., 2017)	✓		
(Liu et al., 2018b)	✓	✓	✓
(Yao et al., 2019)	✓	✓	✓
(Nguyen & Tran, 2020)	✓	✓	✓
(Tang et al., 2020)		✓	
(Liu et al., 2020)	✓	✓	
(Pang et al., 2020)	✓	✓	✓
(Nguyen & Tran, 2021)	✓		

Table 1. Summary of representative backdoor attacks and their threat models.

Transformation Types	Function Call
Angle	<code>rotate(X, $i \times p$)</code>
Brightness	<code>adjust_brightness(X, $1 + i \times p$)</code>
Hue	<code>adjust_hue(X, $i \times p$)</code>
Saturation	<code>adjust_saturation(X, $1 + i \times p$)</code>

Table 2. Function calls for generating training datasets D_i for different data distribution drifts with given shift steps p . X is the original training data with no transformations.

B. Details for Experimental Setup

In this section, we provide further information about our experimental setup, expanding upon the background from §5.1 of the main paper.

More details about distribution shifts. We select 4 types of image transformations, namely: i) changing angle, ii) changing brightness, iii) changing hue, and iv) changing saturation. These transformations also reflect practical scenarios when the camera’s color spectrum varies due to hardware aging or dust accumulation or a deployed camera’s view is shadowed by a new structure nearby or the angle of the camera is rotated. We use these transformations to introduce fine-grained, parameterized data distribution shifts over the sequence of changing data distributions ($\{D_i\}_{i>0}$). When implementing the transformations, we use PyTorch’s built-in functions in `torchvision.transforms.functional` (see Table 2).

More details on model training and updating. To train an initial model F_0 , we choose ResNet-9 as our default model architecture and train the model using D_0 with a batch-size of 512. We train the model for 80 epochs for CIFAR10 and 40 epochs for MNIST (note the initial training datasets for both tasks are half of the original training datasets). By default, we use an SGD optimizer with momentum= 0.9, weight decay= $5e-4$. When using STLR, we set the maximum learning rate to 0.5. We also run experiments with two other model architectures (ResNet-18 and DenseNet-121) on CIFAR10. When training an initial model F_0 , we train the model for 80 epochs using the same optimizer settings and the STLR scheduler as the ResNet-9 experiments.

To update the model (i.e., from F_{i-1} to F_i), our default updating setting is to fine-tune each model F_{i-1} with the new training data D_i for 5 epochs using an SGD optimizer with a constant learning rate= 0.01, momentum= 0.9 and weight decay= $5e-4$. We set learning rate= 0.01 since it produces the best normal accuracy among our experiments. In §6, we also experiment with an SGD optimizer with STLR setting max learning rate= 0.5, momentum= 0.9 and weight_decay= $5e-4$. We vary the learning rates and training epochs in §6 and report the normal accuracy if it degrades over 2% compared to our initial setting.

C. Additional Experimental Results.

C.1. Normal Accuracy Drop with Data Distribution Drifts.

Figure 10 shows how normal accuracy drops on a static model when inference data distribution drifts over time. For MNIST, we rotate the test images by 4° each time, and for CIFAR10, we change the hue of test images by a factor of 0.02 each time.

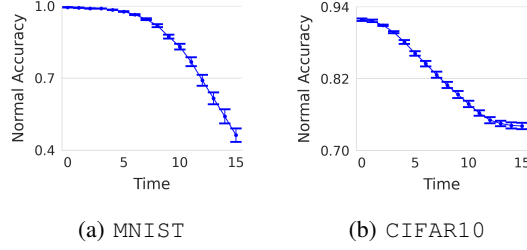


Figure 10. Normal accuracy for a static model when inference data distribution drifts. For CIFAR10 we change the hue by a factor of 0.02 per drift step and for MNIST we change the angle for 4° per drift step. We report the mean with std for 5 models on each dataset.

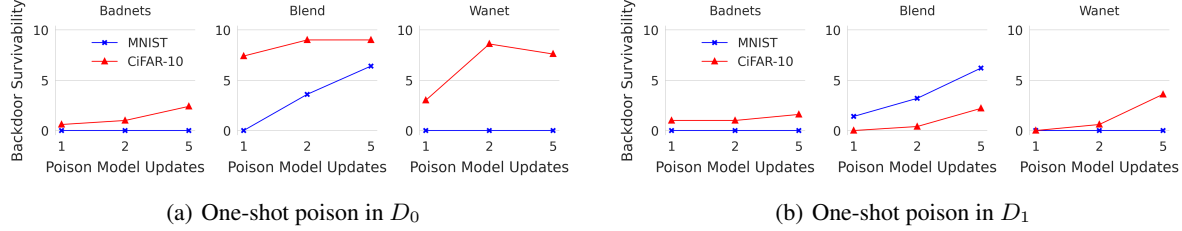


Figure 11. Backdoor survivability for persistent poisoning with different poison model updates for the 3 attack methods on MNIST and CIFAR10. The results are averaged on 5 instances.

C.2. Persistent Poisoning

We also consider powerful attackers who can continuously poison the training data. Clearly, if the attacker can poison a sufficient fraction of $D_i, \forall i$, the backdoor will remain intact in the time-varying model (which we validated empirically). Here, a more interesting question is: “Does poisoning more model updates make the backdoor survive longer once poison stops?” Therefore, we poison the model for more model updates (2, 5) and compare the backdoor survivability. Figure 11 shows that in general poisoning more model updates will increase the backdoor survivability, but there is no guarantee on this and the trend varies with different attack methods on different datasets. When using STLRL, our results indicate that the backdoor survivability stays 0 for persistent poisoning when the poison setting same as Figure 11. The detailed results can be found in Figure 12.

C.3. Number of Training Epochs.

Figure 13 shows that increasing the number of training epochs during model updates from 5 to 20 reduces the backdoor survivability in most cases. While we are multiplying the training efforts, the impact on the backdoor survivability is very limited. This is likely because although additional training epochs allows the model to learn more new data features (and thus forget existing features like the backdoor faster), the model weights might be trapped in the local minimum in DNNs.

C.4. Existing Defenses

We test `Neural Cleanse` and `TABOR` with the three attacks (Badnets, Blend and Wanet) on CIFAR10 dataset. We first run the two defenses on clean and backdoored initial models (F_0 s). As shown in Table 3, when we set the attack success rate threshold to 99% as guided in the original papers (Wang et al., 2019a; Guo et al., 2020), both `Neural Cleanse` and `TABOR` work well on all three attacks (both defenses suggest that models with anomaly index over 2 are detected as backdoored). However, when we run `Neural Cleanse` and `TABOR` on the fine-tuned backdoored models after the poison stops, Table 4 shows that `Neural Cleanse` and `TABOR` fail to detect the backdoor models in most cases (only `TABOR` can detect the backdoored models attacked by Blend).

A straightforward way of adapting the defenses is to decrease the attack success rate threshold to a smaller threshold, like 75%, 50% or 25%, since the attack success rate on fine-tuned models are lower than 99%. The defender can set the threshold according to their need. However, our results imply that this direct adaptation does not work. Table 5 shows that when reducing the attack threshold, the detection results are unstable in two aspects: 1) the anomaly index for clean models may increase over 2 (attack success rate threshold as 50% for `Neural Cleanse` and attack success rate threshold 25% for

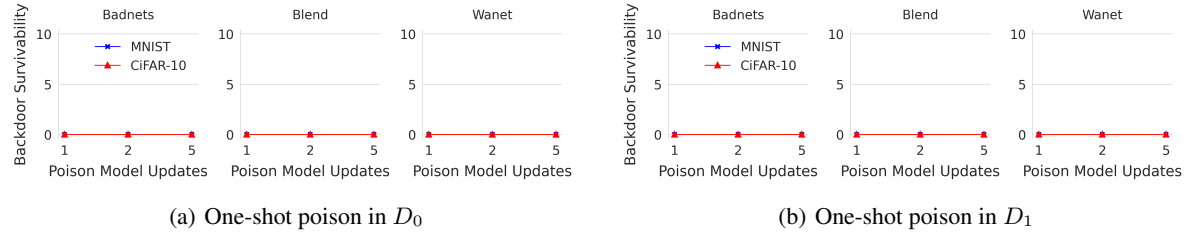


Figure 12. Backdoor survivability for persistent poisoning with different poison model updates with STL.

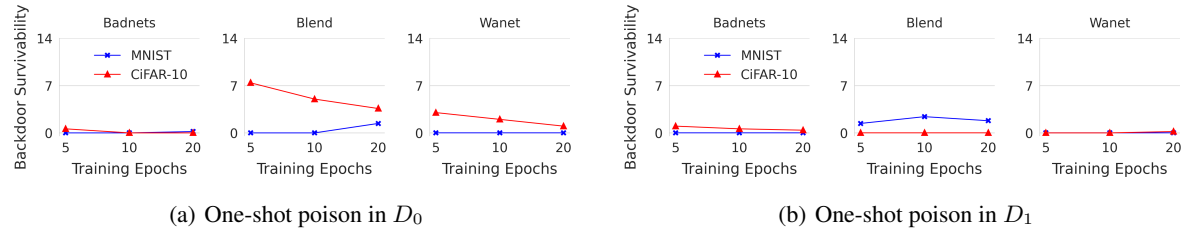


Figure 13. Average backdoor survivability for persistent poisoning with different training epochs during model updates for the 3 attack methods on MNIST and CIFAR10.

TABOR); 2) the anomaly index for backdoored model may drop below 2.

Models	Neural Cleanse	TABOR
Clean	1.52	1.84
Badnets	3.13	2.12
Blend	3.35	3.11
Wanet	2.44	2.01

Table 3. Average anomaly index for Neural Cleanse and TABOR on clean models and backdoored models (F_0). The attack success rate threshold is set to 99%. For each type of models, we average the anomaly index over 5 models.

Models	Neural Cleanse	TABOR
Badnets	1.00	1.54
Blend	1.52	2.12
Wanet	0.87	1.45

Table 4. Average anomaly index for Neural Cleanse and TABOR on fine-tuned backdoored models after poison stops (F_1 , the backdoors are injected in F_0). The attack success rate threshold is set to 99%. **Bold numbers** indicate failures to detect the backdoors.

Attack Success Rate Threshold		75%		50%		25%	
		Neural Cleanse	TABOR	Neural Cleanse	TABOR	Neural Cleanse	TABOR
Models	Clean	1.26	1.90	2.27	1.34	1.53	3.31
	Badnets	3.38	2.89	3.23	2.06	1.70	2.41
	Blend	2.29	2.46	2.11	3.02	1.28	2.01
	Wanet	1.64	1.86	1.53	1.52	1.63	1.51

Table 5. Average anomaly index for Neural Cleanse and TABOR on clean and backdoored models (F_0) with different attack success rate threshold. **Numbers in bold** indicate instances where either the backdoors were not detected or false positive detections of backdoors were made on clean models.